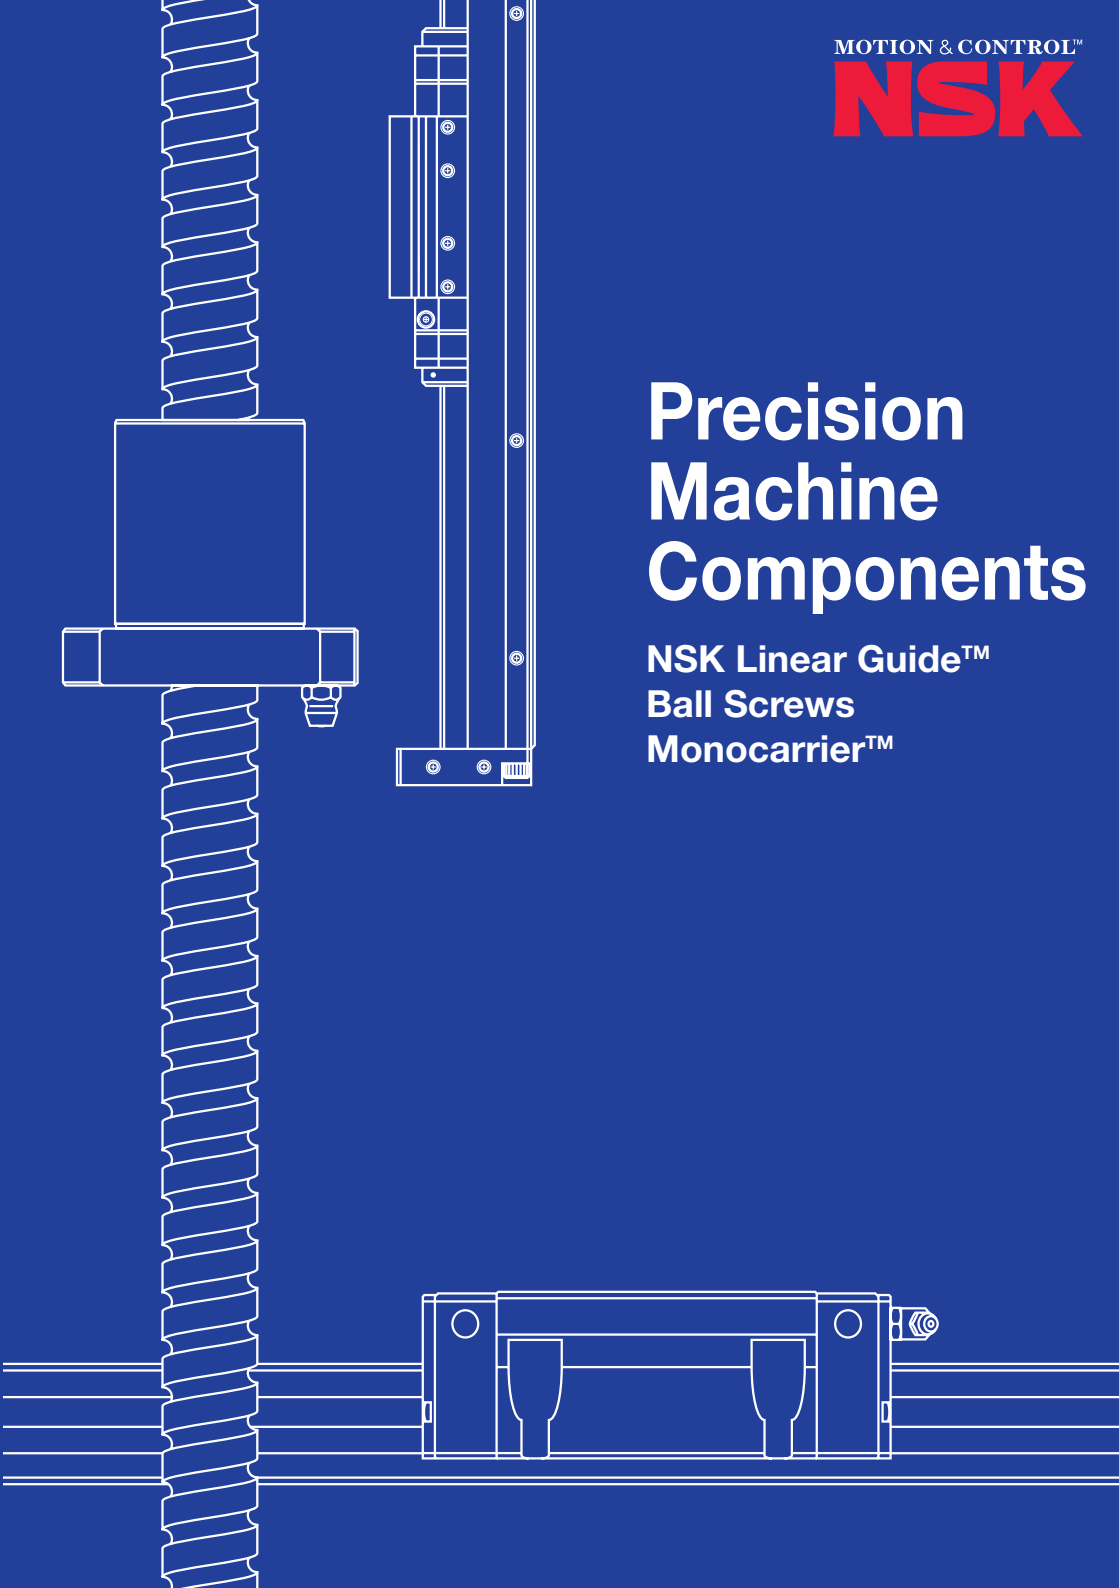
MOTION & CONTROL™

NSK

Precision Machine Components

NSK Linear Guide™
Ball Screws
Monocarrier™



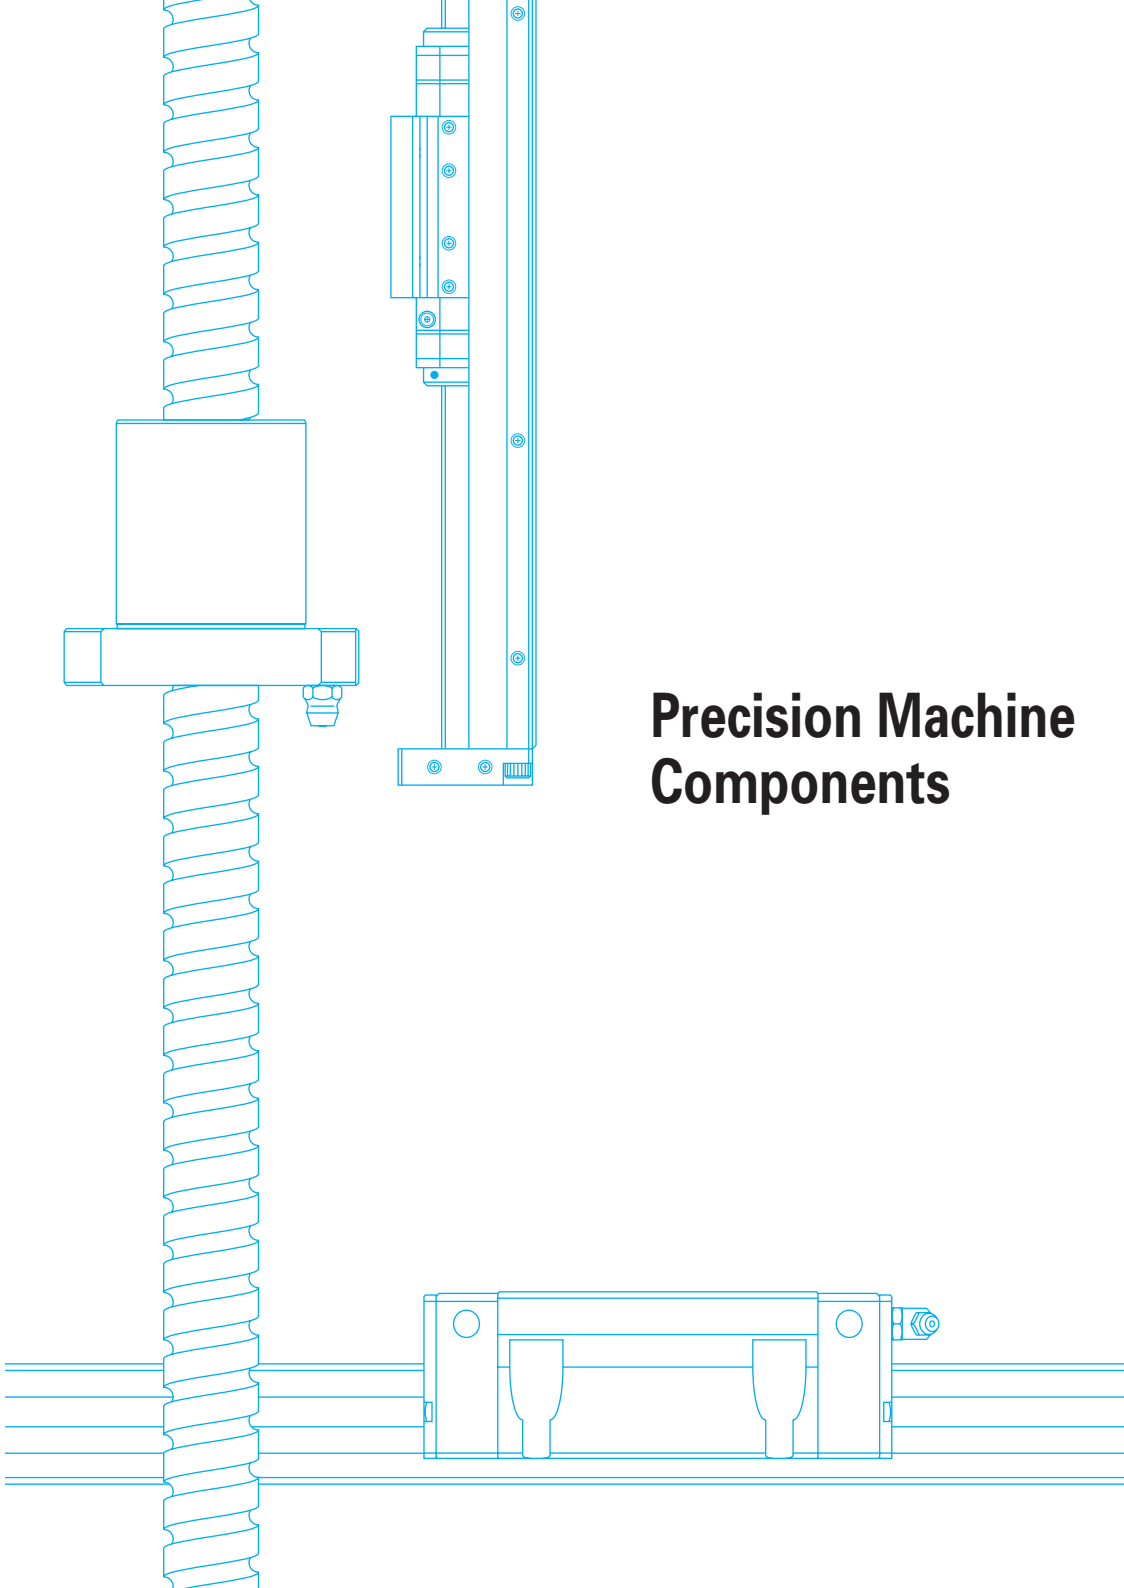
A. NSK Linear Rolling Guide Product A1 – A352

B. Ball Screws B1 – B586

C. Monocarrier™ C1 – C142

D. Other D1 – D24

E. Appendices E1 – E10



Precision Machine Components

Preface

It is our pleasure to announce the publication of a new catalog which contains all NSK linear motion products. We believe this publication is one way to show our deep appreciation of your patronage.

Market demand for more sophisticated and diversified machines and equipment is rapidly escalating. NSK precision products are not only used widely in these machines, but also are crucial elements.

In response to this trend, ball screws, NSK linear guides, and Monocarriers, which are crucial mechanical components of these machines, are required to be highly reliable, maintenance-free, smaller in size and lightweight. They also are expected to heighten efficiency and satisfy uses in special environment.

Publishing a catalog to introduce our entire product line is especially meaningful under such circumstances.
This is an improved version of the previous catalog; products are categorized, and each product category has two sections. The first section contains an explanation of products for selection and a technical explanation including results of the latest experiments and research to assist thorough technological discussion. The second half is dimension tables. Last, "Other," whose pages are in color, explains special environments and lubrications such as grease, which are general issues for NSK precision products.

We hope abundant NSK products in the new catalog will be your aide in selecting the most suitable products for your purpose.
We solicit your continued patronage.

Contents

A. NSK Linear Rolling Guide

A-1 Characteristics of NSK Linear Rolling Guides
1. Comparision of Rolling Guides and Sliding Guides A1
2. Structure and Characteristics of NSK Linear Guides A2

A-2 Types of NSK Linear Rolling Guides A5

A-3 Selection of NSK Linear Rolling Guides
1. Selection Flow Chart A13
2. Rating Life and Basic Load Rating A15
3. Preload A28
4. Accuracy A32
5. Maximum Rail Length A37
6. Lubrication A38
7. Dust Proof A52
8. Rust Prevention (Stainless Steel and Surface Treatment) A57
9. Special Environment A60
10. Arrangement and Mounting of Linear Guide A67
11. Drills to Select Linear Guide A79
12. Reference A90

A-4 NSK Linear Guide™ A91

A-5 Technical Description and Dimension Table for NSK Linear Guides
1. General purpose Series A111
2. Miniature Series A185
3. High Rigidity Series A247
4. High-Accuracy Series A305

A-6 Other Linear Rolling Guide Products
1. Linear Rolling Bushing A335
2. Roller Pack A345

B. Ball Screws

B-1. Selection Guide to NSK Ball Screw
1. Features of NSK Ball Screws B1
2. Structure of a Ball Screw B3
3. Ball Screw Series B7
4. Procedures to Select Ball Screw B17
5. When Placing Orders B31

B-2 Technical Description of Ball Screws
1. Accuracy B37
2. Static Load Limitation B44
3. Permissible Rotational Speed B47
4. Supporting Conditions for Calculation of Buckling Load and Critical Speed B51
5. Life (Dynamic Load Limitation) B53
6. Preload and Rigidity B56
7. Friction Torque and Drive Torque B62
8. Even Load Distribution in Ball Nut (In Case of Ball Screws for High-Load Drive) B65
9. Lubrication of Ball Screw B67
10. Dust Prevention for Ball Screw B68
11. Rust Prevention and Surface Treatment of Ball Screws B69
12. Ball Screw Specifications for Special Environment B70
13. Noise and Vibration B71
14. Installation of Ball Screw B73
15. Precautions for Designing Ball Screw B83
16. Shaft End Machining B86
17. Ball Screw Selection Exercise B87
18. Reference B101
19. Guide to Technical Services B102
20. Precautions When Handling Ball Screws B103

B-3 Ball Screw Dimension Table
1. Standard Ball Screws B105
2. Standard Nut Ball Screws B429
3. Application-Oriented Ball Screws B489

C. Monocarrier™

C-1 Monocarrier™
1. Features C5
2. Classifications and Series C7
3. Accessories C9
4. Selection of Monocarrier C10
5. MCM Series C25
6. MCH Series C73

C-2 Toughcarrier™
1. Features C95
2. Classifications and Series C95
3. Accessories C97
4. Selection of Toughcarrier C98
5. TCH Series Dimension Table for Standard Products C111
6. Accessories C117
7. Motor Bracket Compatibility Table C130
8. Sensor Rail and Top Cover Unit Combination Table C131
9. Toughcarrier High-Thrust Series C134

C-3 Technical Guide
1. Sensor Specifications C137
2. Characteristics and Evaluation Method C139
3. Special Specifications C140
4. Maintenance C141
5. NSK Clean Greace LG2 Specifications C142

D. Other

1. Special Environments D1
2. Lubrication D13
3. RoHS Compliant D24

E Appendices: Tables

1. Conversion from International System of Units (SI) E1
2. Conversion Table between N and kgf E3
3. Conversion Table between kg and lb E4
4. Conversion Table of Hardness E5
5. Deviations of Shafts Use in Common Fits E7
6. Deviations of Holes Used in Common Fits E9

A BLOCK NSK Linear Rolling Guide Product

A-1 Characteristics of NSK Linear Rolling Guides

1. Comparison of Rolling Guides and Sliding Guides A1
2. Structure and Characteristics of NSK Linear Guides A2
1. Structure of NSK Linear Guides A2
2. Characteristics of NSK Linear Guides A2

A-2 Types of NSK Linear Rolling Guides A5

A-3 Selection of NSK Linear Rolling Guides

1. Selection Flow Chart A13
2. Rating Life and Basic Load Rating A15
2.1 Life and Basic Load Rating A15
1. Life A15
2. Rating fatigue life A15
3. Basic load ratings in compliance with ISO standard A15
4. Basic dynamic load rating A15
5. Calculation of rating fatigue life A15
6. Dynamic equivalent load A16
7. Basic static load rating A16
8. Basic static moment load rating A16
9. Basic load rating by load direction A16
2.2 How to Calculate the Life A17
1. Setting operating condition of linear guide A17
2. Calculate load to a slide A17
3. Calculation of dynamic equivalent load A21
4. Calculation of mean effective load A23
5. Various coefficients A24
6. Calculation of rating life A25
7. Examination of the basic load rating A26
8. Precautions for the design in examining the life A27
3. Preload A28
1. Objective of preload A28
2. Preload and rigidity A28
3. Selection of preload classification A29
4. Estimation of the elastic deformation A30
5. Application examples of preload A30
6. Load and rating life when the preload is taken into account A31
7. Calculating friction force by preload A31
4. Accuracy A32
1. Accuracy standard A32
2. Definition of accuracy A32
3. Application example of accuracy grade and preload A35
4. Combination of accuracy grade and preload A36
5. Maximum Rail Length A37
6. Lubrication A38
1. NSK linear guides equipped with "NSK K1™" lubrication unit A38
2. Lubrication A42
7. Dust Proof A52
1. Standard specification parts A52
2. Dust-proof parts A53
8. Rust Prevention (Stainless Steel and Surface Treatment) A57
1. Stainless steel A57
2. Surface treatment A57
9. Special Environment A60
1. Heat-resistant specifications A60
2. Vacuum and clean specifications A60
3. "NSK linear guides for food processing equipment and medical devices" for sanitary environment A61
4. Specifications for special environments A63
5. Lubrication and materials A64
6. Responsiveness of NSK linear guides for special environments A66
7. Precautions for handling A66
10. Arrangement and Mounting of Linear Guides A67
1. Arrangement A67
2. Mounting accuracy A69
3. Installation A72
4. Assembly random-matching type linear guide A77
5. Butting rail specification A77
6. Handling preloaded assembly A78
11. Drills to Select Linear Guide A79
1. Single axis material handling system A79
2. Machining center A84
12. Reference A90

A-4 NSK Linear Guide™

1. Structure of NSK Linear Guides A91
2. Characteristics of NSK Linear Guides A91
3. Types and Characteristics of NSK Linear Guides A93
4. Guide to Technical Services A107
5. Linear Guides: Handling Precautions A107
6. Design Precautions A109

A-5 Technical Description and Dimension Table for NSK Linear Guides

1. General Purpose Series
1.1 NH Series A113
1.2 VH Series A133
1.3 NS Series A153
1.4 LW Series A171
2. Miniature Series
2.1 PU Series A187
2.2 LU Series A197
2.3 PE Series A209
2.4 LE Series A219
2.5 Miniature LH Series A233
2.6 LL Series A243
3. High Rigidity Series
3.1 RA Series A249
3.2 RB Series A271
3.3 LA Series A287
4. High-Accuracy Series
4.1 HA Series A307
4.2 HS Series A321

A-6 Other Linear Rolling Guide Products

1. Linear Rolling Bushing A335
2. Roller Pack A345


A-1 Characteristics of NSK Linear Rolling Guides

Characteristics of the NSK linear rolling guides are:


- Designs are simple and economic. This contributes to a highly accurate and low cost guide way system.
- Low friction coefficient facilitates a compact and low cost driving mechanism.
- Ultra-high purity of materials and superb processing technology ensure a long-term reliable operation.
- Prompt delivery thanks to a variety of interchangeable components.
- Users can select the most suitable guide from a wide variety of the ball guides and roller guides.

A-1-1 Comparision of Rolling Guides and Sliding Guides

The following describes a characteristic comparison between general rolling and sliding guide ways.



Example of rolling guide




Example of sliding guide


Comparative characteristics of rolling and sliding guide ways

Function	Rolling guide	Sliding guide
Friction	• Friction coefficient: 0.01 or lower • Difference between static and dynamic friction is small. • The fluctuation of friction force due to varying speed is far less than sliding guides.	• Friction is high. • The difference between static and dynamic friction coefficient is significant.
Positioning accuracy	• Lost motion is minimal. • Stick-slip is minimal. • Easy to achieve sub-micron positioning	• Larger lost motion • Stick-slip at low speed • Difficult to achieve sub-micron positioning
Life	• Possible to estimate useful life	• Difficult to estimate useful life
Static rigidity	• Generally high • No play because of preload • Easy to estimate rigidity	• Rigidity is great against load from a particular direction. • There is a mechanical play. • Difficult to estimate rigidity
Speed	• Wide range of use from low to high speed	• Unsuitable for extremely low or high speed
Maintenance, reliability	• Long life through a simple maintenance	• Precision is lost greatly by a worn out slide way surface.

In response to the demand for a high-speed, high-precision, high-quality, and easy maintenance, rolling guides which have above features are becoming prevalent.
Utilizing the technology we have sharpened in anti-friction rotating bearings, NSK makes various types of rolling linear guides which are highly accurate and reliable.

A-1-2 Structure and Characteristics of NSK Linear Guides





1. Structure of NSK Linear Guides

By avoiding structural complexity, and by reducing the number of components, we not only enhanced the precision of linear guides, but also are able to keep costs low. We have added NSK's patented unique structural feature to the original invention (**Fig. 1**). This contributes to higher precision and lower prices.
NSK linear guides consist of a rail and a slide (**Fig. 2**). The balls or rollers roll on the race way surface, and are scooped up by the end caps attached to both ends of the ball or roller slide. Then, the balls or rollers go through a passage made in the slide, and circulate back to the other end.

2. Characteristics of NSK Linear Guides

The use of a unique offset Gothic arch groove (**Fig. 3**) allows the ball type of NSK linear guides to satisfy groove designs required for specific purposes.
This unique ball groove design facilitates precise measurement of the ball groove, thus enabling the stable and highly accurate production of the rails and ball slides for random matching. (**Fig. 4**)
On top of that, we have developed and marketed the NSK Roller Guides, representing the culmination of NSK's analysis technology and tribology.
Such technologies ensure the features of NSK linear guides outlined below.

(1) High precision and quality

- High precision and quality come from our superb production and measuring technologies, strengthened by extensive experience in antifriction rotary bearings and ball screw production. Our quality assurance extends to the smallest components.

(2) High reliability and durability

- Logical simplicity in shape, along with stable processing, maintains high precision and reliability.
- Super-clean materials, our advanced heat treatment and processing technologies increase product durability.

(3) Abundant in type for any purpose

- Various series are available, and their slide models and size categories are standardized to satisfy any requirement. Our technology, polished by abundant experience in the use of special materials and surface treatments, meets the customer's most demanding expectations.

(4) Development of random-matching parts for short delivery time

- The adoption of the Gothic arch groove which makes measuring easy, and a new reliable quality control method has made random-matching of the rails and the ball slides possible. The parts are stocked as standard products, thereby reducing delivery time.

(5) Patented static load carrying capacity (impact-resistance)

- When a super-high load (impact) is applied, our Gothic arch groove spreads the load to surfaces which usually do not come into contact in the ball type NSK linear guides. This increases impact load resistance (**Fig. 5**).

(6) Lineup of extremely high-load capacity series

- The LA series provides a top class high-load capacity for the ball linear guides through a unique load carrying configuration with three ball recirculation circuits on the one side.
  By installing rollers that are the largest possible diameter and length, the NSK roller linear guides have realized the world's highest load capacity, far superior to the roller linear guides of other companies.

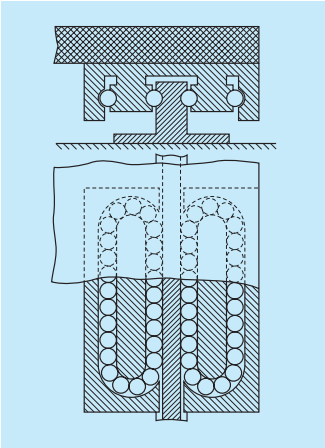


Fig. 1 • French Patent in 1932.
• Inventor: Gretsh (German)

NSK added its patented technology to the invention in Fig. 1, and improved the linear guide structure, thus realizing low cost design.

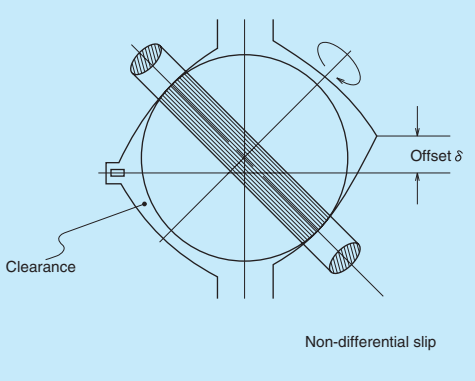


Fig. 3 Two point contacts of the offset Gothic arch groove

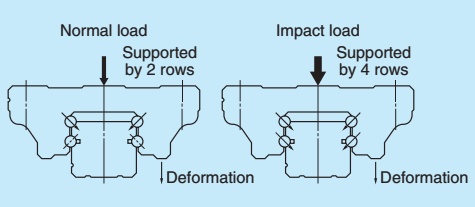


Fig. 5 Shock-resistance

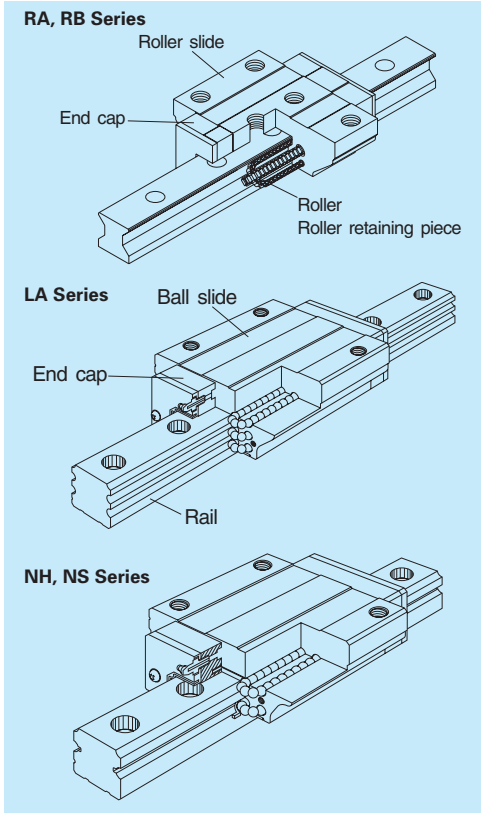


Fig. 2 Structure of NSK linear guides

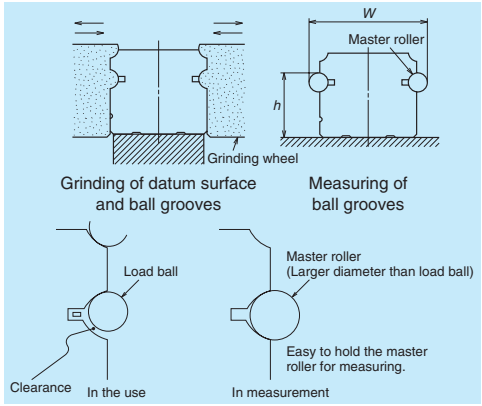






























Fig. 4 Processing and measuring grooves













Measuring grooves is easy: you can obtain highly accurate results for all types of NSK series. This is why you can purchase rails and slides separately for random matching.






A-2 Types of NSK Linear Rolling Guides

Rigidity: ☆, Extremely high; ◎, High; ◎, Medium; ○, Low
Friction characteristics: ◎, Low; ○, Normal
Assembly workability: ◎, Good; ○, Fair

Product	Appearance	Shape	Rolling element	Load carrying characteristics	Rigidity	Friction characteristic	Assembly workability	Major applications	Page
NSK Linear Guides	NH Series 		Ball	High vertical load carrying capacity 	◎	◎	◎	• Industrial robots • Materials handling equipment • Semiconductor manufacturing equipment • Laser cutting machines • Electric discharge machines • Packaging/packing machines	A113
	VH Series 		Ball	High vertical load carrying capacity 	◎	◎	◎	• Industrial robots • Materials handling equipment • Woodworking machines • Laser cutting machines • Electric discharge machines • Packaging/packing machines	A133
	NS Series 		Ball	High vertical load carrying capacity 	◎	◎	◎	• Industrial robots • Materials handling equipment • Electric discharge machines • Woodworking machines • Semiconductor manufacturing equipment • Packaging/packing machines • Pneumatic equipment	A153
	LW Series 		Ball	High vertical load carrying capacity 	◎	◎	◎	• Industrial robots • Materials handling equipment • Electric discharge machines • Woodworking machines • Semiconductor manufacturing equipment • Packaging/packing machines • Pneumatic equipment	A171

Product	Appearance	Shape	Rolling element	Load carrying characteristics	Rigidity	Friction characteristic	Assembly workability	Major applications	Page
NSK Linear Guides	PU Series 		Ball	Four-way equal load carrying capacity 	◯	◎	◎	• Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Medical equipment • Optical stages • Microscope XY stages • Miniature robots • Pneumatic equipment • Computer peripherals	A187
	LU Series 		Ball	Four-way equal load carrying capacity 	◯	◎	◎	• Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Medical equipment • Optical stages • XY stage of microscope • Miniature robots • Pneumatic equipment • Computer peripherals	A197
	PE Series 		Ball	Four-way equal load carrying capacity 	◯	◎	◎	• Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Medical equipment • Optical stages • Microscope XY stages • Miniature robots • Pneumatic equipment • Computer peripherals	A209
	LE Series 		Ball	Four-way equal load carrying capacity 	◯	◎	◎	• Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Medical equipment • Optical stages • XY stages of microscope • Miniature robots • Pneumatic equipment • Computer peripherals	A219
	Miniature LH Series 		Ball	High vertical load carrying capacity 	◎	◎	◎	• Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Medical equipment • Optical stages • Microscope XY stages • Miniature robots • Pneumatic equipment • Computer peripherals	A233
	LL Series 		Ball	Four-way equal load carrying capacity 	◯	◎	◎	• Knitting machines • Computer peripherals • Pneumatic equipment • Office equipment	A243


Product	Appearance	Shape	Rolling element	Load carrying characteristics	Rigidity	Friction characteristic	Assembly workability	Major applications	Page
NSK Linear Guides	RA Series 		Roller	Four-way equal load carrying capacity 	☆	◎	◎	• Machining centers • NC lathes • Heavy cutting machine tools • Various types of NC grinders • Gear-cutting machines • Press machines • Electric discharge machines	A249
	RB Series 		Roller	Four-way equal load carrying capacity 	☆	◎	◎	• Machining centers • NC lathes • Heavy cutting machine tools • Various types of NC grinders • Gear-cutting machines • Press machines • Electric discharge machines	A271
	LA Series 		Ball	Four-way equal load carrying capacity 	◎	○	◎	• Machining centers • NC lathes • Heavy cutting machine tools • Various types of NC grinders • Gear-cutting machines • Press machines • Electric discharge machines	A287
	HA Series 		Ball	Four-way equal load carrying capacity 	◎	○	◎	• Machining centers • Precision lathes • Various types of NC grinders • Electric discharge machines • Optical stages • Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Die molding machines • High-precision measuring equipment	A307
	HS Series 		Ball	High vertical load carrying capacity 	◎	◎	◎	• Machining centers • Precision lathes • Various types of grinders • Electric discharge machines • Optical stages • Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • High-precision measuring equipment	A321

Product	Appearance	Shape	Rolling element	Load carrying characteristics	Rigidity	Friction characteristic	Assembly workability	Major applications	Page
Linear rolling bushing			Ball		○	◎	○	• Materials handling equipment • Packaging/packing machines • Medical equipment • Pneumatic equipment • Office equipment • Assembling machines	A335
Roller pack			Roller		◎	◎	○	• Large machine tools • Conveyor system for heavy objects (guide ways for heavy loads)	A345

A-3 Selection of NSK Linear Rolling Guides

A-3-1 Selection Flow Chart

The flow chart below shows the basic steps for the selection.

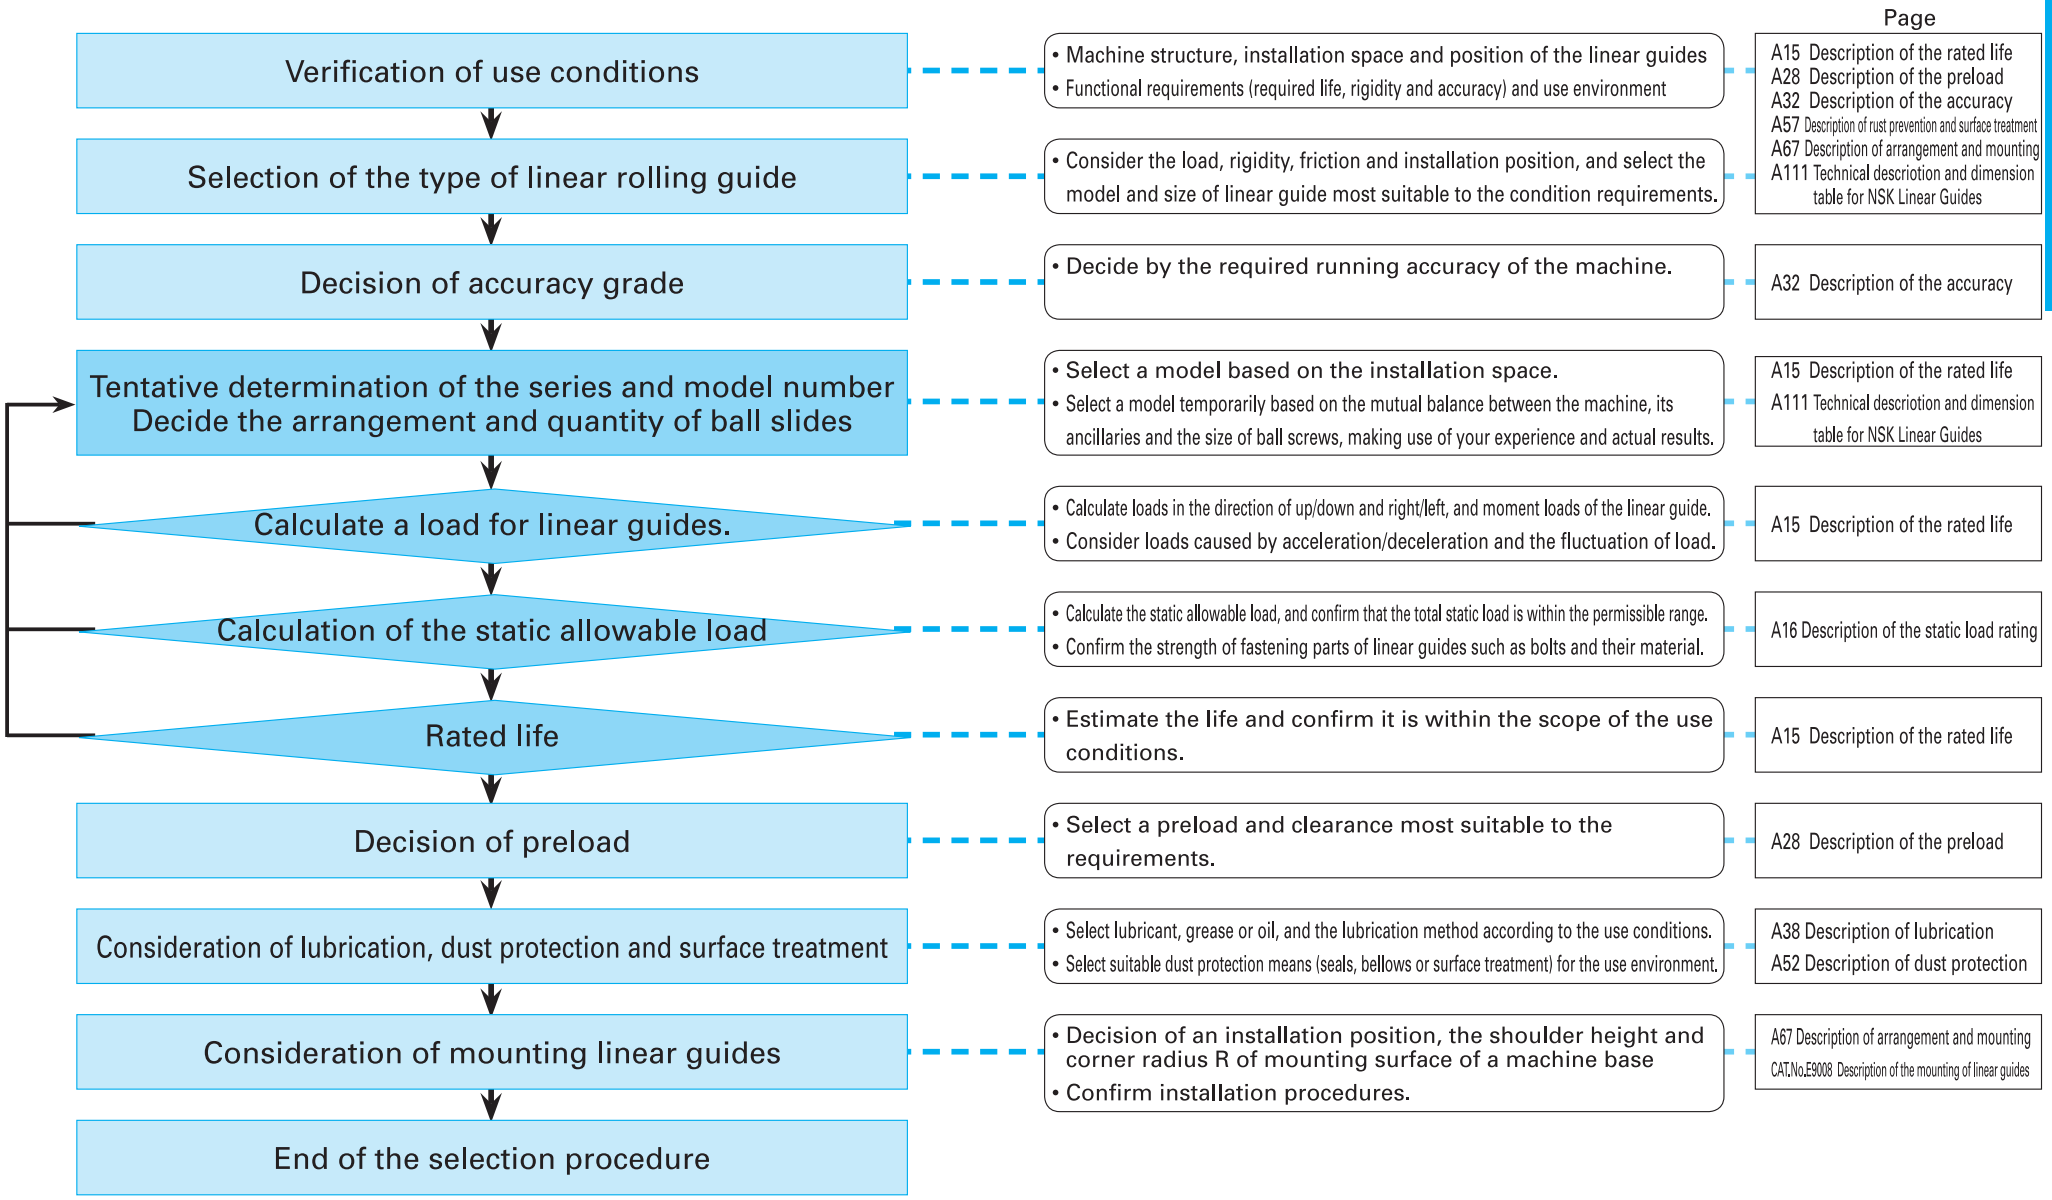

A-3-2 Rating Life and Basic Load Rating

A-3-2.1 Life and Basic Load Rating

1. Life

Although used in appropriate conditions, the linear guide deteriorates after a certain period of operation, and eventually becomes unusable. In broad definition, the period until the linear guide becomes unusable is called "life." There are "fatigue life " caused by flaking, and "accuracy life" which the result of wear components.

2. Rating fatigue life

When the linear guide runs under loads, the rolling elements and the rolling contact surface of the grooves are exposed to repetitive stress. This brings about fatigue to the material, and generates flaking. Flaking is scale-like damage to the surface of the rolling contact surface.

Total running distance until first appearance of flaking is called "fatigue life." This is "life" in the narrow sense. The fatigue life varies significantly even in linear guides produced in the same lot, and even when they are operated under the same conditions. This is attributable to the inherent variation of the fatigue of the material itself.

"Rating fatigue life" is the total running distance which allows 90% of the group of linear guides of the same reference number to run without causing flaking when they are independently run under the same conditions. The rating fatigue life is sometimes indicated by total operating hours when the linear guides run at a certain speed.

3. Basic load ratings in compliance with ISO standard

NSK defines the basic load rating in compliance with the ISO standard.

The basic load rating listed in "**A-5 Technical Description and Dimension Table for NSK Linear Guides.**" comply with the ISO standard.

ISO: International Organization for Standardization

[Basic dynamic load rating]

ISO 14728-1; Rolling bearings — Linear motion rolling bearings

Part 1: Dynamic load ratings and rating life

[Basic static load rating]

ISO 14728-2; Rolling bearings — Linear motion rolling bearings

Part 2: Static load ratings

4. Basic dynamic load rating

- ISO international standard, the basic dynamic load rating, which indicates load carrying capacity of the linear guide, is a load whose direction and volume do not change, and which furnishes 100 km of rating fatigue life.
- In case of the linear guides, it is a constant load applied to downward direction to the center of the slide.
- For balls as rolling element, some linear guide manufacturers in Japan and Asian countries define the load for the basic fatigue life of 50 km as the basic dynamic load ratings.

- The following formula may be used to convert the basic dynamic load rating for 50 km (C_{50}) into the dynamic load rating for 100 km (C_{100}) rated fatigue life.

- For balls as rolling element $C_{100}=\frac{C_{50}}{1.26}$
- For rollers as rolling element $C_{100}=\frac{C_{50}}{1.23}$

5. Calculation of rating fatigue life

- In general, the rating fatigue life "L" can be calculated from the basic dynamic load rating "C" and the load "F" to a slide using the following formula.

[For balls as rolling element] The third power of the index.

For the basic dynamic load rating for 100 km

$$L=100\times\left(\frac{C_{100}}{F}\right)^{3}$$

For the basic dynamic load rating for 50 km

$$L=50\times\left(\frac{C_{50}}{F}\right)^{3}$$

[For rollers as rolling element] The ten third power of the index.

For the basic dynamic load rating for 100 km

$$L=100\times\left(\frac{C_{100}}{F}\right)^{\frac{10}{3}}$$

For the basic dynamic load rating for 50 km

$$L=50\times\left(\frac{C_{50}}{F}\right)^{\frac{10}{3}}$$

L ; Rating fatigue life (km)

C_{100} ; Basic dynamic load rating for 100 km rated fatigue life (N)

C_{50} ; Basic dynamic load rating for 50 km rated fatigue life (N)

F ; Load to a slide (dynamic equivalent load) (N)

6. Dynamic equivalent load

- Loads applied to the linear guide (slide load) comes from various directions up/down and right/left directions and/or as moment loads. Sometimes more than one type of load is applied simultaneously. Sometimes the volume and direction of the load may change.

Various loads cannot be used as they are to calculate the life of the linear guide. Therefore, it is necessary to use a hypothetical load on the slide with a constant volume, which would generate a value equivalent to an actual fatigue life. This is called "dynamic equivalent load." For actual calculation, refer to "**A-3-2.2 3. Calculation of dynamic equivalent load**"

7. Basic static load rating

- When an excessive load or a momentary large impact is applied to the linear guide, local permanent deformation takes place on the rolling elements and on the rolling contact surfaces. After exceeding a certain level, the deformation hampers smooth linear guide operation.
- Basic static load rating is a static load when: [Permanent deformation of the rolling elements] + [permanent deformation of the rolling contact surfaces] becomes approximately 0.0001 times of the rolling element diameter.
- In the case of the linear guides, it is a load which is applied in downward direction to the center of the slide.
- Values of the basic static load rating C_0 are shown in "**A-5 Technical Description and Dimension Table for NSK Linear Guides.**"

8. Basic static moment load rating

- Generally, NSK linear guides use a set of two rails and four slides for the guide way of one axis. Under some operating condition, static moment load should be taken into account.

"M_0," which is the limit of static moment load , and calculated from permanent deformation in such use is shown in "**A-5 Technical Description and Dimension Table for NSK Linear Guides.**"

9. Basic load rating by load direction

- The basic load rating is considered to be a downward load to the slide and is indicated in the dimension tables as the dynamic load rating C and the static load rating C_0 respectively. However, the load may be applied to a slide in upward or lateral directions in actual use. In such a case the basic load rating shall be compensated as shown in **Table 2.1**. The basic dynamic load rating of the RA and LA Series is the same in C and C_0 for all load directions, up, down and lateral, while the NH Series, for an example, has different basic load ratings by the load direction as shown in the table.

Table 2.1 Basic load ratings by load direction

Series \ Load rating / Load direction	Basic dynamic load rating			Basic static load rating		
	Downward	Upward	Lateral	Downward	Upward	Lateral
NH,VH,NS, LW,LH,HS	C	C	$0.84C$	C_0	$0.78C_0$	$0.65C_0$
PU,LU,PE,LE,LL, RA,RB,LA,HA	C	C	C	C_0	C_0	C_0

A-3-2.2 How to Calculate the Life

1. Setting operating condition of linear guide

- First, set operating conditions to determine whether the temporarily selected model satisfies the required life.
- Major operating conditions are as follows. Set all values to calculate applied loads to each slide. (Refer to **Table 2.2**.)

Axis set up	: Horizontal or vertical
Rail combination	: Single rail or multiple rail
Applying loads	: F_x, F_y and F_z (N)
Slide span	: l (mm)
Rail span	: L (mm)
Position of load action point	: X, Y, Z (mm)
Center of driving mechanism	: X_b, Y_b, Z_b (mm)
Operating speed	: V (mm/sec)
Time in acceleration	: t (sec)
Operating frequency (duty cycle)	

2. Calculating load to a slide

- **Table 2.2** shows a formula to calculate loads that are going to be applied to each assembled slide into a machine.
  The Table shows six typical patterns of linear guide installing structure.
- In the Tables, directions indicated by arrows denote "plus" for the applied loads (F_x, F_y, F_z) and the loads which are applied to the slides. (F_r, F_s, M_r, M_p, M_y)
- Codes in the Tables are as follows:
  F_r : Vertical loads to the slide (N)
  F_s : Lateral loads to the slide (N)
  M_r : Rolling moment to the slide (N · mm)
  M_p : Pitching moment to the slide (N · mm)
  M_y : Yawing moment to the slide (N · mm)
  Suffixes (1, 2, ...) to the above F_r – M_y : Slide number
  F_{xi} : Load applied in X direction (i = 1 to n; n is the number of loads applied in X direction) (N)
  F_{yj} : Load applied in Y direction (j = 1 to n; n is the number of loads applied in Y direction) (N)
  F_{zk} : Load applied in Z direction (k = 1 to n; n is the number of loads applied in Z direction) (N)
  Coordinates (X_{xi}, Y_{xi}, Z_{xi}): Point where load F_{xi} (mm) is applied.
  Coordinates (X_{yj}, Y_{yj}, Z_{yj}): Point where load F_{yj} (mm) is applied.
  Coordinates (X_{zk}, Y_{zk}, Z_{zk}): Point where load F_{zk} (mm) is applied.
  l: Slide span (mm)
  L: Rail span (mm)
  Coordinates (X_b, Y_b, Z_b): Center of driving mechanism
  K_r : Vertical direction rigidity of the slide (N/μm)
  K_s : Lateral direction rigidity of the slide (N/μm)

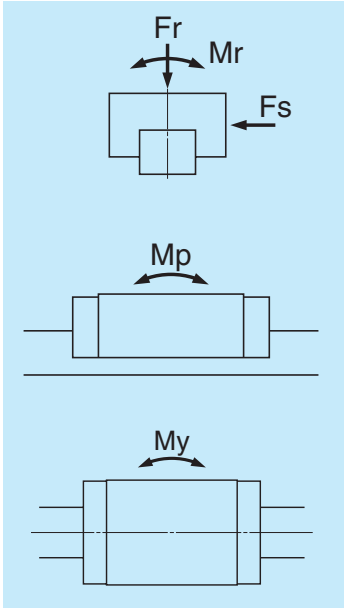
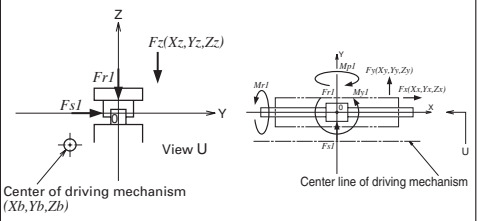
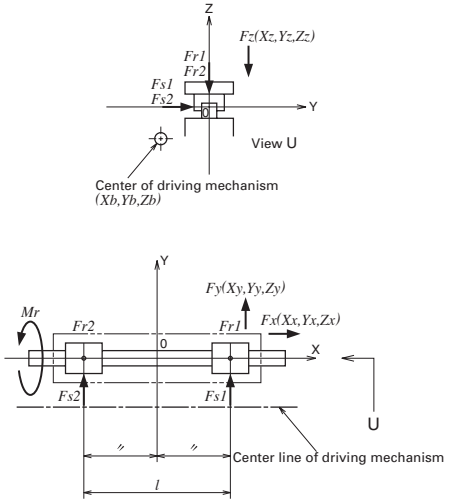
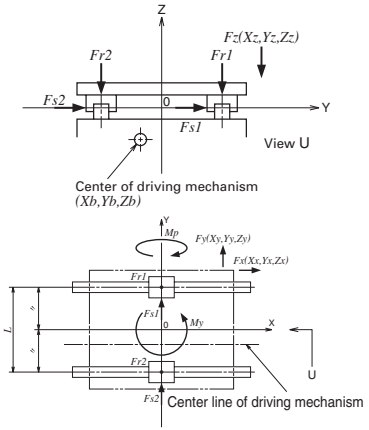
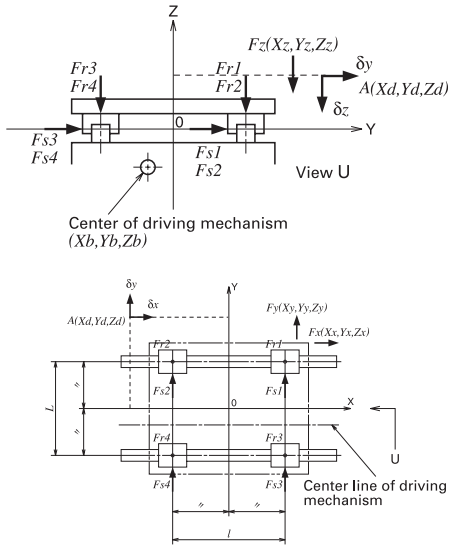
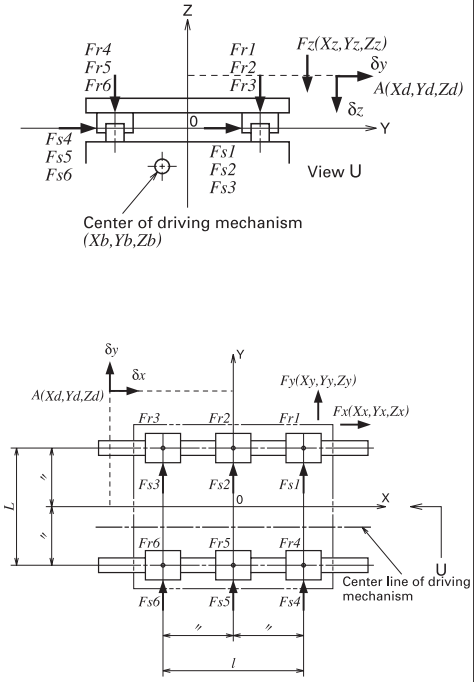
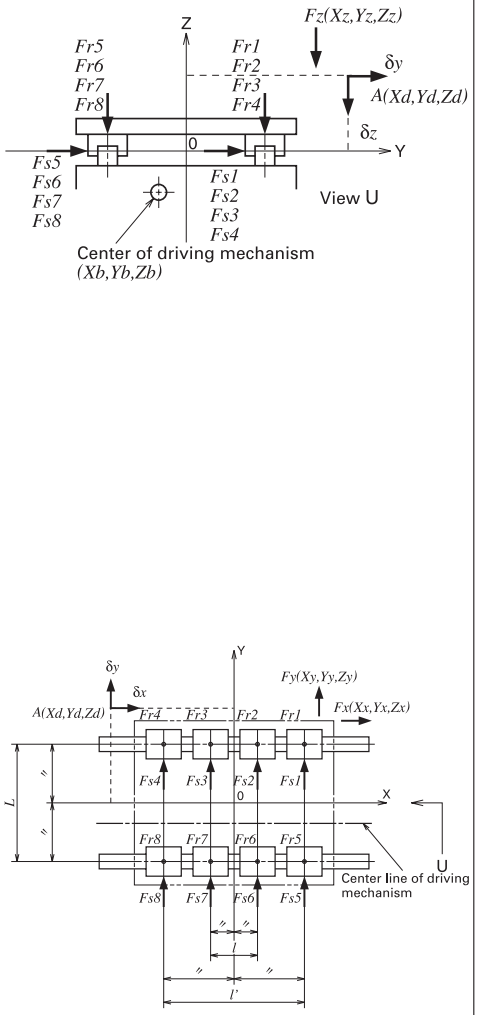


Fig. 2.1

Table 2.2 Loads applied to the slides

Pattern	Arrangement of slides	Load to slide
1		$Fr_1=\sum_{k=1}^{n}Fz_k \quad , \quad Fs_1=\sum_{j=1}^{n}Fy_j$ $Mr_1=\sum_{j=1}^{n}(Fyj\cdot Zyj)+\sum_{k=1}^{n}(Fzk\cdot Yzk)$ $Mp_1=\sum_{i=1}^{n}\{Fxi\cdot(Zxi-Zb)\}+\sum_{k=1}^{n}(Fzk\cdot Xzk)$ $My_1=-\sum_{i=1}^{n}\{Fxi\cdot(Yxi-Yb)\}+\sum_{j=1}^{n}(Fyj\cdot Xyj)$
2		$Fr_1=\frac{\sum_{k=1}^{n}Fz_k}{2}+\frac{M2}{l} \quad , \quad Fr_2=\frac{\sum_{k=1}^{n}Fz_k}{2}-\frac{M2}{l}$ $Fs_1=\frac{\sum_{j=1}^{n}Fy_j}{2}+\frac{M3}{l} \quad , \quad Fs_2=\frac{\sum_{j=1}^{n}Fy_j}{2}-\frac{M3}{l}$ $Mr_1=\frac{M1}{2} \quad , \quad Mr_2=\frac{M1}{2}$ $M1=\sum_{j=1}^{n}(Fy_j\cdot Zy_j)+\sum_{k=1}^{n}(Fz_k\cdot Yz_k)$ $M2=\sum_{i=1}^{n}\{Fx_i\cdot(Zx_i-Zb)\}+\sum_{k=1}^{n}(Fz_k\cdot Xz_k)$ $M3=-\sum_{i=1}^{n}\{Fx_i\cdot(Yx_i-Yb)\}+\sum_{j=1}^{n}(Fyj\cdot Xyj)$
3		$Fr_1=\frac{\sum_{k=1}^{n}Fz_k}{2}+\frac{M1}{L} \quad , \quad Fr_2=\frac{\sum_{k=1}^{n}Fz_k}{2}-\frac{M1}{L}$ $Fs_1=Fs_2=\frac{\sum_{j=1}^{n}Fy_j}{2}$ $Mp_1=Mp_2=\frac{M2}{2} \quad , \quad My_1=My_2=\frac{M3}{2}$ $M1=\sum_{j=1}^{n}(Fy_j\cdot Zy_j)+\sum_{k=1}^{n}(Fz_k\cdot Yz_k)$ $M2=\sum_{i=1}^{n}\{Fx_i\cdot(Zx_i-Zb)\}+\sum_{k=1}^{n}(Fz_k\cdot Xz_k)$ $M3=-\sum_{i=1}^{n}\{Fx_i\cdot(Yx_i-Yb)\}+\sum_{j=1}^{n}(Fy_j\cdot Xy_j)$

Pattern	Arrangement of slides	Load to slide and deformation at Point A
4		$Fr_1=\frac{\sum_{k=1}^{n}Fz_k}{4}+\frac{M1}{2L}+\frac{M2}{2l}$, $Fr_2=\frac{\sum_{k=1}^{n}Fz_k}{4}+\frac{M1}{2L}-\frac{M2}{2l}$ $Fr_3=\frac{\sum_{k=1}^{n}Fz_k}{4}-\frac{M1}{2L}+\frac{M2}{2l}$, $Fr_4=\frac{\sum_{k=1}^{n}Fz_k}{4}-\frac{M1}{2L}-\frac{M2}{2l}$ $Fs_1=Fs_3=\frac{\sum_{j=1}^{n}Fy_j}{4}+\frac{M3}{2l}$, $Fs_2=Fs_4=\frac{\sum_{j=1}^{n}Fy_j}{4}-\frac{M3}{2l}$ $M1=\sum_{j=1}^{n}(Fy_j\cdot Zy_j)+\sum_{k=1}^{n}(Fz_k\cdot Yz_k)$ $M2=\sum_{i=1}^{n}\{Fx_i(Zx_i-Zb)\}+\sum_{k=1}^{n}(Fz_k\cdot Xz_k)$ $M3=-\sum_{i=1}^{n}\{Fx_i(Yx_i-Yb)\}+\sum_{j=1}^{n}(Fy_j\cdot Xy_j)$ $\delta x=Y_d\cdot\frac{Fs_2-Fs_1}{l\cdot Ks}+Z_d\cdot\frac{Fr_1-Fr_2}{l\cdot Kr}$ $\delta y=\frac{\sum_{j=1}^{n}Fy_j}{4\cdot Ks}+X_d\cdot\frac{Fs_1-Fs_2}{l\cdot Ks}+Z_d\cdot\frac{Fr_1-Fr_3}{L\cdot Kr}$ $\delta z=\frac{\sum_{k=1}^{n}Fz_k}{4\cdot Kr}+X_d\cdot\frac{Fr_1-Fr_2}{l\cdot Kr}+Y_d\cdot\frac{Fr_1-Fr_3}{L\cdot Kr}$
5		$Fr_1=\frac{\sum_{k=1}^{n}Fz_k}{6}+\frac{M1}{3L}+\frac{M2}{2l}$, $Fr_2=\frac{\sum_{k=1}^{n}Fz_k}{6}+\frac{M1}{3L}$ $Fr_3=\frac{\sum_{k=1}^{n}Fz_k}{6}+\frac{M1}{3L}-\frac{M2}{2l}$, $Fr_4=\frac{\sum_{k=1}^{n}Fz_k}{6}-\frac{M1}{3L}+\frac{M2}{2l}$ $Fr_5=\frac{\sum_{k=1}^{n}Fz_k}{6}-\frac{M1}{3L}$, $Fr_6=\frac{\sum_{k=1}^{n}Fz_k}{6}-\frac{M1}{3L}-\frac{M2}{2l}$ $Fs_1=Fs_4=\frac{\sum_{j=1}^{n}Fy_j}{6}+\frac{M3}{2l}$, $Fs_2=Fs_5=\frac{\sum_{j=1}^{n}Fy_j}{6}$ $Fs_3=Fs_6=\frac{\sum_{j=1}^{n}Fy_j}{6}-\frac{M3}{2l}$ $M1=\sum_{j=1}^{n}(Fy_j\cdot Zy_j)+\sum_{k=1}^{n}(Fz_k\cdot Yz_k)$ $M2=\sum_{i=1}^{n}\{Fx_i\cdot(Zx_i-Zb)\}+\sum_{k=1}^{n}(Fz_k\cdot Xz_k)$ $M3=-\sum_{i=1}^{n}\{Fx_i\cdot(Yx_i-Yb)\}+\sum_{j=1}^{n}(Fy_j\cdot Xy_j)$ $\delta x=Y_d\cdot\frac{Fs_3-Fs_1}{l\cdot Ks}+Z_d\cdot\frac{Fr_1-Fr_3}{l\cdot Kr}$ $\delta y=\frac{\sum_{j=1}^{n}Fy_j}{6\cdot Ks}+X_d\cdot\frac{Fs_1-Fs_3}{l\cdot Ks}+Z_d\cdot\frac{Fr_1-Fr_4}{L\cdot Kr}$ $\delta z=\frac{\sum_{k=1}^{n}Fz_k}{6\cdot Kr}+X_d\cdot\frac{Fr_1-Fr_3}{l\cdot Kr}+Y_d\cdot\frac{Fr_1-Fr_4}{L\cdot Kr}$

Pattern	Arrangement of slides	Load to slide and deformation at Point A
6		$Fr_1=\frac{\sum_{k=1}^{n}Fz_k}{8}+\frac{M1}{4L}+\frac{M2\cdot l'}{2\cdot(l^2+l'^2)}$ $Fr_2=\frac{\sum_{k=1}^{n}Fz_k}{8}+\frac{M1}{4L}+\frac{M2\cdot l}{2\cdot(l^2+l'^2)}$ $Fr_3=\frac{\sum_{k=1}^{n}Fz_k}{8}+\frac{M1}{4L}-\frac{M2\cdot l}{2\cdot(l^2+l'^2)}$ $Fr_4=\frac{\sum_{k=1}^{n}Fz_k}{8}+\frac{M1}{4L}-\frac{M2\cdot l'}{2\cdot(l^2+l'^2)}$ $Fr_5=\frac{\sum_{k=1}^{n}Fz_k}{8}-\frac{M1}{4L}+\frac{M2\cdot l'}{2\cdot(l^2+l'^2)}$ $Fr_6=\frac{\sum_{k=1}^{n}Fz_k}{8}-\frac{M1}{4L}+\frac{M2\cdot l}{2\cdot(l^2+l'^2)}$ $Fr_7=\frac{\sum_{k=1}^{n}Fz_k}{8}-\frac{M1}{4L}-\frac{M2\cdot l}{2\cdot(l^2+l'^2)}$ $Fr_8=\frac{\sum_{k=1}^{n}Fz_k}{8}-\frac{M1}{4L}-\frac{M2\cdot l'}{2\cdot(l^2+l'^2)}$ $Fs_1=Fs_5=\frac{\sum_{j=1}^{n}Fyj}{8}+\frac{M3\cdot l'}{2\cdot(l^2+l'^2)}$ $Fs_2=Fs_6=\frac{\sum_{j=1}^{n}Fy_j}{8}+\frac{M3\cdot l}{2\cdot(l^2+l'^2)}$ $Fs_3=Fs_7=\frac{\sum_{j=1}^{n}Fy_j}{8}-\frac{M3\cdot l}{2\cdot(l^2+l'^2)}$ $Fs_4=Fs_8=\frac{\sum_{j=1}^{n}Fy_j}{8}-\frac{M3\cdot l'}{2\cdot(l^2+l'^2)}$ $M1=\sum_{j=1}^{n}(Fy_j\cdot Zy_j)+\sum_{k=1}^{n}(Fz_k\cdot Yz_k)$ $M2=\sum_{i=1}^{n}\{Fx_i\cdot(Zx_i-Zb)\}+\sum_{k=1}^{n}(Fz_k\cdot Xz_k)$ $M3=-\sum_{i=1}^{n}\{Fx_i\cdot(Yx_i-Yb)\}+\sum_{j=1}^{n}(Fy_j\cdot Xy_j)$ $\delta x=Y_d\cdot\frac{Fs_4-Fs_1}{l_2\cdot Ks}+Z_d\cdot\frac{Fr_1-Fr_4}{l_2\cdot Kr}$ $\delta y=\frac{\sum_{j=1}^{n}Fy_j}{8\cdot Ks}+X_d\cdot\frac{Fs_1-Fs_4}{l_2\cdot Ks}+Z_d\cdot\frac{Fr_1-Fr_5}{L\cdot Kr}$ $\delta z=\frac{\sum_{k=1}^{n}Fz_k}{8\cdot Kr}+X_d\cdot\frac{Fr_1-Fr_4}{l_2\cdot Kr}+Y_d\cdot\frac{Fr_1-Fr_5}{L\cdot Kr}$

3. Calculation of dynamic equivalent load

• For the calculation of dynamic equivalent load, use the load in **Table 2.3** which matches the intended use of the linear guide.

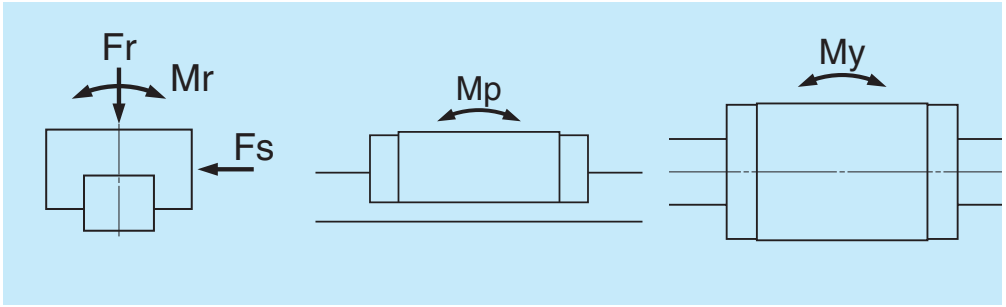






Fig. 2.2

Table 2.3 Loads in the arrangement of linear guides

Pattern	Arrangement of linear guide	Loads necessary to calculate dynamic equivalent load					Dynamic equivalent load
		Load		Moment load			
		Up/down (vertical)	Right/left (lateral)	Rolling	Pitching	Yawing	
1		F_r	F_s	M_r	M_p	M_y	$F_r = F_r$ $F_{se} = F_s \cdot \tan\alpha$ $F_{re} = \varepsilon_r \cdot M_r$ $F_{pe} = \varepsilon_p \cdot M_p$ $F_{ye} = \varepsilon_y \cdot M_y$ α : Contact angle NH, VH, NS, LW, LH, HS Series $\alpha = 50°$ PU, LU, PE, LE, RA, RB, LA, HA Series $\alpha = 45°$
2		F_r	F_s	M_r			
3		F_r	F_s		M_p	M_y	
4		F_r	F_s				

• Use the dynamic equivalent coefficient ε in the table below for an easy conversion of moment loads to the dynamic equivalent load.

• The coefficient of each moment direction is as follows.
ε_r: Rolling direction
ε_p: Pitching direction
ε_y: Yawing direction

Table 2.4 Dynamic equivalent coefficients

Unit: 1/m

Model No.	ε_r	ε_p	ε_y	Model No.	ε_r	ε_p	ε_y	Model No.	ε_r	ε_p	ε_y
NH15	188	111	132	PU05	377	431	431	RA20L	79	55	55
NH15L	188	72	86	PU07	267	349	349	RA25	71	64	64
NH20	142	81	97	PU09	215	222	222	RA25L	71	50	50
NH20L	142	57	68	PU09L	215	136	136	RA30	56	58	58
NH25	123	68	81	PU12	163	204	204	RA30L	56	44	44
NH25L	123	51	61	PU12L	163	125	125	RA35	46	52	52
NH30A	98	70	83	PU15	133	174	174	RA35L	46	39	39
NH30EF	98	58	69	PU15L	133	102	102	RA45	37	40	40
NH30L	98	44	52					RA45L	37	30	30
NH35	78	51	61	LU05	385	359	359	RA55	32	33	33
NH35L	78	36	43	LU07	286	305	305	RA55L	32	24	24
NH45	60	38	45	LU09	217	242	242	RA65	26	28	28
NH45L	60	30	36	LU09L	217	138	138	RA65L	26	19	19
NH55	51	31	37	LU09R	217	203	203				
NH55L	51	25	30	LU12	167	204	204	RB30	56	58	58
NH65	43	27	32	LU12L	167	116	116	RB30L	56	44	44
NH65L	43	20	24	LU15	133	174	174	RB35	46	52	52
				LU15L	133	94	94	RB35L	46	39	39
VH15	188	111	132					RB45	37	40	40
VH15L	188	72	86	PE05	194	277	277	RB45L	37	30	30
VH20	142	81	97	PE07	141	203	203	RB55	32	33	33
VH20L	142	57	68	PE09	123	161	161	RB55L	32	24	24
VH25	123	68	81	PE09L	123	108	108	RB65	26	28	28
VH25L	123	51	61	PE12	90	136	136	RB65L	26	19	19
VH30A	98	70	83	PE12L	90	90	90				
VH30EF	98	58	69	PE15	50	111	111	LA25	122	76	76
VH30L	98	44	52	PE15L	50	72	72	LA25L	122	47	47
VH35	78	51	61					LA30	105	63	63
VH35L	78	36	43	LE05	196	248	248	LA30L	105	43	43
VH45	60	38	45	LE05S	196	323	323	LA35	84	54	54
VH45L	60	30	36	LE07	141	188	188	LA35L	84	37	37
VH55	51	31	37	LE07S	141	349	349	LA45	60	41	41
VH55L	51	25	30	LE07L	141	122	122	LA45L	60	31	31
				LE09	123	149	149	LA55	51	33	33
NS15	177	116	138	LE09S	123	277	277	LA55L	51	26	26
NS15S	177	174	208	LE09L	123	102	102	LA65	43	29	29
NS20	127	94	112	LE12	90	125	125	LA65L	43	20	20
NS20S	127	136	162	LE12S	90	233	233				
NS25	111	70	83	LE12L	90	86	86	HA25	122	33	33
NS25S	111	108	129	LE15	50	102	102	HA30	105	27	27
NS30	94	63	75	LE15S	50	174	174	HA35	84	23	23
NS30S	94	102	121	LE15L	50	68	68	HA45	60	20	20
NS35	76	54	64					HA55	51	16	16
NS35S	76	87	104	LH08	316	269	321				
				LH10	253	203	242	HS15	177	45	54
LW17	66	125	149	LH12	223	136	162	HS20	127	39	47
LW21	59	108	129					HS25	111	33	39
LW27	53	76	91	RA15	105	95	95	HS30	94	27	32
LW35	32	51	61	RA15L	105	70	70	HS35	76	23	28
LW50	25	38	46	RA20	79	74	74				

Definitions of codes appearing at the end of the model number in **Table 2.4**:

L	: Super-high-load type	; NH45L
S	: Medium load type	; NS25S
No code	: High-load type	; NH45__
A	: Ball slide shape is square	; NH30A (only NH30 and VH30)
EF	: Ball slide shape is flanged type (EL, FL type)	; NH30EF (only NH30 and VH30)
R	: Miniature Series with ball retainer	; LU09R (only LU and LE)

• The formula is determined by the relationship of loads in terms of volume. A full dynamic equivalent load can be easily obtained by using each coefficient.
After obtaining the dynamic equivalent load of the necessary load directions from **Table 2.4**, use the formulas below to calculate full dynamic equivalent loads.

- When ***Fr*** is the largest load : ***Fe* = *Fr* + 0.5*Fse* + 0.5*Fre* + 0.5*Fpe* + 0.5*Fye***
- When ***Fse*** is the largest load : ***Fe* = 0.5*Fr* + *Fse* + 0.5*Fre* + 0.5*Fpe* + 0.5*Fye***
- When ***Fre*** is the largest load : ***Fe* = 0.5*Fr* + 0.5*Fse* + *Fre* + 0.5*Fpe* + 0.5*Fye***
- When ***Fpe*** is the largest load : ***Fe* = 0.5*Fr* + 0.5*Fse* + 0.5*Fre* + *Fpe* + 0.5*Fye***
- When ***Fye*** is the largest load : ***Fe* = 0.5*Fr* + 0.5*Fse* + 0.5*Fre* + 0.5*Fpe* + *Fye***

For the values of each dynamic equivalent load in the formulas above, disregard load directions and take the absolute value.

• It is necessary to include the amount of preload for the calculation of rating life when selecting "Z3 medium preload" or "Z4 heavy preload" as a preload. For the calculation of full dynamic equivalent loads that consider preload, see "**A-3-3 6**" on page A31.

4. Calculation of mean effective load

When the load to the slide deviates, obtain a mean effective load which becomes equal to the life of slide under variable load conditions. If the load does not vary, use the full dynamic equivalent load as it is.

(1) When load and running distance vary stepwise (Fig. 2.3)

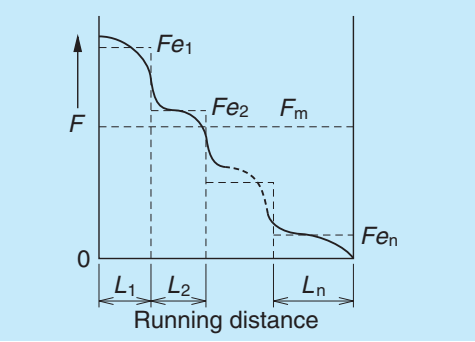


Fig. 2.3 Stepwise load change

Running distance while full dynamic equivalent load Fe_1 is applied: L_1
Running distance while full dynamic equivalent load Fe_2 is applied: L_2
Running distance while full dynamic equivalent load Fe_3 is applied: L_3
• • • • • • • • • • • • • • • • • • •
Running distance while full dynamic equivalent load Fe_n is applied: L_n

From the above, mean effective load F_m can be obtained by the following formula.

In case of ball

$$F_m = \sqrt[3]{\frac{1}{L}\left(Fe_1^3 L_1 + Fe_2^3 L_2 + \cdots\cdots + Fe_n^3 L_n\right)}$$

In case of roller

$$F_m = \sqrt[\frac{10}{3}]{\frac{1}{L}\left(Fe_1^{\frac{10}{3}} L_1 + Fe_2^{\frac{10}{3}} L_2 + \cdots\cdots + Fe_n^{\frac{10}{3}} L_n\right)}$$

F_m : Mean effective load of the deviating load (N)
L : Running distance (ΣL_n)

(2) When load changes almost linearly (Fig. 2.4)
Approximate mean effective load F_m can be obtained by the following formula.

$$F_m \fallingdotseq \frac{1}{3}(F_{min} + 2F_{max})$$

F_{min} : Minimum value of dynamic equivalent load (N)
F_{max} : Maximum value of dynamic equivalent load (N)

(3) When load changes in sinusoidol pattern (Fig. 2.5)
At time of (a): $F_m = 0.65\ F_{max}$
At time of (b): $F_m = 0.75\ F_{max}$

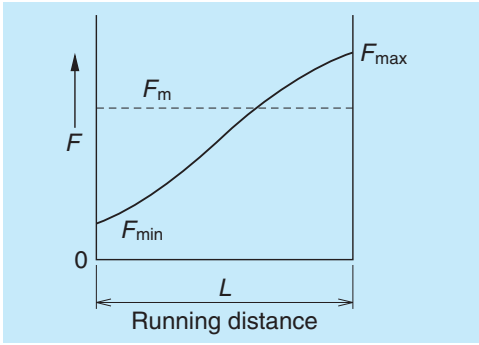


Fig. 2.4 Linear load change

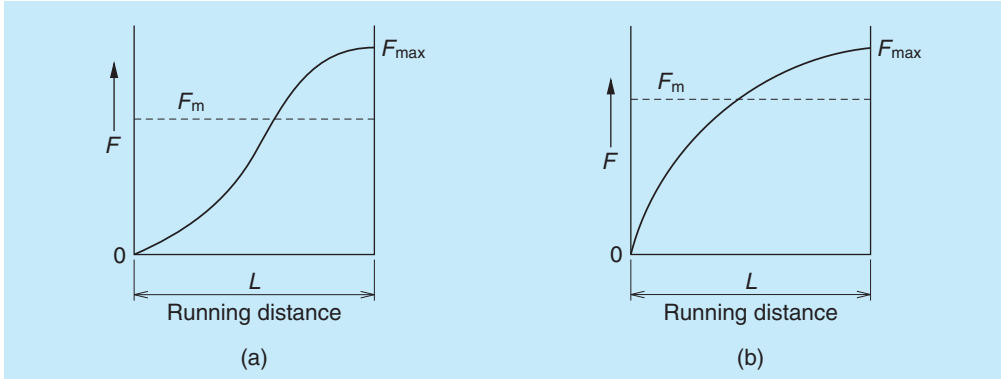


Fig. 2.5 Load that changes in sinusoidal pattern

5. Various coefficients

(1) Load factors

• Although a load applied to the slide can be calculated, the actual load becomes larger than the calculated value due to the machine's vibration and impact.
• Therefore, calculation of load on the slide should take into consideration the load factors in **Table 2.5**.

Table 2.5 Load factor f_w

Impact/Vibration	Load factor
No external impact/ vibration	1.0 – 1.5
There is impact/ vibration from outside.	1.5 – 2.0
There is significant impact/vibration.	2.0 – 3.0

(2) Hardness coefficient

- For linear guides, in order to function optimally, both the rolling elements and the rolling contact surface must have a hardness of HRC58 to 62 to an appropriate depth.
- The hardness of NSK linear guide fully satisfies HRC58 to 62. Therefore, in most cases it is not necessary to consider hardness. If the linear guide is made of a special material by a customer's request, as the material hardness is lower than HRC58, use the following formula for adjustment.

$C_H = f_H \cdot C$

$C_{OH} = f_H' \cdot C_o$

C_H : Basic dynamic load rating adjusted by hardness coefficient

f_H : Hardness coefficient (Refer to **Fig. 2.6**)

C_{OH} : Basic static load rating adjusted by hardness coefficient

f_H' : Static hardness coefficient (Refer to **Fig. 2.6**)

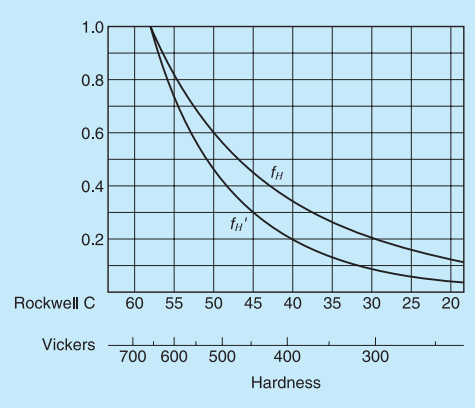


Fig. 2.6 Hardness coefficient

(3) Reliability coefficient

- In general, a reliability of 90% is customary. In this case, reliability coefficient is 1. Therefore, the reliability coefficient does not have to be included in calculation.

6. Calculation of rating life

(1) Life Calculating Formula

The life calculating formula in the stroke movement with normal lubrication, the following relationships exist between the slide mean effective load F_m (N), the basic dynamic load rating to load application direction C (N), and the rating fatigue life L (km).

[For balls as rolling element]

For the basic dynamic load rating for 100 km

$$L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_w \cdot F_m} \right)^3$$

For the basic dynamic load rating for 50 km

$$L = 50 \times \left(\frac{f_H \cdot C_{50}}{f_w \cdot F_m} \right)^3$$

[For rollers as rolling element]

For the basic dynamic load rating for 100 km

$$L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_w \cdot F_m} \right)^{\frac{10}{3}}$$

For the basic dynamic load rating for 50 km

$$L = 50 \times \left(\frac{f_H \cdot C_{50}}{f_w \cdot F_m} \right)^{\frac{10}{3}}$$

L : Rating fatigue life (km)

C_{100} : Basic dynamic load rating for 100 km rated fatigue life (N)

C_{50} : Basic dynamic load rating for 50 km rated fatigue life (N)

f_H : Hardness coefficient

f_W : Load coefficient

F_m : Average load (N)

Note: Do not use the basic static load rating C_0 and the basic static moment rating M_{R0}, M_{P0} or M_{Y0} for a calculation of the life.

(2) Life as an entire guide way system

In those cases when several slides comprise a single guide way system (such as a single-axis table), the life of the slide to which the most strenuous condition is applied is considered to be the life of the entire system.




Fig. 2.7 Life of a system

For example, in **Fig. 2.7**, if "slide A" is the slide which receives the largest mean effective load, or if "slide A" is the one which has the shortest life, the life of the system is considered to be the life of "slide A."

7. Examination of the basic static load rating

(1) Examine from the basic static load rating

- Examine the static equivalent load P_0, which is applied to the slide, from the basic static load rating C_0 and the static permissible load factor fs.

$$fs = \frac{C_0}{P_0}$$

When the static equivalent load P_0 is a combination of vertical loads Fr and lateral load Fs, calculate it using formulas below.

For NH, VH, NS, LW, LH and HS Series:

If compressed load and lateral load are combined

$$P_0 = Fr + 1.54Fs$$

If tensile load and lateral load are combined

$$P_0 = 1.28Fr + 1.54Fs$$

For PU, LU, PE, LE, LL, RA, RB, LA and HA Series:

$$P_0 = Fr + Fs$$

- The table below shows guidelines of fs for general industrial use.

Table 2.6

Use conditions	f_s
Under normal operating conditions	2 – 3
Operating under vibration/impact	2.5 – 4

- Basic static load rating is not a destructive force to the balls, rollers, rails, or slides. The balls can withstand a load more than seven times larger than the basic static load rating . It is sufficient as a safety factor to the destruction load designed for general machines.
- However, when a heavy load applied to the rail and slide in tension direction, the strength of the bolts which secures the rail and the ball slide affects the strength of the entire system. Strength of the bolt and its material should be considered.

(2) Examining from static moment load rating

- Also examine the static permissible moment load M_0 from the basic static moment load M_{po} and the static permissible load factor fs.

$$fs = \frac{M_{p0}}{M_0}$$

If more than one moment load in any direction is combined, please consult NSK.

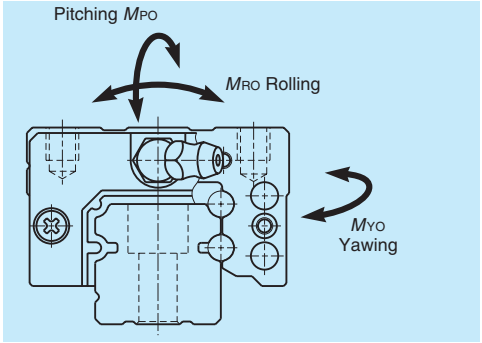


Fig. 2.8 Moment load directions

8. Precautions for the design in examining the life

The following points must be heeded in examining the life.

In case of oscillating motion

- If the rolling elements do not rotate all the way, but only halfway, and if this minute stroke is repeated, lubricant disappears from the contact surface of rolling elements and raceways. This generates "fretting," a premature wear. Fretting cannot be entirely prevented, but it can be mitigated.
- A grease which prevents fretting is recommended for oscillating stroke operations. When a standard grease is used, the life can be markedly prolonged by adding a normal stroke travel (about the slide length) once every several thousand cycles.

When applying pitching or yawing moment

- The load applied to the rolling element rows inside the slide is inconsistent if a pitching or yawing moment load is applied. Loads are heavy on the rolling elements on each end of the row.
- In such case, a heavy load lubricant grease or oil are recommended. Another countermeasure is using one size larger model of linear guide to reduce the load per rolling element.
- The moment load to a ball slide is insignificant for 2-rail, 4-slide combination which is commonly used.

When an extraordinary high load is applied during stroke

- If an extraordinary large load is applied at certain position of the stroke, calculate not only the life based on the mean effective load, but also the life based on the load in this range.
- When an extraordinary heavy load is applied and thus the application of high tensile stress to fixing bolts of the rails and slides is foreseen, the strength of the bolts should be considered.

When the calculated life is extraordinarily short (Less than 3 000 km in calculated life)

- In such case, the contact pressure to the rolling elements and the rolling contact surface is extraordinarily high.
- If the linear guides are operated under such state continually, the life is significantly affected by the loss of lubrication and the presence of dust, and thus the actual life becomes shorter than calculated.
- It is necessary to reconsider the arrangement of linear guides, the number of slide, and the type of model in order to reduce the load to the slides.
- It is necessary to consider preload for calculation of rating life when selecting Z3 (medium preload) or Z4 (heavy preload) as a preload. For the calculation of full dynamic equivalent loads that consider preload, see "**A-3-3 6**" on page A31.

Application at high speed

- The standard maximum allowable speed of a linear guide under normal conditions is 100 m/min. However, the maximum allowable speed can be affected by accuracy of installation, operating temperature, external loading etc.
- The end cap with high speed specification must be used when the operating speed exceeds the permissible speed. In such a case, please consult NSK.

A-3-3 Preload

1. Objective of preload

- An elimination of clearance between the raceways and rolling elements vanishes the mechanical play of the linear guide system.
- When a preload is applied, the deformation of linear guides by external vertical load is further improved thus increasing the system stiffness.
- Preloading method
  The preload is applied by inserting rolling elements slightly bigger than the space of two raceways as shown in **Fig. 3.1**.

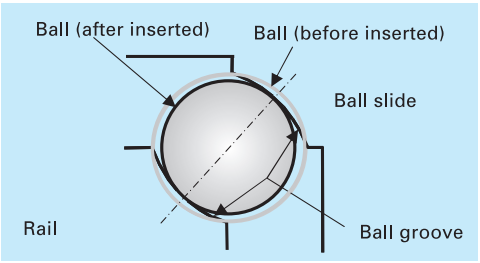


Fig. 3.1 Preloading method

2. Preload and rigidity

- In NSK linear guides, slight size changes of rolling elements, which are going to be inserted in the slide, control the clearance and amount of preload.
- In NSK linear guides, the rigidity is further increased and the elastic deformation is reduced by applying preload.
- In general, the load range of ball guide system in which the preload is effective, is about 2.8 times of the preload (**Fig.3.2**). For roller guide system, it becomes about 2.2 times of the preload.
- **Fig. 3.3** shows the relationship between the ball slide deformation and the external vertical load under a specified preload. NH35 is used as an example.
- The following show the definition of linear guide rigidity.

(1) Radial rigidity: Rigidity of vertical and lateral directions, up/down and right/left (**Fig. 3.4**).
(2) Moment rigidity: Three moment directions, pitching, rolling, and yawing (**Fig. 3.5**).

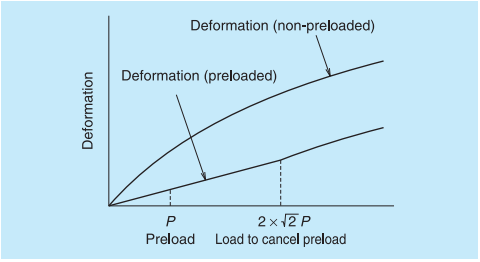


Fig. 3.2 Elastic deformation

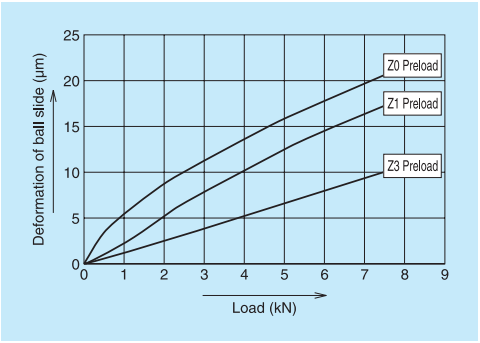


Fig. 3.3 Rigidity of NH35, downward direction load (example)

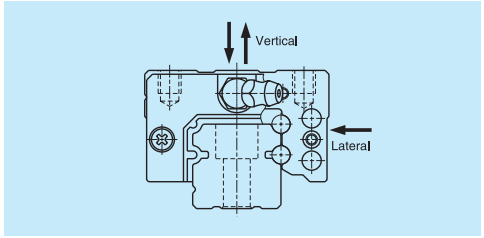


Fig. 3.4 Radial rigidity

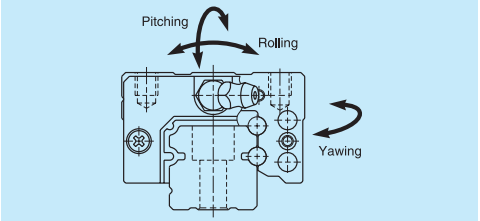


Fig. 3.5 Moment rigidity

- Since two rails and four slides are used in general as a pair, consideration only for the radial rigidity is sufficient.
- However, in cases as shown in **Fig. 3.6**, **Fig. 3.7** and **Fig. 3.8**, it is necessary to take into account the moment rigidity in addition to the radial rigidity.

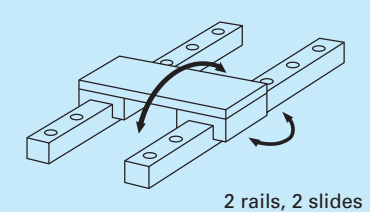


Fig. 3.6 Pitching and yawing direction




Fig. 3.7 Rolling direction




Fig. 3.8 All directions

3. Selection of preload classification

- Several types of preload that match the characteristic of each series are set for NSK linear guides.
- Types of preload classification for each series are shown in **Table 3.1**. **Table 3.2** shows the selection criterion of the preload classification.

Table 3.1 Classification of preload in each series

	Preload	Preloaded assembly (not random matching)				Random-matching type		
		Heavy preload	Medium preload	Slight preload	Fine clearance	Medium preload	Slight preload	Fine clearance
	Series	Z4	Z3	Z1	Z0	ZH	ZZ	ZT
Ball guide	NH, NS		○	○	○	○	○	○
	VH		○	○	○		○	○
	LW		(○)	○	○		○	○
	PU			○	○			○
	LU			○	○			○
	PE			○	○			○
	LE			○	○			○
	Miniature LH			○	○			
	LL				○			
	LA	○	○					
	HA		○	○				
	HS		○	○				
Roller guide	RA		○	○		○	○	
	RB		○					

Table 3.2 Selection criterion of the preload

Classification of preload	Use condition	Applications
Z0 and ZT (Fine clearance)	• An application in which a set of two parallel linear guides (four slides/two rails) is used to sustain a unidirectional load with low vibration and impact. • An application in which the accuracy is not very necessary but a friction force must be minimized.	Welding machines, Glass processing machines, Packaging/packing machines, Materials handling equipment
Z1 and ZZ (Slight preload)	• Moment loads are applied. • Application for a highly accurate operation.	Industrial robots, Inspection/measuring equipment, Laser cutting machine, Electric discharge machines, PCB drillers, Chip mounters
Z3, ZH, and Z4 (Medium preload, Heavy preload)	• Application in which extremely high stiffness is essential. • Application in which vibration and impact load will be applied.	Machining centers, Lathes, Milling machines, Boring machines, Grinders

4. Estimation of the elastic deformation

The followings are the relation between load and deformation.

- Without the preload
  When the rolling element is ball
  The deformation is proportional to the 2/3 power of the load.
  When the rolling element is roller
  The deformation is proportional to the 9/10 power of the load.
- With the preload
  The deformation is directly proportional to the load.




Fig. 3.9 Elastic deformation

A preloaded linear guide deforms proportionally to the load as shown in **Fig. 3.9**; the calculation of system deformation can be done using the deformation curve. The factors required for an estimation of the system deformation are listed below. The stiffness of slide is shown on the relevant explanation of each linear guide series.

<Required conditions to calculate deformation>
- Volume of load
- Direction of load
- Point of load application
- Position of deformation calculation
- Arrangement of rails and ball slides
- Position of a driving mechanism

Please refer to the calculation formula of deformation for typical table structures on the pages A18 to A20.

5. Application examples of preload

Table 3.3 shows typical application for each preload types of the NSK linear guides.
Refer to this table when selecting the preload type for your application.

Table 3.3 Application examples of preload

Type of machine	Application	Preload						
		Preloaded assembly				Random-matching type		
		Heavy preload	Medium preload	Slight preload	Fine clearance	Medium preload	Slight preload	Fine clearance
		Z4	Z3	Z1	Z0	ZH	ZZ	ZT
Machine tools	Machining centers	○	○			○		
	Jig borers	○	○			○		
	Grinder	○	○			○		
	Lathes	○	○			○		
	Milling machines	○	○			○		
	Drilling machines	○	○			○		
	Boring machines	○	○			○		
	Gear cutters	○	○			○	○	
	Laser cutting machines		○	○	○	○	○	
	Electric discharge machines	○	○	○		○		
	Turning centers	○	○			○		
	Transport section (including ATC, etc.)		○	○	○	○	○	○
	Punch presses		○	○	○	○	○	○
	Other processing machines		○	○		○		
Industrial machines and equipment	Press machines		○	○	○	○	○	○
	Welding machines		○	○	○	○	○	○
	Painting machines		○	○	○	○	○	○
	Coil winders		○	○	○	○	○	○
	Woodworking machines		○	○	○	○	○	○
	Glass processing machines		○	○	○	○	○	○
	Stone cutting machines		○	○	○	○	○	○
	Industrial robots		○	○	○	○	○	○
	Assembling devices		○	○	○	○	○	○
	Material handling equipment		○	○	○	○	○	○
	Packing machines		○	○	○	○	○	○
	Paper manufacturing machines		○	○	○	○	○	○
	Steel machinery		○	○	○	○	○	○
	Textile machines		○	○	○	○	○	○
	Tire manufacturing equipment		○	○	○	○	○	○
	Measuring/inspection equipment			○		○	○	
	Image processing device		○	○	○	○	○	
	Three-dimensional measuring equipment		○	○		○	○	
	Medical equipment			○	○	○	○	○
	Food processing equipment			○	○	○	○	○
	OA equipment			○	○	○	○	○
	Pneumatic equipment			○	○	○	○	○
	Platform door (railway related)			○			○	
	Rechargeable battery manufacturing equipment		○	○	○	○	○	○
	Other inspection equipment		○	○	○	○	○	○
	Other machines		○	○	○	○	○	○
Semiconductor and flat panel display manufacturing equipment	Wafer slicers		○			○	○	
	Chemical processing equipment		○	○	○	○	○	○
	Lithographic machines		○	○		○	○	
	Probers		○	○		○	○	
	Wafer dicers		○			○	○	
	Bonders		○	○		○	○	
	Wire bonders		○	○		○	○	
	IC handlers		○	○	○	○	○	○
	Printed circuit board drilling machines		○	○		○	○	
	Electronic component mounting machines		○	○	○	○	○	○
	Semiconductor/flat panel display inspection equipment			○		○	○	○
	Other semiconductor/flat panel display equipment		○	○	○	○	○	○

6. Load and rating life when the preload is taken into account

- It is necessary to include the amount of preload for the calculation of rating life when the Z3 (medium preload) or the Z4 (heavy preload) preload type is specified.

- Full dynamic equivalent load when the preload is taken into account can be obtained by the following formulas.

For balls as rolling element

$$Fe_P = P\left(1+\frac{Fe}{2.83\times P}\right)^{\frac{3}{2}}$$

***P*: Preload (N)**

However, when the full dynamic equivalent load taking account of preload is larger than the load at which preload is removed, $Fe_P = Fe$.
For this case, preload is lost at $F_{PO} = 2\frac{3}{2}P$

For rollers as rolling element

$$Fe_P = P\left(1+\frac{Fe}{2.16\times P}\right)^{\frac{10}{9}}$$

***P*: Preload (N)**

However, when the full dynamic equivalent load taking preload into account is larger than the load at which preload is removed, $Fe_P = Fe$.
For this case, preload is lost at $F_{PO} = 2\frac{10}{9}P$

7. Calculating friction force by preload

- Dynamic friction force per one slide of the ball guide can be calculated from a preload value.
- The following is a simple calculation to obtain the criterion of dynamic friction force.
  For the slight preload ZZ of a preloaded random-matching type linear guide, use the preload volume of slight preload Z1 type assembly.

$F = iP$

F : Dynamic friction force (N)
P : Preload (N)
i : Contact coefficient

Use the following contact coefficient values (i) for each series of linear guides.

NH, VH, NS, LW, LH and HS Series	**: 0.004**
LA and HA Series	**: 0.010**
PU, LU, PE and LE Series	**: 0.026**

- The starting friction force when the slide begins to move depends on lubrication condition. Roughly estimate it at 1.5 to 2 times of the dynamic friction obtained by the above method.

Calculation example

In case of NH35AN - Z3
$i = 0.004$
$P = 2\,350$ (N) (refer to NH series preload)
$F = iP$
$= 0.004 \times 2\,350 = 9.4$ (N)
Therefore, the criteria of the dynamic friction force of NH35AN - Z3 is 9.4 N.

For seal friction, refer to seal friction of each Series.

A-3-4 Accuracy

1. Accuracy standard

The accuracy characteristics of linear guide are specified to each series in the variations of assembled height, assembled width, and running parallelism. We also specify the mutual variation of a pair of linear guides in the assembled height and assembled width. The accuracy of the table equipped with a set of linear guides is depending on other accuracies and many factors besides the accuracy of linear guides. Those are the accuracy of the mounting surface of the machine, the mounting span between two linear guides, the span of ball slides, the number of ball slides, and the location of the point at where the accuracy is really required. The NSK linear guides can deal with these factors and provide the best suited model for your specific application.

2. Definition of accuracy

- **Table 4.1**, **Fig. 4.1** and **Fig. 4.2** show accuracy characteristics.

Table 4.1 Definition of accuracy

Characteristics	Definition (**Figs. 4.1** and **4.2**)
Mounting height H	Distance from A (rail bottom datum surface) to C (slide top surface)
Variation of H	Variation of H in slides assembled to the rails of a set of linear guides
Mounting width W_2 or W_3	Distance from B (rail side datum surface) to D (slide side datum surface). Applicable only to the reference linear guide.
Variation of W_2 or W_3	Difference of the width (W_2 or W_3) between the assembled slides which are installed in the same rail. Applicable only to the reference linear guide.
Running parallelism of slide, surface C to surface A	Variation of C (slide top surface) to A (rail bottom datum surface) when slide is moving.
Running parallelism of slide, surface D to surface B	Variation of D (slide side datum surface) to B (rail side datum surface) when a slide is moving.

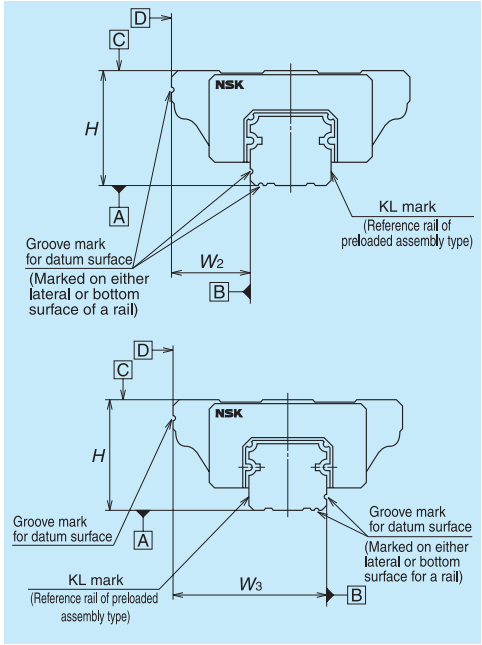


Fig. 4.1 Assembled dimensions

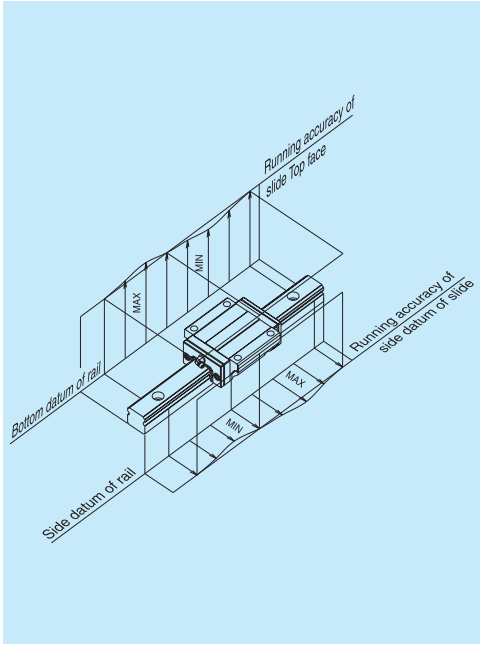


Fig. 4.2 Running parallelism of slide

Mounting width: W_2 and W_3

- Mounting width differs depending on the arrangement of the datum surfaces of the rail and slide on the reference linear guide (indicated as KL on the rail). (**Fig. 4.3** and **Fig. 4.4**)

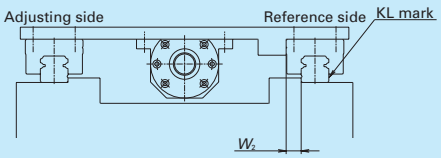


Fig. 4.3 Mounting width W_2

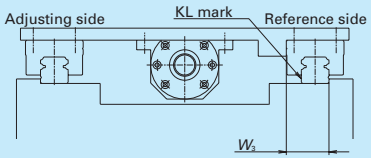


Fig. 4.4 Mounting width W_3

Running Parallelism of Slide

The running parallelism which matches the characteristic of each series is set. It is shown in Table4.2 and 4.3. In addition, applicable accuracy grades differ by series. Please refer to "**Table 4.5 Accuracy grade and applicable series**" on page A36.

Table 4.2 Running parallelism of slide for NH, VH, NS, LW, RA, RB, LA, HA, HS Series Unit: μm

Rail length (mm) over	Rail length (mm) or less	Accuracy grade: Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN	High precision PH	Normal grade PC
	Preloaded assembly (not random matching)						Random-matching type	
–	50	2	2	2	4	5	2	5
50 –	80	2	2	3	4	5	3	5
80 –	125	2	2	3	4	5	3	5
125 –	200	2	2	3.5	5	6	3.5	6
200 –	250	2	2.5	4.5	6	7.5	4.5	7.5
250 –	315	2	2.5	5	6.5	8.5	5	8.5
315 –	400	2	3	5.5	7	9.5	5.5	9.5
400 –	500	2	3	6	7.5	11	6	11
500 –	630	2	3.5	6.5	8.5	12	6.5	12
630 –	800	2	4	7	9.5	13	7	13
800 –	1 000	2.5	4.5	7.5	10	15	7.5	15
1 000 –	1 250	3	5	8.5	12	16	8.5	16
1 250 –	1 600	3.5	5.5	9.5	13	17	9.5	17
1 600 –	2 000	4	6.5	11	14	19	11	19
2 000 –	2 500	4.5	7.5	12	16	21	12	21
2 500 –	3 150	5.5	8.5	13	18	23	13	23
3 150 –	4 000	6	9.5	14	19	25	14	25

Table 4.3 Running parallelism of slide for PU, LU, PE, LE, Miniature LH Series Unit: μm

Rail length (mm) over	Rail length (mm) or less	Accuracy grade: Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN	High precision PH	Normal grade PC
	Preloaded assembly (not random matching)						Random-matching type	
–	50	2	2	2	4.5	6	2	6
50 –	80	2	2	3	5	6	3	6
80 –	125	2	2	3.5	5.5	6.5	3.5	6.5
125 –	200	2	2	4	6	7	4	7
200 –	250	2	2.5	5	7	8	5	8
250 –	315	2	2.5	5	8	9	5	9
315 –	400	2	3	6	9	11	6	11
400 –	500	2	3	6	10	12	6	12
500 –	630	2	3.5	7	12	14	7	14
630 –	800	2	4.5	8	14	16	8	16
800 –	1 000	2.5	5	9	16	18	9	18
1 000 –	1 250	3	6	10	17	20	10	20
1 250 –	1 600	4	7	11	19	23	11	23
1 600 –	2 000	4.5	8	13	21	26	13	26
2 000 –	2 500	5	10	15	22	29	15	29
2 500 –	3 150	6	11	17	25	32	17	32
3 150 –	4 000	9	16	23	30	34	23	34

3. Application examples of accuracy grade and preload

Table 4.4 shows examples of accuracy grade and preload of NSK linear guides for specific purposes. Refer to this table when selecting accuracy grade and preload type for your application.

Table 4.4 Application examples of accuracy grade and preload

Type of machine	Application	Accuracy grade							Preload						
		Preloaded assembly					Random-matching type		Preloaded assembly				Random-matching type		
		Ultra precision	Super precision	High precision	Precision grade	Normal grade	High precision	Normal grade	Heavy preload	Medium preload	Slight preload	Fine clearance	Medium preload	Slight preload	Fine clearance
		P3	P4	P5	P6	PN	PH	PC	Z4	Z3	Z1	Z0	ZH	ZZ	ZT
Machine tools	Machining centers		○	○	○		○		○	○			○		
	Jig borers	○	○	○	○		○		○	○			○		
	Grinder	○	○	○	○		○		○	○			○		
	Lathes		○	○	○		○		○	○			○		
	Milling machines		○	○	○		○		○	○			○		
	Drilling machines		○	○	○		○		○	○			○		
	Boring machines		○	○	○		○		○	○			○		
	Gear cutters		○	○	○		○		○	○			○	○	
	Laser cutting machines		○	○	○		○			○	○	○	○	○	
	Electric discharge machines	○	○	○			○		○	○	○		○		
	Turning centers		○	○	○		○		○	○			○		
	Transport section (including ATC, etc.)				○	○	○	○		○	○	○	○	○	○
	Punch presses		○	○	○		○	○		○	○	○	○	○	○
	Other processing machines		○	○	○		○			○	○		○		
Industrial machines and equipment	Press machines				○	○	○	○		○	○	○	○	○	○
	Welding machines				○	○	○	○		○	○	○	○	○	○
	Painting machines				○	○	○	○		○	○	○	○	○	○
	Coil winders				○	○	○	○		○	○	○	○	○	○
	Woodworking machines				○	○	○	○		○	○	○	○	○	○
	Glass processing machines				○	○	○	○		○	○	○	○	○	○
	Stone cutting machines				○	○	○	○		○	○	○	○	○	○
	Industrial robots			○	○	○	○	○		○	○	○	○	○	○
	Assembling devices			○	○	○	○	○		○	○	○	○	○	○
	Material handiing equipment			○	○	○	○	○		○	○	○	○	○	○
	Packing machines				○	○	○	○		○	○	○	○	○	○
	Paper manufacturing machines				○	○	○	○		○	○	○	○	○	○
	Steel machinery				○	○	○	○		○	○	○	○	○	○
	Textile machines				○	○	○	○		○	○	○	○	○	○
	Tire manufacturing equipment				○	○	○	○		○	○	○	○	○	○
	Measuring/inspection equipment	○	○	○	○		○				○		○	○	
	Image processing device	○	○	○	○		○			○	○	○	○	○	
	Three-dimensional measuring equipment	○	○	○	○		○			○	○		○	○	
	Medical equipment		○	○	○		○	○			○	○	○	○	○
	Food processing equipment				○	○	○	○			○	○	○	○	○
	OA equipment				○	○	○	○			○	○	○	○	○
	Pneumatic equipment				○	○	○	○			○	○	○	○	○
	Platform door (railway related)					○		○			○			○	
	Rechargeable battery manufacturing equipment			○	○	○	○	○		○	○	○	○	○	○
	Other inspection equipment		○	○	○		○			○	○	○	○	○	○
	Other machines			○	○	○	○	○		○	○	○	○	○	○
Semiconductor and flat panel display manufacturing equipment	Wafer slicers	○	○	○	○					○			○	○	
	Chemical processing equipment	○	○	○	○		○			○	○	○	○	○	○
	Lithographic machines	○	○	○	○		○			○	○		○	○	
	Probers	○	○				○			○	○		○	○	
	Wafer dicers	○	○							○			○	○	
	Bonders									○	○		○	○	
	Wire bonders			○	○		○			○	○		○	○	
	IC handlers		○	○	○		○	○		○	○	○	○	○	○
	Printed circuit board drilling machines	○	○	○			○			○	○		○	○	
	Electronic component mounting machines		○	○	○		○	○		○	○	○	○	○	○
	Semiconductor/flat panel display inspection equipment										○		○	○	○
	Other semiconductor/flat panel display equipment			○	○	○	○	○		○	○	○	○	○	○

Note: Only Z1 and Z0 are available for PN grade.
For random-matching type, preload "ZH" and "ZZ" are available for PH grade. For PC grade, "ZH", "ZZ" and "ZT" are available.

4. Combination of accuracy grade and preload

(1) Accuracy grades

- The accuracy grade which matches the characteristic of each series is set for the NSK linear guides.
- **Table 4.5** shows the accuracy grades available for each series.
- Refer to "**3. Application examples of accuracy grade and preload**" which shows cases of appropriate accuracy grade for specific purpose.

Table 4.5 Accuracy grades and applicable series

Series	Preloaded assembly (not random matching)					Random-matching type	
	Ultra precision	Super precision	High precision	Precision grade	Normal grade	High precision	Normal grade
	P3	P4	P5	P6	PN	PH	PC
NH, NS	○	○	○	○	○	○	○
VH	○	○	○	○	○		○
LA	○	○	○	○			
LW			○	○	○		○
PU, LU, PE, LE		○	○	○	○		○
Miniature LH		○	○	○	○		
LL					○		
HA, HS	○	○	○				
RA	○	○	○	○		○*	
RB	○	○	○	○			

*) Only RA25 to RA65 are available in random matching.

(2) Preload

- Several classifications of preload that match the characteristic of each series are set for the NSK linear guides.
- The classification of preload for each series are shown in **Table 4.6**.
- Refer to the specifications of each series for details of radial clearance, preload, and rigidity.
- "**3. Application examples of accuracy grade and preload**" shows the cases of appropriate preload classifications and accuracy grades for specific purposes.

Table 4.6 Classification of preload

Series	Preloaded assembly (not random matching)				Random-matching type		
	Heavy preload	Medium preload	Slight preload	Fine clearance	Medium preload	Slight preload	Fine clearance
	Z4	Z3	Z1	Z0	ZH	ZZ	ZT
NH, NS		○	○	○	○	○	○
VH		○	○	○		○	○
LA	○	○					
LW		(○)	○	○		○	○
PU, LU, PE, LE			○	○			○
Miniature LH			○	○			
LL				○			
HA, HS		○	○				
RA		○	○		○	○	
RB		○					

Notes: 1) Z3 preload classification is only applicable to LW35 and LW50 for LW Series.
2) Only RA25 to RA65 are available in random matching.
3) The preload code of "Z" is omitted from the specification number. Only the number of preload classification code is specified on the last code of the reference number. (Refer to the reference number of each series.)

(3) Combinations of accuracy grade and preload

• Combinations of accuracy grade and preload are shown in **Table 4.6**.

Table 4.6 Combinations of accuracy grade and preload type

	Accuracy grade	Preload
Preloaded assembly	P3 – P6	Z4 – Z0
	PN	Z1, Z0
Random-matching type	PC, PH*1, *2	ZH, ZZ, ZT

*1) The random-matching type is available for the models of RA25 to RA65. PH grade is set for the accuracy.
*2) ZH and ZZ preload are available for the PH accuracy grade.

A-3-5 Maximum Rail Length

General Purpose Series Unit: mm

Series	Material \ Size	15	20	25	30	35	45	55	65
NH	Special high carbon steel	2 980	3 960	3 960	4 000	4 000	3 990	3 960	3 900
	Stainless steel	1 800	3 500	3 500	3 500				
VH	Special high carbon steel	2 000	3 960	3 960	4 000	4 000	3 990	3 960	
	Stainless steel	1 800	3 500	3 500	3 500				
NS	Special high carbon steel	2 920	3 960	3 960	4 000	4 000			
	Stainless steel	1 800	3 500	3 500	3 500	3 500			

Unit: mm

Series	Material \ Size	17	21	27	35	50
LW	Special high carbon steel	1 000	1 600	2 000	2 000	2 000

Miniature Series Unit: mm

Series	Material \ Size	05	07	08	09	10	12	15
PU	Stainless steel	210	375		600		800	1 000
LU	Special high carbon steel				1 200		1 800	2 000
	Stainless steel	210	375		600		800	1 000
PE	Stainless steel	150	600		800		1 000	1 200
LE	Stainless steel	150	600		800		1 000	1 200
LH	Stainless steel			375		600	800	

High Rigidity Series Unit: mm


Series	Material \ Size	15	20	25	30	35	45	55	65
RA	Special high carbon steel	2 000	3 000	3 900	3 900	3 900	3 650	3 600	3 600
RB	Special high carbon steel				3 900	3 900	3 650	3 600	3 600
LA	Special high carbon steel			3 960	4 000	4 000	3 990	3 960	3 900

High-Accuracy Series Unit: mm

Series	Material \ Size	15	20	25	30	35	45	55
HA	Special high carbon steel			3 960	4 000	4 000	3 990	3 960
HS	Special high carbon steel	2 000	3 960	3 960	4 000	4 000		
	Stainless steel	1 300	3 500	3 500	3 500	3 500		

A-3-6 Lubrication

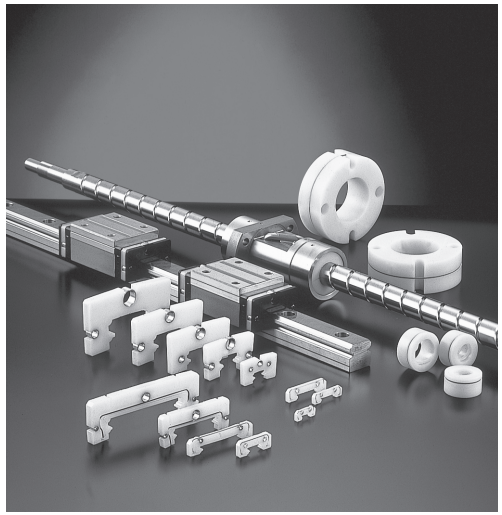
1. NSK linear guides equipped with "NSK K1™" lubrication unit



NSK K1 lowers machine operation cost, and reduces impact on the environment.

What is "long-term, maintenance-free" operation?
Ball screws and linear guides which are equipped with NSK K1 do not require maintenance for five years or up to 10 000 km operational distance.

What is NSK K1 lubrication unit?
NSK K1 is a lubrication device which combines oil and resin in a single unit. The porous resin contains a large amount of lubrication oil. Touching its surface to the raceway of a rail close to the ball contact point NSK K1 constantly supplies fresh oil which seeps from the resin.



Enlarged surface of NSK K1 Lubrication Unit

Polyolefin
Unlike vinyl chloride products, polyolefin does not produce dioxin. Polyolefin is also being used increasingly at supermarkets for food wrapping.

Lubrication oil
It is mineral oil-based lubricant. The oil has a viscosity of 100 cSt.

Remarkable capacity with new material:
NSK K1™ lubrication unit information

- A NSK K1 lubrication unit (referred to as NSK K1 hereafter) equipped with an NSK linear guide is an outstanding new lubrication material.
- A Newly developed porous synthetic resin contains large volume of lubricant oil that seeps out and enhances lubricating function.
- Simply install NSK K1 inside a standard end seal (rubber).
- We also provide NSK K1 lubrication unit for sanitary environments suited for food processing machinery, medical equipment and their ancillaries for the environment where hygiene control is essential. For details, refer to **"A-3-9 3. NSK Linear Guides for Food Processing Equipment and Medical Devices for Sanitary Environment"**.

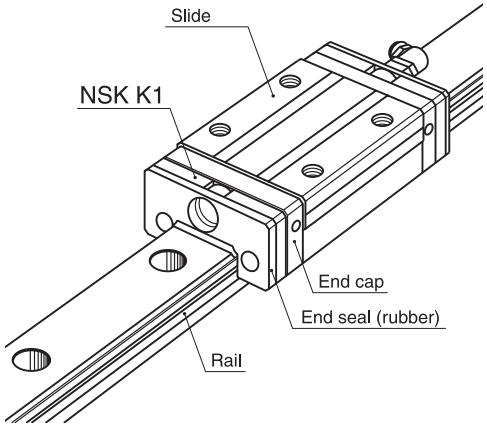


Fig. 6.1

(1) Features

NSK K1 comprises a part of the compact and efficient lubrication unit.

1) Maintenance is required only infrequently

Used with grease, the lubrication function lasts for a long time. Ideal for systems/environments in which replenishing is difficult.

▼

For automotive component processing lines, etc.

2) Does not pollute the environment

A very small volume of grease combined with NSK K1 can provide sufficient lubrication in the environment where grease is undesirable as well as in the environment where high cleanliness is required.

▼

Food processing/medical equipment, flat panel display/semiconductor manufacturing equipment, etc.

We also provide NSK K1 lubrication unit for sanitary environment suited for food processing machinery, medical equipment and their ancillaries for the environment where hygiene control is essential. For details, refer to **"A-3-9 3. NSK Linear Guides for Food Processing Equipment and Medical Devices for Sanitary Environment"**.

3) Good for applications where lubricant is washed away

Used with grease, life of the machine is prolonged even when the machine is washed entirely by water, or in an environments where the machine is exposed to rain or wind.

▼

Food processing equipment, housing/construction machines, etc.

4) Maintains efficiency in dusty environments

In environments where oil- and grease-absorbing dust is produced, long-term efficiency in lubrication and prevention from foreign inclusions is maintained by using NSK K1 in combination with grease.

▼

Woodworking machines, etc.

*Stainless steel linear guides are available for use in corrosive environments or other environments where rusting is a potential problem.

(2) Functions

NSK K1 has various superb functions. NSK's ample test data and field performances confirm NSK K1 abilities.

1) Durability test at high speed, with no other lubrication

Fig. 6.2 shows test results under these conditions.
The linear guide operated with no lubricant is unable to travel after a short period because breakage occurs. Equipped with NSK K1, the linear guide easily travels 25 000 km.

Conditions: Sample ; LH30AN (preload Z1)
Travel speed ; 200 m/min
Stroke ; 1 800 mm
No lubricant: Completely degreased, no lubrication
NSK K1: Completely degreased, no lubrication + NSK K1

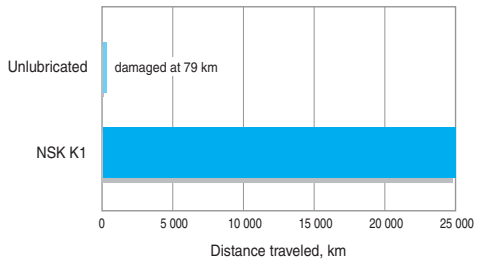


Fig. 6.2 Durability test at high speed, with no lubrication (lubricated by NSK K1 only)

2) Immersion test

Fig. 6.3 shows the test results after a linear guide is immersed in water once per week for 24 hours at a time, then traveled for 2 700 km. Without NSK K1, the ball groove surface wore out at an early stage and broke. With NSK K1, the wear was reduced to about 1/3 (**Table 6.1**). This test proves the effect of NSK K1.

Conditions: Sample ; LS30 Stainless steel (preload Z1)
Travel speed ; 24 m/min
Stroke ; 400 mm
Load ; 4 700 N/Slide
Lubricant ; Fully packed with grease (*) exclusive use for food proccesing machines
Immersing condition:
Immersed and traveled once per week for 24 hours at a time.

* Grease made in U.S.A.
Characteristic
Consistency: 280
Base oil viscosity: 580 (cSt)

Table 6.1 Comparison in wear of grooves and steel balls (2 700 km)

Unit: μm

Lubricating condition	Ball slide groove	Rail groove	Steel balls
With NSK K1	16 – 18	2 – 3	6 – 8
Without NSK K1	30 – 45	9 – 11	17 – 25

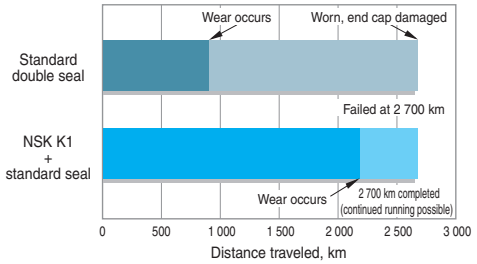


Fig. 6.3 Durability test immersed in water

4) Dust generation

Fig. 6.5 is a comparison of dust generation of NSK K1. The combination of NSK K1 and NSK Clean Grease LG2 (low dust generation grease) generates as little dust as fluorine grease (vacuum grease).

Conditions: Sample ; LS20
Travel speed ; 36 m/min

3) Durability test with wood chips

Wood chips absorb lubricant. Maintaining lubrication in such environment is extremely difficult. **Fig. 6.4** shows that the life when NSK K1 is added to a standard seal is two times longer than the life when two seals are combined (standard double seal).

Conditions: Sample ; LH30AN (preload Z1)
Travel speed ; 24 m/min
Stroke ; 400 mm
Load ; 490 N/Slide
Seal specifications/lubricant:
Standard double Seal···Standard double Seal + AS2 Grease
NSK K1·····NSK K1 + Standard seal + AS2 Grease
Wood chip conditions:
1····· Volume of wood chips: Large
2····· Volume of wood chips: Medium

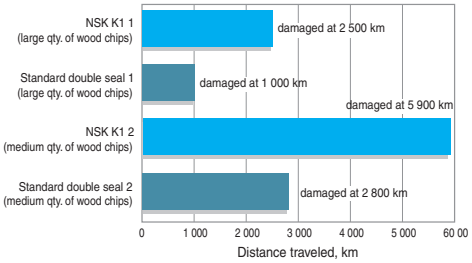


Fig. 6.4 Durability test with wood chips

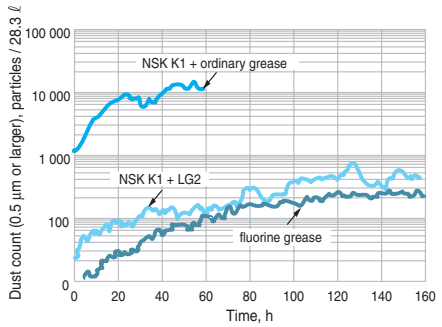


Fig. 6.5 Comparison of dust emission

(3) Specifications

1) Applicable series and sizes

a) Can be installed in NH, NS, LW, PU, LU, PE, LE, LH, RA, RB, LA, HA, and HS series. It is standard equipment for the VH Series.

b) Can be used with stainless steel materials and surface-treated items.

2) Standard specifications

a) NSK K1 is installed between the end seal and end cap.
(Double-seal specification, and specification with protector are also available upon request.)

b) NSK standard grease is packed inside the slide.
(You may specify the type of grease and its volume if required.)

c) Accuracy and preload classifications are the same as standard items. (Dynamic friction increases slightly due to NSK K1.)

3) Number of installed NSK K1

Normally, one NSK K1 should be installed on both ends of slides. (two K1s for one slide)
However, more NSK K1 may be required under more stringent operating conditions and environment. Please consult NSK for details in such a case.

4) About new NSK K1-L lubrication unit

Model No. NH15, NH20, NH25, VH15, VH20, and VH25 use the new NSK K1-L lubrication unit instead of NSK K1.
NSK K1-L features a newly developed oil-impregnated material that supplies lubrication oil for an even longer period. For details, see catalog ESP-190220 "NSK Linear Guide™ NSK K1-L Lubrication Unit."

Precautions for handling

To maintain high fuctionality of the NSK K1, observe the following precautions.

1. Temperature range for use: Maximum temperature in use: 50°C
   Momentary maximum temperature in use: 80°C

2. Chemicals that should not come into contact with NSK K1:
   Do not leave the NSK K1 in an organic solvent, such as hexane and thinner that remove oil, or rust preventive oil that contains white kerosene.

Note: Water-type cutting oil, oil-type cutting oil, mineral-oil type grease and ester-type grease do not damage NSK K1.

2. Lubrication

Mainly there are two ways of lubrication, grease and oil, for linear guides.
Use a lubricant agent and method most suitable to condition requirements and the purpose to optimize functions of linear guides.
In general, lubricants with low base oil kinematic viscosity are used for high-speed operation, in which thermal expansion has a large impact, and in low temperatures.
Lubrication with high base oil kinematic viscosity is used for oscillating operations, operations in low speeds and in high temperatures.
The following are lubrication methods by grease and by oil.

(1) Grease Lubrication

Grease lubrication is widely used because it does not require a special oil supply system or piping. Grease lubriction accessories available from NSK are:

- Various types of grease in bellows tube which can be instantly attached to the hand grease pump;
- NSK Grease Unit that consists of a hand grease pump and various nozzles. These are compact and easy to use.

1) NSK grease lubricants

Table 6.2 shows the marketed general grease widely used for linear guides. In addition to these grease, NSK provides special grease for specific conditions and purposes.

Table 6.2 Grease lubricant for linear guides

Type	Thickener	Base oil	Base oil kinematic viscosity mm^2/s (40°C)	Range of use temperature (°C)	Purpose
AS2*1	Lithium type	Mineral oil	130	–10 – 110	For general use at high load
PS2*2	Lithium type	Synthetic oil + synthetic hydrocarbon oil	15.9	–50 – 110	For low temperature and high frequency operation
LG2	Lithium type	Mineral oil + synthetic hydrocarbon oil	32	–20 – 70	For clean environment
LGU	Diurea	Synthetic hydrocarbon oil	95.8	–30 – 120	For clean environment
NF2	Urea composite type	Synthetic hydrocarbon oil	26	–40 – 100	For fretting resistant

*1) Standard grease of NH, VH, NS, LW, LH, RA, RB, LA, HA, and HS Series.
*2) Standard grease of PU, LU, PE, and LE Series.

[1] NSK Grease AS2

● Features

It is environmentally friendly and widely used grease for high-load applications. It is mineral oil based grease containing lithium thickener and several additives. It is superb in load resistance as well as stability in oxidization. It not only maintains good lubrication over a long period of time, but also demonstrates superb capability in retaining water. Even containing a large amount of water, it does not lose grease when it is softened.

● Application

It is standard grease for general NSK linear guides. It is prevalently used in many applications because of its high base oil viscosity, high-load resistance, and stability in oxidization.

● Nature

Thickener	Lithium soap base
Base oil	Mineral oil
Consistency	275
Dropping point	181°C
Volume of evaporation	0.24% (99°C, 22 hr)
Copper corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	2.8% (100°C, 24 hr)
Base oil kinematic viscosity	130 mm^2/s (40°C)

[2] NSK Grease PS2

● Features

The major base oil component is synthetic oil with mineral oil. It is an excellent lubrication especially for low-temperature operation. It is for a high-speed and light-load application.

● Application

It is standard grease for NSK miniature linear guides. It is especially superb for low-temperature operation, but also functions well in normal temperatures, making it ideal for small equipment with light load.

● Nature

Thickener	Lithium soap base
Base oil	Synthetic oil + Synthetic hydrocarbon oil
Consistency	275
Dropping point	190°C
Volume of evaporation	0.60% (99°C, 22 hr)
Copper corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	3.6% (100°C, 24 hr)
Base oil kinematic viscosity	15.9 mm^2/s (40°C)

[3] NSK Grease LG2

● Features

This grease was developed by NSK to be exclusively used for linear guides in clean room. Compared to the fluorine grease which is commonly used in clean room, LG2 has several advantages such as:

- Higher in lubrication function
- Longer lubrication life
- More stable torque (resistant to wear)
- Higher rust prevention.

In dust generation, LG2 is more than equal to the fluorine grease in keeping dust volume low. Since the base oil is not special oil but mineral oil, LG2 can be handled in the same manner as general grease.

● Application

LG2 is the lubrication grease for linear guides for semiconductor and flat panel display (FPD) processing equipment which require a highly clean environment. Because LG2 is exclusively for a clean environment at normal temperatures, however, it cannot be used in a vacuum environment.

Refer to "Special environment" in page A60 for the detailed data on superb characteristics of NSK Grease LG2.

● Nature

Thickener	Lithium soap base
Base oil	Mineral oil + Synthetic hydrocarbon oil
Consistency	199
Dropping point	201°C
Volume of evaporation	1.40% (99°C, 22 hr)
Copper corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.8% (100°C, 24 hr)
Base oil kinematic viscosity	32 mm^2/s (40°C)

[4] NSK Grease LGU

● Features

This is a proprietary urea base grease of NSK featuring low dust emission exclusively for linear guides which are used in clean room.
In comparison with the fluorine base grease, which has been used commonly in clean room, LGU has better lubricating property, longer duration of lubricant, better torque variation, much better anti-rust property, and equivalent or better dust generation. In addition, this grease can be handled in the same way as the other common grease because high-grade synthetic oil is used as the base oil.
LGU grease contains much less metallic elements compared to LG2 grease. It can be used in high temperature environment.

● Application

This is exclusive lubrication grease for linear guides that are installed in equipment that requires cleanliness, as same as LG2 grease, and it can be used in high temperature range of –30°C to 180°C.
This grease cannot be used in vacuum.

● Nature

Thickener	Diurea
Base oil	Synthetic hydrocarbon oil
Consistency	201
Dropping point	260°C
Volume of evaporation	0.09% (99°C, 22 hr)
Copper corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.6% (100°C, 24 hr)
Base oil kinematic viscosity	95.8 mm^2/s (40°C)

[5] NSK Grease NF2

● Features

It uses high-grade synthetic oil as the base oil and urea base organic compound as the thickener. It has remarkable anti-fretting corrosion property. It can be used in wide temperature range, from low to high, and has superior lubrication life.

● Application

This grease suits for linear guides whose application includes oscillating operations. Allowable temperature range is –40°C to 100°C.

● Nature

Thickener	Diurea
Base oil	Synthetic hydrocarbon oil
Consistency	288
Dropping point	260°C
Volume of evaporation	0.22% (99°C, 22 hr)
Copper corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.5% (100°C, 24 hr)
Base oil kinematic viscosity	26 mm^2/s (40°C)

● Precautions for handling

- Wash the linear guides to remove oil prior to applying Clean Grease LG2 or LGU, so the grease functions are fully utilized.
- The clean grease is exclusively used for clean environments at normal pressure.

2) How to replenish grease

Use the grease fitting of a slide if an exclusive grease supply system is not used. Supply the required amount of grease by a grease pump.
Wipe off old grease and accumulated dust before supplying new grease. If the grease fitting is not used due to the size limitation, apply grease directly to the rail. Remove the seal if possible, and move the slide few strokes so the grease permeates it. A hand grease pump, an exclusive and easy lubricating device for linear guides, is available at NSK.

3) Volume of grease to be replenished

Once grease is replenished, another supply is not required for a long time. But under some operational conditions, it is necessary to periodically replenish grease. The following are replenishing methods.

• When there is an exclusive grease supply system and the volume from the spout can be controlled, the criterion is:

All at once, replenish the amount that fills about 50% of the internal space of the slide. This method eliminates waste of grease, and is efficient.
Page A46 shows the internal spaces of slide of each series for your reference.

• When replenishing grease using a grease pump:
Use a grease pump and fill the inside of slide with grease. Supply grease until it comes out from the slide area. Move the slide by hand while filling them with grease, so the grease permeates all areas. Do not operate the machine immediately after replenishing. Always try to run-in the system a few times to spread the grease throughout the system and to remove excess grease from inside. Running-in operation is necessary because the sliding force of the linear guide greatly increases immediately after the replenishment (full-pack state) and may cause problems. Grease's stirring resistance is accountable for this phenomenon. Wipe off excess grease that accumulates at the end of the rail after trial runs, so the grease does not scatter to other areas.

4) Intervals of checks and replenishments

Although the grease is of high quality, it gradually deteriorates and its lubrication function diminishes. Also, the grease in the slide is gradually removed by stroke movement. In some environments, the grease becomes dirty, and foreign objects may enter a slide. New grease should be replenished depending on the frequency of use. The following is a guide of intervals of grease replenishments to linear guides.

Table 6.3 Intervals of checks and replenishments for grease lubrication

Intervals of checks	Items to be checked	Intervals of replenishments
3-6 months	Dirt, foreign matters such as cutting chip	Usually once per year is sufficient. Every 3 000 km for a system such as material handling equipment that travels more than 3 000 km per year. Replenish if checking results warrant it necessary.

Notes: 1) As a general rule, do not mix greases of different brands. Grease structure may be destroyed if greases of different thickeners are mixed. Even when greases have the same thickener, different additives in them may have an adverse effect on each other.

2) Grease viscosity varies by temperature. Viscosity is particular high in winter due to low temperature. Pay attention to increase in linear guide's sliding resistance in such occasion.

Table 6.4 Inside space of the slide

NH Series

Unit: cm³

Model No. \ Series	NH	
	High-load type	Super-high-load type
15	3	4
20	6	8
25	9	13
30	13	20
35	22	30
45	47	59
55	80	100
65	139	186

VH Series

Unit: cm³

Model No. \ Series	VH	
	High-load type	Super-high-load type
15	3	4
20	6	8
25	9	13
30	13	20
35	22	30
45	47	59
55	80	100

NS Series

Unit: cm³

Model No. \ Series	NS	
	Medium-load type	High-load type
15	2	3
20	3	4
25	5	8
30	8	12
35	12	19

LW Series

Unit: cm³

Model No. \ Series	LW
17	3
21	3
27	7
35	24
50	52

PU, LU Series

Unit: cm³

Model No. \ Series	PU		LU	
	Standard type	High-load type	Standard type	High-load type
05	0.1	–	0.1	–
07	0.1	–	0.1	–
09	0.2	0.3	0.2	0.3
12	0.3	0.4	0.3	0.4
15	0.8	1.1	0.8	1.1

PE, LE Series

Unit: cm³

Model No. \ Series	PE		LE		
	Standard type	High-load type	Medium-load type	Standard type	High-load type
05	0.1	–	0.1	0.1	–
07	0.2	–	0.1	0.2	0.3
09	0.4	0.5	0.2	0.4	0.5
12	0.5	0.7	0.3	0.5	0.7
15	1.2	1.6	0.8	1.2	1.6

Miniature LH Series

Unit: cm³

Model No. \ Series	LH
08	0.2
10	0.4
12	1.2

RA Series

Unit: cm³

Model No. \ Series	RA	
	High-load type	Super-high-load type
15	1	1.5
20	2	2.5
25	3	3.5
30	5	6
35	6	8
45	10	13
55	15	20
65	33	42

RB Series

Unit: cm³

Model No. \ Series	RB	
	High-load type	Super-high-load type
30	5	6
35	6	8
45	10	13
55	15	20
65	33	42

LA Series

Unit: cm³

Model No. \ Series	LA	
	High-load type	Super-high-load type
25	8	12
30	14	18
35	21	29
45	38	48
55	68	86
65	130	177

HA, HS Series

Unit: cm³

Model No. \ Series	HA	HS
15	–	5
20	–	9
25	16	16
30	27	25
35	42	40
45	67	–
55	122	–

5) NSK grease unit

A hand grease pump and lubrication grease contained in a bellows tube (80 g of grease) which can be loaded to the grease pump.



Grease in a bellows tube



[1] Composition of NSK grease unit

Components and grease types are shown below.

	Name	(Tube color)	Reference number
NSK Grease Unit			
NSK Grease (80 g in a bellows tube)	NSK Grease AS2	(Ocher)	NSK GRS AS2
	NSK Grease PS2	(Orange)	NSK GRS PS2
	NSK Grease LG2	(Blue)	NSK GRS LG2
	NSK Grease LGU	(Yellow)	NSK GRS LGU
	NSK Grease NF2	(Gray)	NSK GRS NF2
NSK Hand Grease Pump Unit			
NSK Hand Grease Pump (Straight nozzle NSK HGP NZ1 -- One nozzle is provided with a hand grease pump.)			NSK HGP
Grease nozzle (used with a hand grease pump)			
	NSK straight nozzle		NSK HGP NZ1
	NSK chuck nozzle		NSK HGP NZ2
	NSK drive-in fitting nozzle		NSK HGP NZ3
	NSK point nozzle		NSK HGP NZ4
	NSK flexible nozzle		NSK HGP NZ5
	NSK flexible extension pipe		NSK HGP NZ6
	NSK straight extension pipe		NSK HGP NZ7

[2] NSK greases (80 g in a bellows tube)

Refer to pages A43 and D14 for their natures and details.

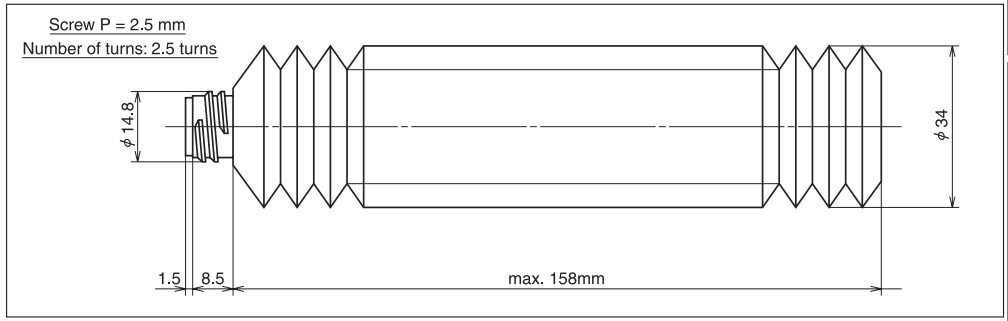


Fig. 6.6 Bellows tube

[3] NSK hand grease pump unit

a) NSK Hand Grease Pump
(Reference number: NSK HGP)

●Features

- Light-weight ·····Can be operated by one hand, yet there is no worry to make a mistake.
- Inserting by high pressure···Insert at 15 Mpa.
- No leaking ·····Does not leak when held upside down.
- Easy to change grease····Simply attach grease in bellows tube.
- Remaining grease ·····Can be confirmed through slit on tube.
- Several nozzles ·····Five types of nozzles to choose from.

●Specifications

- Discharge rate·····15 MPa
- Spout volume ·····0.35 cc/shot
- Mass of main body·····Without nozzle 240 g
  Provided nozzle 90 g
- Outer diameter of bellows grease tube····· φ38.1
- Accessories·····Several nozzles for a unique application can be attached

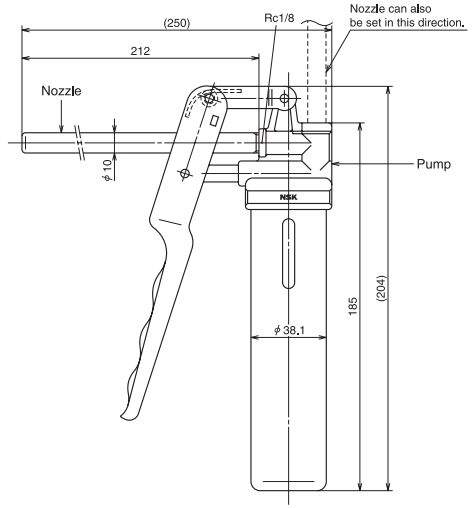


Fig. 6.7 NSK Hand Grease Pump with NSK straight nozzle

*Air is contained in the unopened bellows tube. Try the system tens of times when to use the hand grease pump. The tube will be use after deflated from the tube.

b) Nozzles

Table 6.5 Nozzles that can be attached to NSK Hand Grease Pump


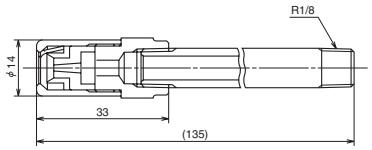
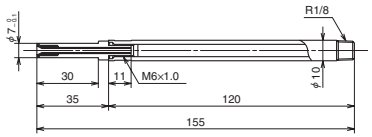
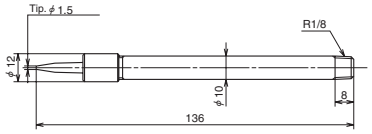



Name	Designation code	Use	Dimensions
NSK straight nozzle	NSK HGP NZ1	Can be used with grease fitting A, B, and C under JIS B1575 standard.	
NSK chuck nozzle	NSK HGP NZ2	Same as above. However, there is no need to press the hand pump because the grease fitting and the nozzle come into contact due to the chucking mechanism at the tip.	
NSK drive-in fitting nozzle	NSK HGP NZ3	Dedicated for the -ϕ3 drive-in grease fitting.	
NSK point nozzle	NSK HGP NZ4	Used for linear guides that do not have grease fitting. Supplies grease directly to the ball grooves, or through the opening of slide or slide to inside.	
NSK flexible nozzle	NSK HGP NZ5	The tip of the flexible nozzle is a chuck nozzle. The straight nozzle is not available for use.	
NSK flexible extension pipe	NSK HGP NZ6	Flexible extension pipe connects the grease pump and the nozzle	
NSK straight extension pipe	NSK HGP NZ7	Straight extension pipe connects the grease pump and the nozzle.	

Table 6.6 Grease fittings used for NSK linear guide

Series	Model No.	Tap hole for grease fitting	Standard grease fitting	Straight nozzle NZ1	Chuck nozzle NZ2	Drive-in fitting nozzle NZ3	Point nozzle NZ4	Flexible nozzle NZ5
NH Series	NH15	ϕ3	Drive-in type			○		
	NH20, 25, 30, 35*	M6×0.75	B type	○	○			○
	NH45, 55, 65	Rc1/8	B type	○	○			○
VH Series	VH15	ϕ3	Drive-in type			○		
	VH20, 25, 30, 35*	M6×0.75	B type	○	○			○
	VH45, 55	Rc1/8	B type	○	○			○
NS Series	NS15	ϕ3	Drive-in type			○		
	NS20, 25, 30, 35*	M6×0.75	B type	○	○			○
LW Series	LW17	ϕ3	Drive-in type			○		
	LW21, 27, 35*	M6×0.75	B type	○	○			○
	LW50	Rc1/8	B type	○	○			○
PU Series	PU05, 07, 09, 12	–	–				○	
	PU15	ϕ3	Drive-in type			○		
LU Series	LU05, 07, 09, 12, 15	–	–				○	
PE Series	PE05, 07, 09, 12	–	–				○	
	PE15	ϕ3	Drive-in type			○		
LE Series	LE05, 07, 09, 12, 15	–	–				○	
Miniature LH Series	LH08, LH10	–	–				○	
	LH12	ϕ3	Drive-in type			○		
RA Series	RA15, 20	ϕ3	Drive-in type			○		
	RA25, 30, 35*	M6×0.75	B type	○	○			○
	RA45, 55, 65	Rc1/8	B type	○	○			○
RB Series	RB30	ϕ3	Drive-in type			○		
	RB35, 45	M6×0.75	B type	○	○			○
	RB55, 65	Rc1/8	B type	○	○			○
LA Series	LA25, 30, 35*	M6×0.75	B type	○	○			○
	LA45, 55, 65	Rc1/8	B type	○	○			○
HA Series	HA25, 30, 35*	M6×0.75	B type	○	○			○
	HA45, 55	Rc1/8	B type	○	○			○
HS Series	HS15	ϕ3	Drive-in type			○		
	HS20, 25, 30, 35*	M6×0.75	B type	○	○			○

Note: PU, LU, PE, and LE Series; Apply grease directly to ball groove, etc. using a point nozzle.

*) When using a chuck nozzle, make sure that it does not interfere with the table on linear guides.

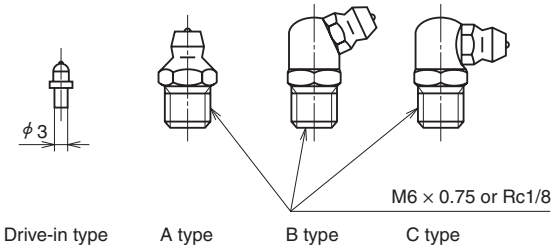


Fig. 6.8 Grease fittings

A long threaded grease fitting is required because of dust-proof parts. Please refer to the sections pertaining to the lubrication and dust-proof parts of each series.

(2) Oil lubrication

Required amount of new oil is regularly supplied by:

- Manual or automatic intermittent supply system;
- Oil mist lubricating system via piping.

Equipment for oil lubrication is more costly than one for grease lubrication. However, oil mist lubricating system supplies air as well as oil, thus raising the inner pressure of the slide. This prevents foreign matters from entering, and the air cools the system. Use an oil of high atomizing rate such as ISO VG 32-68 for the oil mist lubrication system.

ISO VG 68-220 are recommended for common intermittent replenishment system. Approximate volume of oil Q for a slide of linear guide per hour can be obtained by the following formula.

In case of all ball type linear guides except LA series

$Q \geq n/150$ (cm^3/hr)

In case of LA, RA, and RB series

$Q \geq n/100$ (cm^3/hr)

n: Linear guide size code

e.g. When NH45 is used,

$n = 45$,

Therefore,

$Q = 45/150 = 0.3$ cm^3/hr

For the oil lubrication by gravity drip, the oil supply position and installation position of the slide are crucial. In case of linear guide, unless it is installed to a horizontal position, the oil flows only on the down side, and does not spread to all raceway surface. This may cause insufficient lubrication. Please consult NSK to correct such situations prior to use. NSK has the internal design which allows oil lubricant to flow throughout the system.

Table 6.7 shows the criterion of intervals of oil checks and replenishments.

Table 6.7 Intervals of checks and replenishments

Method	Intervals of checks	Items to check	Replenishment or intervals of changes
Automatic intermittent supply	Weekly	Volume of oil, dirt, etc.	Replenish at each check. Suitable volume for tank capacity.
Oil bath	Daily before operation	Oil surface	Make a suitable criterion based on consumption

Notes: 1) As with grease lubrication, do not mix oil lubricant with different types.

2) Some components of the linear guide are made of plastic. Avoid using an oil that adversely affects synthetic resin.

3) When using oil mist lubricating system, please confirm an oil supply amount at the each outlet port.

A-3-7 Dust Proof

1. Standard specification parts

- To keep foreign matters from entering inside the slide, NSK linear guides have end seals on both ends, bottom seals at the bottom surfaces, and an inner seal in the inside of slide.
- The seals for standard specification for each series are shown in **Table 7.1**.
- Seal friction per a standard slide is shown in the technical description of the dust-proof parts of each series.

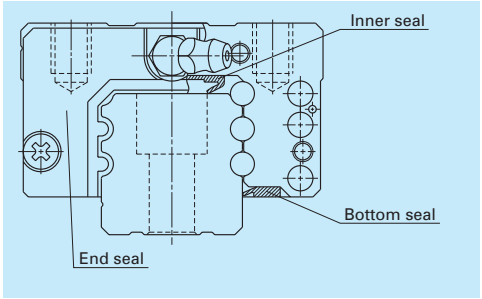


Fig. 7.1

Table 7.1 Standard seals

		End seal	Bottom seal	Inner seal
NH Series	NH15	○	○	–
	NH20, NH25, NH30, NH35, NH45, NH55, NH65	○	○	△
VH Series	VH15	○	○	–
	VH20, VH25, VH30, VH35, VH45, VH55	○	○	△
NS Series	NS15	○	○	–
	NS20, NS25, NS30, NS35	○	○	△
LW Series	LW17, LW21, LW27, LW35, LW50	○	○	–
PU Series	PU05, PU07, PU09, PU12, PU15	○	–	–
LU Series	LU05, LU07, LU09	△	–	–
	LU12, LU15	○	–	–
PE Series	PE05, PE07, PE09, PE12, PE15	○	–	–
LE Series	LE05, LE07, LE09, LE12, LE15	○	–	–
Miniature LH Series	LH08, LH10	○	–	–
	LH12	○	○	–
RA Series	RA15, RA20	○	○	△
	RA25, RA30, RA35, RA45, RA55, RA65	○	○	○
RB Series	RB30, RB35, RB45, RB55, RB65	○	○	○
LA Series	LA25, LA30, LA35, LA45, LA55, LA65	○	○	△
HA Series	HA25, HA30, HA35, HA45, HA55	○	○	○
HS Series	HS15, HS20, HS25, HS30, HS35	○	△	–

○ : Equipped as a standard feature
△ : Available upon request

2. Dust-proof parts

• NSK has the following items for the dust-proof parts. Select a suitable type for the operating environment.

Table 7.2 Optional dust-proof parts

Name	Purpose	Reference page
NSK K1 lubrication unit	Made of oil impregnated resin. Enhances lubricating functions.	A38 – A41
Double seal	It combines two end seals for enhancing sealing function.	A53
Protector	Protect the end seal from hot and hard contaminants.	A54
Rail cap	Prevents foreign matters, such as swarf generated in cutting operation from clogging the rail-mounting holes.	A54
Inner seal	Installed inside a slide, and prevents foreign matters from entering the rolling contact surface.	A55
Bellows	Covers the linear guide.	A55
Rail cover *	Covers the rail top surface, and prevents foreign matters, such as cutting dust, from collecting in the rail mounting holes.	A256

*) The rail cover is available only for RA25 to RA65 of RA series.

(1) Double seal

• It is a combination of two end seals to enhance seal function.
• When the double seal is installed, the end seal section becomes thicker than the standard item. Please pay attention to the increase in a slide length when designing the mounting dimension of slide and the table stroke. Please refer to the section of dust-proof components for the dimensional increase in the length direction of each series due to fitting of double seal.
• Double-seal set: Can be installed to a completed standard ball slide assembly later upon request. It comprises two end seals, two collars, and two machine screws for installation (**Fig. 7.2**). The product reference numbers of each series are described on the section of dust-proof parts.
• When attaching a grease fitting to the end cap after the double seal is equipped, you require a connector shown in **Fig. 7.2**. Please specify the connector set when ordering the linear guides.
• For VH, RA, RB, LA, HA, and HS Series, the double-seal set can be only installed before shipping from the factory.

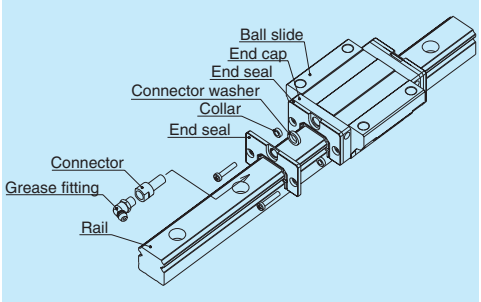


Fig. 7.2 Double seal

(2) Protector

• A protector is usually installed outside the end seal to prevent high-temperature fine particles such as welding spatter and other hard foreign matters from entering the slide.
• Same as the case with the double seal, when the protector is installed, the slide becomes longer. Take this thickness of slide into consideration for determining the relevant dimensions such as the system stroke and the ball slide installation envelope. An increase in the length of the ball slide due to the installation of protector is shown in the technical description of the dust-proof parts of each series.
• The protectors are available from the stock and we can install them to a completed standard slide assembly upon request. The model numbers of the protectors for ordering are shown in the technical explanation of the dust -proof parts of each series.
• When attaching a grease fitting to the end cap after the protector is equipped, you require the connector shown in **Fig. 7.3**. Please specify the connector set when ordering the linear guides.
• For VH, RA, RB, LA, HA, and HS Series, the protector can only be installed only before shipping from the factory.

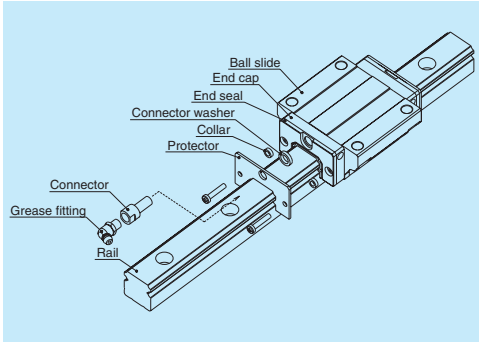


Fig. 7.3 Protector

(3) Bolt-hole cap to plug the bolt holes for rail mounting

• After the rail is mounted to the machine base, a bolt-hole cap is used to plug the bolt hole to prevent foreign matters from clogging up the hole and from entering into the slide (**Fig. 7.4**).
• The bolt-hole cap is made of synthetic resin which has superb in its resistance to oil and abrasion.
• Sizes of the bolt for the each linear guide model as well as the reference number of the bolt-hole cap are shown in the technical description of the dust-proof parts of each series.
• To insert the cap into the rail bolt hole, use a flat dolly block (**Fig. 7.5**). Pound the cap gradually until its height becomes flush with the rail top surface.
• You can reorder extra bolt hole caps. Sizes of the bolts and each model number of bolt-hole caps are shown in the technical description of the dust-proof parts of each series.
• Caps which are made of metal is also available upon request.

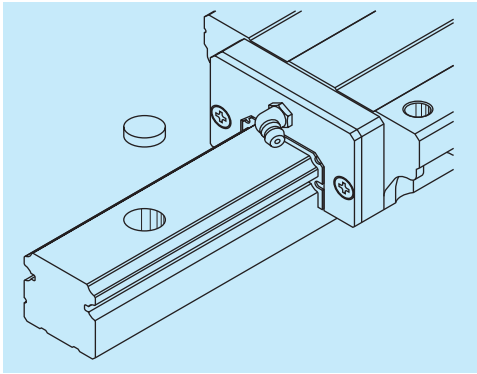


Fig. 7.4

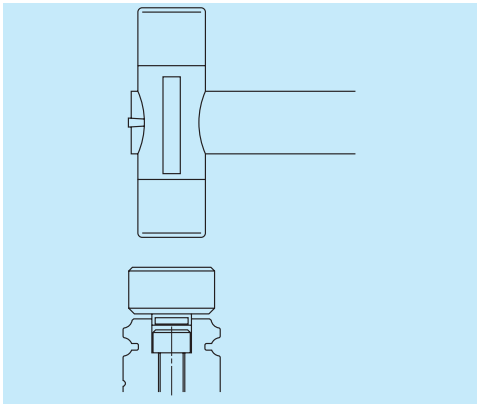


Fig. 7.5

(4) Inner seal

- The end seal installed on both ends of a slide cannot arrest entire contaminant, though the missed amount is negligible. An inner seal protects the rolling contact surface from such contaminant which entered inside the slide (**Fig. 7.6**).
- The inner seal is installed inside the slide. Therefore, the appearance in size and the shape are the same as the standard slide. (The inner seal is already installed before shipping.)
- It is strongly recommended to use the bellows and the double seal along with the inner seal to maintain the precision of the linear guide.
- Refer to **Table 7.1** for availability of inner seal.

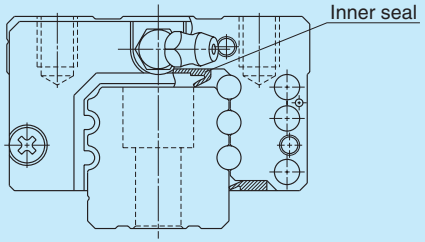


Fig. 7.6 Inner seal when installed

[1] Installation of bellows NH and NS Series

*** Fixing to the ball slide (Fig. 7.7)**

- Remove two machine screws (M_2) which secure the end seals to the end of the slide (**Fig. 7.7**). For NS15, hold the end cap by hand. Otherwise, the end cap is detached from the ball slide, and the balls inside may spill out.
- Then insert a spacer to the hole for securing the end seal. Fasten the mounting plate at the end of the bellows to the slide with a slightly longer machine screw (provided with the bellows).

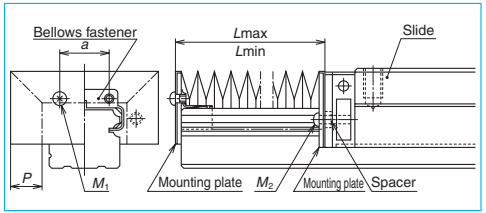


Fig. 7.7

(5) Bellows

- A bellows covers entire linear guide. It has been used widely as a way of protection in an environment where foreign matters are prevalent.
- NSK has bellows exclusively for NH, NS, LW, RA and LA Series. They have a middle bellows and a bellows at both ends. For NH Series, there are low and high type bellows which are in compliance with their slide types.
- The high type is used for AN and BN types. The low type is used for EM, GM, AL and BL types. The top of the high type bellows is slightly lower than the top surface of the slide.
- When a high type bellows is installed to the slide with the height code L (such as AL), the top of the bellows becomes higher than the slide. However, it is advantageous for stroke because the pitch of the bellows becomes larger than the low type.
- Special bellows are required when installing the linear guide vertically, or hanging it from a ceiling. Please consult NSK in such a case.
- When a bellows is used, please be advised that we cannot put a grease fitting on the end of slide to which the bellows is attached. If you require the grease fitting, it shall be put on the side of end cap or slide body. Consult NSK for details.
- For the dimension of bellows, please refer to the section of dust proof parts of each series.

*** Fixing to the rail**

- To install bellows for NH and NS Series, lightly knock a fastener exclusively for bellows to the end of the rail (**Fig. 7.7**). Then secure the mounting plate to the end of the bellows through the tap hole of the fastener.
- As described above, a bellows can be easily fixed to the end of the rail without adding a tap hole on the end of the rail.
- Bellows fastener is available only for the horizontal mounting positions. For other mounting positions, sliding plate is required (see **Fig. 7.10** on page A56.)

For fixing to the rail, make tap holes to the rail end surface. Fix the bellows mounting plate to the rail end surface through these tap holes by using a machine screw. NSK processes a tap hole to the rail end face when ordered with a linear guide.

[2] LW and LA Series

*** Fixing to the ball slide (Fig. 7.8 and Fig. 7.9)**

- Remove two machine screws which secure the end seal. (For LW17 and LW21, hold the end cap by hand while removing the machine screw. Otherwise, the end cap is detached from the slide, and the balls inside may spill over and fall.)
- Insert a spacer to the securing hole of the end seal, fasten the mounting plate on the end of the bellows using a slightly longer machine screw (provided with the bellows).

*** Fixing to the rail**

- Make two tap holes to the rail end surface. Fix the bellows mounting plate with machine screws to the rail end surface through these tap holes. NSK processes the tap holes to the rail end surface when ordered with a linear guide.

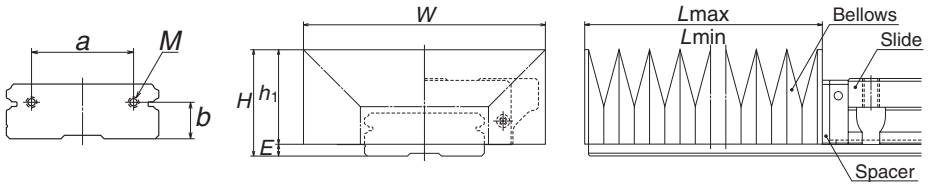


Fig. 7.8

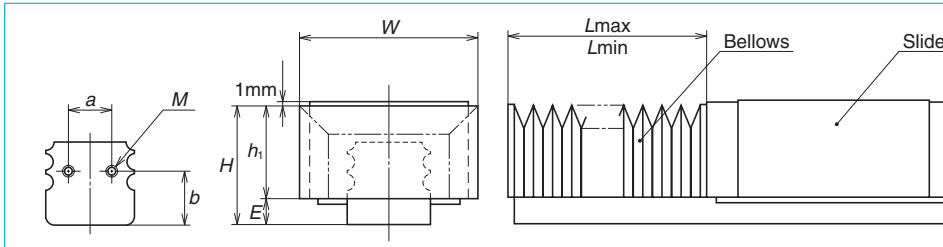


Fig. 7.9

[3] RA Series

- Please refer to page A260.

Calculating length of bellows

- The formula is as follows excluding RA series.
- A bellows forms one block (BL) with six folds as shown in **Fig. 7.10**. The stroke is determined by multiplying by an integer of this BL.
- Length when stretched to the maximum length :
  ***L*max = 7 × P × Number of BL**
- Length when contracted to the minimum length :
  ***L*min = 17 × Number of BL**
- Stroke : ***St* = *L*max – *L*min**
- The dimension of *P* and the number of BL are shown in the bellows dimension table of each series.
- In case of RA series, refer to page A260.

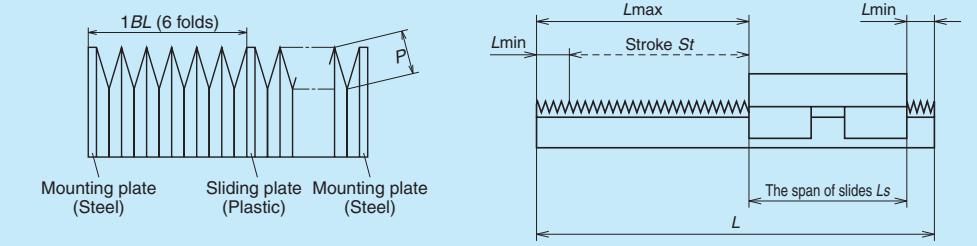


Fig. 7.10

A-3-8 Rust Prevention (Stainless Steel and Surface Treatment)

1. Stainless steel

NSK linear guide is available in stainless steel.

○Stainless steel standard series

PU Series PE Series
LE Series Miniature LH Series LL Series

○Available in stainless steel

NH Series
NS Series
LU Series

Select from the above when using in the environments which invite rust.

2. Surface treatment

(1) Recommended surface treatment

We recommend "low temperature chrome plating" and "fluoride low temperature chrome plating" for rust prevention because of the result of the humidity chamber test for antirust characteristics and their cost-effectiveness.

However, never apply any organic solvent to those treatments for degreasing because it has adverse effect on antirust characteristics.

Refer to the next page for the results of humidity chamber test.

Please consult NSK for other surface treatment.

○**Low temperature chrome plating (Electrolytic rust prevention black treatment)**

- Used to prevent corrosion, light reflection, and for cosmetic purpose.

○**Fluoride low temperature chrome plating**

- Fluoroplastic coating is provided following the low temperature chrome plating.
- Resistance to corrosion is higher than electrolytic rust prevention film treatment.

(2) Rust prevention of fluoride low temperature chrome plating

NSK linear guides are used in various applications and environments, from industrial machinery to semiconductor/FPD manufacturing and aerospace equipment. Preventing rust from developing in these applications is crucial, particularly for machines around water such as part/device washers and for semiconductor/FPD manufacturing equipment involved in chemical wet processing. NSK applies a fluororesin coating to an electrolytic black plating (fluoride low-temperature chrome plating) on these linear guides for optimal rust resistance.

● What is "Fluoride low temperature chrome plating?"


This is a type of black chrome plating which forms a black film (1 to 2 μm in thickness) on the metal surface. Fluoroplastic coating is added to the film to increase corrosion resistance.

- Accuracy control is easily manageable due to low temperature treatment and to the absence of hydrogen embrittlement.
- Product accuracy is less affected due to the thin film which has high-corrosion resistance.
- This method is superior to other surface treatments in durability on the rolling surface.
- Inexpensive compared with products with other surface treatment and stainless steel products.

However, do not use organic solvent because it adversely affects antirust property of the plating.

● Humidity chamber test

Table 8.1 Results of the humidity test




Characteristic \ Test sample			Fluoride low temperature chrome plating (Recommended)	Hard chrome plating (Reference)	Electroless nickel plating (Reference)	Equivalent to SUS440C material	Standard steel
Corrosion-resistant property	Rusting	Top	(Ground) B	(Ground) B	(Ground) A	(Ground) C	(Ground) D
		Side	(Ground) A	(Ground) A	(Ground) A	(Ground) C	(Ground) E
		Bottom	(Ground) A	(Ground) A	(Ground) A	(Ground) C	(Ground) E
		End	(Machined) A	(Machined) C	(Machined) A	(Machined) C	(Machined) E
		Chamfer/grinding recess	(Drawn) A	(Drawn) D	(Drawn) A	(Drawn) C	(Drawn) E
	<Test conditions> ● Testing chamber: High temperature, highly moist chamber (made by DABAI ESPEC) ● Temperature: 70°C ● Relative humidity: 95% ● Testing time: 96 h Time to "ramp-up" and "ramp-down" conditions of the temperature and the humidity Ramp-up: 5 h Ramp-down: 2 h						
							
	Film thickness		5 μm	0.5 – 7 μm	10 μm	—	—

Rusting A: No rust B: Not rusted, but slightly discolored
C: Spotty rust D: Slightly rusted E: Completely rusted

● Chemical corrosion resistance test

Table 8.2 Results of the corrosion resistance test

Test conditions Rail base material : Equivalent to SUS440C
Chemical density : 1 mol/ℓ

Fluoride low temperature chrome plating		Hard chrome plating (reference)	None surface treatment
	Immersed in solution for 24 hrs Nitric acid		
	Immersed in solution for 24 hrs Fluoride		
	Immersed in solution for 72 hrs Hydrochloric acid type washing solution $HC\ell : H_2O_2 : H_2O$ =1 : 1 : 8		
○	Hydrochloric acid (immersed)	○	▲
○	Sulfuric acid (immersed)	○	×
○	Ammonia or sodium hydroxide	○	△

○: Normal △: Partial surface damage ▲: Overall surface damage ×: Corroded

● Surface treatment durability test

Peeling resistance of surface treatment

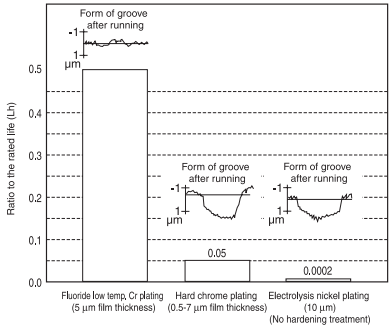


Fig. 8.1 Results of durability test

● Total evaluation

Table 8.3 Evaluation

	Rust prevention ability	Quality stability	Durability	Cost
Fluoride low temperature chrome plating (recommended)	◎	○	◎	◎
Hard chrome plating (reference)	○	×	△	△
Electroless nickel plating (reference)	◎	△	×	△
Material equivalent to SUS440C	○	◎	◎	△

◎: Excellent ○: Suitable in use
△: Not so good for use ×: Problem in use

A-3-9 Special Environment

1. Heat-resistant specifications

- Standard linear guides use plastic for rolling element recirculation component. The maximum temperature in use for standard linear guides is 80°C.
- Use the linear guide with heat-resistant specifications under temperatures that exceed this limit.

Table 9.1 Comparison of materials: Standard and heat-resistant specifications

Component	Standard specification	Heat-resistant specification
Rail	Special high carbon steel (equivalent to SUS440C/JIS)	Special high carbon steel (equivalent to SUS440C/JIS)
Slide	Special high carbon steel (equivalent to SUS440C/JIS)	Special high carbon steel (equivalent to SUS440C/JIS)
Rolling elements	SUJ2, SUS440C	SUJ2, SUS440C
Retainer	Polyacetals	SUS304
Retaining wire	SUS304	SUS304
End cap	Polyacetals	SUS316L
Return guide	Polyacetals	SUS316L
End seal	Acrylonitril-butadiene rubber, SPC/JIS and stainless steel	Fluoro rubber, SPC/JIS and stainless steel
Bottom seal	Acrylonitril-butadiene rubber, SPC/JIS and stainless steel	Fluoro rubber, SPC/JIS and stainless steel

Heat resistant linear guides

NH Series **NS Series**
LW Series **LU Series**
LE Series

See page A66 for the availability.

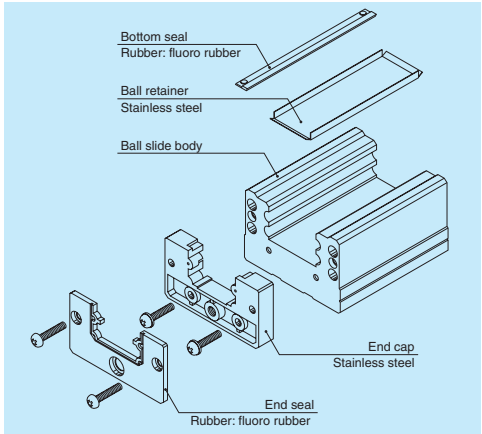



Fig. 9.1

2. Vacuum and clean specifications

- Based on its abundant experience and technology, NSK manufactures linear guides that can be used in a vacuum or in clean environment. Please consult NSK for more details.
- Linear guide specifications vary for environmental conditions.
  For example, "all stainless steel plus special grease, or solid film lubricant is suitable" for vacuum environment.
- NSK has low-dust generating grease "**LG2**" and "**LGU**" which are ideal for clean environment.
  Refer to page A43 for details.

3. "NSK linear guides for food processing equipment and medical devices" for sanitary environment

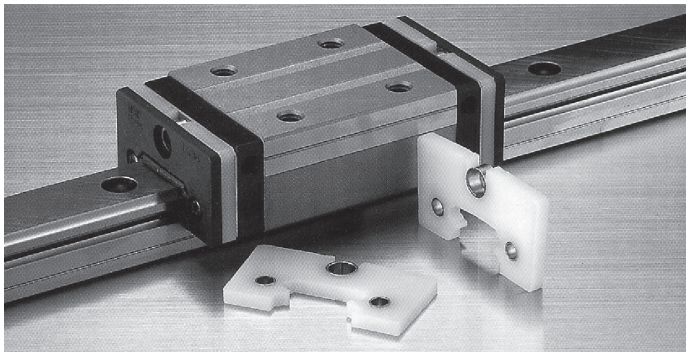Used with NSK K1 for food processing equipment and medical devices and grease for food processing equipment.



What is "NSK K1™" for food processing equipment and medical devices?

Thanks to a new material seal, NSK K1 for food processing and medical equipment is safe and FDA-compliant.

In NSK K1, a newly developed, porous synthetic resin provides continuous and abundant lubricant. The unit is also easy to install inside standard end seals made of rubber. After success in general industry, we utilized special materials to allow use in food processing and medical equipment.

(1) Features

1) The highest grade of category H1 grease of USDA standard is used for NSK K1 lubrication unit.

*category H1: Lubricants permitted for use where there is possibility of incidental food contact

*USDA: USDA (The United States Department of Agriculture)

<Features of grease for food processing machines>

• This grease is approved by USDA H1. (National Science Foundation [NSF] carries out certification for USDA.)

• Superb water resistance and antirust capability

• Superb wear resistance

• Applicable for a centralized oiling system

2) Appropriate volume of grease


A supply of appropriate volume of grease reduces grease draining and scattering, and maintains a clean environment.

(2) Available models

Table 9.2 shows available models.

Table 9.2

NH Series	NH15, NH20, NH25, NH30 and NH35
NS Series	NS15, NS20, NS25, NS30 and NS35
LW Series	LW17, LW21, LW27 and LW35
PU Series	PU09, PU12 and PU15
LU Series	LU09, LU12 and LU15
PE Series	PE09, PE12 and PE15
LE Series	LE09, LE12 and LE15
Miniature LH Series	LH12

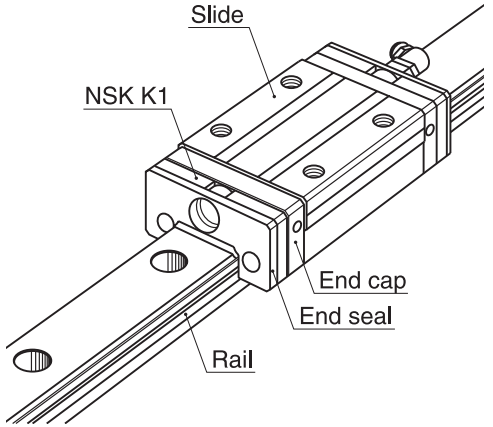

Precautions for use

To maintain optimal performance of NSK K1 lubrication unit over a long time, please follow the instructions below:

1. Temperatures range for use: Maximum temperature in use: 50°C
   Momentary maximum temperature in use: 80°C
2. Chemicals that should not come to contact:
   Do not leave NSK K1 lubrication unit in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust prevention oil which contains white kerosene.

Note: Water-type cutting oil, oil-type cutting oil and grease such as mineral-type and ester-type do not damage NSK K1 lubrication unit.

4. Specifications for special environments

Table 9.3 Linear guide specifications

Environment	Condition	NSK linear guide specifications				Technical Explanation Page No.
		Rail, slide	Steel balls/rollers	Ball Recirculation component	Lubrication/surface treatment	
Clean	Atmosphere, normal temperature	Standard material	Standard material	Standard material	LG2 Grease, LGU Grease	D8
					NSK K1 lubrication unit	D10
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	LG2 Grease, LGU Grease	D8
					NSK K1 lubrication unit	D10
					Fluoride low temperature chrome plating	D5
	Atmosphere–Vacuum, normal temperature				Fluoride grease	
	Atmosphere–Vacuum up to 200°C					
Vacuum	Atmosphere–Vacuum, normal temperature	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Fluoride grease	
	Atmosphere–Vacuum up to 200°C					
	Atmosphere–Vacuum up to 300°C				Molybdenum disulfide	
	High vacuum up to 500°C				Special silver film	D7
Corrosion resistance	Vapor, steam	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		
		Standard material	Standard material	Standard material	Fluoride low temperature chrome plating	D5
	Acid, alkali			Austenitic stainless steel		D5
		Martensitic stainless steel	Martensitic stainless steel			D5
	Acid, alkali, clean				Fluoride low temperature chrome plating	D5
					LG2 Grease, LGU Grease	D8
	Strong acid, strong alkali				Fluoride low temperature chrome plating	D5
					Fluoride grease	
	Organic solvent				Fluoride grease	
High temperature	Atmosphere up to 150°C	Standard material	Standard material	Austenitic stainless steel	ET-100K Grease	
		Martensitic stainless steel	Martensitic stainless steel			
	Atmosphere Up to 200°C				Fluoride grease	
	Atmosphere Up to 200°C, Corrosion resistant				Fluoride grease	
Low temperature	-273°C and higher	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Solid lubricant	
Radiation resistance	Atmosphere	Standard material	Standard material	Standard material	Radiation resistant grease	
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		
Foreign matters	Fine particles, wooden chips	Standard material	Standard material	Standard material	NSK K1 lubrication unit	D10
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		D10
	Water, under water		Standard material	Standard material		D10
			Martensitic stainless steel	Austenitic stainless steel		D10

5. Lubrication and materials

(1) Lubrication

Grease can be used for high rotation and magnetic field. However, grease evaporates or solidifies in special environment such as vacuum, high temperature, and low temperature. Solid lubricant is used when it is difficult to use grease. Functions of solid lubricant differ greatly by condition where it is used. It is important to select the most suitable solid lubrication for the environment.

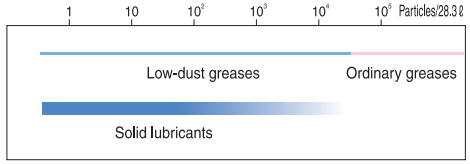


Fig. 9.2 Lubrication in clean environment

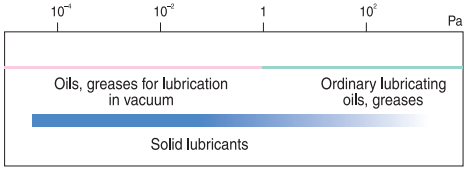


Fig. 9.3 Lubrication in vacuum

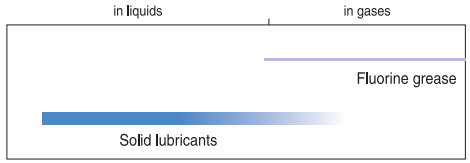


Fig. 9.4 Lubrication in corrosive environment

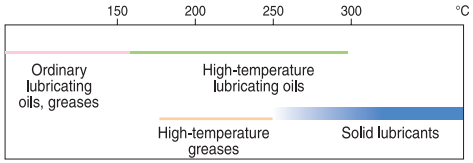


Fig. 9.5 Lubrication in high temperature

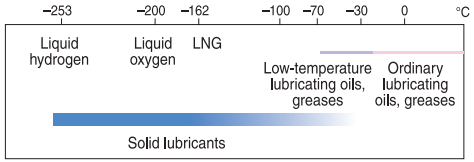


Fig. 9.6 Lubrication in low temperature

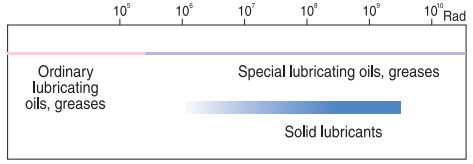


Fig. 9.7 Lubrication in radioactive environment

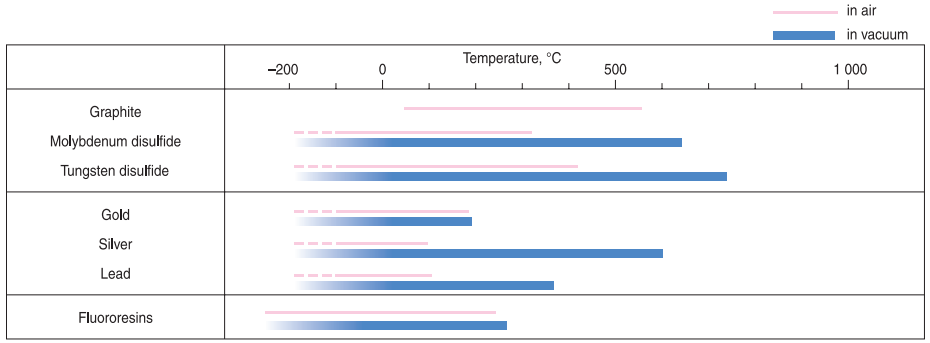


Fig. 9.8 Temperature range for using solid lubricants

(2) Materials

Iron type metals are used in vacuum, high temperature, and high speed environments as the basic material. We generally use nonmagnetic stainless steel for nonmagnetic materials.

Table 9.4 Characteristics of metal materials

Application	Type of steel	Linear expansivity $\times 10^{-6}$/°C	Young's modulus GPa	Hardness * HB
For clean environment, vacuum environment, corrosion resistance, low temperature, high temperature, radioactive resistance	Martensitic stainless steel SUS440C	10.1	200	580
	Austenitic stainless steel SUS304	16.3	193	150
	Precipitation hardened stainless steel SUS630	10.8	200	277 – 363
Nonmagnetic	Nonmagnetic stainless steel	17.0	195	420

*) Hardness of steel is usually indicated by Rockwell C Scale. For comparison, these figures are expressed by Brinell number.

6. Responsiveness of NSK linear guides for special environments

Series	Model No.	Special environment which linear guide can tolerate					
		Clean	Vacuum	Corrosive	High-temperature	Hygienic	Dust-contaminated
NH	NH15	○		○		○	
	NH20	○	○	○	○	○	
	NH25	○	○	○	○	○	
	NH30	○	○	○	○	○	
	NH35	○		○	○	○	
	NH45	○		○	○		
	NH55	○		○			
	NH65	○		○			
VH	VH15	○		○			○
	VH20	○		○			○
	VH25	○		○			○
	VH30	○		○			○
	VH35	○		○			○
	VH45	○		○			○
	VH55	○		○			○
NS	NS15	○	○	○	○	○	
	NS20	○	○	○	○	○	
	NS25	○	○	○	○	○	
	NS30	○	○	○	○*	○	
	NS35	○		○		○	
LW	LW17	○		○	○*	○	
	LW21	○		○	○*	○	
	LW27	○		○	○	○	
	LW35	○		○		○	
	LW50	○		○			
PU	PU05	○		○			
	PU07	○		○			
	PU09	○		○		○	
	PU12	○		○		○	
	PU15	○		○		○	
LU	LU05	○		○			
	LU07	○		○			
	LU09_L	○	○	○	○	○	
	LU09_R	○		○		○	
	LU12_L	○	○	○	○	○	
	LU12_R	○		○		○	
	LU15	○	○	○	○*	○	
PE	PE05	○		○			
	PE07	○		○			
	PE09	○		○		○	
	PE12	○		○		○	
	PE15	○		○		○	

Series	Model No.	Special environment which linear guide can tolerate					
		Clean	Vacuum	Corrosive	High-temperature	Hygienic	Dust-contaminated
LE	LE05	○		○			
	LE07	○	○	○	○*		
	LE09_L	○	○	○	○*	○	
	LE09_R	○		○		○	
	LE12_L	○	○	○	○	○	
	LE12_R	○		○		○	
	LE15_L	○	○	○	○	○	
	LE15AR	○		○		○	
Miniature LH	LH08	○		○			
	LH10	○		○			
	LH12	○	○	○	○*	○	
RA	RA15	○		○			
	RA20	○		○			
	RA25	○		○			
	RA30	○		○			
	RA35	○		○			
	RA45	○		○			
	RA55	○		○			
	RA65	○		○			
RB	RB30	○		○			
	RB35	○		○			
	RB45	○		○			
	RB55	○		○			
	RB65	○		○			
LA	LA25	○		○			
	LA30	○		○			
	LA35	○		○			
	LA45	○		○			
	LA55	○		○			
	LA65	○		○			
HA	HA25	○		○			
	HA30	○		○			
	HA35	○		○			
	HA45	○		○			
	HA55	○		○			
HS	HS15	○		○			
	HS20	○		○			
	HS25	○		○			
	HS30	○		○			
	HS35	○		○			

*) Applicable except for the dust-proofing parts.

7. Precautions for handling

Please observe the following precautions to maintain high functions of NSK linear guide.

- Products are washed to remove oil, and wrapped in a way to protect them from moisture. Use the product as soon as possible after opening the package.
- After opening, store the products in a clean, air-tight container such as desiccater with desiccating agent (e.g. silica gel). Do not apply rust preventive oil or an antirust paper that vaporizes rust preventive agent.
- Wear plastic gloves and handle product in a clean place.

Note: Please refer to the catalog "CAT. No. E1258 SPACEA" for the details of special environmental use.

A-3-10 Arrangement and Mounting of Linear Guide

1. Arrangement

- For NSK linear guides, the datum surfaces of the rail and of the slide are either marked with a "datum surface groove" or with an "arrow."
- In case that two or more linear guides are used together, one linear guide is designated as a reference side guide, and the rest is adjusting side guide(s). The reference side linear guide has its reference number, serial number, and "KL" mark on the opposite side of the datum surface (**Fig. 10.1**).
- When the datum surfaces of the reference side rail and slides are pressed to their mounting datum surfaces respectively, the variation of distance (mounting width W_2 or W_3) between the datum surfaces of the rails and that of the slides must be a minimum and therefore, it is specified as the standard. (**Figs. 10.2** and **10.3**)
- The ways to indicate the datum surfaces of each series are shown in **Table 10.1**.

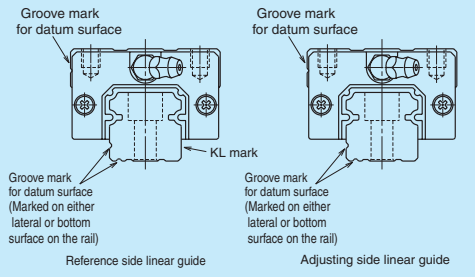


Fig. 10.1 Datum surface

Example of arrangement

- The arrangement of the linear guides must be determined taking into account the table mounting position (horizontal, vertical, inclined, or upside-down), strokes and the size of the machine base to which the table is mounted. **Table 10.2** shows common arrangement examples and their properties (features/precautions).

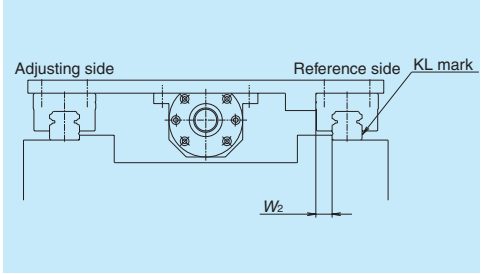


Fig. 10.2 Most common setting of the reference side rail

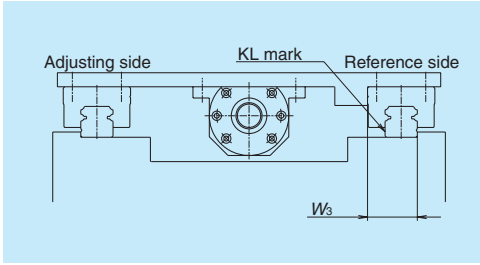


Fig. 10.3 Setting of the reference side rail in certain occasions

Table 10.1 Marks on the rail datum surfaces in each series











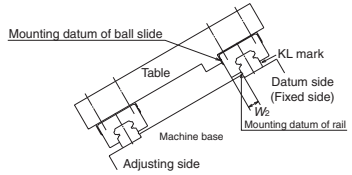

Material \ Model No.	Standard	LU05, 07, 09 PU05, 09, 12, 15 LE07, 09, 12	LU12, 15, NH15, NS15	PU07 LE05, 15 LE09, 12 (with a ball retainer) PE series LH08, 10, 12 LW17, 21 RA15
Special high carbon steel				
Stainless steel				

Table 10.2 Arrangement example

Arrangement	Features/Precautions
	• Easy for a highly-accurate installation (recommended arrangement)
	• Easy in highly-accurate installation • The lubricant oil may not be supplied to slides. When oil lubricant is used, special care is required to design the oil supply routing.
	• Slightly difficult for a highly-accurate installation • The life of the linear guides is affected by the mounting accuracy. • When oil lubricant is used, special care is required to design the oil supply routing.
	• Difficult for a highly-accurate installation • When oil lubricant is used, special care is required to design the oil supply routing.
	• Rather easy for a highly-accurate installation • When oil lubricant is used, special care is required to design the oil supply routing.
	• Easy in highly-accurate installation if the linear guides are installed to the machine base first, and then hung them upside down along with the machine base. • The slide may detach from the rail and fall down if the linear guide is damaged and rolling elements in the slide fall out. It is necessary to take preventive measures against the falling of the ball slide.

2. Mounting accuracy

(1) Accuracy of the mounting base of machine

- The mounting accuracy of linear guide usually copies the accuracy of the machine base.
- However, when two or more slides are assembled to each rail, the table stroke becomes shorter than the mounting surface. This, along with the fact that the mounting error is evenly spread, contributes to a higher table accuracy than the mounting surface accuracy, reducing the error to about 1/3 in average (**Fig. 10.4**).

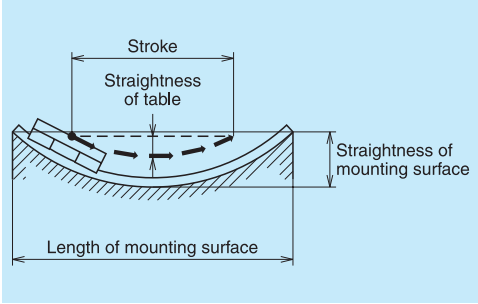

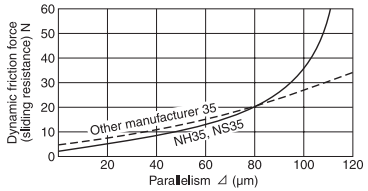



Fig. 10.4

(2) Installation error

- Mounting error affects mainly three factors: life, friction and accuracy (**Table 10.3**).

Table 10.3 Influence of mounting error

Factor	Influence	
Life		• Large mounting error generates a force which twists the slide and reduces its life. • It also distorts the contact point of the ball and the groove, and changes contact angle, thus lowering the table rigidity.
Friction		• NH and NS Series are affected very little by mounting error thanks to their small friction. (self aligning capability) • However, because of off-set Gothic arch grooves, their friction suddenly soars once the mounting error exceeds a certain level. • The mounting error severely affects friction of LA Series with heavy preload.
Accuracy		• When the rigidity of four slides is equal, the theoretical straightness becomes 1/2 of the installation error "e_1". • However, this value becomes slightly larger due to the deformation of the rail and the machine base.

(3) Permissible values of mounting error

- Among the three factors of life, friction, and accuracy, which are affected by the mounting error, NSK focuses on the life factor to determine the permissible mounting accuracy. The specifications are based on the following conditions.

For ball linear guides
- The permissible load per ball slide due to the mounting error is 10% of the basic dynamic load rating C_{50}.
- The rated life is 5 000 km.
- The rigidity of the machine base is infinite.

For roller linear guide
- The permissible load per roller slide due to the mounting error is 10% of the basic dynamic load rating C_{100}.
- The rated life is 10 000 km.
- The rigidity of the machine base is infinite.

C_{50} ; Basic dynamic load rating for 50 km rated fatigue life

C_{100} ; Basic dynamic load rating for 100 km rated fatigue life

- **Figs. 10.5** and **10.6** are representing the mounting errors of e_1 and e_2. Their permissible values are shown in the description of "**5. Installation**" of the each series.

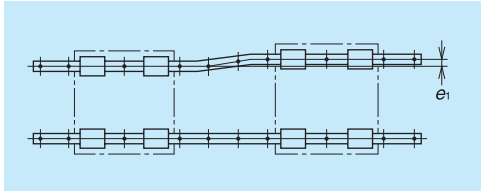


Fig. 10.5

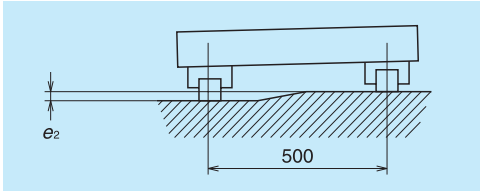


Fig. 10.6

(4) Running accuracy and the influence of even-off effect

- When mounting on a machine base, the linear guide is affected by the flatness of the mounting surface. However, in the case of two-rail/four-slide specification, which is most widely used, the straightness as a table unit is generally less than the straightness as a single component. This is due to the even-off effect generated by the shorter table stroke, compared to the rail length, as well as by interaction between the rails and slides.
- **Fig. 10.9** shows an actually measured straightness of the table which uses NSK linear guides. In this case, the final straightness of the table is about 1/5 of the straightness of the mounting surface.

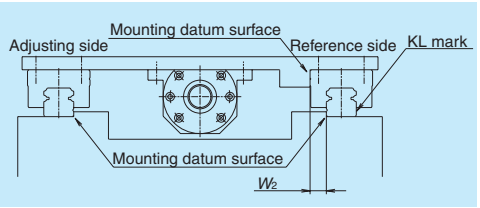


Fig. 10.7

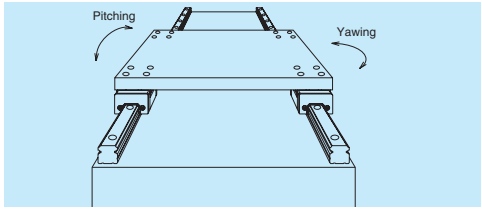


Fig. 10.8

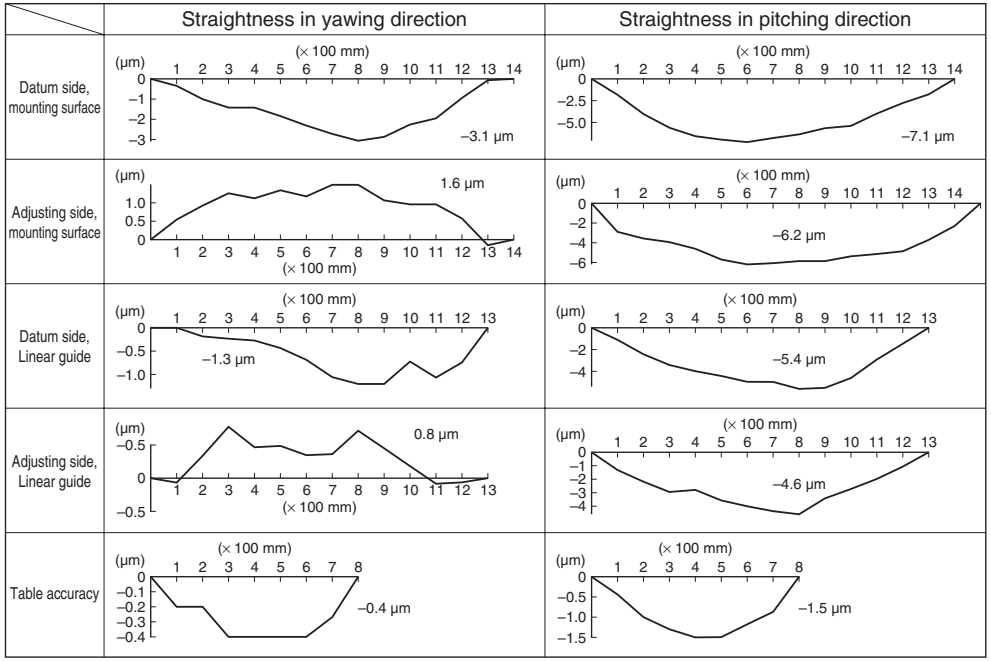


Fig. 10.9 Straightness of the table equipped with linear guide

3. Installation

(1) Shoulder height of the mounting surface of the machine base and corner radius r

- **Figs. 10.10** and **10.11**, show shoulder height of the mounting surface of the machine base and the size of corner radius. These figures are relevant when the linear guide is pressed to the shoulder of the machine base or table (the raised section from where the mounting surface begins), and horizontally secured to it. Recommended sizes are shown in the clause of "Shoulder height and corner radius r" of each series introduction.
- The shoulder should be thick (wide) enough, so it is not deformed by the pressing force.




Fig. 10.10 Shoulder for the rail datum surface




Fig. 10.11 Shoulder for the slide datum surface

(2) Tightening torque of the bolt

- **Table 10.4** shows tightening torque of the bolt when the rail is secured to the fixture of race way grinding machine.
- Apply same torque in this table when securing the rail to the machine base. Equal accuracy at the time of grinding can be obtained.

Table 10.4 Bolt tightening torque (Bolt material: High carbon chromium steel)

Unit: N·m

Bolt size	Tightening torque	Bolt size	Tightening torque
M2	0.27	M8	22
M2.3	0.38	M10	43
M2.5	0.58	M12	76
M3	1.06	M14	122
M4	2.5	M16	196
M5	5.1	M18	265
M6	8.6	M22	520

(3) Installation procedures

- There are two installation ways depending on the accuracy requirement.
  a. Installation with high accuracy
  b. Accuracy is not high, but easy to install
- For both methods, wipe off the rust preventive oil applied to the linear guide. Remove burrs and small bumps on the machine base and table mounting surface with an oilstone (**Fig. 10.12**).
  Apply machine oil or similar oil with low viscosity to the mounting surface to increase the rust preventive effect.
- Linear guides are precision products. Handle them with care.

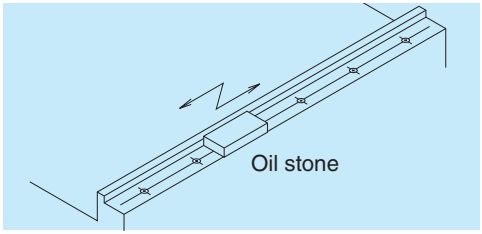


Fig. 10.12

1) Highly accurate installation
A) Rail installation procedures
a) When the machine base has a shoulder for the reference side rail.

[1] Confirm that the rail is reference side rail, and the datum surface of the rail comes to face to face with the shoulder of the machine base. Keep the slides on the rail, and carefully place the rail on the machine base on its mounting surface. Loosely tighten the bolts.
At this time, press the rail from sideways to make the rail tightly contact to the shoulder of the machine base. When using a shoulder plate, refer to **Table 10.4** for the bolt tightening torque (**Fig. 10.13**).
Refer to "**4. Various methods to press linear guide sideways.**"

[2] For final tightening of the bolts to secure the rail, tighten the bolt on either end of the rail, then proceed to other end.
If the datum surface is on the left side as shown in **Fig. 10.14**, tighten the bolt at the farthest end first, then proceed to the near end.
This way, creates a bolt rotating force that presses the rail against the shoulder. (Therefore, the rail is pressed sufficiently tight against the shoulder by merely pressing the rail by hand. However, if there is a possibility applying a lateral impact load, it is necessary to use a shoulder plate to prevent the rail from slipping.)

[3] If the mounting surface of the machine base where the adjusting side rail is installed also has a shoulder, repeat the steps [1] - [2].

[4] If there is no shoulder on the mounting surface of the machine base for the adjusting side rail: Secure a measuring table to the slides of the reference side rail (**Fig. 10.15**). Use this to adjust the parallelism of the adjusting side rail. Check parallelism of the adjusting side rail with a dial indicator from one end of the rail, tightening the bolts one by one.
The measuring table is more stable if secured to two slides, but one slides is sufficient.
Parallelism between two rails can also be checked by the same method in **Fig. 10.15** when there is a shoulder on the surface where the adjusting side rail is installed.

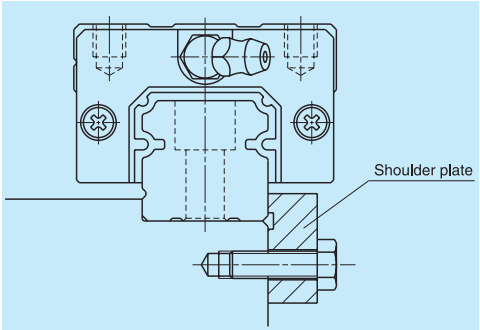


Fig. 10.13 Pressing the rail from sideways

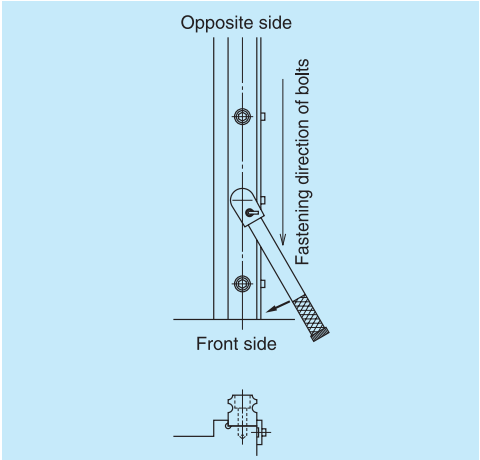


Fig. 10.14 Rail installation

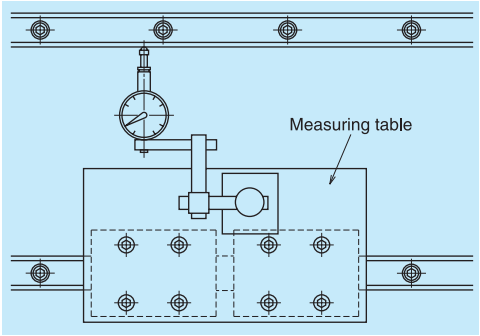


Fig. 10.15 Measuring parallelism

b) When the machine base does not have a shoulder on the side where the reference side rail is installed

[1] Carefully place the reference side rail on its mounting surface of the machine base. Loosely tighten the bolts. Do not tighten the bolts all the way, but stop tightening when the bolt enters halfway into the bolt hole. This makes the proceeding steps easier.

[2] Place the straight edge almost parallel to the reference side rail which is temporarily secured by the bolts. (At both ends of the rail and straight edge, the distance between them shall be almost same.)

[3] Once the position of the straight edge is determined, use it as the reference. With a dial indicator, check parallelism with the rail, and adjust the rail if necessary. Then tighten the bolts.
Ensure that the straight edge does not move while the bolts are being tightened.
This procedure should be carried out starting from one end of the rail to the other end (**Fig. 10.16**).

[4] Finally tighten all bolts with specified torque.

[5] There are two ways for installation of adjusting side rail:
1. Based on the straight edge which is used for reference side rail installation
2. Based on the reference side rail which is installed prior to the adjusting side rail.
In both cases, use a dial indicator to measure parallelism.
Other procedures are the same as [1] - [4] above, and the [4] for the case where there is a shoulder on the machine base.

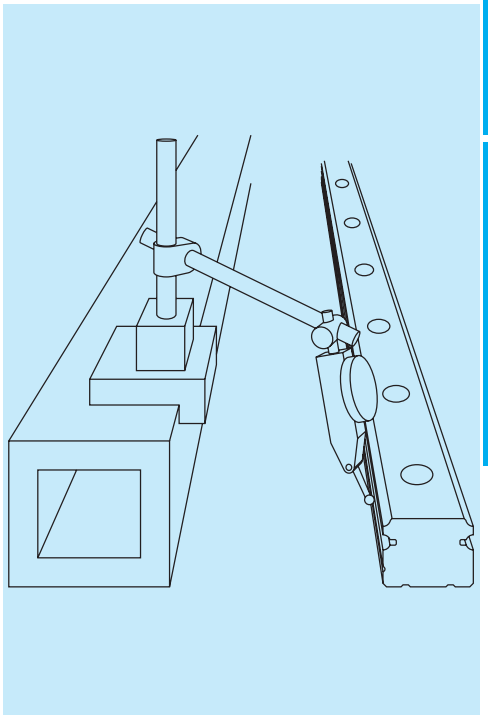


Fig. 10.16

B) Procedures for slide installation
a) When the table has a shoulder

[1] Arrange the slides so that locations match to their mounting section of the table. Carefully place the table on the slides. Loosely tighten all bolts.

[2] While pressing the table from sideways, further tighten the bolts which secure the slides on the reference side, so the table shoulder and the slide's mounting datum surface are sufficiently tightly pressed.
If a shoulder plate is provided, first tighten the bolts of the plate, then further tighten the bolts to the slides (**Fig. 10.17**).

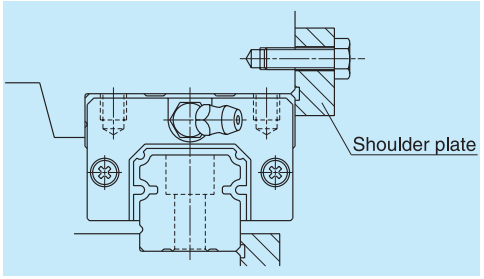


Fig. 10.17 Pressing slide from sideways

[3] Then, further tighten the bolts for slides on the adjusting side rail.
Move the table by hand to confirm that there is no abnormality such as excessive friction force during stroking. (This confirms that the correct installation steps were taken.)
[4] Finally, tighten all bolts with standard torque.

b) When table does not have a shoulder
[1] Arrange the slides so that locations match to their mounting section of the table. Carefully place the table on the slides. Loosely tighten bolts to secure the slides.
[2] Since the table does not have a shoulder, immediately tighten the bolts further to secure slides.
[3] Move the table by hand to confirm that there is no abnormality. Finally, tighten all bolts with the specified torque.

2) Easy installation
[1] Carefully place the reference side rail on the machine base. Then tighten the bolts to the specified torque.
[2] Loosely tighten the bolts on the adjusting side rail.
[3] Tighten the slides on the reference side rail and one slide on the adjustment side rail with the specified torque. Leave the rest of the slide on the adjusting side rail loosely tightened (**Fig. 10.18**).
[4] While moving the table with each pitch of the bolt for rail: With the specified torque, tighten the rail mounting bolt which is located immediately adjacent to the slide on the adjusting side rail that had been firmly tightened.
Take this procedure from one end to the other.
[5] Return the table to the original position once. Then, tighten the rest of the slides on the adjusting side to the specified torque. By the same procedure as in [4], tighten the rest of the rail mounting bolts to the specified torque. Move the table to check any abnormality such as large friction force.

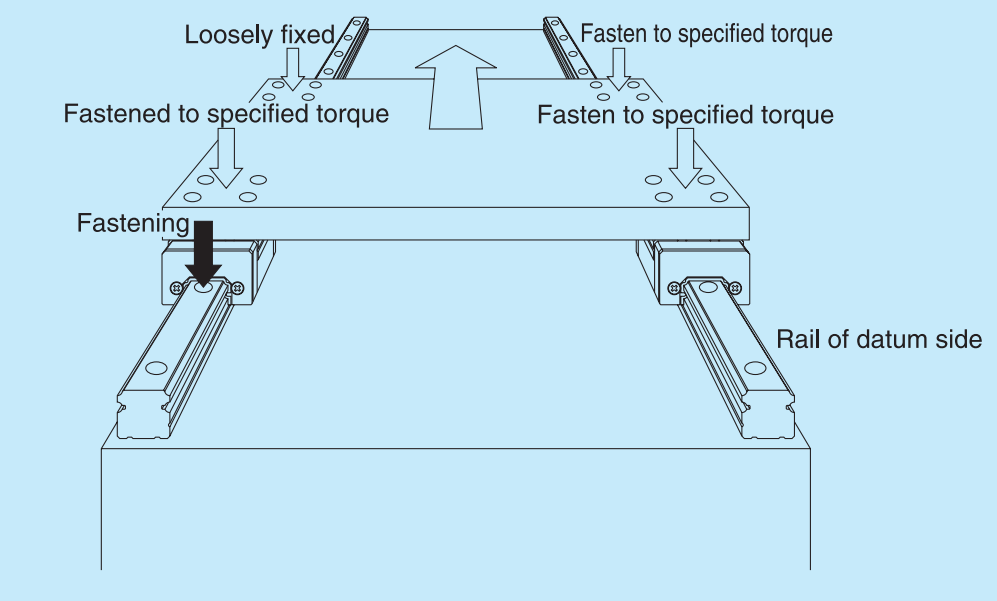


Fig. 10.18 Easy installation

(4) Various methods to press linear guide sideways

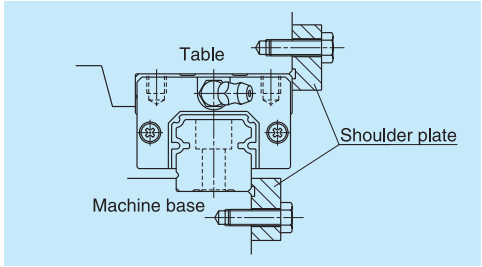


Fig. 10.19 Recommended method

- This method is most widely used, and generally recommended. The slides and the rail should protrude slightly from the sides of the table and the machine base. The shoulder plate should have a recess, so that the corners of the rail and slide do not touch the shoulder plate.

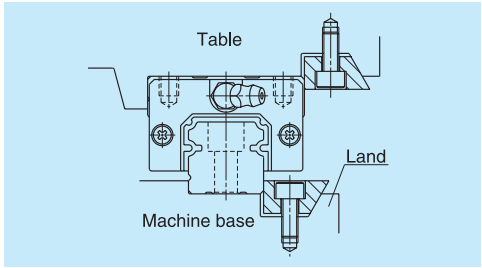


Fig. 10.20 Installation that requires caution

- A tapered block is squeezed in. However, the slightest tightening of the bolt generates a large pressing force to the side. Too much tightening may cause the rail to deform, or the land (shown in the figure left) to warp to the right. This method requires caution.

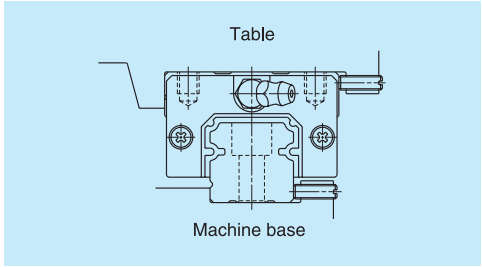


Fig. 10.21

- The bolt that presses rail must be thin due to limited space.

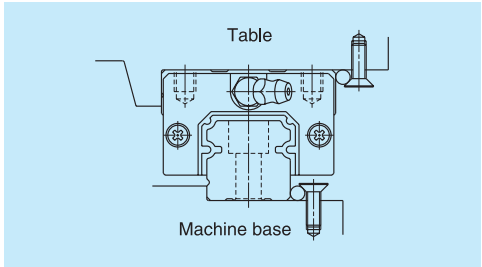


Fig. 10.22

- Press a needle roller with a taper section of the head of a slotted pan head screw. Watch out for the position of the screw.

4. Assembly random-matching type linear guide

- Slides of random-matching type are assembled on a provisional rail (an inserting tool) when it is delivered (**Fig. 10.23**).
- NSK standard grease is packed into the slide, allowing immediate use.

Assembly procedures of a random-matching type linear guide

Follow steps as described below.

(1) Wipe off the rust preventive oil from the rail and slide.

(2) Please match a groove mark for the datum surface of slide and rail to set a desired assembling state W_2 or W_3.

(3) Align the provisional rail to the rail in the bottom and side surfaces. Press the provisional rail lightly against the rail, and move the slide over the rail (**Fig. 10.23**).

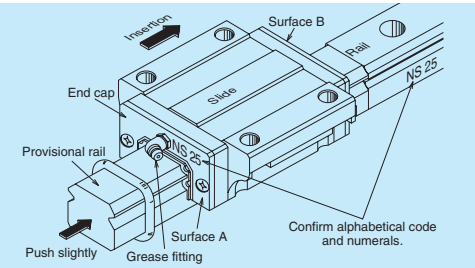


Fig. 10.23 Inserting slide into the rail

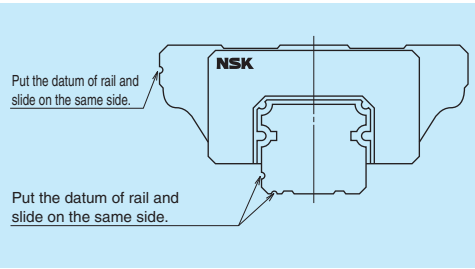


Fig. 10.24

5. Butting rail specification

- A rail which requires the length that exceeds the machine capacity manufactured maximum length comes in butting specification.
- The rails with butting specification are marked with alphabet (A, B, C ...) and an arrow on the opposite side of the mounting datum surface. Use the alphabets and arrows for assembly order and direction of the rail (**Fig. 10.25**).
  The random-matching rails for butting specification are only marked with the arrows.
- The pitch of the rail mounting hole on the butting section should be as F in **Fig. 10.26**. When two rails are used in parallel, the butted sections should not align. This is to avoid change in the running accuracy of the table at the butted sections.
- We recommend shifting the butting sections more than the length of a slide. If the higher running accuracy is required, consider installing the slides into the table so that they do not simultaneously pass the butting sections.

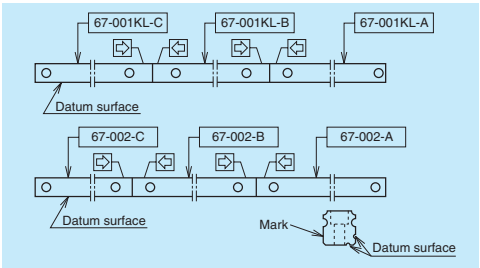


Fig. 10.25

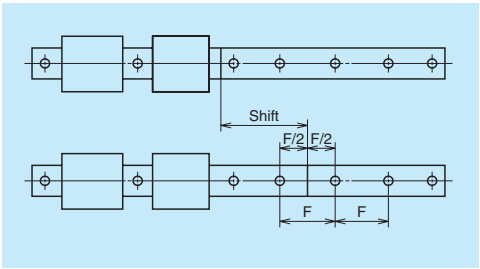


Fig. 10.26

6. Handling preloaded assembly

- In case of the preloaded assembly (not random-matching type), do not remove slides from the rail as a general rule.
- If it is unavoidable to remove slides from the rail, make certain to use a provisional rail (a jig used to insert a slide to the rail) as shown in **Fig. 10.27**.
- The provisional rails for each series and sizes are available.
- Pay due attention to the assembly mark when returning the slide back to the rail. Follow the cautions described below.

Mark for assembling ball slide and rail

- Rails of preloaded assembly (not random-matching type) are marked with a reference number and a serial number on the opposite of the datum surface.
- Slides to be combined are also marked with the same serial number (the reference number is not marked).
- Furthermore, slides are marked with an arrow. Slides should be positioned with their arrows facing each other.
- In case that the slides had to be removed from the rail, confirm their serial numbers and the directions of arrows for re-assembly (**Fig. 10.28**).
- When two or more rails are used in a single set, serial numbers are in sequence if their reference numbers are the same. The linear guide with smallest serial number has the "KL" mark (**Fig. 10.29**).
- When two or more rails of different reference number are used in a single set, the rails and slides have the same serial number. In this case, when slides are removed from the rail, it is unclear which rail each slide was previously installed on. When removing ball slides from the rail for an unavoidable reason (**Fig. 10.30**), sufficient precaution is required.

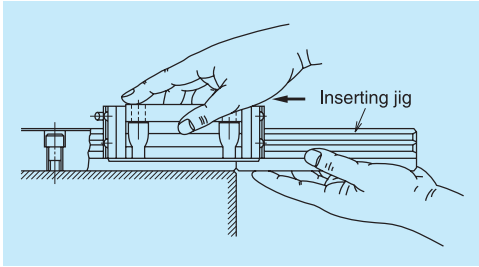


Fig. 10.27

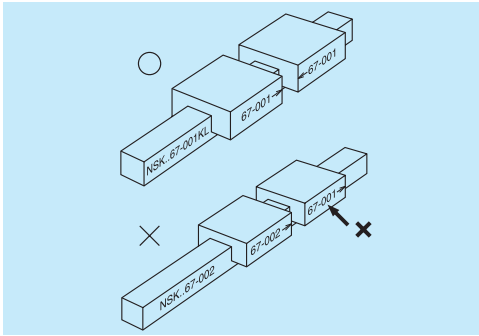


Fig. 10.28

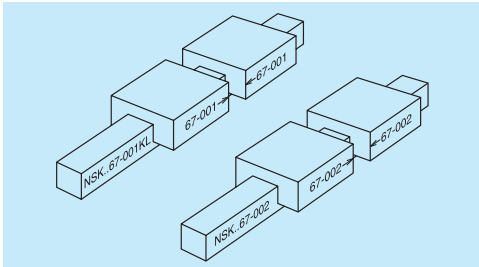


Fig. 10.29 When two rails have the same reference number


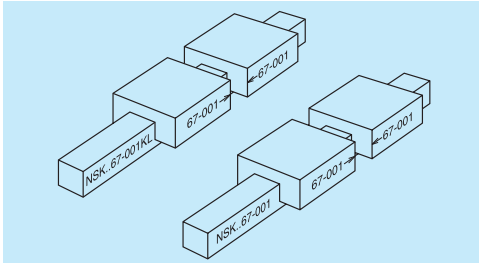


Fig. 10.30 When two rails have different reference number

A-3-11 Drills to Select Linear Guide

1. Single axis material handling system

This section explains the selection of linear guide, life calculation, and deformation at load acting point for a single axis material handling system equipped with linear guides.

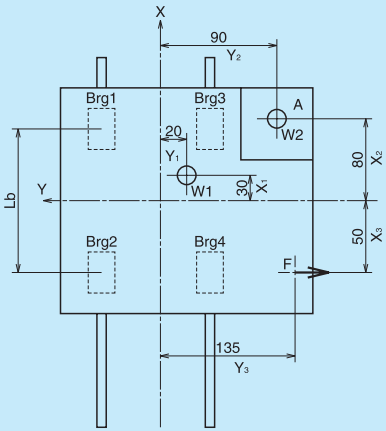

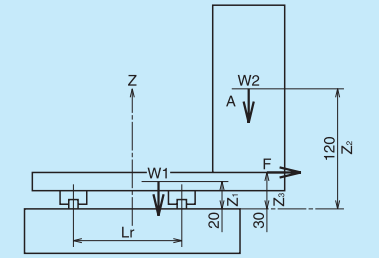


Fig. 11.1 Single axis material handling system

The work load is applied only to one way of stroke. Assume that the load is acting in full stroke as the condition of acting load is unknown.

Specification of the single axis material handling system

Table weight	W1	: 150 (N)
Weight of the work	W2	: 200 (N)
Acting load	F	: 200 (N)
Ball slide span	L_b	: 100 (mm)
Rail span	L_r	: 90 (mm)

Load point coordinates from the table center (mm)

Load	X axis	Y axis	Z axis
W1	30	–20	20
W2	80	–90	120
F	–50	–135	30

Stroke: 1 000 mm
(1 cycle: 2 000 mm)

Environment	: 10 – 30 (°C)
Travel speed	: 12 (m/min)
Time to reach travel speed	: 0.25 (sec)
Operating hour	: 16 (hr/day)

(1) Selection of linear guide model

Select a type of linear guide from **"A-1-2 Structure and Characteristics of Linear Guide."** Since this material handling system has two rails and four ball slides, **NH, NS, and PU Series** are suitable.

Here, we temporary select PU15 because of the dimensions of mounting space.

(2) Calculating life

Calculate life of the selected PU15AL based on **"A-3-2 Rating Life and Basic Load Rating."**

Linear guide PU15AL

Basic dynamic load rating C_{100} **: 4 400 (N)**
Basic static load rating C_0 **: 6 600 (N)**

Load conditions of the linear guide

Table weight	W1	: 150 (N)
Weight of the work	W2	: 200 (N)
Applied load	F	: 200 (N)
Rail span	L_r	: 90 (mm)
Ball slide span	L_b	: 100 (mm)

From the time to reach travel speed and the travel speed, the table acceleration is 0.8 m/sec^2. Therefore, it is not necessary to take into account inertial force brought about by the table mass.

Calculation of the load applied to ball slide

Calculate two occasions:

1. There is the work mounted on the table.
2. No work mounted on the table.

From **Pattern 4** on page A19 in **Table 2.2**

When a work is mounted on the table

Vertical loads

$$M1=\sum_{j=1}^{n}\left(F_{yj}\cdot Z_{yj}\right)+\sum_{k=1}^{n}\left(F_{zk}\cdot Y_{zk}\right)$$
$$=F\cdot Z_3+W1\cdot Y_1+W2\cdot Y_2$$
$$=-200\times 30+150\times(-20)+200\times(-90)$$
$$=-27\,000\ (\mathrm{N\cdot mm})$$

$$M2=\sum_{i=1}^{n}\left\{F_{xi}\cdot\left(Z_{xi}-Z_b\right)\right\}+\sum_{k=1}^{n}\left(F_{zk}\cdot X_{zk}\right)$$
$$=W1\cdot X_1+W2\cdot X_2$$
$$=150\times 30+200\times 80$$
$$=20\,500\ (\mathrm{N\cdot mm})$$

$$F_{r1}=\frac{\sum_{k=1}^{n}F_{zk}}{4}+\frac{M1}{2\cdot L}+\frac{M2}{2\cdot \ell}$$
$$=\frac{W1+W2}{4}+\frac{M1}{2\cdot L_r}+\frac{M2}{2\cdot L_b}$$
$$=\frac{150+200}{4}+\frac{-27\,000}{2\times 90}+\frac{20\,500}{2\times 100}$$
$$=40\ (\mathrm{N})$$

Similarly
$F_{r2}=-165(\mathrm{N})$
$F_{r3}=\ 340(\mathrm{N})$
$F_{r4}=\ 135(\mathrm{N})$

Lateral loads

$$M3=-\sum_{i=1}^{n}\left\{F_{xi}\cdot\left(Y_{xi}-Y_b\right)\right\}+\sum_{j=1}^{n}\left(F_{yj}\cdot X_{yj}\right)$$
$$=F\cdot X_3$$
$$=-200\times(-50)$$
$$=10\,000\ (\mathrm{N\cdot mm})$$

$$F_{s1} = F_{s3} = \frac{\sum_{j=1}^{n} F_{yj}}{4} + \frac{M3}{2 \cdot l}$$
$$= \frac{F}{4} + \frac{M3}{2L_b}$$
$$= \frac{-200}{4} + \frac{10\,000}{2 \times 100}$$
$$= 0 \text{ (N)}$$

Similarly
$F_{s2} = F_{s4} = -100$(N)

No work mounted on the table
Vertical load

$$M1 = \sum_{j=1}^{n} (F_{yj} \cdot Z_{yj}) + \sum_{k=1}^{n} (F_{zk} \cdot Y_{zk})$$
$$= F \cdot Z_3 + W1 \cdot Y_1$$
$$= -200 \times 30 + 150 \times (-20)$$
$$= -9\,000 \text{ (N·mm)}$$

$$M2 = \sum_{i=1}^{n} \{F_{xi} (Z_{xi} - Z_b)\} + \sum_{k=1}^{n} (F_{zk} \cdot X_{zk})$$
$$= W1 \cdot X_1$$
$$= 150 \times 30$$
$$= 4\,500 \text{ (N·mm)}$$

$$F_{r1} = \frac{\sum_{k=1}^{n} F_{zk}}{4} + \frac{M1}{2 \cdot L} + \frac{M2}{2 \cdot l}$$
$$= \frac{W1}{4} + \frac{M1}{2 \cdot L_r} + \frac{M2}{2 \cdot L_b}$$
$$= \frac{150}{4} + \frac{-9\,000}{2 \times 90} + \frac{4\,500}{2 \times 100}$$
$$= 10 \text{ (N)}$$

Similarly
$F_{r2} = -35$ (N)
$F_{r3} = 110$ (N)
$F_{r4} = 65$ (N)

Lateral loads

$$M3 = -\sum_{i=1}^{n} \{F_{xi} \cdot (Y_{xi} - Y_b)\} + \sum_{j=1}^{n} (F_{yj} \cdot X_{yj})$$
$$= F \cdot X_3$$
$$= -200 \times (-50)$$
$$= 10\,000 \text{ (N·mm)}$$

$$F_{s1} = F_{s3} = \frac{\sum_{j=1}^{n} F_{yj}}{4} + \frac{M3}{2 \cdot l}$$
$$= \frac{F}{4} + \frac{M3}{2 \cdot L_b}$$
$$= \frac{-200}{4} + \frac{10\,000}{2 \times 100}$$
$$= 0 \text{ (N)}$$

Similarly
$F_{s2} = F_{s4} = -100$ (N)

For calculation, take into consideration the positive or negative signs (+ or -) for load point coordinates.

Calculation of dynamic equivalent load
Use **"A-3-2.2 3. Calculation of dynamic equivalent load."**
It matches Position 4 in **"Table 2.3 Loads in the arrangement of linear guides."** Ball slide loads that must be considered are vertical and lateral direction loads.


In case of PU15AL,
Vertical direction dynamic equivalent load
$F_r = F_r$
Lateral direction dynamic equivalent load
$F_{se} = F_s \cdot \tan\alpha = F_s$
Use the formula for full dynamic equivalent load (page A23) to calculate F_e.
Results are shown in the table below.

Unit: N

Work mounted	Slide1	Slide2	Slide3	Slide4
F_r ($F_{r1} - F_{r4}$)	40	– 165	340	135
F_{se} ($F_{s1} - F_{s4}$)	0	– 100	0	– 100
F_e	40	215	340	185
No work mounted	Slide1	Slide2	Slide3	Slide4
F_r ($F_{r1} - F_{r4}$)	10	– 35	110	65
F_{se} ($F_{s1} - F_{s4}$)	0	– 100	0	– 100
F_e	10	118	110	133

Based on the results of calculations, a ball slide that bears the maximum dynamic equivalent load shall be taken as the representative of the linear guides for further life calculation. For this case, we take the Slide3.
Therefore;
Work mounted $F_{e1} = 340$ **(N)**
No work mounted $F_{e2} = 110$ **(N)**

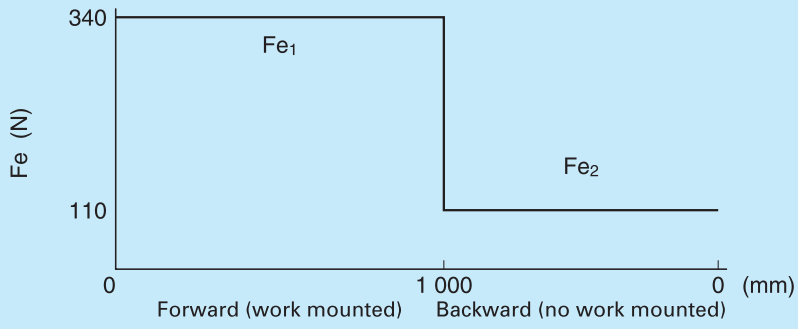Calculation of mean effective load
Based on **"A-3-2.2 4. Calculation of mean effective load,"** calculate from the largest full dynamic equivalent loads.



Cycle patterns of full dynamic equivalent load

From the cycle pattern, the mean effective load matches the case **"(1) When load and running distance vary stepwise."** Therefore, use the following formula.
Assuming that L is: $L = L_1 + L_2$.

$$Fm = \sqrt[3]{\frac{1}{L}\left(F_{e1}^3 L_1 + F_{e2}^3 L_2\right)}$$
$$= \sqrt[3]{\frac{1}{2\,000}\left(340^3 \times 1\,000 + 110^3 \times 1\,000\right)}$$
$$= 273 \text{ (N)}$$

Determine various coefficients

Determine applicable coefficients from **"A-3-2.2 5. Various coefficients."**

Load factors

Use conditions are: Travel speed, 12 m/min; Acceleration, 0.8 m/sec^2 (0.082 G). As the load factor f_w is in the range of 1.0 to 1.5, use common value $\boldsymbol{f_w = 1.2}$.

Hardness coefficient

The hardness of NSK linear guides is HRC58 to 62. Use a hardness coefficient $\boldsymbol{f_H = 1}$ and take the value of basic dynamic load rating as it is.

Calculate rating life

Use **"A-3-2.2 6. Calculation of basic rating life."**

The basic dynamic load rating (C_{100}) of linear guide PU15AL : 4 400 (N)
Mean effective load F_m : 273 (N)
Load factor f_w : 1.2
Hardness coefficient f_H : 1

$$\text{Rating fatigue life } L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_w \cdot F_m}\right)^3$$
$$= 100 \times \left(\frac{1 \times 4\,400}{1.2 \times 273}\right)^3$$
$$= \text{approximately 242 280 (km)}$$

Travel speed, 12 m/min; Operating hours, 16 hr/day.
Convert the above rating fatigue life into hours:

$$\frac{242\,280 \times 1\,000}{12 \times 60 \times 16} = \text{approximately 21 030 (days)}$$

Examine static load

Based on **"A-3-2.2 7. Examination of static load,"** find out on which ball slide the static equivalent load P_0 becomes largest.
The basic static load rating (C_0) of linear guide PU15AL: 6 600 (N)
Ball slide No. 3 bears the largest load.
P_0 at this time:

$$P_0 = F_r + F_s = 340$$

Therefore, static permissible load coefficient f_s is:

$$f_s = \frac{C_0}{P_0} = \frac{6\,600}{340} = 19.4$$

There is no problem at this value.

(3) Selection of accuracy grade and preload

Based on **"A-3-4 3. Application examples of accuracy,"** select accuracy grade PN and preload Z1 for material handling system.

(4) Calculation of deformation

Calculate deformation by the weight of the mounted work W_2. From **"Rigidity of PU series,"** the rigidity of linear guide PU15AL with Z1 preload is:

$\boldsymbol{K_s = K_r = 45\ (N/\mu m) = 45\,000\ (N/mm)}$

Deformation by the weight of the mounted work W_2 can be obtained as the difference in deformation when W_2 applies or does not apply.

From Pattern 4 in Table 2.2 (page A19)

Work mounted:

$$\delta_{x1} = Y_d \cdot \frac{F_{s2} - F_{s1}}{L_b \cdot K_s} + Z_d \cdot \frac{F_{r1} - F_{r2}}{L_b \cdot K_r}$$
$$= -90 \times \frac{-100 - 0}{100 \times 45\,000} + 120 \times \frac{40 - (-165)}{100 \times 45\,000}$$
$$= 0.0075 \text{ (mm)} = 7.5 \text{ (μm)}$$

Similarly, $\delta_{y1} = -0.0082$ (mm) $= -8.2$ (μm)
$\delta_{z1} = 0.0123$ (mm) $= 12.3$ (μm)

No work mounted:

$$\delta_{x2} = Y_d \cdot \frac{F_{s2} - F_{s1}}{L_b \cdot K_s} + Z_d \cdot \frac{F_{r1} - F_{r2}}{L_b \cdot K_r}$$
$$= -90 \times \frac{-100 - 0}{100 \times 45\,000} + 120 \times \frac{10 - (-35)}{100 \times 45\,000}$$
$$= 0.0032 \text{ (mm)} = 3.2 \text{ (μm)}$$

Similarly, $\delta_{y2} = -0.0023$ (mm) $= -2.3$ (μm)
$\delta_{z2} = 0.0039$ (mm) $= 3.9$ (μm)

Therefore, the difference in deformation by whether there is a mounted work or not is as follows:

$\delta_x = \delta_{x1} - \delta_{x2} = 7.5 - 3.2 = 4.3$ (μm)
$\delta_y = \delta_{y1} - \delta_{y2} = -8.2 - (-2.3) = -5.9$ (μm)
$\delta_z = \delta_{z1} - \delta_{z2} = 12.3 - 3.9 = 8.4$ (μm)

2. Machining center

The following is a calculation example of a horizontal type machining center. Arrangements of each axis are shown in **Fig. 11.2** (front view) and **Fig. 11.3** (side view).

Operating conditions

Dimensions and load conditions are:

X axis column's weight	Wx :	7 500 (N)
Y axis spindle head's weight	Wy :	2 500 (N)
Z axis table's weight	Wz :	5 500 (N)
X axis rail span	XL_r :	450 (mm)
X axis ball slide span	XL_b :	310 (mm)
Y axis rail span	YL_r :	410 (mm)
Y axis ball slide span	YL_b :	308 (mm)
Z axis rail span	ZL_r :	660 (mm)
Z axis ball slide span	ZL_b :	420 (mm)

X axis stroke : 400 (mm)
Y axis stroke : 350 (mm)
Z axis stroke : 500 (mm)

Average rapid traverse speed : 15 (m/min) [Max. 30 (m/min)]
Starting accelerating speed : 1 (G)
Milling speed : 2.5 (m/min)
Drilling speed : 0.8 (m/min)

Cutting load
Milling process $Fx = Fy =$ 1 000 (N)
Drilling process $Fz =$ 3 000 (N)

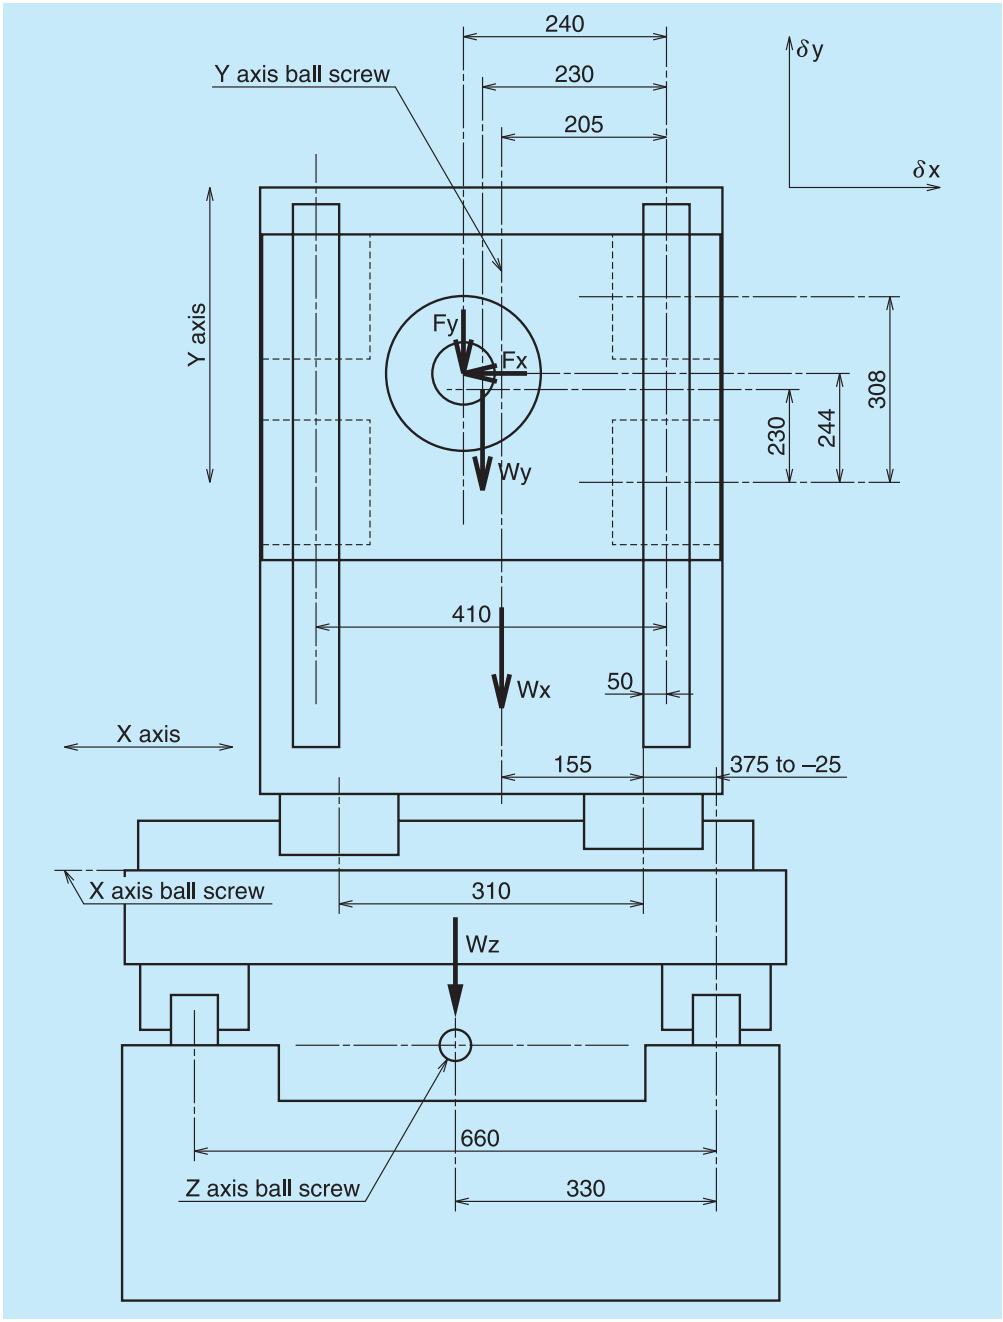


Fig. 11.2 Machining center (front view)

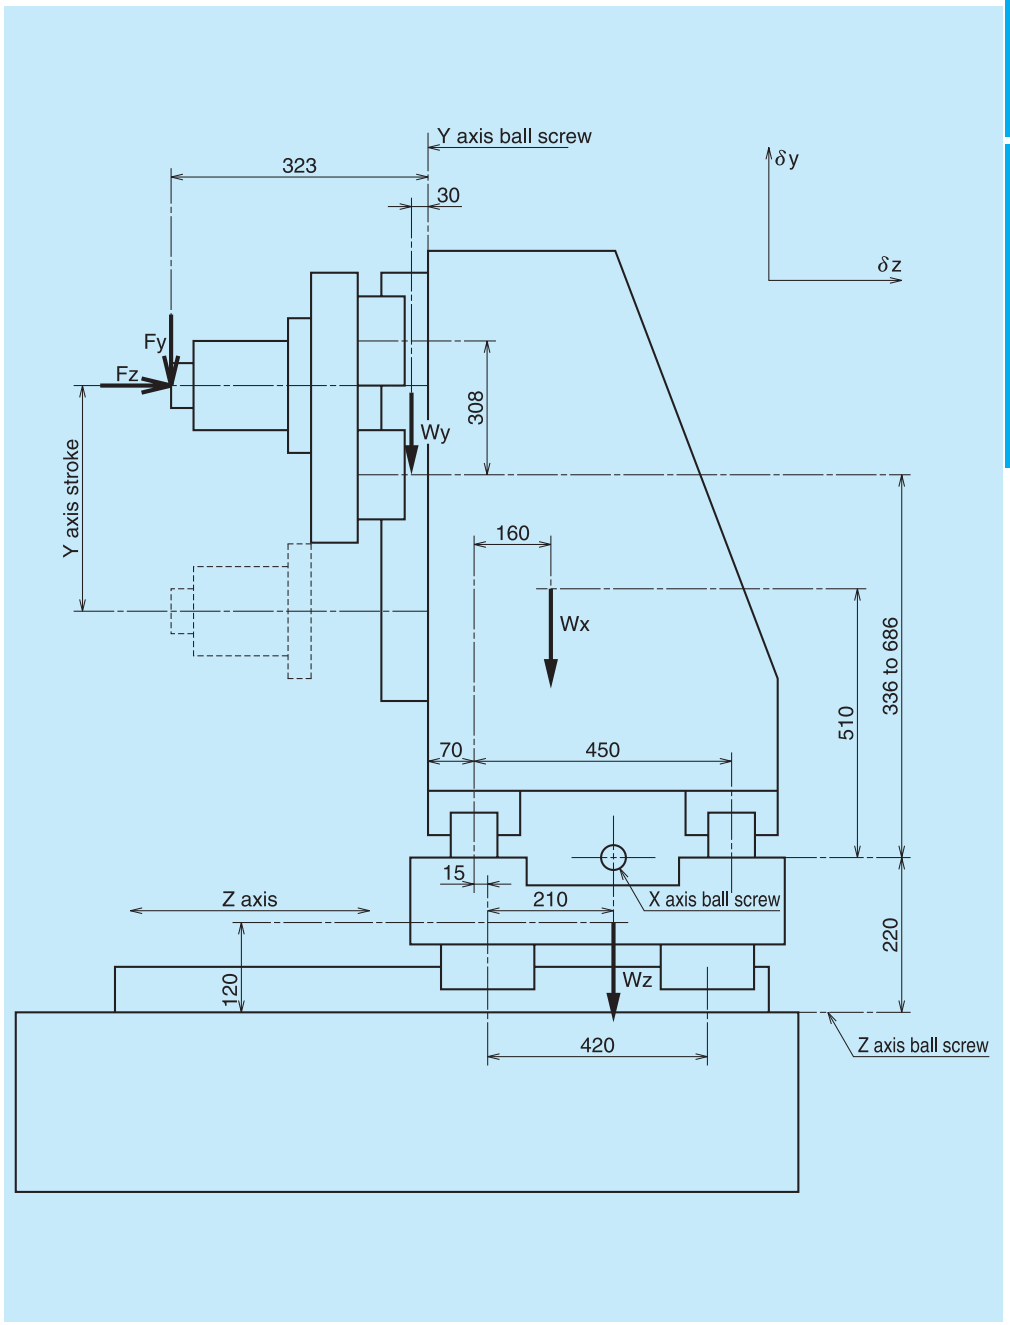


Fig. 11.3 Machining center (side view)

(1) Selection of linear guide model

From the operating conditions, the linear guide should be LA Series which is suitable for the machining center.

Select below temporarily from shaft diameter of ball screw:

X axis LA55
Y axis LA35
Z axis LA65

(2) Selection of accuracy grade and preload

For machining center, select accuracy grade P5 and preload Z3.

(3) Calculation of life expectancy

Examination shall be done in three cases, no cutting load, milling process, and drilling process.

Inertial force associated with the starting acceleration is not considered in this case. However, it must be calculated for more accurate figures.

Calculation of the loads that apply to the ball slide

In case of no cutting load: *Fx* = *Fy* = *Fz* = 0

Calculate load on X, Y, Z axes using **"Table 2.2"** in **"A-3-2.2 2. Calculating load to a ball slide."**

X axis: Loads to be considered Wx and Wy
Y axis: Loads to be considered Wy
Z axis: Loads to be considered Wx, Wy, and Wz

Unit: N

Axis	Load direction	Slide1	Slide2	Slide3	Slide4
X axis	Vertical direction *Fr*	1 156	955	4 045	3 844
	Lateral direction *Fs*	0	0	0	0
Y axis	Vertical direction *Fr*	122	–122	122	–122
	Lateral direction *Fs*	102	–102	102	–102
Z axis	Vertical direction *Fr*	765	3 860	3 890	6 985
	Lateral direction *Fs*	0	0	0	0

In case of milling process: *Fx* = *Fy* = 1 000 (N)

Similarly,

X axis: Loads to be considered *Wx*, *Wy*, *Fx*, and *Fy*
Y axis: Loads to be considered *Wy*, *Fx*, and *Fy*
Z axis: Loads to be considered *Wx*, *Wy*, *Wz*, *Fx*, and *Fy*

The table below shows the calculation of each load coordinates at stroke end which imposes most strict condition.

Unit: N

Axis	Load direction	Slide1	Slide2	Slide3	Slide4
X axis	Vertical direction *Fr*	2 277	–1 039	6 539	3 224
	Lateral direction *Fs*	997	–997	997	–997
Y axis	Vertical direction *Fr*	252	–1 040	1 040	–252
	Lateral direction *Fs*	54	–554	54	–554
Z axis	Vertical direction *Fr*	–771	3 796	4 453	9 020
	Lateral direction *Fs*	486	–986	486	–986

In case of drilling process: *Fz* = 3 000 (N)

X axis: Loads to be considered *Wx*, *Wy*, and *Fz*
Y axis: Loads to be considered *Wy* and *Fz*
Z axis: Loads to be considered *Wx*, *Wy*, *Wz*, and *Fz*

The table below shows calculation of each load coordinates at a stroke end which imposes most strict condition.

Unit: N

Axis	Load direction	Slide1	Slide2	Slide3	Slide4
X axis	Vertical direction *Fr*	4 256	4 055	945	744
	Lateral direction *Fs*	919	581	919	581
Y axis	Vertical direction *Fr*	305	938	561	1 195
	Lateral direction *Fs*	102	–102	102	–102
Z axis	Vertical direction *Fr*	4 872	–247	7 997	2 878
	Lateral direction *Fs*	839	–839	839	–839

Calculation of dynamic equivalent load

Next, find dynamic equivalent load under each cutting condition. From **"Table 2.3"** in **"A-3-2.2 3. Calculation of dynamic equivalent load,"** the necessary loads, *Fr* and *Fse* are, as the linear guide model is LA Series, obtained as follows.

Vertical dynamic equivalent load

$$Fr = Fr$$

Lateral dynamic equivalent load

$$Fse = Fs \cdot \tan\alpha = Fs$$

From the above, calculate *Fe* using formulas for full dynamic equivalent loads shown in page A23. From calculation, the largest full dynamic equivalent loads are as follows.

Axis	Largest full dynamic equivalent load Fe (N)		
	No cutting load	For milling process	For drilling process
X axis	4 045	7 038	4 716
Y axis	173	1 317	1 246
Z axis	6 985	9 513	8 417

Calculation of full dynamic equivalent load taking account of preload

It is necessary to include the amount of preload for the calculation of rating life when Z3 preload is specified. Consider each preload and calculate full dynamic equivalent load. Calculate *Fep* using formulas in **"A-3-3 6. Load and rating life when the preload is taken into account".**

Preload P (X axis linear guide LA55): 8 100 (N)
Preload P (Y axis linear guide LA35): 3 450 (N)
Preload P (Z axis linear guide LA65): 13 800 (N)

From the above, the full dynamic equivalent loads taking preload into account are smaller than the load at which preload is relieved.

Axis	Largest full dynamic equivalent load Fe (N)		
	No cutting load	For milling process	For drilling process
X axis	10 336	12 104	10 724
Y axis	3 542	4 171	4 131
Z axis	17 663	19 138	18 494

Calculation of mean effective load

Calculate the mean effective loads from full dynamic equivalent loads. If duty cycle in the cutting process is not clear, set the mean effective load to 70% of the largest full dynamic equivalent load in all processes.

Therefore,

X axis: 12 104 × 0.7 = 8 473 (N)
Y axis: 4 171 × 0.7 = 2 920 (N)
Z axis: 19 138 × 0.7 = 13 397 (N)

Determine various coefficients

Determine them based on **"A-3-2.2 5. Various coefficients."**

For this case the factors are following.

Load coefficient f_W : 1.5

Hardness coefficient f_H : 1

Calculation of rating life

Based on the calculated loads and various coefficients, calculate the rating life from **"A-3-2.2 6. Calculation of rating life."**

Basic dynamic load rating C_{100}
(X axis linear guide LA55): 111 000 (N)

Basic dynamic load rating C_{100}
(Y axis linear guide LA35): 49 000 (N)

Basic dynamic load rating C_{100}
(Z axis linear guide LA65): 206 000 (N)

Load coefficient f_W: 1.5

Hardness coefficient f_H: 1

Rating fatigue life $L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_w \cdot F_m} \right)^3$

From this,

In case of X axis Lx = 66 617 (km)

In case of Y axis Ly = 140 012 (km)

In case of Z axis Lz = 107 722 (km)

In case of roller linear guides, refer to **"A-3-2.2 6. Calculation of rating life"** (page A25).

Examination of static loads based on "A-3-2.2 7"

Basic static load rating C_0
(X axis linear guide LA55): 215 000 (N)

Basic static load rating C_0
(Y axis linear guide LA35): 98 000 (N)

Basic static load rating C_0
(Z axis linear guide LA65): 420 000 (N)

Examine a case of high-load milling process with large load.

X axis $fs = \frac{C_0}{P_0} = \frac{C_0}{(F_r + F_s)} = \frac{215\,000}{(6\,539 + 997)} = 28.5$

Similarly,

Y axis fs = 61.5

Z axis fs = 42.0

Therefore, there is no problem.

(4) Calculation of deformation

Calculate deformation at the processing points. (The stroke position is the stroke end positions on Y axis and X axis.)

Rigidity of X axis linear guide LA55Z3: 1 400 (N/μm)

Rigidity of Y axis linear guide LA35Z3: 825 (N/μm)

Rigidity of Z axis linear guide LA65Z3: 1 730 (N/μm)

Calculate using Pattern 4 in Table 2.2.

Load conditions	Deformation direction	Deformation of each axis (μm)			Total deformation (μm)
		X axis	Y axis	Z axis	
Table weight alone	δx	–0.2	–0.1	–3.1	–3.4
	δy	–4.6	–0.3	–4.2	–9.1
	δz	–4.3	–0.1	–4.9	–9.3
Milling process	δx	–9.9	–1.3	–6.7	–17.9
	δy	–6.4	–1.7	–5.2	–13.3
	δz	–6.1	–0.4	–7.7	–14.2
Drilling process	δx	–0.9	–0.3	–4.6	–5.8
	δy	1.4	0.8	2.8	5.0
	δz	5.5	1.2	7.6	14.3

Therefore, deformation at processing points at time of milling is:

δx = –17.9 – (–3.4) = –14.5 (μm)

δy = –13.3 – (–9.1) = –4.2 (μm)

δz = –14.2 – (–9.3) = –4.9 (μm)

Deformation at processing points at time of drilling is:

δx = –5.8 – (–3.4) = –2.4 (μm)

δy = 5.0 – (–9.1) = 14.1 (μm)

δz = 14.3 – (–9.3) = 23.6 (μm)

If a rating life of this long period is not required, select a smaller linear guide model, and calculate the life again.

To reduce deformation at the processing point, select a linear guide model with higher rigidity, and then calculate the life again.

A-3-12 Reference

The articles in "Motion & Control (NSK Technical Journals)" which refer to NSK linear guides are listed in the table below for user convenience.

"Motion & Control" is compiled to introduce NSK products and its technologies.

For inquiries and orders of "Motion & Controls," please contact your local NSK sales offices, or Representatives.

Table 12.1 Motion & Control (NSK Technical Journal): Articles relating to linear guides (1997 –)

Issue No.	Date of Publication	Articles related to linear guides
No.5	Dec. 1998	Development of the NSK K1 Seal for Linear Guides
No.8	May. 2000	NSK Linear Guides for High-Temperature Environments
No.9	Oct. 2000	Recent Developments in Highly Precise NSK Linear Guides
No.9	Oct. 2000	High-Performance Seals for NSK Linear Guides
No.11	Oct. 2001	Development of the NSK S1 Series™ Ball Screws and Linear Guides High Load Capacity Mini LH Series of NSK Linear Guides
No.12	Apr. 2002	NSK Linear Guides & Ball Screws Equipped with NSK K1™ Lubrication Unit
No.12	Apr. 2002	NSK S1 Series™ NSK Linear Guides and Ball Screws
No.13	Oct. 2002	Translide™ -New Rolling Element Linear Motion Bearing-
No.14	May. 2003	New Generation of NSK Linear Guides Miniature PU Series
No.15	Dec. 2003	Ultra-Precision NSK Linear Guides for Machine Tools-the HA Series
No.16	Aug. 2004	Numerical analysis Technology & NSK Linear Guides for Machine Tools
No.16	Aug. 2004	NSK RA Series Roller Guide
No.18	Aug. 2005	New Generation of NSK linear Guides Miniature PU Series/PE Series
No.20	Aug. 2007	V1 Series of Highly Dust-Resistant NSK Linear Guides
No.21	Dec. 2009	Technological Trends of NSK Linear Guides for Industrial Machines Highly Accurate HS Series of Ultra-Precision NSK Linear Guides Linear Guides for Food Machine and Medical Devices
No.22	Mar. 2011	Technological Trends of NSK Linear Guides for Industrial Machines High-Accuracy HS Series of Ultra-Precision NSK Linear Guides NSK Linear Guides for Food Processing Equipment and Medical Devices
No.23	Jun. 2013	Technological Trends in Linear Motion Rolling Guides for Machine Tools
No.24	Dec. 2014	Slight-Preload Type RA Series Roller Guides of NSK Linear Guides
No.25	Sep. 2015	Precision-Grade, Medium-Preload, Random-Matching NSK linear Guides Random-Matching, Miniature PU and PE Series of NSK Linear Guides
No.26	Apr. 2016	NSK Roller Guides Equipped with V1 Seals Random-matching, High-Precision-Grade RA Series Roller Guides
No.27	Nov. 2016	NH Series and NS Series NSK Linear Guides: More than Twice the Life of Conventional NSK Linear Guides

A-4 NSK Linear Guide™

1. Structure of NSK Linear Guides

By avoiding structural complexity, and by reducing the number of components, we not only enhanced the precision of linear guides, but also are able to keep costs low. We have added NSK's patented unique structural feature to the original invention (**Fig. 1**). This contributes to higher precision and lower prices.
NSK linear guides consist of a rail and a slide (**Fig. 2**). The balls or rollers roll on the race way surface, and are scooped up by the end caps attached to both ends of the slide. Then, the balls or rollers go through a passage made in the slide and circulate back to the other end.

2. Characteristics of NSK Linear Guides

The use of a unique offset Gothic arch groove (**Fig. 3**) allows the ball type of NSK linear guides to satisfy groove designs required for specific purposes.
This unique groove design facilitates precise measurement of the ball groove, thus enabling the stable and highly accurate production of the slides and the rails for random matching. (**Fig. 4**)
On top of that, we have developed and marketed the NSK Roller Guides, representing the culmination of NSK's analysis technology and tribology.
Such technologies ensure the features of NSK linear guides outlined below.

(1) High precision and quality

- High precision and quality come from our superb production and measuring technologies, strengthened by extensive experience in antifriction rotary bearings and ball screw production. Our quality assurance extends to the smallest components.

(2) High reliability and durability

- Logical simplicity in shape, along with stable processing, maintains high precision and reliability.
- Super-clean materials, our advanced heat treatment and processing technologies increase product durability.

(3) Abundant in type for any purpose

- Various series are available, and their slide models and size categories are standardized to satisfy any requirement. Our technology, polished by abundant experience in the use of special materials and surface treatments, meets the customer's most demanding expectations.

(4) Development of random-matching parts for short delivery time

- The adoption of the Gothic arch groove which makes measuring easy, and a new reliable quality control method has made random-matching of the rails and the ball or roller slides possible. The parts are stocked as standard products, thereby reducing delivery time.

(5) Patented static load carrying capacity (shock-resistance)

- When a super-high load (impact) is applied, our Gothic arch groove spreads the load to surfaces which usually do not come into contact in the ball type NSK linear guides. This increases impact load resistance (**Fig. 5**).

(6) Lineup of extremely high-load capacity series

- The LA series provides a top class high-load capacity for the ball linear guides through a unique load carrying configuration with three ball recirculation circuits on the one side.
  By installing rollers that are the largest possible diameter and length, the NSK roller linear guides have realized the world's highest load capacity, far superior to the roller linear guides of other companies.

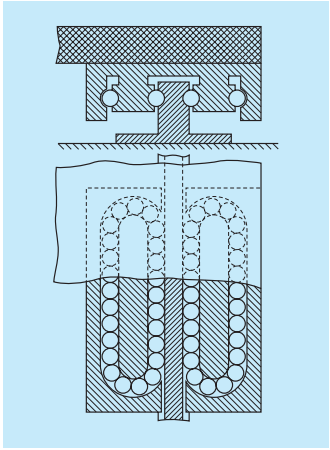


Fig. 1 • French Patent in 1932.
• Inventor: Gretsh (German)

NSK added its patented technology to the invention in Fig. 1, and improved the linear guide structure and realized low cost design.

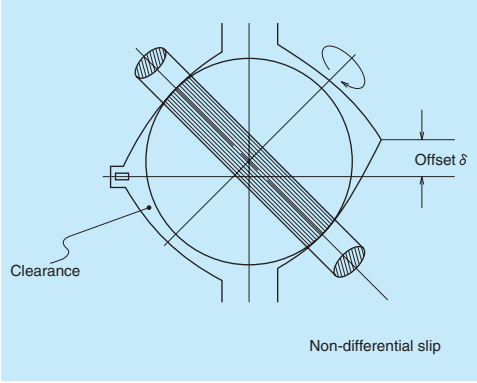


Fig. 3 Two contact point at offset Gothic arch groove

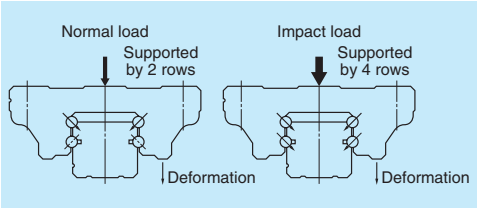


Fig. 5 Shock-resistance

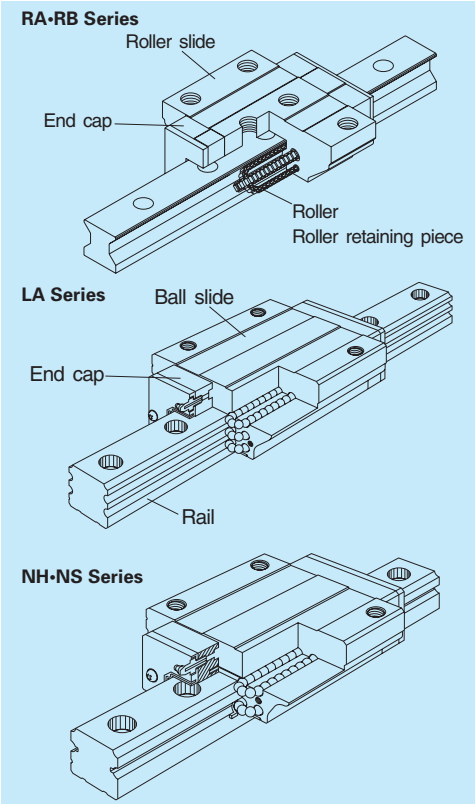


Fig. 2 Structure of NSK linear guides

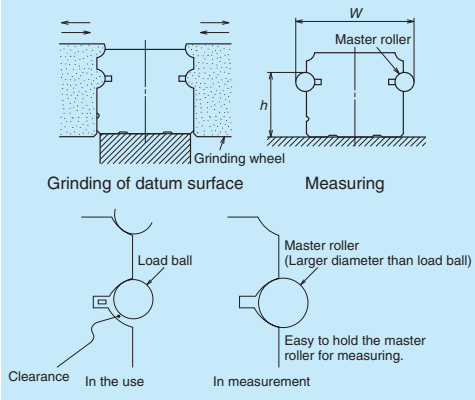






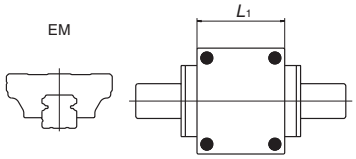

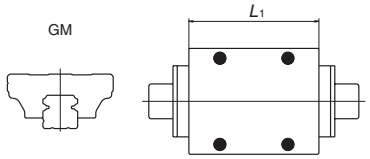




















Fig. 4 Processing and measuring grooves













Measuring grooves accuracy is easy. You can obtain highly accurate results for all types of NSK series. This is why you can purchase rails and slides separately for random matching.


3. Types and Characteristics of NSK Linear Guides


Category		Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure	Characteristics	Applications	Page
High vertical load carrying capacity type	Self-aligning type	NH	AN BN				The NH series is applicable to a wide range of uses from general industrial use to high-accuracy application. Random-matching of rails and ball slides is available as a standard. ● The contact angle between the ball and ball groove is set at 50 degrees. This design increases the load carrying capacity against the vertical directions, which is the main load acting direction in most operations. ● The DF contact structure greatly absorbs the installation error in the perpendicular direction to the rail. ● Balls make contact at two points thanks to the offset Gothic arch groove. This keeps friction to a minimum. ● High resistance against shock load due to the unique load-carrying structure. ● Gothic arch groove renders measuring of ball grooves accurate and easy. ● Standardized random-matching type allows separate purchase of rails and ball slides. ● Stainless steel standard type is also available for small sizes (NH15 to NH30).	• Cartesian type robots • Robots that remove plastic molds from injection machine • Material handling equipment • Food processing machines • Packaging/packing machines • Printing machines • Woodworking machines • Paper manufacturing machines • Measuring equipment • Inspecting equipment • Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Medical equipment • Electric discharge machines • Laser cutting machines • Press machines • Tool grinders • Flat surface grinders • NC lathes • Machining centers • Automatic tool changers	A113
			AL BL						
			EM GM						
			High-load type AN, AL						
			EM						
			Super-high-load type BN, BL						
			GM						












Category		Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure	Characteristics	Applications	Page
High vertical load carrying capacity type	Self-aligning type	VH	AN BN				The VH series delivers outstanding dust-proof functionality and thus ensures long operating life under contaminated environments. Random-matching of rails and ball slides is available as a standard. ● The contact angle between the ball and the raceway is set at 50 degrees. This design increases the load carrying capacity against vertical directions, which is the main load acting direction in most operations. ● The DF contact structure greatly absorbs the installation error in the perpendicular direction to the rail. ● Thanks to the offset Gothic arch groove, balls make contacts at two points. This keeps friction to a minimum. ● High resistance against shock load due to the unique load carrying structure. ● Gothic arch groove renders measuring groove accurate and easy. ● Standardized random-matching type allows separate purchase of rails and ball slides. ● Penetration of fine contaminants is less than 1/10 of the existing products. ● Operating life under contaminated environments is more than 5 times longer.	• Automotive manufacturing equipment • Press machines • Machine tools loader/un-loader • Tire molding machines • Woodworking machines • Automatic doors	A133
			AL BL						
			EM GM						
			High-load type AN, AL  EM 				Super-high-load type BN, BL  GM 		

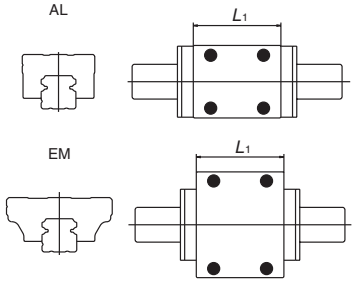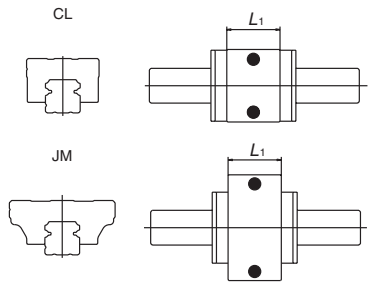
Category		Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure	Characteristics	Applications	Page
High vertical load carrying capacity type	Self-aligning type	NS	CL AL				The NS series is low in height, and is applicable to a wide range of uses from general industrial use to high-accuracy application. Random-matching of rails and ball slides is available as a standard. ● Compact and low profile. ● The contact angle between the ball and the groove is set at 50 degrees. This design increases the load carrying capacity against vertical directions, which is the main load direction prevalent in most operations. ● The DF contact structure greatly absorbs the installation error in the perpendicular direction of the rail. ● Thanks to the offset Gothic arch groove, balls make contacts at two points. This keeps friction to a minimum. ● High resistance against shock load due to the unique load carrying structure. ● Gothic arch groove renders measuring groove accurate and easy. ● Standardized random-matching type allows separate purchase of rails and ball slides. ● Stainless steel type is also available.	• Cartesian type robots • Robots that remove plastic molds from injection machine • Material handling equipment • Food processing machines • Packaging/packing machines • Printing machines • Woodworking machines • Paper manufacturing machines • Measuring equipment • Inspection equipment • Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Medical equipment • Electric discharge machines • Laser cutting machines • Press machines	A153
			JM EM						
			High-load type AL EM				Medium-load type CL JM		
	High moment capacity type	LW	L				High-moment rigidity and low profile products are most suited for a single rail linear guideway system. Random-matching of rails and ball slides is available as a standard. ● The wide rail contributes to a high rolling moment carrying capacity and to great moment rigidity of a single rail linear guideway system. ● Balls contact at two points in the Gothic arch groove, thus keeping friction to a minimum. ● High resistance against shock load ● Standardized random-matching type allows separate purchase of rails and ball slides.	• Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Conveyor systems • Medical equipment • Microscope XY stages	A171














Category		Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure	Characteristics	Applications	Page
Miniature type	Standard type	PU	AL AR TR UR BL				Low inertia and low dust generation miniature series. ● Low dust generation and highly smooth operation ● Super-compact size ● Stainless steel is the standard material. ● A ball retainer is a standard equipment. ● Standardized random-matching type allows separate purchase of rails and ball slides.	• Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Medical equipment • Optical stages • Microscope XY stages • Conveying system of optical fibers • Miniature robots • Computer peripherals • Pneumatic equipment	A187
		LU	AL TL AR TR BL UL				Miniature series ● Extremely compact size ● Stainless steel is the standard material. ● A ball retainer is a standard equipment. ● Standardized random-matching type allows separate purchase of rails and ball slides.		A197
	High moment capacity type	PE	AR TR UR BR				Wide rail miniature with low inertia and low dust generation. ● Low dust generation and highly smooth operation ● Super-compact size ● Stainless steel is the standard material. ● A ball retainer is a standard equipment. ● Standardized random-matching type allows separate purchase of rails and ball slides.	• Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Medical equipment • Optical stages • Microscope XY stages • Conveying optical fibers • Miniature robots • Computer peripherals • Pneumatic equipment	A209
		LE	AL TL AR TR BL UL CL SL				Miniature wide series ● Super-small size in wide rail type ● Stainless steel is the standard material. ● A ball retainer is a standard equipment. ● Standardized random-matching type allows separate purchase of rails and ball slides.		A219













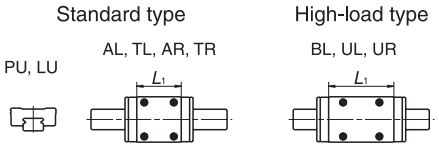


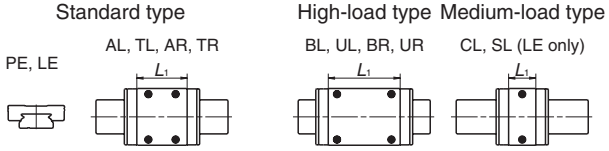

Category		Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure	Characteristics	Applications	Page
Miniature type	Self-aligning type	LH	AN				High vertical load carrying capacity and self-aligning type miniature series ● The contact angle between the ball and ball groove is set at 50 degrees. This design increases the load carrying capacity against the vertical directions, which is the main load acting direction in most operations. ● The DF contact structure greatly absorbs the installation error in the perpendicular direction to the rail. ● Balls make contact at two points thanks to the offset Gothic arch groove. This keeps friction to a minimum. ● High resistance against shock load due to the unique load-carrying structure. ● Gothic arch groove renders measuring of ball grooves accurate and easy. ● A ball retainer is a standard equipment. (LH10～12) ● Stainless steel type is standard.	• Semiconductor manufacturing equipment • Flat panel display manufacturing equipment • Medical equipment • Optical stages • Microscope XY stages • Miniature robots • Computer peripherals • Pneumatic equipment	A233
	Lightweight type	LL	PL				The LL series is a compact and lightweight miniature linear guide for press molding. ● Rails and ball slides are made of thin steel plate, and thus making them very light. ● Stainless steel is the standard material.	• Platter pen heads • Robot hands • Pneumatic equipment	A243
Four-way equal load carrying capacity type	Super-rigid type	RA	AN BN				The RA series roller guides have realized the world highest load capacity. Super-high rigidity and smooth motion contribute to higher performance of machine tools. ● Unique and optimum design of rollers and other component facilitate the high-load capacity and high rigidity. ● High-performance seals, a standard feature in the roller guides, maintain the initial performance for a prolonged time. ● The installation of retaining piece achieves smooth motion. ● Standardized random-matching type allows separate purchase of rails and roller slides.	• Machining centers • NC lathes • Heavy cutting machine tools • Gear cutters • Electric discharge machines • Press machines • Various types of grinders	A249
			AL BL						
			EM GM						

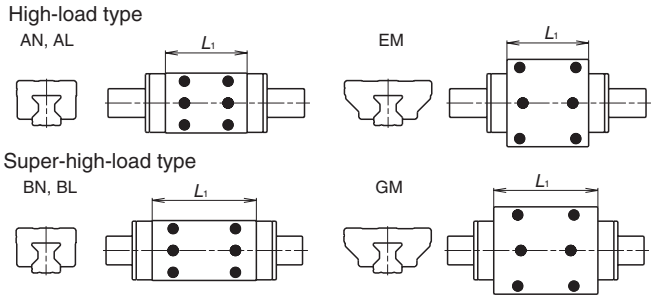

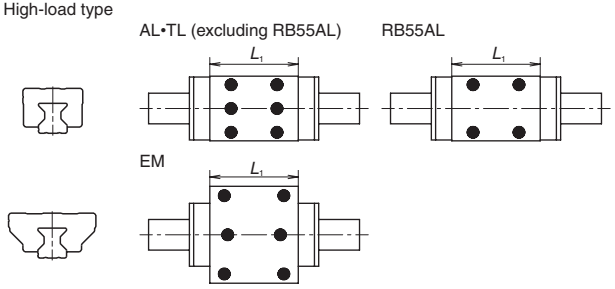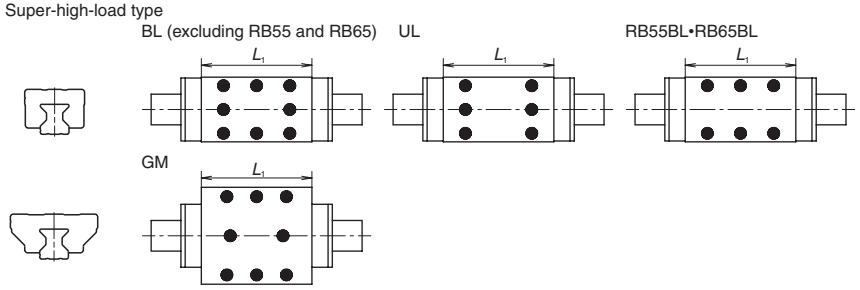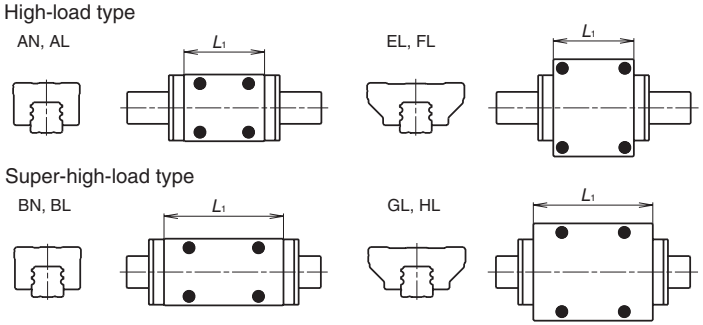Category		Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure	Characteristics	Applications	Page
Four-way equal load carrying capacity type	Super-rigid type	RB	AL TL BL UL				The RB series can contribute to lower center of gravity of machines, while maintaining the load capacity of the RA series. ● Unique and optimum design of rollers and other component facilitate the high-load capacity and high rigidity. ● High-performance seals, a standard feature in the roller guides, maintain the initial performance for a prolonged time. ● The installation of retaining piece achieves smooth motion.	• Machining centers • NC lathes • Heavy cutting machine tools • Gear cutters • Electric discharge machines • Press machines • Various types of grinders	A271
			EM GM						
			High-load type AL•TL (excluding RB55AL) RB55AL EM				Super-high-load type BL (excluding RB55 and RB65) UL RB55BL•RB65BL GM		
Four-way equal load carrying capacity type	Super-rigid type	LA	AN BN				As well as providing a low friction operation, the LA series provides a top class high-load capacity for the ball linear guides. The series is most suited for machine tools. ● The contact angle between the ball and the raceway is set at 45 degrees. This makes load carrying capacity and rigidity equal in vertical and lateral directions. ● Six-row ball grooves support the load from vertical and lateral directions, enhancing rigidity and increasing load carrying capacity. ● Appropriate friction ● Best suited for machine tools.	• Machining centers • NC lathes • Heavy cutting machine tools • Gear cutters • Electric discharge machines • Press machines • Various types of grinders	A287
			AL BL						
			EL GL						
			FL HL						
							High-load type AN, AL EL, FL Super-high-load type BN, BL GL, HL		

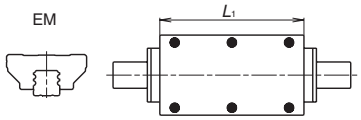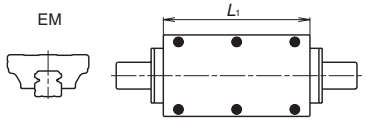Category		Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure	Characteristics	Applications	Page
Four-way equal load carrying capacity type	Super rigidity, high-precision type	HA	AN				The HA Series ball guide with high-precision and high-load carrying capacity, featuring high-motion accuracy equivalent to hydrostatic linear bearings. ● Ball passage vibration has been reduced to one-third of conventional models by ultra-long ball slides and specification of new design. ● The contact angle between the ball and the raceway is set at 45 degrees. This makes load carrying capacity and rigidity equal in vertical and lateral directions. ● High motion accuracy is realized by the feature of super-finished ball groove (optional). ● End seals, bottom seals, and inner seals of high dust-proof specification are the standard equipment. ● Best suited for high-grade machine tools.	• Die molding machines • High precision processing machine • Heavy cutting machine tools • Gear cutters • Press machines • Various types of NC grinders	A307
			AL						
			EM						
			AN, AL				EM 		
High vertical load carrying capacity type	Self-aligning, super-precision type	HS	AL				The HS Series ball guide with high-precision featuring high-motion accuracy equivalent to hydrostatic linear bearings. ● Ball passage vibration has been reduced to one-third of conventional models by ultra-long ball slides and specification of new design. ● The contact angle between the ball and the raceway is set at 50 degrees. The load carrying capacity against vertical directions, which is the main load acting direction in most operations, increases by this design. ● The DF contact structure greatly absorbs the installation error in the perpendicular direction of rail. ● Thanks to the offset Gothic arch groove, balls make contacts at two points, thus keeping friction low.	• High precision processing machines • Electric discharge machines • Various types of NC grinders • Flat panel display manufacturing equipment	A321
			EM						
			AL				EM 		

4. Guide to Technical Services

(1) CAD drawing data

NSK offers CAD data for linear guides. Please download it from the website of NSK.

NSK website

http://www.nsk.com

- Data in drawings are filed in the actual size (some parts are simplified). You can use these data without processing.
- Drawings are three-views projection.
- Dimension lines are omitted to render the data as standard drawing for database.

Data offered by CAD

NSK linear guides

NH Series
VH Series
NS Series
LW Series
PU Series
LU Series
PE Series
LE Series
Miniature LH Series
RA Series
RB Series
LA Series
HA Series
HS Series

(2) Telephone consultation with NSK engineers

This catalog contains technical explanation for each section. However, some descriptions and explanations may be insufficient due to page limitation, etc. To amend this shortcoming, NSK offers telephone assistance. NSK engineers are pleased to help you. Our local offices are listed in the last part of this catalog. Call local NSK office or Representative in your area.

5. Linear Guides: Handling Precautions

NSK linear guides are high quality and are easy to use. NSK places importance on safety in design. For maximum safety, please follow precautions as outlined below.

(1) Lubrication



Confirm lubrication.

a. If your linear guide is rust prevention specification, thoroughly wipe the rust prevention oil and put lubricant inside of slide before using. For seal lubrication products, put lubricant on the rail.
b. Do not mix greases of different brands.
c. If your linear guide is rust prevention specifications, put lubricant inside of slide before using.

(2) Handling



Handle with care.



Do not disassemble.



Do not drop.




Do not give impact.

a. Slides for random-matching are installed to the provisional rail when they leave the factory. Handle the slide with care during installation to the rail.
b. Do not disassemble the linear guide unless absolutely necessary. Not only does it allow dust to enter, but it lessens precision.
c. The slide may move by simply leaning the rail. Make sure that the slide does not disengage from the rail.
d. Standard end cap is made of plastic. Beating it or hitting it against an object may cause damage.

(3) Precautions in use



Do not contaminate.



Temperature limitation.



Do not hang upside down.

a. Make every effort not to allow dust and foreign objects to enter.
b. Please apply splash guard or bellows to the linear guide to prevent sticking resolvent or coolant when it contains corrosive material.
c. The temperature of the place where linear guides are used should not exceed 80°C (excluding heat-resistant type linear guides). A higher temperature may damage the plastic end cap.
d. If the user cuts the rail, thoroughly remove burrs and sharp edges on the cut surface.
e. When hanging upside-down (e.g. the rail is installed upside-down on the ceiling in which the slide faces downward), should the end cap be damaged, causing the balls or rollers to fall out, the slide may be detached from the rail and fall. For such use, take measures including installing a safety device.

(4) Storage



Store in the correct position.

a. When storing the product, store it in the original packaging. Do not open the package or break the inner packaging unnecessarily. It may cause intrusion of garbage and rusting and may cause deterioration of functions.
b. A place where the indoor environment is hot and humid as a storage location is not suitable because it significantly reduces the rust prevention effect. Store in a place with low humidity and little temperature change.
c. Linear guide may bend if the rail is stored in inappropriate position. Place it on a suitable surface, and store it in a flat position.

6. Design Precautions

The following points must be heeded in examining the life.



In case of oscillating stroke

- If the balls or rollers do not rotate all the way, but only halfway, and if this minute stroke is repeated, lubricant disappears from the contact surface of balls or rollers and raceways. This generates "fretting," a premature wear. Fretting cannot be entirely prevented in such a case but it can be mitigated.
- We recommend anti-fretting grease for oscillating stroke operations. Even in a case using a standard grease, the life can be markedly prolonged by adding a normal stroke travel (about the slide length) once every several thousand cycles.



When applying pitching or yawing moment

- Load applied to the ball or roller rows inside the slide is inconsistent if pitching or yawing moment load is applied. Loads are heavy on the balls or rollers on each end of the row.
- In such a case, a heavy load lubricant grease or oil is recommended. Another countermeasure is using one size larger model of linear guide to reduce the load per ball or roller.
- Moment load is insignificant for 2-rail, 4-slide combination which is commonly used.



When an extraordinary large load is applied during stroke

- If an extraordinary large load is applied at certain position of the stroke, calculate not only the life based on the mean effective load, but also the life based on the load in this range.
- When an extraordinary heavy load is applied and thus the application of high tensile stress to fixing bolts of the rails and slides is foreseen, the strength of the bolts should be considered.



When calculated life is extraordinarily short (Less than 3 000 km in calculated life.)

- In such a case, the contact pressure to the balls or rollers and the rolling contact surface is extraordinarily high.
- When a linear guide is operated under such state continually, the life is significantly affected by the loss of lubrication and the presence of dust, and thus the actual life becomes shorter than calculated.
- It is necessary to reconsider the number of slides, the arrangement of slides, and the type of model in order to reduce the load to the slide.
- It is necessary to consider preload for calculation of rating life when selecting Z3 (medium preload) or Z4 (heavy preload) as a preload. For the calculation of full dynamic equivalent loads that consider preload, see "A-3-3 6" on page A31. Please consult NSK for details.



Application at high speed

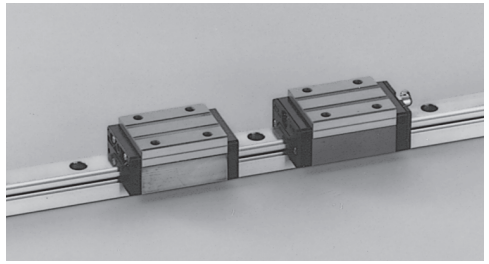
- The standard maximum allowable speed of a linear guide under normal conditions is 100 m/min. However, the maximum allowable speed can be affected by accuracy of installation, temperature, external loading etc.
- The end cap with high speed specification must be used when operating speed exceeds the permissible speed. In such a case, please consult NSK.

A-5 Technical Description and Dimension Table for NSK Linear Guides

1. NH Series A113
2. VH Series A133
3. NS Series A153
4. LW Series A171

A-5-1 General Purpose Series

A-5-1.1 NH Series



1. Features

(1) Improve rating life dramatically

Based on the LH series characterized by reliability and performance, a significant increase in durability has been attained. New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased.

As compared with the LH Series, the load rating capacity of the NH series has increased to 1.3 times, while the life span has increased to twice*1. These features enable you to design a machine with a longer life and downsize the machine. Thus, your design capability is greatly enhanced.

*1: Representative values of series.

(2) Ball circulation path with excellent high-speed property

By reexamining the design practice for the ball circulation path, we have attained smooth ball circulation and reduced noise level. So, NH series is suited for high-speed applications compared with the LH Series.

(3) All mounting dimensions are the same as those for the LH and SH Series

Regarding the mounting dimensions (mounting parts' dimensions), such as the mounting height, mounting width, mounting hole diameter/pitch of the linear guide, etc., the mounting dimensions of the NH Series remain the same as those of the conventional LH series and SH series. So, the new NH Series linear guides can be used without making any design changes.

(4) High self-aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, and thus reducing moment rigidity.

This increases the capacity to absorb errors in installation.

(5) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, and thus increasing load carrying capacity as well as rigidity in vertical direction.

(6) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in **Fig. 2**. The vertical load is generally carried by the top ball rows, where balls are contacting at two points. Because of this design, the bottom ball rows will carry load when a large impact load is applied vertically as shown in **Fig. 3**. This assures high resistance to the impact load.

(7) High accuracy

As showing in **Fig. 4**, fixing the master rollers to the ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

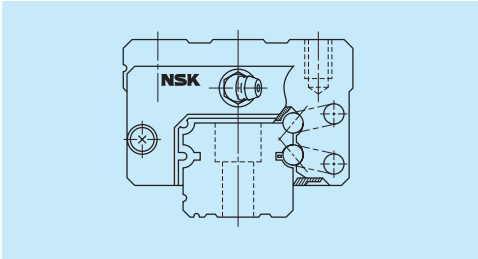


Fig. 1 NH Series

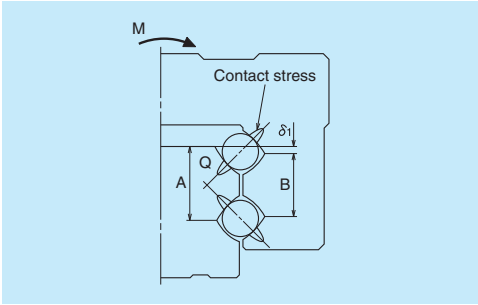


Fig. 2 Enlarged illustration of the offset Gothic arch groove

(8) Easy to handle, and designed with safety in mind.

Balls are retained in the retainer, therefore they do not fall out when the ball slide is withdrawn from the rail.

(9) Abundant models and sizes

Each size of NH Series has various models of ball slides, rendering the linear guide available for numerous uses.

(10) Fast delivery

Lineup of random-matching rails and ball slides supports and facilitates fast delivery.

High precision grade and medium preload types are also available in randam matching. (Special high-carbon steel products)

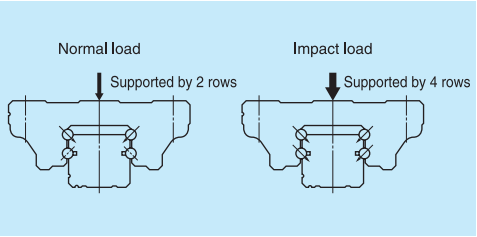


Fig. 3 When load is applied

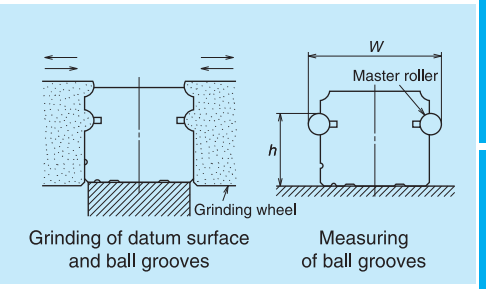











Fig. 4 Rail grinding and measuring

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)	
		High-load type	Super-high-load type
		Standard	Long
AN BN		AN  BN 	
AL BL		AL  BL 	
EM GM		EM  GM 	

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm) over	Rail length (mm) or less	Preloaded assembly (not random matching) Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN	Random-matching type High precision PH	Normal grade PC
–	50	2	2	2	4	5	2	5
50	80	2	2	3	4	5	3	5
80	125	2	2	3	4	5	3	5
125	200	2	2	3.5	5	6	3.5	6
200	250	2	2.5	4.5	6	7.5	4.5	7.5
250	315	2	2.5	5	6.5	8.5	5	8.5
315	400	2	3	5.5	7	9.5	5.5	9.5
400	500	2	3	6	7.5	11	6	11
500	630	2	3.5	6.5	8.5	12	6.5	12
630	800	2	4	7	9.5	13	7	13
800	1 000	2.5	4.5	7.5	10	15	7.5	15
1 000	1 250	3	5	8.5	12	16	8.5	16
1 250	1 600	3.5	5.5	9.5	13	17	9.5	17
1 600	2 000	4	6.5	11	14	19	11	19
2 000	2 500	4.5	7.5	12	16	21	12	21
2 500	3 150	5.5	8.5	13	18	23	13	23
3 150	4 000	6	9.5	14	19	25	14	25

(2) Accuracy standard

The preloaded assembly has five accuracy grades; Ultra precision P3, Super precision P4, High precision P5, Precision P6 and Normal PN grades, while the random-matching type has High precision PH and Normal PC grade.

• Tolerance of preloaded assembly

Table 2

Unit: μm

Characteristics \ Accuracy grade	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H Variation of H (All ball slides on a set of rails)	±8 3	±10 5	±20 7	±40 15	±80 25
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All ball slides on reference rail)	±10 3	±15 7	±25 10	±50 20	±100 30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in **Table 1**, **Fig. 5**, and **Fig. 6**				

• Tolerance of random-matching type

Table 3

Unit: μm

Accuracy grade	High precision grade PH		Normal grade PC	
Characteristics \ Model No.	NH15, 20, 25, 30, 35	NH45, 55, 65	NH15, 20, 25, 30, 35	NH45, 55, 65
Mounting height H	±20	±30	±20	±30
Variation of mounting height H	15① 30②	20① 35②	15① 30②	20① 35②
Mounting width W_2 or W_3	±30	±35	±30	±35
Variation of mounting width W_2 or W_3	20	20	25	30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	See **Table 1**, **Fig. 5** and **Fig. 6**			

Note: ① Variation on the same rail ② Variation on multiple rails

(3) Combinations of accuracy and preload

Table 4

		Accuracy grade: Ultra precision	Super precision	High precision	Precision grade	Normal grade	High precision	Normal grade
Without NSK K1 lubrication unit		P3	P4	P5	P6	PN	PH	PC
With NSK K1 lubrication unit		K3	K4	K5	K6	KN	KH	KC
With NSK K1 for food and medical equipment		F3	F4	F5	F6	FN	FH	FC
Preload	Fine clearance Z0	○	○	○	○	○	—	—
	Slight preload Z1	○	○	○	○	○	—	—
	Medium preload Z3	○	○	○	○	—	—	—
	Random-matching type with fine clearance ZT	—	—	—	—	—	—	○
	Random-matching type with slight preload ZZ	—	—	—	—	—	○	○
	Random-matching type with medium preload ZH	—	—	—	—	—	○	○

(4) Assembled accuracy

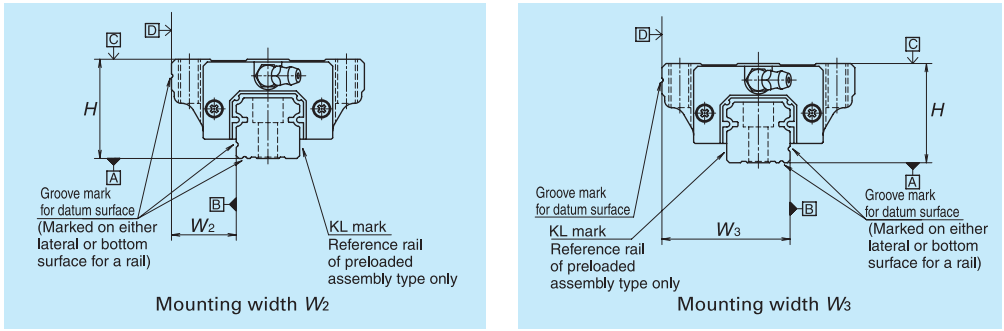


Fig. 5 Special high carbon steel

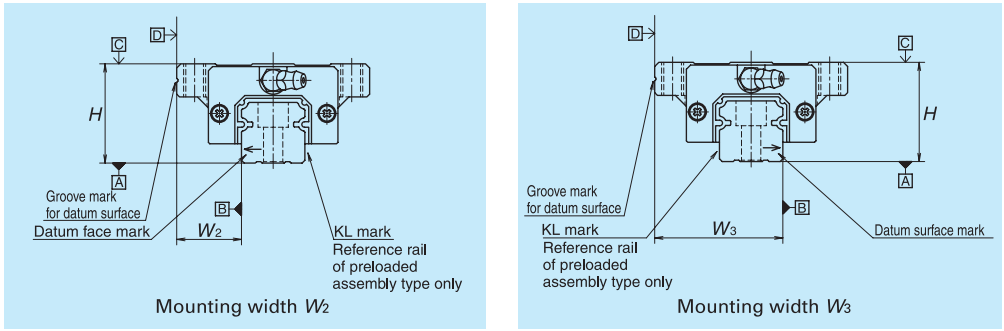


Fig. 6 Stainless steel

(5) Preload and rigidity

We offer six levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with random-matching type of Medium preload ZH, Slight preload ZZ and Fine clearance ZT.

• Preload and rigidity of preloaded assembly

Table 5

	Model No.	Preload (N)		Rigidity (N/μm) Vertical direction		Rigidity (N/μm) Lateral direction	
		Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3
High-load type	NH15 AN, EM	78	490	137	226	98	186
	NH20 AN, EM	147	835	186	335	137	245
	NH25 AL, AN, EM	196	1 270	206	380	147	284
	NH30 AL, AN	245	1 570	216	400	157	294
	NH30 EM	294	1 770	265	480	186	355
	NH35 AL, AN, EM	390	2 350	305	560	216	390
	NH45 AL, AN, EM	635	3 900	400	745	284	540
	NH55 AL, AN, EM	980	5 900	490	910	345	645
	NH65 AN, EM	1 470	8 900	580	1 070	400	755
Super-high-load type	NH15 BN, GM	98	685	196	345	137	284
	NH20 BN, GM	196	1 080	265	480	196	355
	NH25 BL, BN, GM	245	1 570	294	560	216	400
	NH30 BL, BN, GM	390	2 260	360	665	265	480
	NH35 BL, BN, GM	490	2 940	430	795	305	570
	NH45 BL, BN, GM	785	4 800	520	960	370	695
	NH55 BL, BN, GM	1 180	7 050	635	1 170	440	835
	NH65 BN, GM	1 860	11 300	805	1 480	550	1 040

Note: Clearance for Fine clearance Z0 is 0 to 3μm. Therefore, preload is zero.
However, Z0 of PN grade is 0 to 15μm.

• Clearance and preload of random-matching type

Table 6 Unit: μm

Model No.	Fine clearance ZT	Slight preload ZZ	Medium preload ZH
NH15	–4 — 15	–4 — 0	–7 — –3
NH20	–5 — 15	–5 — 0	–8 — –3
NH25		–5 — 0	–9 — –4
NH30		–7 — 0	–12 — –5
NH35		–7 — 0	–12 — –5
NH45		–7 — 0	–14 — –7
NH55		–9 — 0	–18 — –9
NH65		–9 — 0	–19 — –10

Note: Minus sign denotes that a value is an amount of preload (elastic deformation of balls).

4. Maximum rail length

Table 7 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grades.

Table 7 Length limitations of rails Unit: mm

Series	Material \ Size	15	20	25	30	35	45	55	65
NH	Special high carbon steel	2 980	3 960	3 960	4 000	4 000	3 990	3 960	3 900
	Stainless steel	1 800	3 500	3 500	3 500				

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

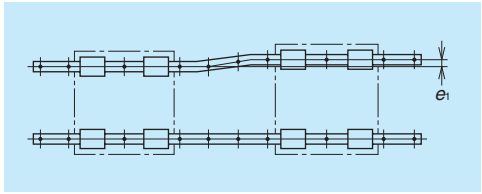


Fig. 7

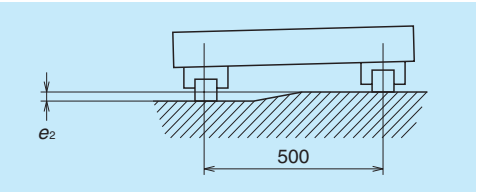


Fig. 8

Table 8 Unit: μm

Value	Preload	Model No. NH15	NH20	NH25	NH30	NH35	NH45	NH55	NH65
Permissible values of parallelism in two rails e_1	Z0, ZT	22	30	40	45	55	65	80	110
	Z1, ZZ	18	20	25	30	35	45	55	70
	Z3, ZH	13	15	20	25	30	40	45	60
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	375μm/500mm							
	Z1, ZZ, Z3, ZH	330μm/500mm							

(2) Shoulder height of the mounting surface and corner radius r




Fig. 9 Shoulder for the rail datum surface




Fig. 10 Shoulder for the ball slide datum surface

Table 9 Unit: mm

Model No.	Corner radius (maximum) r_a	Corner radius (maximum) r_b	Shoulder height H'	Shoulder height H''
NH15	0.5	0.5	4	4
NH20	0.5	0.5	4.5	5
NH25	0.5	0.5	5	5
NH30	0.5	0.5	6	6
NH35	0.5	0.5	6	6
NH45	0.7	0.7	8	8
NH55	0.7	0.7	10	10
NH65	1	1	11	11

6. Maximum allowable speed

An indication of the standard maximum allowable speed aiming at 10,000km operation with NH series under normal conditions is shown in Table 10. However, the maximum allowable speed can be affected by accuracy of installation, operating temperature, external load, etc. If the operation is made exceeding the permissible distance and speed, please consult NSK.

Table 10 Maximum allowable speed Unit: m/min

Series \ Size	15	20	25	30	35	45	55	65
NH	300					200		150

7. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 11 and **Table 11** show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

When you require stainless lubrication accessories, please ask NSK.

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on a side of end cap for an option. (**Fig. 12**)

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

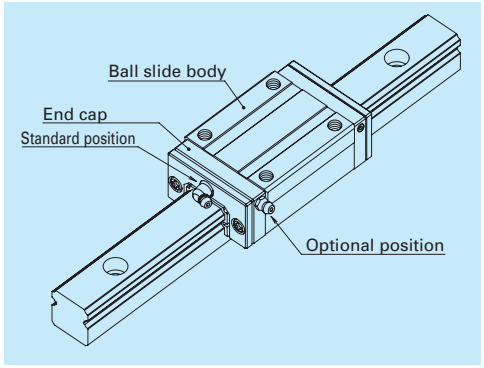


Fig. 12 Mounting position of lubrication accessories

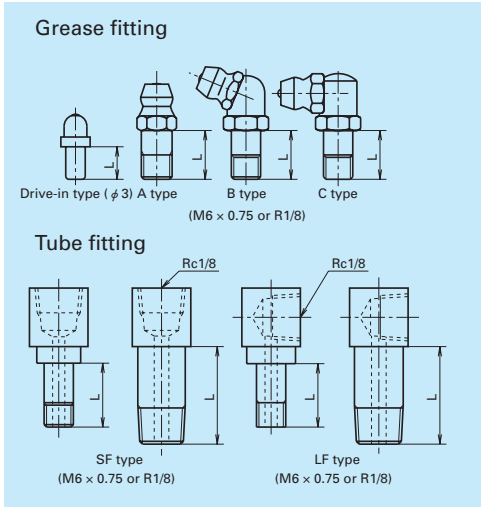


Fig. 11 Grease fitting and tube fitting

Table 11 Unit: mm

Model No.	Dust-proof specification	Dimension L		
		Grease fitting /Drive-in type	Tube fitting SF type	Tube fitting LF type
NH15	Standard	5	–	–
	With NSK K1	10	–	–
	Double seal	*	–	–
	Protector	*	–	–
NH20	Standard	5	–	–
	With NSK K1	12	–	–
	Double seal	10	–	–
	Protector	10	–	–
NH25	Standard	5	5	5
	With NSK K1	12	12	12
	Double seal	10	9	9
	Protector	10	9	9
NH30	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	10	11
NH35	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	10	11
NH45	Standard	8	13.5	17
	With NSK K1	18	20	21.5
	Double seal	14	16	17
	Protector	14	13.5	17
NH55	Standard	8	13.5	17
	With NSK K1	18	20	21.5
	Double seal	14	16	17
	Protector	14	13.5	17
NH65	Standard	8	13.5	17
	With NSK K1	20	22	25.5
	Double seal	16	18	19
	Protector	16	13.5	17

*) A connector is required for this model. Please contact NSK.

8. Dust-proof components

(1) Standard specification

The NH Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.

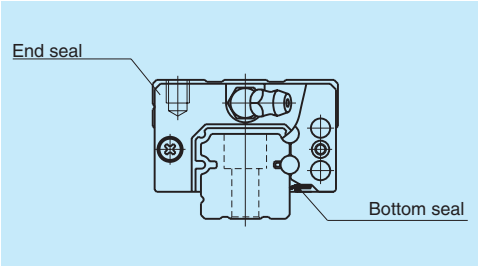


Fig. 13

Table 12 Seal friction per ball slide (maximum value) Unit: N

Series \ Size	15	20	25	30	35	45	55	65
NH	8	9	10	10	12	17	22	29

(2) NSK K1™ and NSK K1-L lubrication units

Table 13 shows linear guide dimensions when equipped with the NSK K1 lubrication unit.

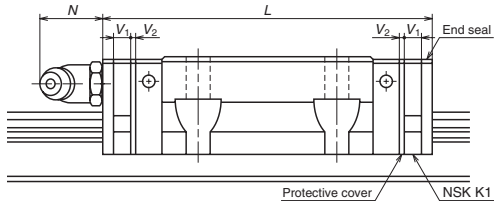


Table 13 Dimensions when equipped with NSK K1 lubrication unit Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V_1	Protective cover thickness V_2	Protruding area of the grease fitting N
NH15	Standard	AN, EM	55	65.6	4.5	0.8	(5)
	Long	BN, GM	74	84.6			
NH20	Standard	AN, EM	69.8	80.4	4.5	0.8	(14)
	Long	BN, GM	91.8	102.4			
NH25	Standard	AL, AN, EM	79.0	90.6	5.0	0.8	(14)
	Long	BL, BN, GM	107	118.6			
NH30	Standard	AL, AN	85.6	97.6	5.0	1.0	(14)
		EM	98.6	110.6			
	Long	BL, BN, GM	124.6	136.6			
NH35	Standard	AL, AN, EM	109	122	5.5	1.0	(14)
	Long	BL, BN, GM	143	156			
NH45	Standard	AL, AN, EM	139	154	6.5	1.0	(15)
	Long	BL, BN, GM	171	186			
NH55	Standard	AL, AN, EM	163	178	6.5	1.0	(15)
	Long	BL, BN, GM	201	216			
NH65	Standard	AN, EM	193	211	8.0	1.0	(16)
	Long	BN, GM	253	271			

Notes: 1) NSK K1 for food processing and medical equipment are available for NH15 to NH35.
2) Dimensions for Model No. NH15 to NH25 apply to NSK K1 for food processing and medical equipment only. In other cases, refer to Table 14 "Dimensions when equipped with new NSK K1-L."
3) When equipped with NSK K1, ball slide length = (standard ball slide length) + (V_1 thickness of single K1 unit) × (number of K1 units) + (V_2 thickness of the protective cover) × 2.

Table 14 shows linear guide dimensions when equipped with the new NSK K1-L lubrication unit.

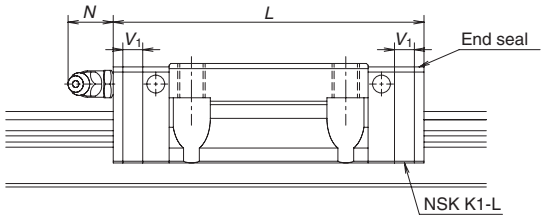


Table 14 Dimensions when equipped with new NSK K1-L lubrication unit Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1-L *L*	Per NSK K1-L thickness V_1	Protruding area of the grease fitting *N*
NH15	Standard	AN, EM	55	65.6	5.3	(5)
	Long	BN, GM	74	84.6		
NH20	Standard	AN, EM	69.8	80.4	5.3	(14)
	Long	BN, GM	91.8	102.4		
NH25	Standard	AL, AN, EM	79	90.6	5.8	(14)
	Long	BL, BN, GM	107	118.6		

Notes: 1) When using NSK K1 for food processing and medical equipment, see Table 13.
2) When equipped with NSK K1-L, ball slide length = (standard ball slide length) + (V_1 thickness of single K1-L unit) × (number of K1-L units).

(3) Double seal

Use a double seal set as showing in **Table 15**, when installing an extra seal to completed standard products. (**Fig. 14**)
When installing a grease fitting after the installation of double seals, a connector as showing in **Fig.14** is required.

(4) Protector

Use a protector set as showing **Table 16**, when installing a protector to completed standard products. (**Fig.15**)
When installing a grease fitting after the installation of protectors, a connector as showing in **Fig.15** is required.

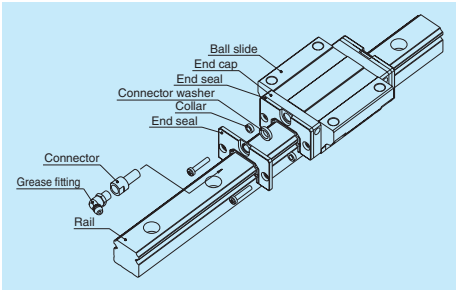


Fig. 14 Double seal

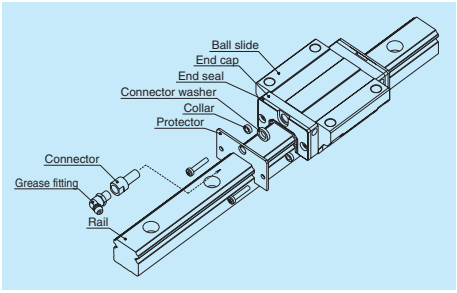


Fig. 15 Protector

Table 15 Double-seal set

Model No.	Reference No. Without connector	Reference No. With connector	Increased thickness V_3 (mm)
NH15	LH15WS-01	*	2.5
NH20	LH20WS-01	LH20WSC-01	2.5
NH25	LH25WS-01	LH25WSC-01	2.8
NH30	LH30WS-01	LH30WSC-01	3.6
NH35	LH35WS-01	LH35WSC-01	3.6
NH45	LH45WS-01	LH45WSC-01	4.3
NH55	LH55WS-01	LH55WSC-01	4.3
NH65	LH65WS-01	LH65WSC-01	4.9

Table 16 Protector set

Model No.	Reference No. Without connector	Reference No. With connector	Increased thickness V_4 (mm)
NH15	LH15PT-01	*	2.7
NH20	LH20PT-01	LH20PTC-01	2.9
NH25	LH25PT-01	LH25PTC-01	3.2
NH30	LH30PT-01	LH30PTC-01	4.2
NH35	LH35PT-01	LH35PTC-01	4.2
NH45	LH45PT-01	LH45PTC-01	4.9
NH55	LH55PT-01	LH55PTC-01	4.9
NH65	LH65PT-01	LH65PTC-01	5.5

*) For installation of a connector to a drive-in type grease fitting, contact NSK.

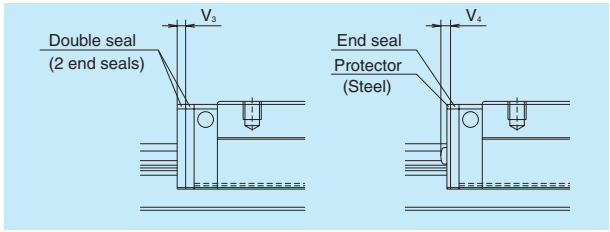


Fig. 16

(5) Cap to plug the rail mounting bolt hole

Table 17 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
NH15	M4	LG-CAP/M4	20
NH20	M5	LG-CAP/M5	20
NH25	M6	LG-CAP/M6	20
NH30, NH35	M8	LG-CAP/M8	20
NH45	M12	LG-CAP/M12	20
NH55	M14	LG-CAP/M14	20
NH65	M16	LG-CAP/M16	20

(6) Inner seal

Inner seal is only available for models shown in the table below.

Table 18

Series	Model No.
NH	NH20, NH25, NH30, NH35, NH45, NH55, NH65

(7) Bellows

- A bellows fastener kit, which includes one of bellows faster, two of M_1 set screws, two of M_2 set screws, and two collars for M_2 set screws as showing Fig. 7.7 on page A55, is supplied with ellows for the ends.
- Middle bellows are supplied with four set screws and four collars.
- Use a bellows fastener kit as showing **Table 19**, when installing bellows to completed standard products.
- When NSK K1, double seals or protectors are used, the set screws of bellows fastener kit are unable to use.


  Please contact NSK for details.
- Bellows fastener is available only for the horizontal mounting positions. For other mounting positions, sliding plate is required (see **Fig. 7.10** on page A56).

  For fixing to the rail, make tap holes to the rail end surface. Fix the bellows mounting plate to the rail end surface through these tap holes by using a machine screw. NSK processes a tap hole to the rail end face when ordered with a linear guide.

Table 19 Bellows fastner kit reference No.

Model No.	Kit reference No.
NH20	LH20FS-01
NH25	LH25FS-01
NH30	LH30FS-01
NH35	LH35FS-01
NH45	LH45FS-01
NH55	LH55FS-01
NH65	LH65FS-01

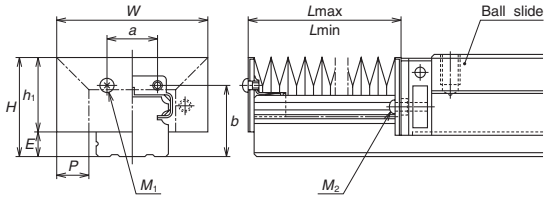Dimension tables of bellows
NH Series



Bellows reference number

J A H 20 N 08

- Bellows: A: Bellows for the ends; B: Middle bellows
- Bellows for NH series
- Size number of linear guide
- N: High type L: Low type
- Number of BL (fold number)

Fig. 17 Dimensions of bellows

Table 20 Dimensions of bellows Unit: mm

Model No.	*H*	h_1	*E*	*W*	*P*	*a*	*b*	BL minimum length	M_1 Tap x depth	M_2 Tap x depth
JAH20N	29.5	24.5	5	48	10	13	22	17	M3 × 5	M2.5 × 16
JAH25L	35	28	7	51	10	16	26	17	M3 × 5	M3 × 18
JAH25N	39	32		61	15					
JAH30L	41	32	9	60	12	18	31	17	M4 × 6	M4 × 22
JAH30N	44	35		66	15					
JAH35L	47	37.5	9.5	72	15	24	34	17	M4 × 6	M4 × 23
JAH35N	54	44.5		82	20					
JAH45L	59	45	14	83	15	32	44.5	17	M5 × 8	M5 × 28
JAH45N	69	55		103	25					
JAH55L	69	54	15	101	20	40	50.5	17	M5 × 8	M5 × 30
JAH55N	79	64		121	30					
JAH65N	89	73	16	131	30	48	61	17	M6 × 8	M6 × 35

Table 21 Numbers of folds (BL) and lengths of bellows Unit: mm


Model No.	Number of BL	2	4	6	8	10	12	14	16	18	20
	L_{min}	34	68	102	136	170	204	238	272	306	340
JAH20N	Stroke	106	212	318	424	530	636	742	848	954	1 060
	L_{max}	140	280	420	560	700	840	980	1 120	1 260	1 400
JAH25L	Stroke	106	212	318	424	530	636	742	848	954	1 060
	L_{max}	140	280	420	560	700	840	980	1 120	1 260	1 400
JAH25N	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L_{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
JAH30L	Stroke	134	268	402	536	670	804	938	1 072	1 206	1 340
	L_{max}	168	336	504	672	840	1 008	1 176	1 344	1 512	1 680
JAH30N	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L_{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
JAH35L	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L_{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
JAH35N	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
	L_{max}	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
JAH45L	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L_{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
JAH45N	Stroke	316	632	948	1 264	1 580	1 896	2 212	2 528	2 844	3 160
	L_{max}	350	700	1 050	1 400	1 750	2 100	2 450	2 800	3 150	3 500
JAH55L	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
	L_{max}	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
JAH55N	Stroke	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
	L_{max}	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200
JAH65N	Stroke	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
	L_{max}	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200

Note: The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of even number BL on the both sides, then by dividing the sum by 2.


9. Reference number


Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

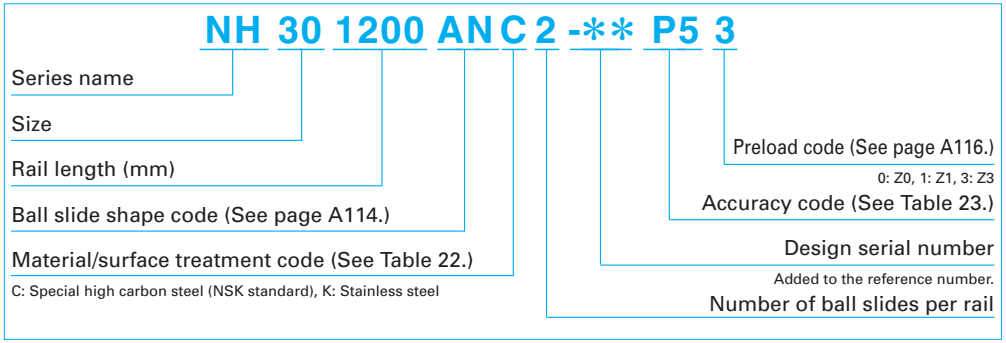(1) Reference number for preloaded assembly



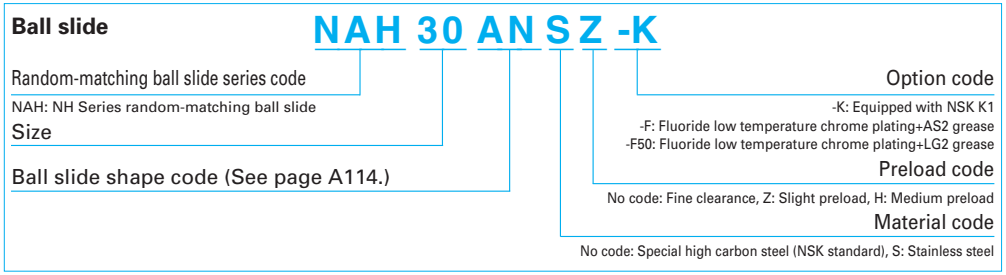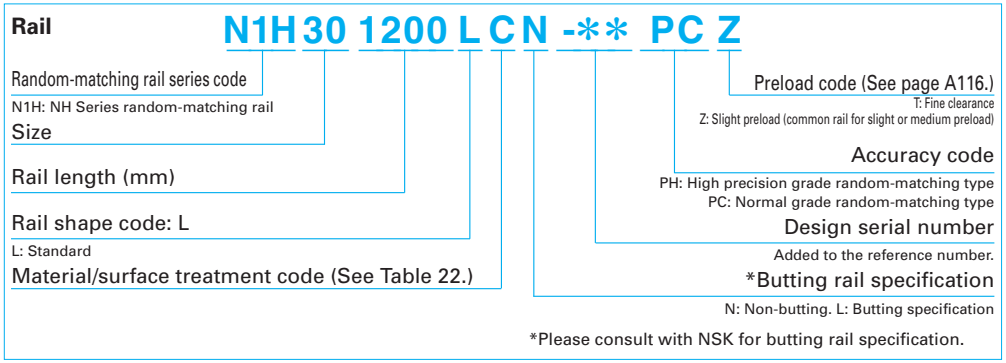(2) Reference number for random-matching type





The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only preload codes of "fine clearance T", "slight preload Z" and "medium preload H" are available (refer to page A116).
Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 22 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
K	Stainless steel (NH15 to NH30 only)
D	Special high carbon steel with surface treatment
H	Stainless steel with surface treatment
Z	Other, special

Note: High-precision grade and medium preload of random-matching type are not available in stainless steel.

Table 23 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
Ultra precision grade	P3	K3	F3
Super precision grade	P4	K4	F4
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN
High precision grade (random-matching type)	PH	KH	FH
Normal grade (random-matching type)	PC	KC	FC


Note: Refer to pages A38 and A61 for NSK K1 lubrication unit.

10. Dimensions
NH-AN (High-load type / Standard)
NH-BN (Super-high-load type / Long)


NH 30 1200 AN C 2 - PC Z**

- Series name: NH
- Size: 30
- Rail length (mm): 1200
- Ball slide shape code (See page A114.): AN
- Material/surface treatment code (See Table 22.): C
  - C: Special high carbon steel (NSK standard), K: Stainless steel
- Number of ball slides per rail: 2
- Design serial number: -**
  - Added to the reference number.
- Accuracy code (See Table 23.): PC
- Preload code (See page A116.): Z
  - 0: Z0, 1: Z1, 3: Z3, T: ZT, Z: ZZ, H: ZH


Front view of AN and BN types



Side view of AN type

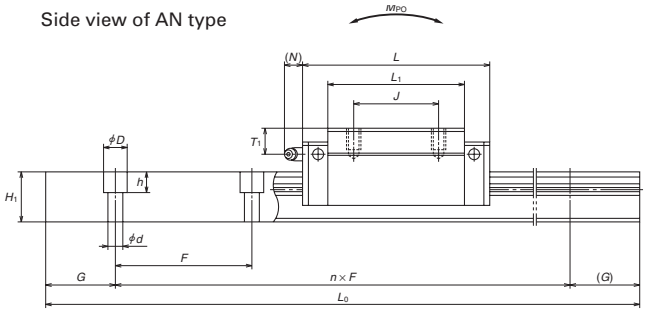

Side view of BN type

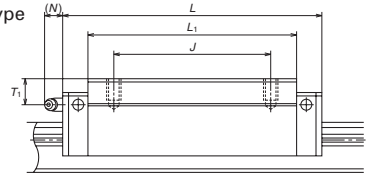

Model No.	Assembly			Ball slide											Width	Height
	Height			Width	Length	Mounting hole						Grease fitting				
	H	E	W_2	W	L	B	J	M × pitch × ℓ	L_1	K	T	Hole size	T_1	N	W_1	H_1
NH15AN	28	4.6	9.5	34	55	26	26	M4×0.7×6	39	23.4	8	φ3	8.5	3.3	15	15
NH15BN					74				58							
NH20AN	30	5	12	44	69.8	32	36	M5×0.8×6	50	25	12	M6×0.75	5	11	20	18
NH20BN					91.8		50		72							
NH25AN	40	7	12.5	48	79	35	35	M6×1×9	58	33	12	M6×0.75	10	11	23	22
NH25BN					107		50		86							
NH30AN	45	9	16	60	85.6	40	40	M8×1.25×10	59	36	14	M6×0.75	10	11	28	26
NH30BN					124.6		60		98							
NH35AN	55	9.5	18	70	109	50	50	M8×1.25×12	80	45.5	15	M6×0.75	15	11	34	29
NH35BN					143		72		114							
NH45AN	70	14	20.5	86	139	60	60	M10×1.5×17	105	56	17	Rc1/8	20	13	45	38
NH45BN					171		80		137							
NH55AN	80	15	23.5	100	163	75	75	M12×1.75×18	126	65	18	Rc1/8	21	13	53	44
NH55BN					201		95		164							
NH65AN	90	16	31.5	126	193	76	70	M16×2×20	147	74	23	Rc1/8	19	13	63	53
NH65BN					253		120		207							


Notes: 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type


Ball slide **NAH 30 AN S Z -K**

- Random-matching ball slide series code: NAH
  - NAH: NH Series random-matching ball slide
- Size: 30
- Ball slide shape code (See page A114.): AN
- Material code: S
  - No code: Special high carbon steel (NSK standard), S: Stainless steel
- Preload code: Z
  - No code: Fine clearance, Z: Slight preload, H: Medium preload
- Option code: -K
  - -K: Equipped with NSK K1
  - -F: Fluoride low temperature chrome plating+AS2 grease
  - -F50: Fluoride low temperature chrome plating+LG2 grease


AN and BN types



AN type

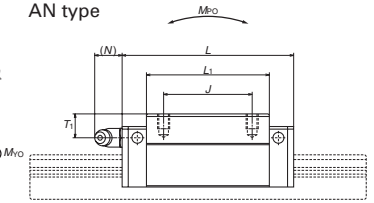


BN type

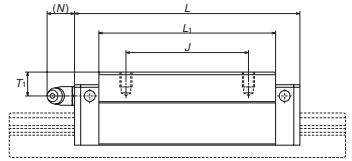

Reference number for rail of random-matching type

Rail **N1H30 1200 L C N -** PC Z**

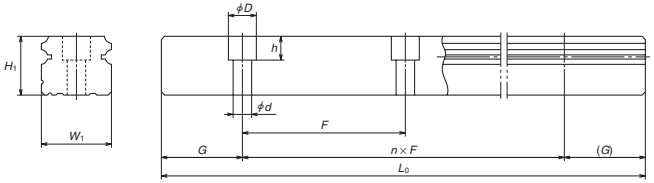- Random-matching rail series code: N1H
  - N1H: NH Series random-matching rail
- Size: 30
- Rail length (mm): 1200
- Rail shape code: L
  - L: Standard
- Material/surface treatment code (See Table 22.): C
- *Butting rail specification: N
  - N: Non-butting. L: Butting specification
  - *Please consult with NSK for butting rail specification.
- Design serial number: -**
  - Added to the reference number.
- Accuracy code: PC
  - PH: High precision grade. PC: Normal grade
- Preload code (See page A116.): Z
  - T: Fine clearance.
  - Z: Slight preload (common rail for medium preload)



Unit: mm

Rail				Basic load rating							Weight	
Pitch	Mounting bolt hole	G	Max. length L_{0max}. ( ) for stainless	[2]Dynamic		Static	Static moment (N·m)				Ball slide	Rail
				[50km]	[100km]			M_{PO}		M_{YO}		
F	d × D × h	(reference)		C_{50}(N)	C_{100}(N)	C_0 (N)	M_{RO}	One slide	Two slides	One slide	Two slides	(kg)	(kg/m)
60	4.5×7.5×5.3	20	2 980 (1 800)	14 200	11 300	20 700	108	94.5	575	79.5	480	0.18	1.6
				18 100	14 400	32 000	166	216	1 150	181	965	0.26	
60	6×9.5×8.5	20	3 960 (3 500)	23 700	18 800	32 500	219	185	1 140	155	955	0.33	2.6
				30 000	24 000	50 500	340	420	2 230	355	1 870	0.48	
60	7×11×9	20	3 960 (3 500)	33 500	26 800	46 000	360	320	1 840	267	1 540	0.55	3.6
				45 500	36 500	71 000	555	725	3 700	610	3 100	0.82	
80	9×14×12	20	4 000 (3 500)	41 000	32 500	51 500	490	350	2 290	292	1 920	0.77	5.2
				61 000	48 500	91 500	870	1 030	5 600	865	4 700	1.3	
80	9×14×12	20	4 000	62 500	49 500	80 500	950	755	4 500	630	3 800	1.5	7.2
				81 000	64 500	117 000	1 380	1 530	8 350	1 280	7 000	2.1	
105	14×20×17	22.5	3 990	107 000	84 500	140 000	2 140	1 740	9 750	1 460	8 150	3.0	12.3
				131 000	104 000	187 000	2 860	3 000	15 600	2 520	13 100	3.9	
120	16×23×20	30	3 960	158 000	125 000	198 000	3 600	3 000	16 300	2 510	13 700	4.7	16.9
				193 000	153 000	264 000	4 850	5 150	26 300	4 350	22 100	6.1	
150	18×26×22	35	3 900	239 000	190 000	281 000	6 150	4 950	27 900	4 150	23 400	7.7	24.3
				310 000	246 000	410 000	8 950	10 100	51 500	8 450	43 500	10.8	

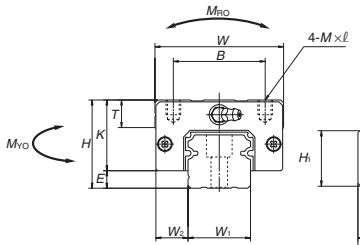
2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life C_{100} ; the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.
3) High-precision grade and medium preload of random-matching type are available for high-carbon steel products.

NH-AL (High-load type / Standard)
NH-BL (Super-high-load type / Long)


NH 30 1200 AL C 2 - ** PC Z**

- Series name: NH
- Size: 30
- Rail length (mm): 1200
- Ball slide shape code (See page A114.): AL
- Material/surface treatment code (See Table 22.): C
  C: Special high carbon steel (NSK standard), K: Stainless steel
- Number of ball slides per rail: 2
- Design serial number: -**
  Added to the reference number.
- Accuracy code (See Table 23.): PC
- Preload code (See page A116.): Z
  0: Z0, 1: Z1, 3: Z3, T: ZT, Z: ZZ, H: ZH


Front view of AL and BL types



Side view of AL type

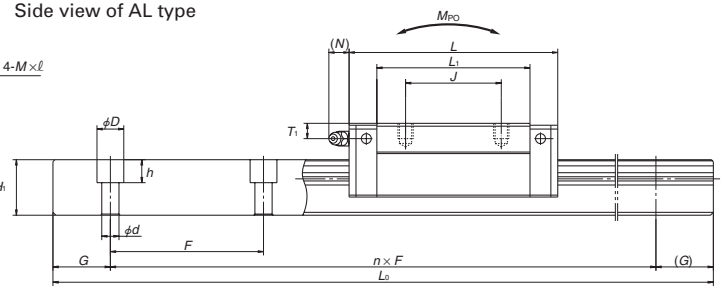

Side view of BL type

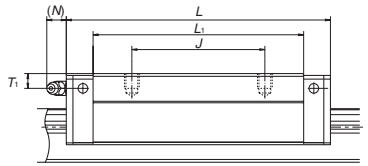

Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	M × pitch × ℓ	L_1	K	T	Grease fitting Hole size	T_1	N	Width W_1	Height H_1
NH25AL	36	7	12.5	48	79	35	35	M6×1×6	58	29	12	M6×0.75	6	11	23	22
NH25BL					107		50		86							
NH30AL	42	9	16	60	85.6	40	40	M8×1.25×8	59	33	14	M6×0.75	7	11	28	26
NH30BL					124.6		60		98							
NH35AL	48	9.5	18	70	109	50	50	M8×1.25×8	80	38.5	15	M6×0.75	8	11	34	29
NH35BL					143		72		114							
NH45AL	60	14	20.5	86	139	60	60	M10×1.5×10	105	46	17	Rc1/8	10	13	45	38
NH45BL					171		80		137							
NH55AL	70	15	23.5	100	163	75	75	M12×1.75×13	126	55	15	Rc1/8	11	13	53	44
NH55BL					201		95		164							


Notes: 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type


Ball slide **NAH 30 AL S Z -K**

- Random-matching ball slide series code: NAH
  NAH: NH Series random-matching ball slide
- Size: 30
- Ball slide shape code (See page A114.): AL
- Material code: S
  No code: Special high carbon steel (NSK standard), S: Stainless steel
- Preload code: Z
  No code: Fine clearance, Z: Slight preload, H: Medium preload
- Option code: -K
  -K: Equipped with NSK K1
  -F: Fluoride low temperature chrome plating+AS2 grease
  -F50: Fluoride low temperature chrome plating+LG2 grease


AL and BL types



AL type

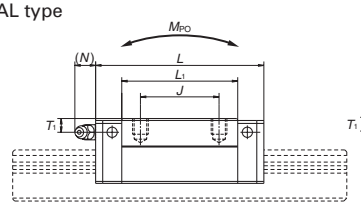


BL type

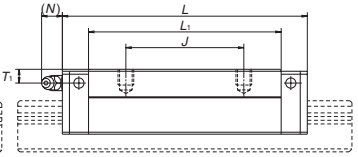

Reference number for rail of random-matching type

Rail **N1H30 1200 L C N -** ** PC Z**

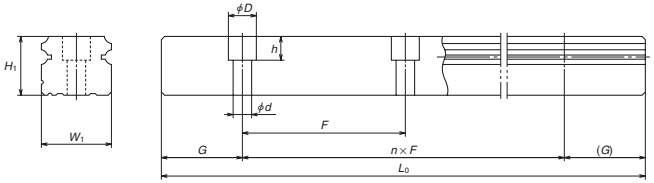- Random-matching rail series code: N1H
  N1H: NH Series random-matching rail
- Size: 30
- Rail length (mm): 1200
- Rail shape code: L
  L: Standard
- Material/surface treatment code (See Table 22.): C
- *Butting rail specification: N
  N: Non-butting. L: Butting specification
  *Please consult with NSK for butting rail specification.
- Design serial number: -**
  Added to the reference number.
- Accuracy code: PC
  PH: High precision grade
  PC: Normal grade
- Preload code (See page A116.): Z
  T: Fine clearance.
  Z: Slight preload (common rail for medium preload)



Unit: mm

Rail Pitch F	Mounting bolt hole d × D × h	G (reference)	Max. length L_{0max}· ( ) for stainless	Basic load rating 2)Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (kg)	Rail (kg/m)
60	7×11×9	20	3 960	33 500	26 800	46 000	360	320	1 840	267	1 540	0.46	3.6
			(3 500)	45 500	36 500	71 000	555	725	3 700	610	3 100	0.69	
80	9×14×12	20	4 000	41 000	32 500	51 500	490	350	2 290	292	1 920	0.69	5.2
			(3 500)	61 000	48 500	91 500	870	1 030	5 600	865	4 700	1.16	
80	9×14×12	20	4 000	62 500	49 500	80 500	950	755	4 500	630	3 800	1.2	7.2
				81 000	64 500	117 000	1 380	1 530	8 350	1 280	7 000	1.7	
105	14×20×17	22.5	3 990	107 000	84 500	140 000	2 140	1 740	9 750	1 460	8 150	2.2	12.3
				131 000	104 000	187 000	2 860	3 000	15 600	2 520	13 100	2.9	
120	16×23×20	30	3 960	158 000	125 000	198 000	3 600	3 000	16 300	2 510	13 700	3.7	16.9
				193 000	153 000	264 000	4 850	5 150	26 300	4 350	22 100	4.7	

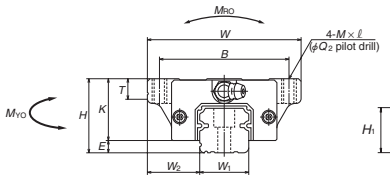
2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life C_{100} ; the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.
3) High-precision grade and medium preload of random-matching type are available for high-carbon steel products.

NH-EM (High-load type / Standard)
NH-GM (Super-high-load type / Long)


NH 30 1200 EM C 2 - PC Z**

- Series name: NH
- Size: 30
- Rail length (mm): 1200
- Ball slide shape code (See page A114.): EM
- Material/surface treatment code (See Table 22.): C
  C: Special high carbon steel (NSK standard), K: Stainless steel
- Number of ball slides per rail: 2
- Design serial number: -**
  Added to the reference number.
- Accuracy code (See Table 23.): PC
- Preload code (See page A116.): Z
  0: Z0, 1: Z1, 3: Z3, T: ZT, Z: ZZ, H: ZH


Front view of EM and GM types



Side view of EM type

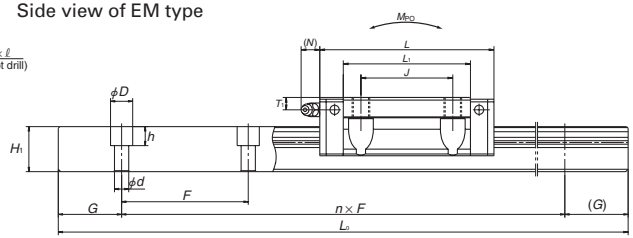

Side view of GM type



Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	M × pitch × ℓ	Q_2	L_1	K	T	Grease fitting Hole size	T_1	N	Width W_1	Height H_1
NH15EM	24	4.6	16	47	55	38	30	M5×0.8×7	4.4	39	19.4	8	φ3	4.5	3.3	15	15
NH15GM					74					58							
NH20EM	30	5	21.5	63	69.8	53	40	M6×1×9.5	5.3	50	25	10	M6×0.75	5	11	20	18
NH20GM					91.8					72							
NH25EM	36	7	23.5	70	79	57	45	M8×1.25×10 (M8×1.25×11.5)	6.8	58	29	11 (12)	M6×0.75	6	11	23	22
NH25GM					107					86							
NH30EM	42	9	31	90	98.6	72	52	M10×1.5×12 (M10×1.5×14.5)	8.6	72	33	11 (15)	M6×0.75	7	11	28	26
NH30GM					124.6					98							
NH35EM	48	9.5	33	100	109	82	62	M10×1.5×13	8.6	80	38.5	12	M6×0.75	8	11	34	29
NH35GM					143					114							
NH45EM	60	14	37.5	120	139	100	80	M12×1.75×15	10.5	105	46	13	Rc1/8	10	13	45	38
NH45GM					171					137							
NH55EM	70	15	43.5	140	163	116	95	M14×2×18	12.5	126	55	15	Rc1/8	11	13	53	44
NH55GM					201					164							
NH65EM	90	16	53.5	170	193	142	110	M16×2×24	14.6	147	74	23	Rc1/8	19	13	63	53
NH65GM					253					207							


Notes: 1) Parenthesized dimensions are for items made of stainless steel.
2) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type


Ball slide NAH 30 EM S Z -K

- Random-matching ball slide series code: NAH
  NAH: NH Series random-matching ball slide
- Size: 30
- Ball slide shape code (See page A114.): EM
- Material code: S
  No code: Special high carbon steel (NSK standard), S: Stainless steel
- Preload code: Z
  No code: Fine clearance, Z: Slight preload, H: Medium preload
- Option code: -K
  -K: Equipped with NSK K1
  -F: Fluoride low temperature chrome plating+AS2 grease
  -F50: Fluoride low temperature chrome plating+LG2 grease


EM and GM types



EM type




GM type



Reference number for rail of random-matching type

Rail N1H30 1200 L C N - PC Z**

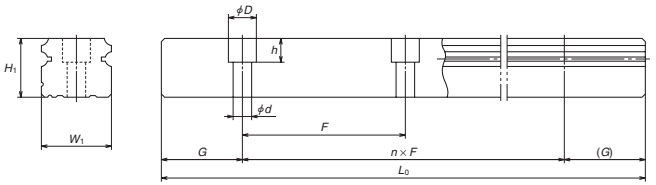- Random-matching rail series code: N1H
  N1H: NH Series random-matching rail
- Size: 30
- Rail length (mm): 1200
- Rail shape code: L
  L: Standard
- Material/surface treatment code (See Table 22.): C
- *Butting rail specification: N
  N: Non-butting. L: Butting specification
  *Please consult with NSK for butting rail specification.
- Design serial number: -**
  Added to the reference number.
- Accuracy code: PC
  PH: High precision grade
  PC: Normal grade
- Preload code (See page A116.): Z
  T: Fine clearance.
  Z: Slight preload (common rail for medium preload)




Unit: mm

Rail Pitch F	Mounting bolt hole d × D × h	G (reference)	Max. length L_{0max}. ( ) for stainless	Basic load rating [3]Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (kg)	Rail (kg/m)
60	4.5×7.5×5.3	20	2 980 (1 800)	14 200	11 300	20 700	108	94.5	575	79.5	480	0.17	1.6
				18 100	14 400	32 000	166	216	1 150	181	965	0.25	
60	6×9.5×8.5	20	3 960 (3 500)	23 700	18 800	32 500	219	185	1 140	155	955	0.45	2.6
				30 000	24 000	50 500	340	420	2 230	355	1 870	0.65	
60	7×11×9	20	3 960 (3 500)	33 500	26 800	46 000	360	320	1 840	267	1 540	0.63	3.6
				45 500	36 500	71 000	555	725	3 700	610	3 100	0.93	
80	9×14×12	20	4 000 (3 500)	47 000	37 500	63 000	600	505	3 150	425	2 650	1.2	5.2
				61 000	48 500	91 500	870	1 030	5 600	865	4 700	1.6	
80	9×14×12	20	4 000	62 500	49 500	80 500	950	755	4 500	630	3 800	1.7	7.2
				81 000	64 500	117 000	1 380	1 530	8 350	1 280	7 000	2.4	
105	14×20×17	22.5	3 990	107 000	84 500	140 000	2 140	1 740	9 750	1 460	8 150	3	12.3
				131 000	104 000	187 000	2 860	3 000	15 600	2 520	13 100	3.9	
120	16×23×20	30	3 960	158 000	125 000	198 000	3 600	3 000	16 300	2 510	13 700	5	16.9
				193 000	153 000	264 000	4 850	5 150	26 300	4 350	22 100	6.5	
150	18×26×22	35	3 900	239 000	190 000	281 000	6 150	4 950	27 900	4 150	23 400	10	24.3
				310 000	246 000	410 000	8 950	10 100	51 500	8 450	43 500	14.1	

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}: the basic dynamic load rating for 50 km rated fatigue life C_{100} ; the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.
4) High-precision grade and medium preload of random-matching type are available for high-carbon steel products.

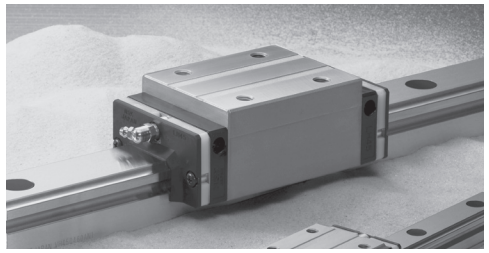A-5-1.2 VH Series



1. Features

(1) High-performance end seals

High-performance end seals with a multi-lip structure prevent the entry of various foreign matters.

(2) NSK K1™ lubrication unit (standard)

Outstanding lubrication support of NSK K1 further improves sealing capability and durability. Additional NSK K1 units can be mounted for specific usage conditions and environments.

(3) Tapped holes on a rail bottom surface (optional)

In addition to standard mounting bolt holes (counterbores on a rail top surface), a specification for tapped holes on a rail bottom surface for enhanced sealing capability is available for the VH Series. (Refer to the dimension table.)

(4) High self-aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, reducing moment rigidity.

This increases the capacity to absorb errors in installation.

(5) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, thus increasing load carrying capacity as well as rigidity in vertical direction.

(6) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in **Fig. 2.** The vertical load is generally carried by the top rows, at where balls are contacting at two points. Because of this design, the bottom rows will carry load when a large impact load is applied vertically as shown in **Fig. 3.** This assures high resistance to the impact load.

(7) High accuracy

As showing in **Fig. 4**, fixing the master rollers to the ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(8) Random matching type

Random-matching of rails and ball slides are available.

(9) Improve rating life dramatically

New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased. As compared with the conventional products, the load rating capacity has increased to 1.3 times, while the life span has increased to twice*1.

*1: Representative values of series.

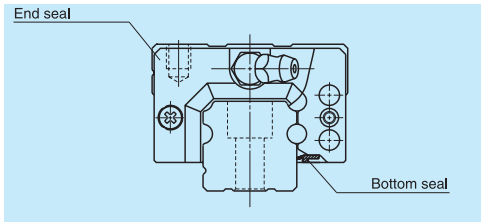


Fig. 1 VH Series

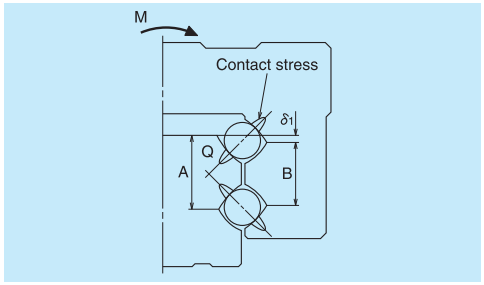


Fig. 2 Enlarged illustration of the offset Gothic arch groove

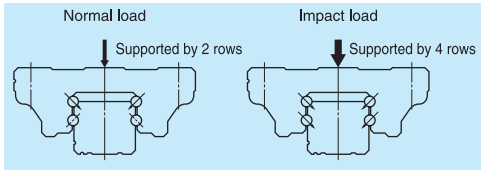


Fig. 3 When load is applied

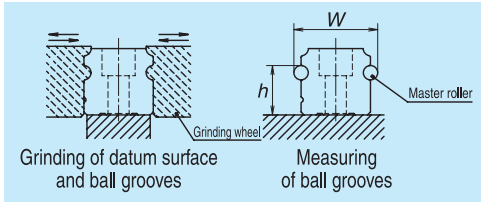


Fig. 4 Rail grinding and measuring

●Comparison with NSK standard products

Less than 1/10 the level of fine contaminants

Results of dust-proof tests reveal that the entry of fine contaminants is reduced to less than one-tenth of existing standard series due to improvements in sealing capability.

Test sample	: VH30AN
Speed	: 16.7 mm/sec
Contaminant	: Graphite powder (average grain size: 0.037 mm) + Grease

Operating life under contaminated environments is more than 5 times longer

Durability test with rubber fragments


Extreme durability tests under contaminated environments using rubber fragments show that durability of the VH Series extended more than five times longer than the existing standard series, as shown in the graph.


Test sample	: VH30AN, preload code Z1 (preload of 245 N)
Rail orientation	: Horizontal (wall mount)
Speed	: 500 mm/sec
Lubrication	: AS2 grease (prepacked AS2 only)
Contaminant	: Rubber fragments


Durability test with fine wood particles


Extreme durability tests in a contaminated environment with fine wood particles show that durability of the VH Series is more than doubled compared to the standard series, as shown in the graph.

Test sample	: VH30AN (preload of 3 200 N)
Rail orientation	: Horizontal (wall mount)
Speed	: 400 mm/sec
Lubrication	: AS2 grease (prepacked AS2 only)
Contaminant	: Fine wood particles

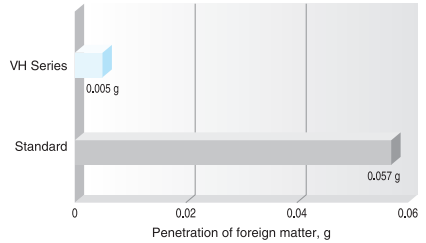


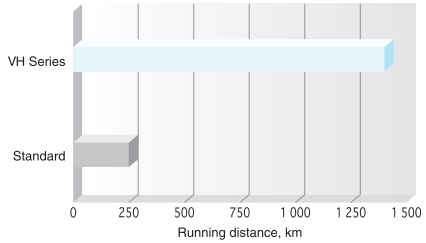

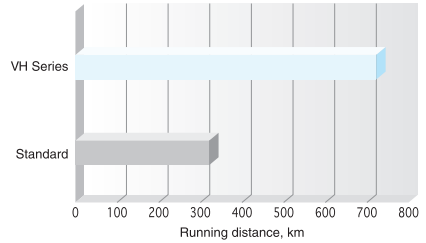












Before the passage of ball slide
(Heavily contaminated with wood particle)



After the passage of ball slide
(All contaminant particles are swept away)

The data shown in the catalog are the results of our tests, and no warranty is given to sealing performance on actual usage on machinery. Sealing performance is affected by usage environment and lubrication conditions. Dust covers and other measures to keep machinery free of dust are recommended.

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length) High-load type Standard	Super-high-load type Long
AN BN		AN 	BN 
AL BL		AL 	BL 
EM GM		EM 	GM 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm) over	or less	Accuracy grade: Preloaded assembly (not random matching) Ultra precision K3	Super precision K4	High precision K5	Precision grade K6	Normal grade KN	Random-matching type Normal grade KC
–	50	2	2	2	4	5	5
50	80	2	2	3	4	5	5
80	125	2	2	3	4	5	5
125	200	2	2	3.5	5	6	6
200	250	2	2.5	4.5	6	7.5	7.5
250	315	2	2.5	5	6.5	8.5	8.5
315	400	2	3	5.5	7	9.5	9.5
400	500	2	3	6	7.5	11	11
500	630	2	3.5	6.5	8.5	12	12
630	800	2	4	7	9.5	13	13
800	1 000	2.5	4.5	7.5	10	15	15
1 000	1 250	3	5	8.5	12	16	16
1 250	1 600	3.5	5.5	9.5	13	17	17
1 600	2 000	4	6.5	11	14	19	19
2 000	2 500	4.5	7.5	12	16	21	21
2 500	3 150	5.5	8.5	13	18	23	23
3 150	4 000	6	9.5	14	19	25	25

(2) Accuracy standard

The preloaded assembly has five accuracy grades; Ultra precision K3, Super precision K4, High precision K5, Precision K6, and Normal KN grades, while the random-matching type has Normal KC grade only.

- **Tolerance of preloaded assembly**

Table 2

Unit: μm

Characteristics \ Accuracy grade	Ultra precision K3	Super precision K4	High precision K5	Precision grade K6	Normal grade KN
Mounting height H Variation of H (All ball slides on a set of rails)	±8 3	±10 5	±20 7	±40 15	±80 25
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All ball slides on reference rail)	±10 3	±15 7	±25 10	±50 20	±100 30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in **Table 1**, **Fig. 5** and **Fig. 6**				

- **Tolerance of random-matching type: Normal grade KC**

Table 3

Unit: μm

Characteristics \ Model No.	VH15, 20, 25, 30, 35	VH45, 55
Mounting height H	±20	±30
Variation of mounting height H	15① 30②	20① 35②
Mounting width W_2 or W_3	±30	±35
Variation of mounting width W_2 or W_3	25	30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	See **Table 1**, **Fig. 5** and **Fig. 6**	

Note: ① Variation on the same rail ② Variation on multiple rails

(3) Combinations of accuracy and preload

Table 4

		Accuracy grade					
		Ultra precision	Super precision	High Precision	Precision grade	Normal grade	Normal grade
With NSK K1 lubrication unit		K3	K4	K5	K6	KN	KC
Preload	Fine clearance Z0	○	○	○	○	○	—
	Slight preload Z1	○	○	○	○	○	—
	Medium preload Z3	○	○	○	○	—	—
	Random-matching type with fine clearance ZT	—	—	—	—	—	○
	Random-matching type with slight preload ZZ	—	—	—	—	—	○

(4) Assembled accuracy

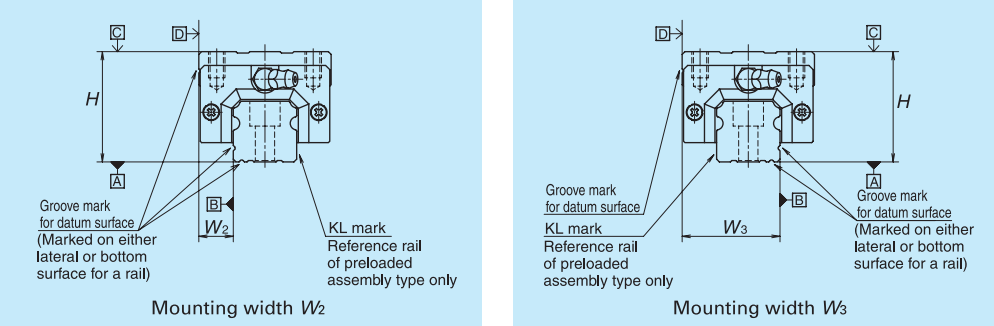


Fig. 5 Special high carbon steel

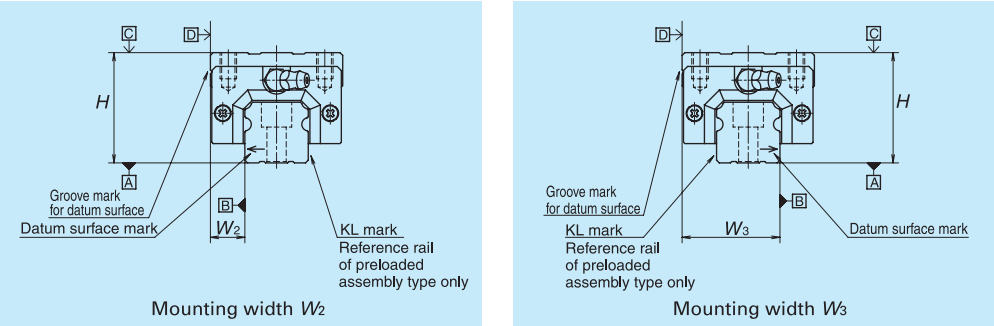


Fig. 6 Stainless steel

(5) Preload and rigidity

We offer five levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with random-matching type of Fine clearance ZT and Slight preload ZZ.

• Preload and rigidity of preloaded assembly

Table 5

	Model No.	Preload (N)		Rigidity (N/μm)			
				Vertical direction		Lateral direction	
		Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3
High-load type	VH15 AN, EM	78	490	137	226	98	186
	VH20 AN, EM	147	835	186	335	137	245
	VH25 AN, AL, EM	196	1 270	206	380	147	284
	VH30 AN, AL	245	1 570	216	400	157	294
	VH30 EM	294	1 770	265	480	186	355
	VH35 AN, AL, EM	390	2 350	305	560	216	390
	VH45 AN, AL, EM	635	3 900	400	745	284	540
	VH55 AN, AL, EM	980	5 900	490	910	345	645
Super-high-load type	VH15 BN, GM	98	685	196	345	137	284
	VH20 BN, GM	196	1 080	265	480	196	355
	VH25 BN, BL, GM	245	1 570	294	560	216	400
	VH30 BN, BL, GM	390	2 260	360	665	265	480
	VH35 BN, BL, GM	490	2 940	430	795	305	570
	VH45 BN, BL, GM	785	4 800	520	960	370	695
	VH55 BN, BL, GM	1 180	7 050	635	1 170	440	835

Note: Clearance for Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero.
However, Z0 of PN grade is 0 to 15 μm.

· Preload of random-matching type

Table 6 Unit: μm

Model No.	Fine clearance ZT	Slight preload ZZ
VH15	–4 – 15	–4 – 0
VH20	–5 – 15	–5 – 0
VH25		–5 – 0
VH30		–7 – 0
VH35		–7 – 0
VH45		–7 – 0
VH55		–9 – 0

Note: Minus sign denotes that a value is an amount of preload (elastic deformation of balls).

4. Maximum rail length

Table 7 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 7 Length limitations of rails Unit: mm

Series	Size / Material	15	20	25	30	35	45	55
VH	Special high carbon steel	2 000	3 960	3 960	4 000	4 000	3 990	3 960
	Stainless steel	1 800	3 500	3 500	3 500			

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

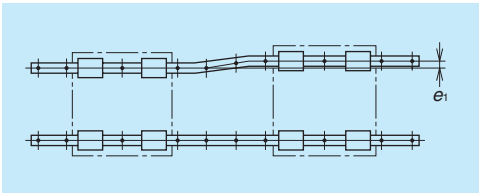


Fig. 7

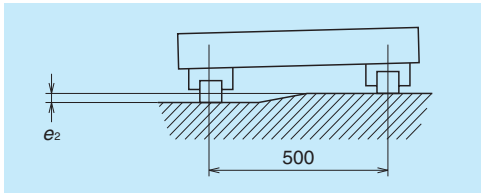


Fig. 8

Table 8

Unit: μm

Value	Preload	Model No.						
		VH15	VH20	VH25	VH30	VH35	VH45	VH55
Permissible values of parallelism in two rails e_1	Z0, ZT	22	30	40	45	55	65	80
	Z1, ZZ	18	20	25	30	35	45	55
	Z3	13	15	20	25	30	40	45
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	375 μm/500 mm						
	Z1, ZZ, Z3	330 μm/500 mm						

(2) Shoulder height of the mounting surface and corner radius r




Fig. 9 Shoulder for the rail datum surface




Fig. 10 Shoulder for the ball slide datum surface

Table 9

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
VH15	0.5	0.5	4	4
VH20	0.5	0.5	4.5	5
VH25	0.5	0.5	5	5
VH30	0.5	0.5	6	6
VH35	0.5	0.5	6	6
VH45	0.7	0.7	8	8
VH55	0.7	0.7	10	10

(3) Specification for tapped holes on a rail bottom surface

- Special high carbon steel is available for this specification.
- Applicable accuracy grades are precision grade (K6) and normal grades (KN and KC) only.
- The minimum rail length for production is 400 mm.
- The tapping pitch is the same as the pitch for regular mounting bolt holes. Please refer to the dimension table.

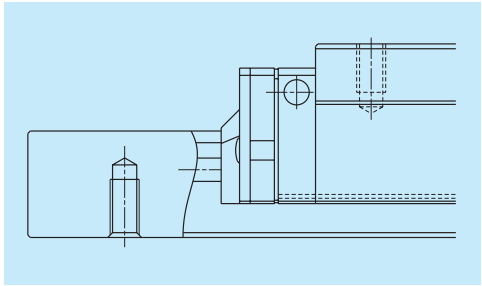


Fig. 11

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 12 and **Table 10** show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

Please ask NSK for stainless lubrication accessories.

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on a side of end cap for an option. (**Fig. 13**)

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

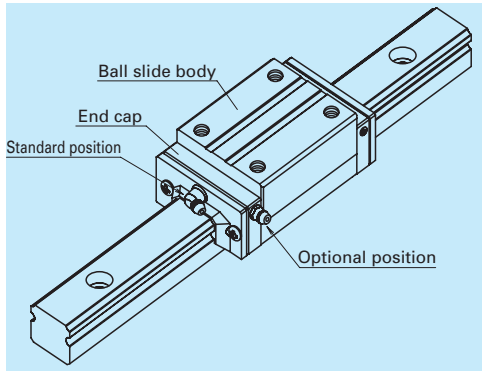


Fig. 13 Mounting position of lubrication accessories

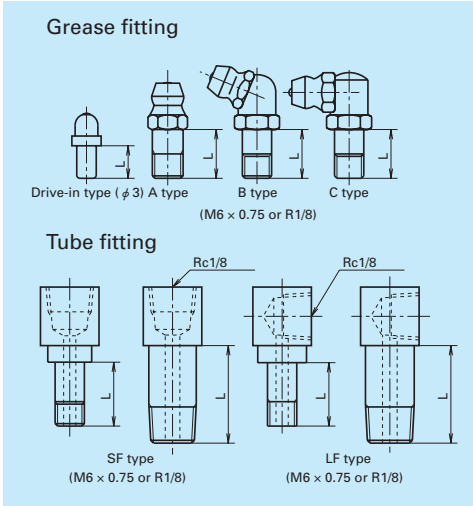


Fig. 12 Grease fitting and tube fitting

Table 10

Unit: mm

Model No.	Dust-proof specification	Dimension L		
		Grease fitting /Drive-in type	Tube fitting SF type	Tube fitting LF type
VH15	Standard*	10	–	–
	Double seal	**	–	–
	Protector	**	–	–
VH20	Standard*	12	–	–
	Double seal	18	–	–
	Protector	18	–	–
VH25	Standard*	12	15	16
	Double seal	18	23	24.5***
	Protector	18	17	18
VH30	Standard*	14	18	17.5
	Double seal	22	25	24.5
	Protector	22	19.5	19
VH35	Standard*	14	15	15
	Double seal	22	25	24.5
	Protector	22	21.5	22
VH45	Standard*	18	22	21.5
	Double seal	22	32	32
	Protector	28	28	30
VH55	Standard*	18	20	20
	Double seal	22	32	32
	Protector	28	28	30

*) NSK K1 units are mounted as a standard specification for VH series.

**) A connector is required for grease fitting. Please contact NSK.

***) Only available for AN and BN type ball slides.

7. Dust-proof components

(1) Standard specification

To keep foreign matters from entering inside the ball slide, VH Series has an end seal on both ends, and bottom seals at the bottom.
Two NSK K1, one at each end, are installed as the standard equipment.

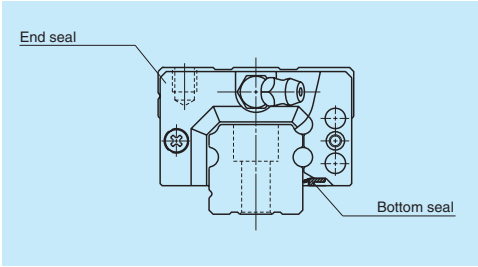


Fig. 14

Table 11 Seal friction per ball slide (maximum value)

Unit: N

Series \ Size	15	20	25	30	35	45	55
VH	11	13	14	17	23	33	44

(2) Double seal and protector

For VH Series, double-seal and protector can be installed only before shipping from the factory. Please consult NSK when you require them.
Table 12 shows the ball slide length when a double seal set and a protector are installed.

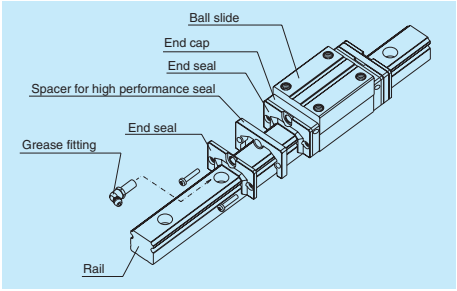


Fig. 15 Double seal

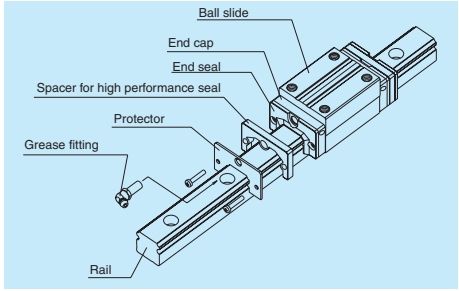


Fig. 16 Protector

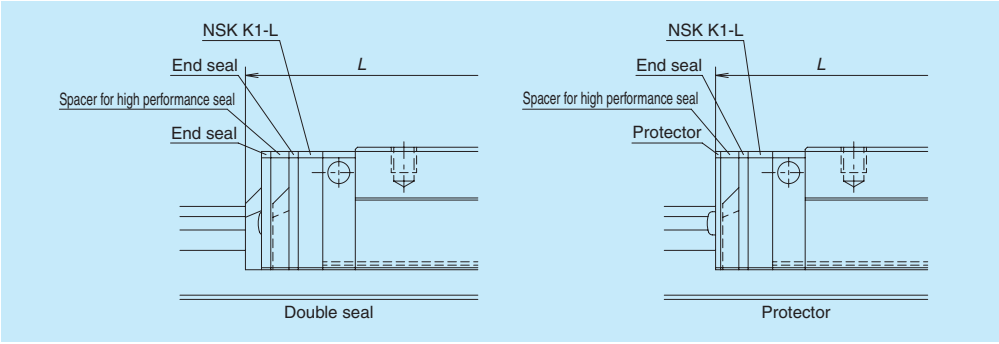


Fig. 17 VH15～25

Table 12 Dimension of installing dust-proof optional components

Unit: mm

Model No.	Ball slide length	Ball slide model	Ball slide length *L*		
			Standard	Double seal installation	Protector installation
VH15	Standard type	AN, EM	70.6	81.6	77
	Long type	BN, GM	89.6	100.6	96
VH20	Standard type	AN, EM	87.4	100.4	94.2
	Long type	BN, GM	109.4	122.4	116.2
VH25	Standard type	AN, AL, EM	97	110	104.4
	Long type	BN, BL, GM	125	138	132.4
VH30	Standard type	AN, AL	104.4	120.4	114.8
		EM	117.4	133.4	127.8
	Long type	BN, BL, GM	143.4	159.4	153.8
VH35	Standard type	AN, AL, EM	128.8	144.8	139.2
	Long type	BN, BL, GM	162.8	178.8	173.2
VH45	Standard type	AN, AL, EM	161.4	180.4	174.2
	Long type	BN, BL, GM	193.4	212.4	206.2
VH55	Standard type	AN, AL, EM	185.4	204.4	198.2
	Long type	BN, BL, GM	223.4	242.4	236.2

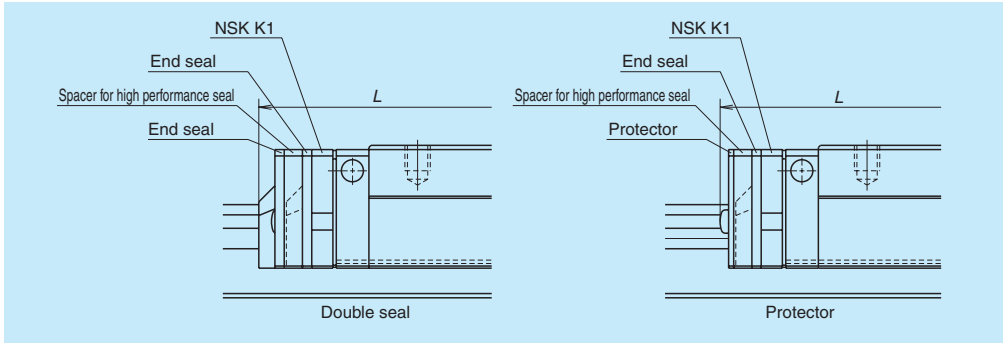


Fig. 18 VH30～55

(3) Cap to plug the rail mounting bolt hole

Table 13 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
VH15	M4	LG-CAP/M4	20
VH20	M5	LG-CAP/M5	20
VH25	M6	LG-CAP/M6	20
VH30, VH35	M8	LG-CAP/M8	20
VH45	M12	LG-CAP/M12	20
VH55	M14	LG-CAP/M14	20

(4) Inner seal

The availability of inner seal is limited to the models shown below.

Table 14

Series	Model No.
VH	VH20, VH25, VH30, VH45, VH55

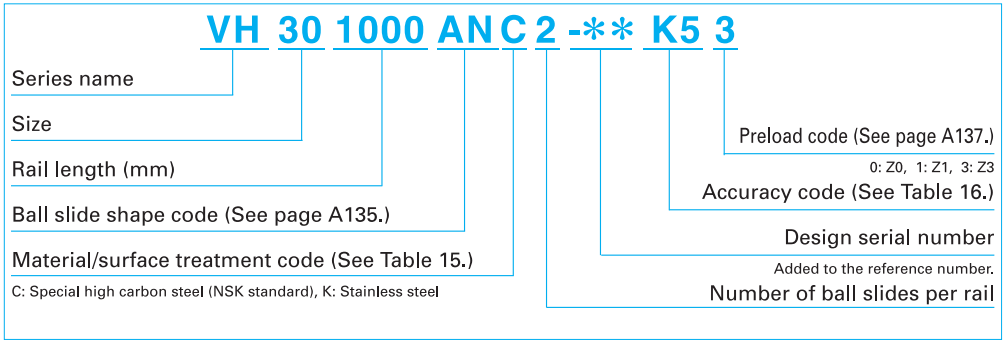
8. Design Precautions

Because the product is used under severe operating conditions that require high performance end seals, please inform NSK about your service conditions using the technical data sheet on page A152.

8. Reference number


Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly




(2) Reference number for random-matching type

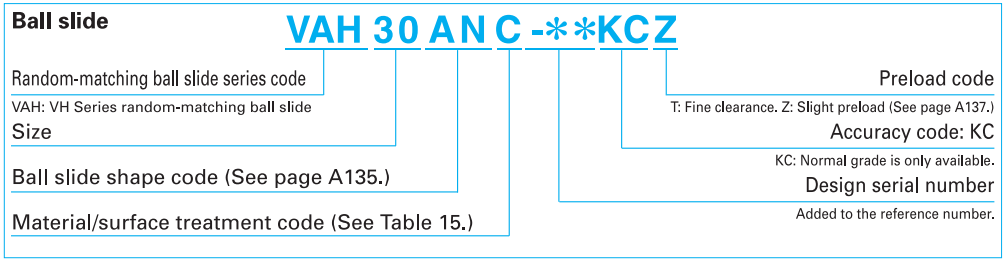Ball slide



Rail

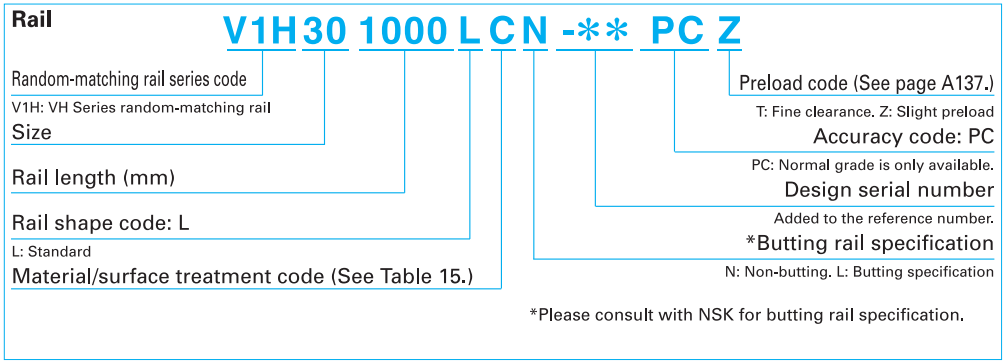

*Please consult with NSK for butting rail specification.

The reference number coding for the assembly of random-matching type is the same as that of preloaded assembly. However, the preload code of "fine clearance T" and "slight preload Z" is only applicable (refer to page A137).

Table 15 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard) + counterbores on a rail top surface
K	Stainless steel + counterbores on a rail top surface
D	Special high carbon steel with surface treatment + counterbores on a rail top surface
H	Stainless steel with surface treatment + counterbores on a rail top surface
V	Special high carbon steel (NSK standard) + tapped holes on a rail bottom surface
W	Special high carbon steel with surface treatment + tapped holes on a rail bottom surface
Z	Other, special

Table 16 Accuracy code

Accuracy	Standard (with NSK K1)
Ultra precision grade	K3
Super precision grade	K4
High precision grade	K5
Precision grade	K6
Normal grade	KN
Normal grade (random-matching type)	KC


Note: Refer to page A38 for NSK K1 lubrication unit.

9. Dimensions
VH-AN (High-load type / Standard)
VH-BN (Super-high-load type/ Long)


VH 30 1000 AN C 2 - KC Z**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A135.)
- Material/surface treatment code (See Table 15.)
  C: Special high carbon steel (NSK standard), K: Stainless steel
- Number of ball slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 16.)
- Preload code (See page A137.)
  0: Z0, 1: Z1, 3: Z3, T: ZT, Z: ZZ


Front view of AN and BN type




Side view of AN type

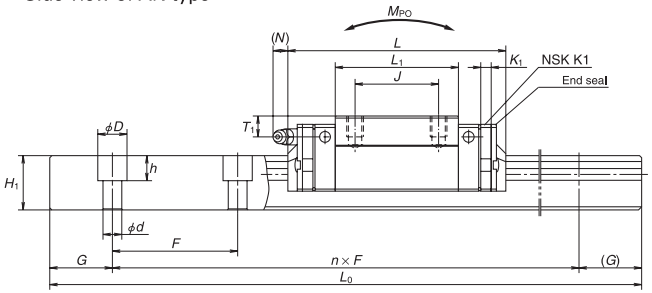

Specification for tapped holes on a rail bottom face



Side view of BN type

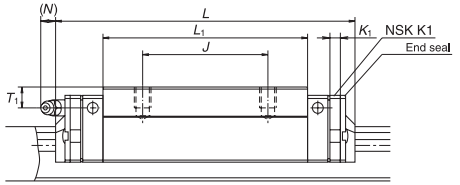

Model No.	Assembly Height H	E	W2	Ball slide Width W	Length L	Mounting hole B	J	M × pitch × ℓ	L1	K	T	K1	Grease fitting Hole size	T1	N	Width W1	Height H1
VH15AN	28	4.6	9.5	34	70.6〈 77〉	26	26	M4×0.7×6	39	23.4	8	4.5	φ3	8.5	1 〈 8.2〉	15	15
VH15BN					89.6〈 96〉				58								
VH20AN	30	5	12	44	87.4〈 94.2〉	32	36	M5×0.8×6	50	25	12	4.5	M6×0.75	5	11.1〈12.3〉	20	18
VH20BN					109.4〈116.2〉		50		72								
VH25AN	40	7	12.5	48	97 〈104.4〉	35	35	M6×1×9	58	33	12	5	M6×0.75	10	9.6〈12.9〉	23	22
VH25BN					125 〈132.4〉		50		86								
VH30AN	45	9	16	60	104.4〈114.8〉	40	40	M8×1.25×10	59	36	14	5	M6×0.75	10	11.4〈14.2〉	28	26
VH30BN					143.4〈153.8〉		60		98								
VH35AN	55	9.5	18	70	128.8〈139.2〉	50	50	M8×1.25×12	80	45.5	15	5.5	M6×0.75	15	10.9〈13.7〉	34	29
VH35BN					162.8〈173.2〉		72		114								
VH45AN	70	14	20.5	86	161.4〈174.2〉	60	60	M10×1.5×17	105	56	17	6.5	Rc1/8	20	12.5〈14.1〉	45	38
VH45BN					193.4〈206.2〉		80		137								
VH55AN	80	15	23.5	100	185.4〈198.2〉	75	75	M12×1.75×18	126	65	18	6.5	Rc1/8	21	12.5〈14.1〉	53	44
VH55BN					223.4〈236.2〉		95		164								


Notes: 1) Figure inside 〈 〉 is the dimension when equipped with the protector.
2) VH Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
3) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type


Ball slide **VAH 30 AN C -**KC Z**

- Random-matching ball slide series code
  VAH: VH Series random-matching ball slide
- Size
- Ball slide shape code (See page A135.)
- Material/surface treatment code (See Table 15.)
- Preload code (See page A137.)
  T: Fine clearance. Z: Slight preload
- Accuracy code: KC
  KC: Normal grade is only available.
- Design serial number
  Added to the reference number.


AN and BN types



AN type

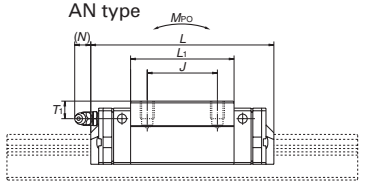


BN type

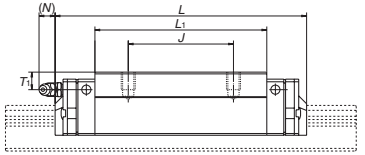

Reference number for rail of random-matching type

Rail **V1H30 1000 L C N -** PC Z**

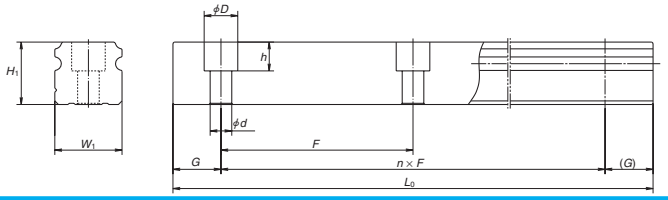- Random-matching rail series code
  V1H: VH Series random-matching rail
- Size
- Rail length (mm)
- Rail shape code: L
  L: Standard
- Material/surface treatment code (See Table 15.)
- *Butting rail specification
  N: Non-butting. L: Butting specification
  *Please consult with NSK for butting rail specification.
- Design serial number
  Added to the reference number.
- Accuracy code: PC
  PC: Normal grade is only available.
- Preload code (See page A137.)
  T: Fine clearance. Z: Slight preload



Unit: mm

Rail Pitch F	Mounting bolt hole d × D × h	Tapped hole M2 × pitch × ℓ2	G (reference)	Max. length L0max. ( ) for stainless	Basic load rating 4)Dynamic [50km] C50(N)	[100km] C100(N)	Static C0 (N)	Static moment (N·m) MRO	MPO One slide	MPO Two slides	MYO One slide	MYO Two slides	Weight Ball slide (kg)	Rail (kg/m)
60	4.5×7.5×5.3	M5×0.8×8	20	2 000 [1 800]	14 200	11 300	20 700	108	94.5	575	79.5	480	0.18	1.6
					18 100	14 400	32 000	166	216	1 150	181	965	0.26	
60	6×9.5×8.5	M6×1×10	20	3 960 [3 500]	23 700	18 800	32 500	219	185	1 140	155	955	0.33	2.6
					30 000	24 000	50 500	340	420	2 230	355	1 870	0.48	
60	7×11×9	M6×1×12	20	3 960 [3 500]	33 500	26 800	46 000	360	320	1 840	267	1 540	0.55	3.6
					45 500	36 500	71 000	555	725	3 700	610	3 100	0.82	
80	9×14×12	M8×1.25×15	20	4 000 [3 500]	41 000	32 500	51 500	490	350	2 290	292	1 920	0.77	5.2
					61 000	48 500	91 500	870	1 030	5 600	865	4 700	1.3	
80	9×14×12	M8×1.25×17	20	4 000	62 500	49 500	80 500	950	755	4 500	630	3 800	1.5	7.2
					81 000	64 500	117 000	1 380	1 530	8 350	1 280	7 000	2.1	
105	14×20×17	M12×1.75×24	22.5	3 990	107 000	84 500	140 000	2 140	1 740	9 750	1 460	8 150	3.0	12.3
					131 000	104 000	187 000	2 860	3 000	15 600	2 520	13 100	3.9	
120	16×23×20	M14×2×24	30	3 960	158 000	125 000	198 000	3 600	3 000	16 300	2 510	13 700	4.7	16.9
					193 000	153 000	264 000	4 850	5 150	26 300	4 350	22 100	6.1	


4) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}: the basic dynamic load rating for 50 km rated fatigue life C_{100}: the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.

VH-AL (High-load type / Standard)
VH-BL (Super-high-load type / Long)


VH 30 1000 AL C 2 - KC Z**

- Series name: VH
- Size: 30
- Rail length (mm): 1000
- Ball slide shape code (See page A135.): AL
- Material/surface treatment code (See Table 15.): C
  - C: Special high carbon steel (NSK standard), K: Stainless steel
- Number of ball slides per rail: 2
- Design serial number: -**
  - Added to the reference number.
- Accuracy code (See Table 16.): KC
- Preload code (See page A137.): Z
  - 0: Z0, 1: Z1, 3: Z3, T: ZT, Z: ZZ


Front view of AL and BL type




Side view of AL type

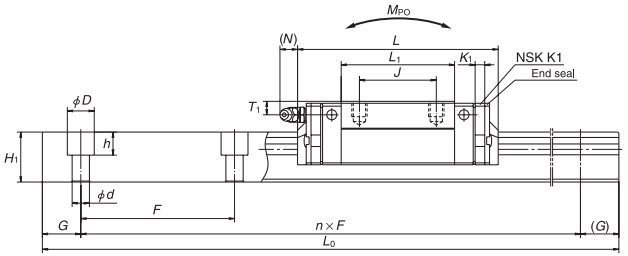

Specification for tapped holes on a rail bottom face



Side view of BL type

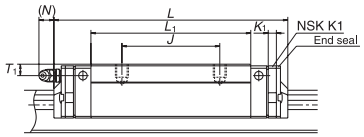

Model No.	Assembly Height H	E	W2	Ball slide Width W	Length L	Mounting hole B	J	M×pitch×ℓ	L1	K	T	K1	Grease fitting Hole size	T1	N	Width W1	Height H1
VH25AL	36	7	12.5	48	97 ⟨104.4⟩	35	35	M6×1×6	58	29	12	5	M6×0.75	6	9.6 ⟨12.9⟩	23	22
VH25BL					125 ⟨132.4⟩		50		86								
VH30AL	42	9	16	60	104.4 ⟨114.8⟩	40	40	M8×1.25×8	59	33	14	5	M6×0.75	7	11.4 ⟨14.2⟩	28	26
VH30BL					143.4 ⟨153.8⟩		60		98								
VH35AL	48	9.5	18	70	128.8 ⟨139.2⟩	50	50	M8×1.25×8	80	38.5	15	5.5	M6×0.75	8	10.9 ⟨13.7⟩	34	29
VH35BL					162.8 ⟨173.2⟩		72		114								
VH45AL	60	14	20.5	86	161.4 ⟨174.2⟩	60	60	M10×1.5×10	105	46	17	6.5	Rc1/8	10	12.5 ⟨14.1⟩	45	38
VH45BL					193.4 ⟨206.2⟩		80		137								
VH55AL	70	15	23.5	100	185.4 ⟨198.2⟩	75	75	M12×1.75×13	126	55	15	6.5	Rc1/8	11	12.5 ⟨14.1⟩	53	44
VH55BL					223.4 ⟨236.2⟩		95		164								


Notes: 1) Figure inside ⟨ ⟩ is the dimension when equipped with the protector.
2) VH Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
3) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type


Ball slide VAH 30 AL C -KCZ**

- Random-matching ball slide series code: VAH
  - VAH: VH Series random-matching ball slide
- Size: 30
- Ball slide shape code (See page A135.): AL
- Material/surface treatment code (See Table 15.): C
- Design serial number: -**
  - Added to the reference number.
- Accuracy code: KC
  - KC: Normal grade is only available.
- Preload code (See page A137.): Z
  - T: Fine clearance. Z: Slight preload


AL and BL types



AL type

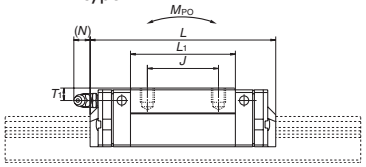


BL type

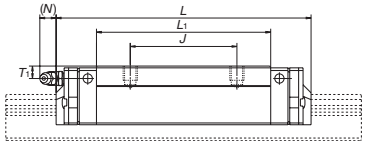

Reference number for rail of random-matching type

Rail V1H 30 1000 L C N - PC Z**

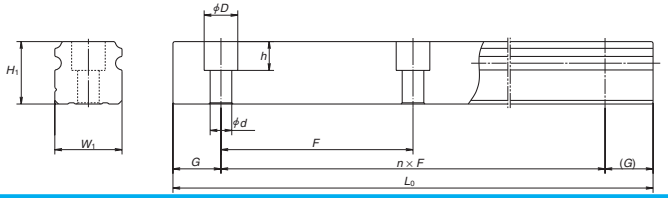- Random-matching rail series code: V1H
  - V1H: VH Series random-matching rail
- Size: 30
- Rail length (mm): 1000
- Rail shape code: L
  - L: Standard
- Material/surface treatment code (See Table 15.): C
- *Butting rail specification: N
  - N: Non-butting. L: Butting specification
  - *Please consult with NSK for butting rail specification.
- Design serial number: -**
  - Added to the reference number.
- Accuracy code: PC
  - PC: Normal grade is only available.
- Preload code (See page A137.): Z
  - T: Fine clearance. Z: Slight preload



Unit: mm

Rail Pitch F	Mounting bolt hole d×D×h	Tapped hole M2×pitch×ℓ2	G (reference)	Max. length L0max. ( ) for stainless	Basic load rating 4)Dynamic [50km] C50(N)	[100km] C100(N)	Static C0 (N)	Static moment (N·m) MRO	MPO One slide	MPO Two slides	MYO One slide	MYO Two slides	Weight Ball slide (kg)	Rail (kg/m)
60	7×11×9	M6×1×12	20	3 960 [3 500]	33 500	26 800	46 000	360	320	1 840	267	1 540	0.46	3.6
					45 500	36 500	71 000	555	725	3 700	610	3 100	0.69	
80	9×14×12	M8×1.25×15	20	4 000 [3 500]	41 000	32 500	51 500	490	350	2 290	292	1 920	0.69	5.2
					61 000	48 500	91 500	870	1 030	5 600	865	4 700	1.16	
80	9×14×12	M8×1.25×17	20	4 000	62 500	49 500	80 500	950	755	4 500	630	3 800	1.2	7.2
					81 000	64 500	117 000	1 380	1 530	8 350	1 280	7 000	1.7	
105	14×20×17	M12×1.75×24	22.5	3 990	107 000	84 500	140 000	2 140	1 740	9 750	1 460	8 150	2.2	12.3
					131 000	104 000	187 000	2 860	3 000	15 600	2 520	13 100	2.9	
120	16×23×20	M14×2×24	30	3 960	158 000	125 000	198 000	3 600	3 000	16 300	2 510	13 700	3.7	16.9
					193 000	153 000	264 000	4 850	5 150	26 300	4 350	22 100	4.7	

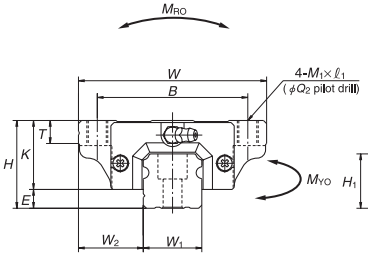
4) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life C_{100}; the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.

VH-EM (High-load type / Standard)
VH-GM (Super-high-load type / Long)


VH 30 1000 EM C 2 - KC Z**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A135.)
- Material/surface treatment code (See Table 15.)
  - C: Special high carbon steel (NSK standard), K: Stainless steel
- Number of ball slides per rail
- Design serial number
  - Added to the reference number.
- Accuracy code (See Table 16.)
- Preload code (See page A137.)
  - 0: Z0, 1: Z1, 3: Z3, T: ZT, Z: ZZ


Front view of EM and GM type




Side view of EM type

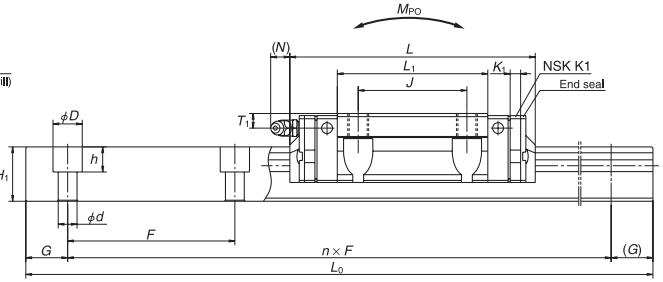

Specification for tapped holes on a rail bottom face



Side view of GM type

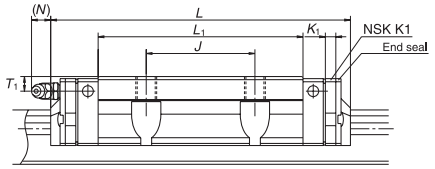

Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	Q_1 × ℓ_1 M_1 × pitch × ℓ_1	Q_2	L_1	K	T	K_1	Grease fitting Hole size	T_1	N	Width W_1	Height H_1
VH15EM	24	4.6	16	47	70.6〈 77〉	38	30	M5×0.8×7	4.4	39	19.4	8	4.5	ϕ3	4.5	1 〈 8.2〉	15	15
VH15GM					89.6〈 96〉					58								
VH20EM	30	5	21.5	63	87.4〈 94.2〉	53	40	M6×1×9.5	5.3	50	25	10	4.5	M6x0.75	5	11.1〈12.3〉	20	18
VH20GM					109.4〈116.2〉					72								
VH25EM	36	7	23.5	70	97 〈104.4〉	57	45	M8×1.25×10	6.8	58	29	11	5	M6x0.75	6	9.6〈12.9〉	23	22
VH25GM					125 〈132.4〉			[M8×1.25×11.5]		86		[12]						
VH30EM	42	9	31	90	117.4〈127.8〉	72	52	M10×1.5×12	8.6	72	33	11	5	M6x0.75	7	11.4〈14.2〉	28	26
VH30GM					143.4〈153.8〉			[M10×1.5×14.5]		98		[15]						
VH35EM	48	9.5	33	100	128.8〈139.2〉	82	62	M10×1.5×13	8.6	80	38.5	12	5.5	M6x0.75	8	10.9〈13.7〉	34	29
VH35GM					162.8〈173.2〉					114								
VH45EM	60	14	37.5	120	161.4〈174.2〉	100	80	M12×1.75×15	10.5	105	46	13	6.5	Rc1/8	10	12.5〈14.1〉	45	38
VH45GM					193.4〈206.2〉					137								
VH55EM	70	15	43.5	140	185.4〈198.2〉	116	95	M14×2×18	12.5	126	55	15	6.5	Rc1/8	11	12.5〈14.1〉	53	44
VH55GM					223.4〈236.2〉					164								


Notes: 1) Figure inside 〈 〉 is the dimension when equipped with the protector.
2) Figure inside [ ] is applied to stainless products.
3) VH Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
4) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type


Ball slide **VAH 30 EM C -**KCZ**

- Random-matching ball slide series code
  - VAH: VH Series random-matching ball slide
- Size
- Ball slide shape code (See page A135.)
- Material/surface treatment code (See Table 15.)
- Preload code (See page A137.)
  - T: Fine clearance. Z: Slight preload
- Accuracy code: KC
  - KC: Normal grade is only available.
- Design serial number
  - Added to the reference number.


EM and GM types



EM type




GM type



Reference number for rail of random-matching type

Rail **V1H30 1000 L C N -** PC Z**

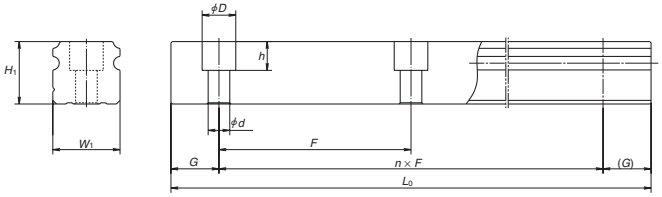- Random-matching rail series code
  - V1H: VH Series random-matching rail
- Size
- Rail length (mm)
- Rail shape code: L
  - L: Standard
- Material/surface treatment code (See Table 15.)
- *Butting rail specification
  - N: Non-butting. L: Butting specification
  - *Please consult with NSK for butting rail specification.
- Design serial number
  - Added to the reference number.
- Accuracy code: PC
  - PC: Normal grade is only available.
- Preload code (See page A137.)
  - T: Fine clearance. Z: Slight preload



Unit: mm

Rail Pitch F	Mounting bolt hole d × D × h	Tapped hole M_2 × pitch × ℓ_2	G (reference)	Max. length L_{0max}. ( ) for stainless	Basic load rating [5]Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (kg)	Rail (kg/m)
60	4.5×7.5×5.3	M5×0.8×8	20	2 000 [1 800]	14 200	11 300	20 700	108	94.5	575	79.5	480	0.17	1.6
					18 100	14 400	32 000	166	216	1 150	181	965	0.25	
60	6×9.5×8.5	M6×1×10	20	3 960 [3 500]	23 700	18 800	32 500	219	185	1 140	155	955	0.45	2.6
					30 000	24 000	50 500	340	420	2 230	355	1 870	0.65	
60	7×11×9	M6×1×12	20	3 960 [3 500]	33 500	26 800	46 000	360	320	1 840	267	1 540	0.63	3.6
					45 500	36 500	71 000	555	725	3 700	610	3 100	0.93	
80	9×14×12	M8×1.25×15	20	4 000 [3 500]	47 000	37 500	63 000	600	505	3 150	425	2 650	1.2	5.2
					61 000	48 500	91 500	870	1 030	5 600	865	4 700	1.6	
80	9×14×12	M8×1.25×17	20	4 000	62 500	49 500	80 500	950	755	4 500	630	3 800	1.7	7.2
					81 000	64 500	117 000	1 380	1 530	8 350	1 280	7 000	2.4	
105	14×20×17	M12×1.75×24	22.5	3 990	107 000	84 500	140 000	2 140	1 740	9 750	1 460	8 150	3.0	12.3
					131 000	104 000	187 000	2 860	3 000	15 600	2 520	13 100	3.9	
120	16×23×20	M14×2×24	30	3 960	158 000	125 000	198 000	3 600	3 000	16 300	2 510	13 700	5.0	16.9
					193 000	153 000	264 000	4 850	5 150	26 300	4 350	22 100	6.5	

5) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}: the basic dynamic load rating for 50 km rated fatigue life C_{100}: the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.

NSK Data Sheet for Linear Guides in Contaminated Environments

[Example]

(Please copy) 1／1

Model: Graphite milling machine Location: Table axis

1. Operating Conditions

Operating Conditions	a) Ball or Roller slide motion b) Rail motion	Mounting Orientation	a) Vertical (b) Horizontal c) Wall d) Upside-down e) Inclined f) Other
Stroke in Normal Use	200 [mm] (Please indicate operating pattern)		
Lubricant	(a) Grease (Brand: NSK AS2 grease) b) Oil (Brand:)	Lubricating Method	a) Automatic (b) Grease gun (cm^3/ min)
Operating Duration	2 years months		

2. Linear Guide Environment (Accessories & Contamination)

Contaminant	Graphite powder	Contaminant Size	Particle size 20 – 60μm
Cause of Contamination	Falls evenly on the rail surface. (Please reference with photographs)		
Countermeasures (For already assembled parts, complete after inspection)	a) Telescopic cover (b) Bellow (c) Dust collector ~~d) Dust-resistant lubricant~~ e) Other ( ) (Please supply drawings to demonstrate dust countermeasures)		

3. Linear Guide Dimensions

Model	VH25AN	Rail Length	540 mm	No. of Slides/Rail	2	Accuracy Grade	P6
Preload	Z1	Max. Speed	20 mm/sec	Dust-Proof Accessories	a) Double seal (b) Mounting hole cap c) Protector d) Bellow		

Remarks

4. Durability Test

Durability test → (Scheduled)

→ Not scheduled (Reason:)

Linear Guide Use in Contaminated Environments

※Please read the below and tick the relevant boxes

- ☑ An evaluation test result of the special dust-resistant seal which NSK carried out is one case by a particular examination condition (alien substance environment and operating conditions). I accept that the special dust-resistant seal is unable to completely prevent contamination in such an environment and that life may be affected.
- ☑ In order to improve wear life in contaminated environments, NSK require **dust-proof accessories (covers, lubricating oil, dust collectors, etc)** in addition to the recommended seal exchange.
- ☑ Linear guide wear life is greatly impacted by contamination entering the slide, offset load from misalignment, as well as lubricating condition. **The final durability comes to need the evaluation confirmation with the actual machine.**

Company Name:	Date:	NSK Ltd. Sales Representative	NSK Ltd. Sales Manager
Department:	Name:		
Address:	Tel: Fax:	Sign	Sign

NSK Ltd.

NSK Data Sheet for Linear Guides in Contaminated Environments

(Please copy) 1／1

Model: Location:

1. Operating Conditions

Operating Conditions	a) Ball or Roller slide motion b) Rail motion	Mounting Orientation	a) Vertical b) Horizontal c) Wall d) Upside-down e) Inclined f) Other
Stroke in Normal Use	[mm] (Please indicate operating pattern)		
Lubricant	a) Grease (Brand:) b) Oil (Brand:)	Lubricating Method	a) Automatic b) Grease gun (cm^3/ min)
Operating Duration	years months		

2. Linear Guide Environment (Accessories & Contamination)

Contaminant		Contaminant Size	Particle size -
Cause of Contamination	(Please reference with photographs)		
Countermeasures (For already assembled parts, complete after inspection)	a) Telescopic cover b) Bellow c) Dust collector d) Dust-resistant lubricant e) Other ( ) (Please supply drawings to demonstrate dust countermeasures)		

3. Linear Guide Dimensions

Model		Rail Length	mm	No. of Slides/Rail		Accuracy Grade	
Preload		Max. Speed	mm/sec	Dust-Proof Accessories	a) Double seal b) Mounting hole cap c) Protector d) Bellow		

Remarks

4. Durability Test

Durability test → Scheduled

→ Not scheduled (Reason:)

Linear Guide Use in Contaminated Environments


※Please read the below and tick the relevant boxes

- ☐ An evaluation test result of the special dust-resistant seal which NSK carried out is one case by a particular examination condition (alien substance environment and operating conditions). I accept that the special dust-resistant seal is unable to completely prevent contamination in such an environment and that life may be affected.
- ☐ In order to improve wear life in contaminated environments, NSK require **dust-proof accessories (covers, lubricating oil, dust collectors, etc)** in addition to the recommended seal exchange.
- ☐ Linear guide wear life is greatly impacted by contamination entering the slide, offset load from misalignment, as well as lubricating condition. **The final durability comes to need the evaluation confirmation with the actual machine.**

Company Name:	Date:	NSK Ltd. Sales Representative	NSK Ltd. Sales Manager
Department:	Name:		
Address:	Tel: Fax:	Sign	Sign

NSK Ltd.

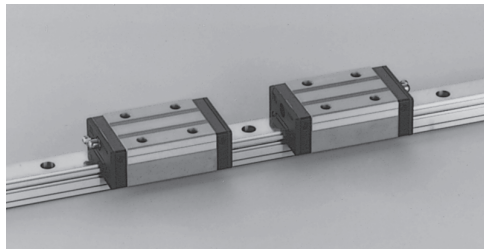A-5-1.3 NS Series



1. Features

(1) Improve rating life dramatically

Based on the LS series characterized by reliability and performance, a significant increase in durability has been attained. New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased.

As compared with the LS Series, the load rating capacity of the NS series has increased to 1.3 times, while the life span has increased to twice[*1]. These features enable you to design a machine with a longer life and downsize the machine. Thus, your design capability is greatly enhanced.

*1: Representative values of series.

(2) Ball circulation path with excellent high-speed property

By reexamining the design practice for the ball circulation path, we have attained smooth ball circulation and reduced noise level. So, NS series is suited for high-speed applications compared with the LS Series.

(3) All mounting dimensions are the same as those for the LS and SS Series

Regarding the mounting dimensions (mounting parts' dimensions), such as the mounting height, mounting width, mounting hole diameter/pitch of the linear guide, etc., the mounting dimensions of the NS Series remain the same as those of the conventional LS series and SS series. So, the new NS Series linear guides can be used without making any design changes.

(4) High self aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, and thus reducing moment rigidity. This increases the capacity to absorb errors in installation.

(5) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, and thus increasing load carrying capacity as well as rigidity against the load in vertical direction.

(6) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in **Fig. 2**. The vertical load is usually carried by top 2 rows, where balls are contacting at two points. Because of this design, the bottom rows will carry the load when a large impact load is applied as shown in **Fig. 3**. This assures high resistance to the impact load.

(7) High accuracy

As showing in **Fig. 4**, fixing the measuring rollers to the ball grooves is simple thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(8) Easy to handle, and designed with safety in mind.

Balls are retained in the retainer and do not fall out when the ball slide is withdrawn from the rail.

(9) Abundant models and sizes come in series.

Each size of NS Series has several ball slide models, rendering the linear guide available for numerous uses. The NS Series also has standardized long stainless- steel rail (maximum 3 500 mm).

(10) Fast delivery

Lineup of random-matching rails and ball slides supports and facilitates fast delivery.

High precision grade and medium preload types are also available in random matching. (Special high-carbon steel products)




Fig. 1 NS Series




Fig. 2 Enlarged illustration of the offset Gothic arch groove

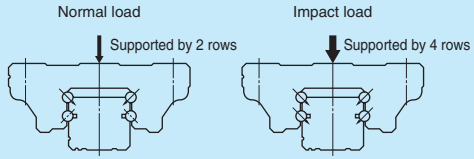


Fig. 3 When load is applied

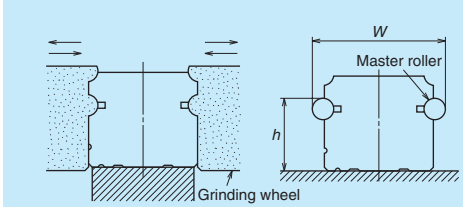








Fig. 4 Rail-grinding and measuring

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)	
		Medium-load type	High-load type
		Standard	Long
AL CL		CL 	AL 
EM JM		JM 	EM 

Note: High-precision grade and medium preload of random-matching type are not applicable to EL, JL, FL and KL models.

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm) over	or less	Accuracy grade: Preloaded assembly (not random matching) Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN	Random-matching type High precision PH	Normal grade PC
–	50	2	2	2	4	5	2	5
50	80	2	2	3	4	5	3	5
80	125	2	2	3	4	5	3	5
125	200	2	2	3.5	5	6	3.5	6
200	250	2	2.5	4.5	6	7.5	4.5	7.5
250	315	2	2.5	5	6.5	8.5	5	8.5
315	400	2	3	5.5	7	9.5	5.5	9.5
400	500	2	3	6	7.5	11	6	11
500	630	2	3.5	6.5	8.5	12	6.5	12
630	800	2	4	7	9.5	13	7	13
800	1 000	2.5	4.5	7.5	10	15	7.5	15
1 000	1 250	3	5	8.5	12	16	8.5	16
1 250	1 600	3.5	5.5	9.5	13	17	9.5	17
1 600	2 000	4	6.5	11	14	19	11	19
2 000	2 500	4.5	7.5	12	16	21	12	21
2 500	3 150	5.5	8.5	13	18	23	13	23
3 150	4 000	6	9.5	14	19	25	14	25

(2) Accuracy standard

The preloaded assembly has five accuracy grades; Ultra precision P3, Super precision P4, High precision P5, Precision P6 and Normal PN grades, while the random-matching type has High-precision PH and Normal PC grade.

• Tolerance of preloaded assembly

Table 2

Unit: μm

Characteristics \ Accuracy grade	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H Variation of H (All ball slides on a set of rails)	±8 3	±10 5	±20 7	±40 15	±80 25
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All ball slides on reference rail)	±10 3	±15 7	±25 10	±50 20	±100 30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	See **Table 1**, **Fig. 5** and **Fig. 6**				

• Tolerance of random-matching type

Table 3

Unit: μm

Characteristics \ Model No.	High precision grade PH	Normal grade PC
Mounting height H	±20	±20
Variation of mounting height H	15①	15①
	30②	30②
Mounting width W_2 or W_3	±30	±30
Variation of mounting width W_2 or W_3	20	25
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	See **Table 1**, **Fig. 5** and **Fig. 6**	


Notes: ① Variation on the same rail
② Variation on multiple rails

(3) Combinations of accuracy and preload

Table 4

		Accuracy grade: Ultra precision	Super precision	High precision	Precision grade	Normal grade	High precision	Normal grade
Without NSK K1 lubrication unit		P3	P4	P5	P6	PN	PH	PC
With NSK K1 lubrication unit		K3	K4	K5	K6	KN	KH	KC
With NSK K1 for food and medical equipment		F3	F4	F5	F6	FN	FH	FC
Preload	Fine clearance Z0	○	○	○	○	○	—	—
	Slight preload Z1	○	○	○	○	○	—	—
	Medium preload Z3	○	○	○	○	—	—	—
	Random-matching type with fine clearance ZT	—	—	—	—	—	—	○
	Random-matching type with slight preload ZZ	—	—	—	—	—	○	○
	Random-matching type with medium preload ZH	—	—	—	—	—	○	○

(4) Assembled accuracy

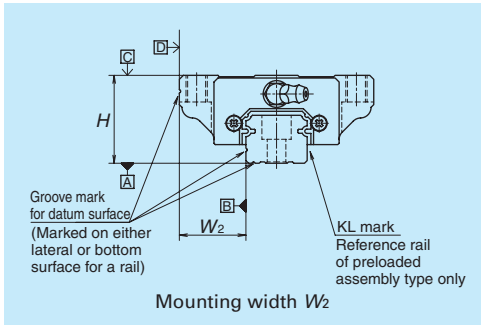


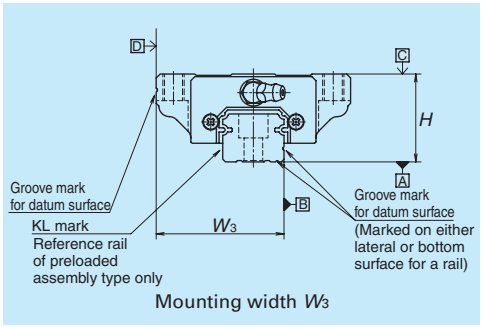


Fig. 5 Special high carbon steel

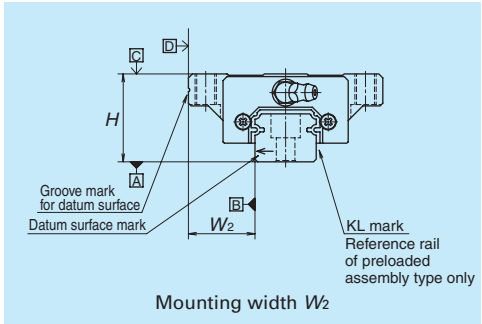

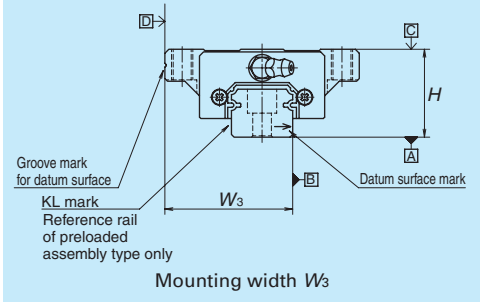


Fig. 6 Stainless steel

(5) Preload and rigidity

We offer six levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with random-matching type of Medium preload ZH, Fine clearance ZT and Slight preload ZZ.

• Preload and rigidity of preloaded assembly

Table 5

	Model No.	Preload (N)		Rigidity (N/μm)			
				Vertical direction		Lateral direction	
		Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3
High-load type	NS15 AL, EM	69	390	127	226	88	167
	NS20 AL, EM	88	540	147	284	108	206
	NS25 AL, EM	147	880	206	370	147	275
	NS30 AL, EM	245	1 370	255	460	186	345
	NS35 AL, EM	345	1 960	305	550	216	400
Medium-load type	NS15 CL, JM	49	294	78	147	59	108
	NS20 CL, JM	69	390	108	186	78	137
	NS25 CL, JM	98	635	127	235	88	177
	NS30 CL, JM	147	980	147	275	108	206
	NS35 CL, JM	245	1 370	186	335	137	245

Note: Clearance for Fine clearance Z0 is 0 to 3μm. Therefore, preload is zero.
However, Z0 of PN grade is 0 to 15μm.

• Clearance and preload of random-matching type

Table 6

Unit: μm

Model No.	Fine clearance ZT	Slight preload ZZ	Medium preload ZH
NS15	–4 — 15	–4 — 0	–7 — –3
NS20	–4 — 15	–4 — 0	–7 — –3
NS25	–5 — 15	–5 — 0	–9 — –4
NS30	–5 — 15	–5 — 0	–9 — –4
NS35	–5 — 15	–6 — 0	–10 — –4

Note: Minus sign denotes that a value is an amount of preload (elastic deformation of balls).

4. Maximum rail length

Table 7 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 7 Length limitations of rails

Unit: mm

Series	Size / Material	15	20	25	30	35
NS	Special high carbon steel	2 920	3 960	3 960	4 000	4 000
	Stainless steel	1 800	3 500	3 500	3 500	3 500

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

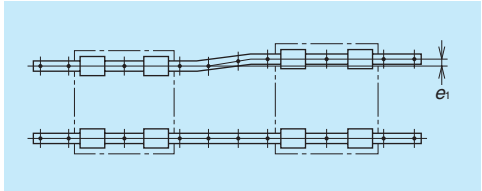


Fig. 7

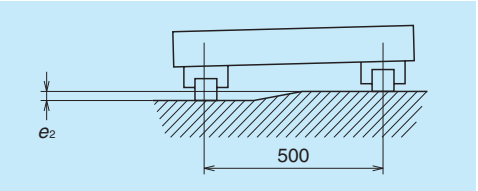


Fig. 8

Table 8

Unit: μm

Value	Preload	Model No. NS15	NS20	NS25	NS30	NS35
Permissible values of parallelism in two rails e_1	Z0, ZT	20	22	30	35	40
	Z1, ZZ	15	17	20	25	30
	Z3, ZH	12	15	15	20	25
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	375 μm/500 mm				
	Z1, ZZ, Z3, ZH	330 μm/500 mm				

(2) Shoulder height of the mounting surface and corner radius r




Fig. 9 Shoulder for the rail datum surface




Fig. 10 Shoulder for the ball slide datum surface

Table 9

Unit: mm

Model No.	Corner radius (maximum) r_a	r_b	Shoulder height H'	H''
NS15	0.5	0.5	4	4
NS20	0.5	0.5	4.5	5
NS25	0.5	0.5	5	5
NS30	0.5	0.5	6	6
NS35	0.5	0.5	6	6

6. Maximum allowable speed

An indication of the standard maximum allowable speed aiming at 10,000km operation with NS series under normal conditions is shown in Table 10. However, the maximum allowable speed can be affected by accuracy of installation, operating temperature, external load, etc. If the operation is made exceeding the permissible distance and speed, please consult NSK.

Table 10 Maximum allowable speed Unit: m/min

Series / Size	15	20	25	30	35
NS	300				

7. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 11 and **Table 11** show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

When you require stainless lubrication accessories, please ask NSK.

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on a side of end cap for an option. (**Fig. 12**)

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

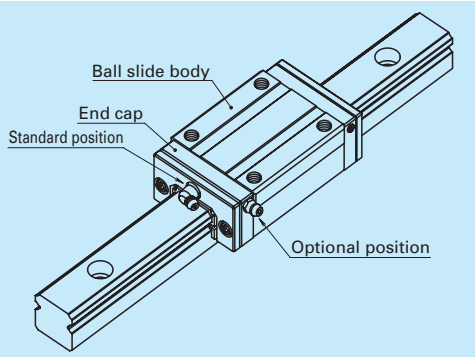


Fig. 12 Mounting position of lubrication accessories

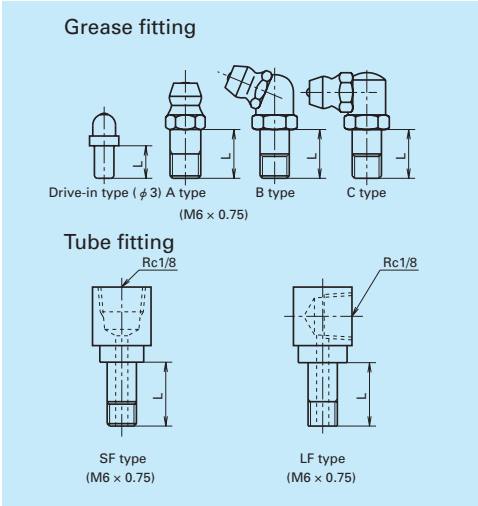


Fig. 11 Grease fitting and tube fitting

Table 11 Unit: mm

Model No.	Dust-proof specification	Dimension L		
		Grease fitting /Drive-in type	Tube fitting SF type	Tube fitting LF type
NS15	Standard	5	–	–
	With NSK K1	10	–	–
	Double seal	*	–	–
	Protector	*	–	–
NS20	Standard	5	–	–
	With NSK K1	10	–	–
	Double seal	8	–	–
	Protector	8	–	–
NS25	Standard	5	6	6
	With NSK K1	12	11	11
	Double seal	10	9	9
	Protector	10	9	9
NS30	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	10	11
NS35	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	10	11

*) A connector is required for this model. Please contact NSK.

8. Dust-proof components

(1) Standard specification

The NS Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.

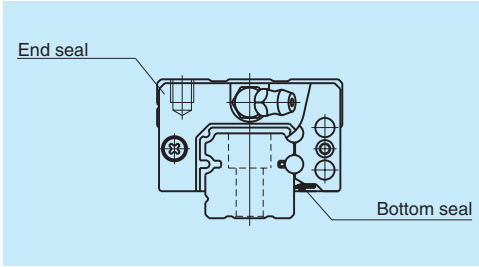


Fig. 13

Table 12 Seal friction per ball slide (maximum value) Unit: N

Series \ Size	15	20	25	30	35
NS	8	9	9	9	10

(2) NSK K1™ lubrication unit

Table 13 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

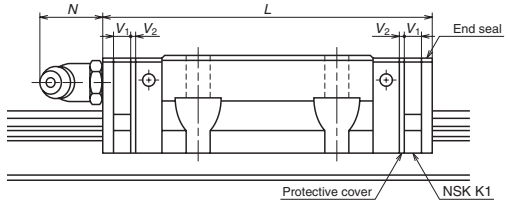


Table 13 Dimensions when equipped with the NSK K1 lubrication unit Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V_1	Protective cover thickness V_2	Protruding area of the grease fitting N
NS15	Standard	AL, EM	56.8	66.4	4.0	0.8	(5)
	Short	CL, JM	40.4	50			
NS20	Standard	AL, EM	65.2	75.8	4.5	0.8	(14)
	Short	CL, JM	47.2	57.8			
NS25	Standard	AL, EM	81.6	92.2	4.5	0.8	(14)
	Short	CL, JM	59.6	70.2			
NS30	Standard	AL, EM	96.4	108.4	5.0	1.0	(14)
	Short	CL, JM	67.4	79.4			
NS35	Standard	AL, EM	108	121	5.5	1.0	(14)
	Short	CL, JM	77	90			

Note: When equipped with NSK K1, ball slide length = (standard ball slide length) + (V_1 thickness of single K1 unit) × (number of K1 units) + (V_2 thickness of the protective cover) × 2.

(3) Double seal

Use a double seal set as showing in **Table 14**, when installing an extra seal to completed standard products. (**Fig. 14**)
When installing a grease fitting after the installation of double seals, a connector as showing **Fig.14** is required.

(4) Protector

Use a protector set as showing **Table 15**, when installing a protector to completed standard products. (**Fig.15**)
When installing a grease fitting after the installation of protectors, a connector as showing **Fig.15** is required.

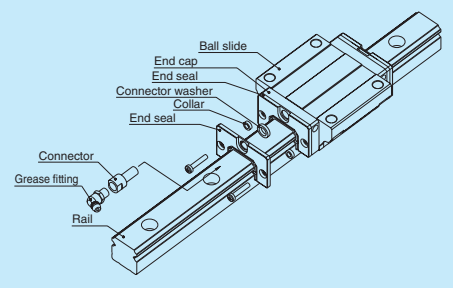


Fig. 14 Double seal

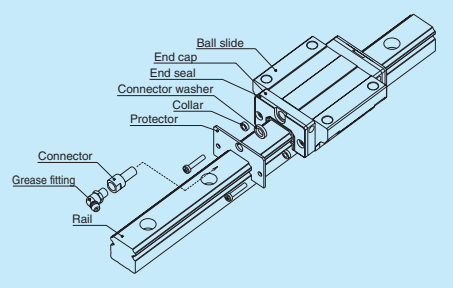


Fig. 15 Protector

Table 14 Double-seal set

Model No.	Reference No.		Increased thickness V_3 (mm)
	Without connector	With connector	
NS15	LS15WS-01	*	2.8
NS20	LS20WS-01	LS20WSC-01	2.5
NS25	LS25WS-01	LS25WSC-01	2.8
NS30	LS30WS-01	LS30WSC-01	3.6
NS35	LS35WS-01	LS35WSC-01	3.6

Table 15 Protector set

Model No.	Reference No.		Increased thickness V_4 (mm)
	Without connector	With connector	
NS15	LS15PT-01	*	3
NS20	LS20PT-01	LS20PTC-01	2.7
NS25	LS25PT-01	LS25PTC-01	3.2
NS30	LS30PT-01	LS30PTC-01	4.2
NS35	LS35PT-01	LS35PTC-01	4.2

*) For installation of a connector to a drive-in type grease fitting, contact NSK.

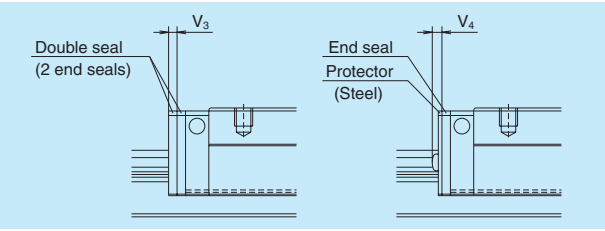


Fig. 16

(5) Cap to plug the rail mounting bolt hole

Table 16 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
NS15	M3	LG-CAP/M3	20
NS15	M4	LG-CAP/M4	20
NS20	M5	LG-CAP/M5	20
NS25, NS30	M6	LG-CAP/M6	20
NS35	M8	LG-CAP/M8	20

(6) Inner seal

Inner seal is only available for the models shown below.

Table 17

Series	Model No.
NS	NS20, NS25, NS30, NS35


(7) Bellows

- A bellows fastener kit, which includes one of bellows faster, two of M_1 set screws, two of M_2 set screws, and two collars for M_2 set screws as showing Fig. 7.7 on page A55, is supplied with bellows for the ends.
- Middle bellows are supplied with four set screws and four collars.
- Use a bellows fastener kit as showing **Table 18**, when installing bellows to completed standard products.
- When NSK K1, double seals or protectors are used, the set screws of bellows fastener kit are unable to use.
  Please contact NSK for details.
- Bellows fastener is available only for the horizontal mounting positions. For other mounting positions, sliding plate is required (see **Fig. 7.10** on page A56).
  For fixing to the rail, make tap holes to the rail end surface. Fix the bellows mounting plate to the rail end surface through these tap holes by using a machine screw. NSK processes a tap hole to the rail end face when ordered with a linear guide.

Table 18 Bellows fastner kit reference No.

Model No.	Kit reference No.
NS15	LS15FS-01
NS20	LS20FS-01
NS25	LS25FS-01
NS30	LS30FS-01
NS35	LS35FS-01

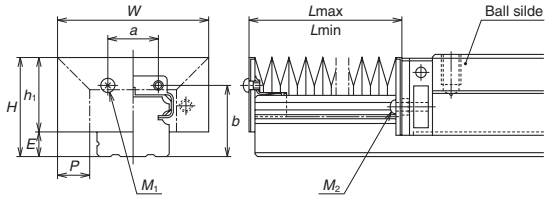Dimension tables of bellows
NS Series



Bellows reference number

J A S 15 L 08

- J: Bellows
- A: Bellows for the ends
- B: Middle bellows
- S: Bellows for NS series
- 15: Size number of linear guide
- L: Low type
- 08: Number of BL (fold number)

Fig. 17 Dimensions of bellows

Table 19 Dimensions of bellows Unit: mm

Model No.	*H*	h_1	*E*	*W*	*P*	*a*	*b*	BL minimum length	M_1 Tap x depth	M_2 Tap x depth
JAS15L	23.5	18.9	4.6	43	10	8	16.5	17	M3 × 5	M3 × 14
JAS20L	27	21	6	48	10	13	19.7	17	M3 × 5	M2.5 × 14
JAS25L	32	25	7	51	10	15	23.2	17	M3 × 5	M3 × 18
JAS30L	41	32	9	66	15	16	29	17	M4 × 6	M4 × 19
JAS35L	47	36.5	10.5	72	15	22	33.5	17	M4 × 6	M4 × 22

Table 20 Numbers of folds (BL) and lengths of bellows Unit: mm


Model No.	Number of BL	2	4	6	8	10	12	14	16	18	20
	L_{min}	34	68	102	136	170	204	238	272	306	340
JAS15L	Stroke	106	212	318	424	530	636	742	848	954	1 060
	L_{max}	140	280	420	560	700	840	980	1 120	1 260	1 400
JAS20L	Stroke	106	212	318	424	530	636	742	848	954	1 060
	L_{max}	140	280	420	560	700	840	980	1 120	1 260	1 400
JAS25L	Stroke	106	212	318	424	530	636	742	848	954	1 060
	L_{max}	140	280	420	560	700	840	980	1 120	1 260	1 400
JAS30L	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L_{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
JAS35L	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L_{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100

Note: The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of even number BL on the both side, then by dividing the sum by 2.

9. Reference number


Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

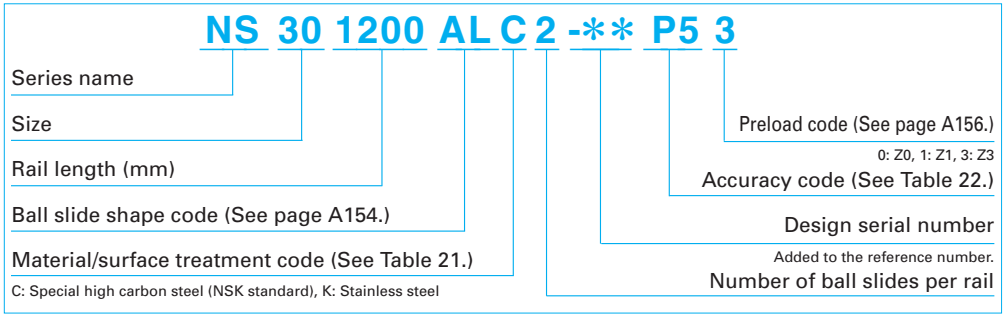(1) Reference number for preloaded assembly




(2) Reference number for random-matching type

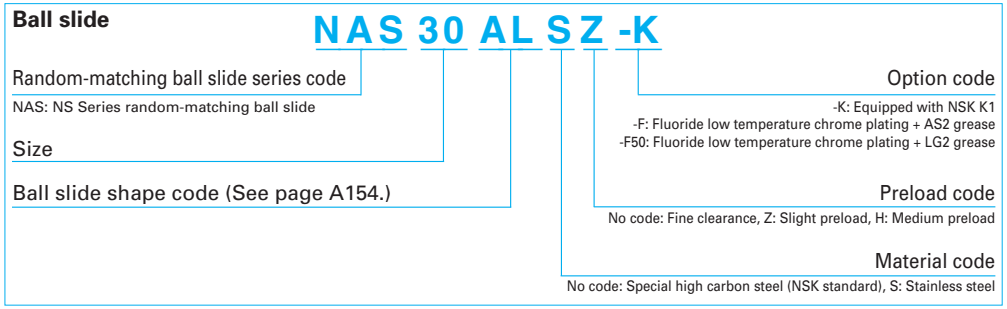Ball slide



Rail

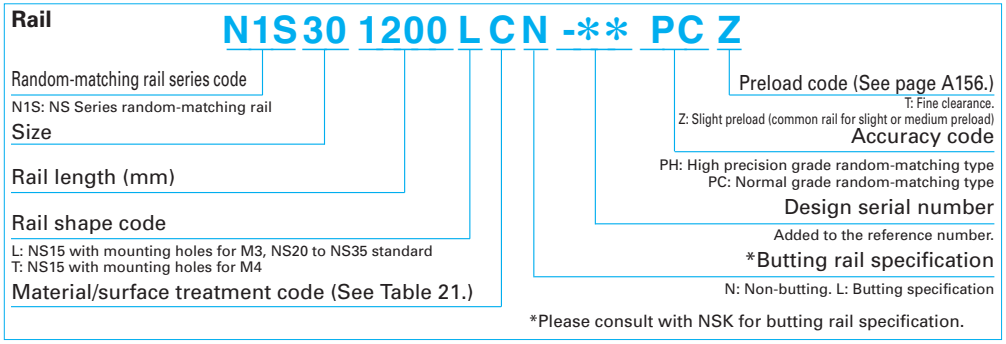

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only preload codes of "fine clearance T" and "slight preload Z" are available (refer to page A156).
Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 21 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
K	Stainless steel
D	Special high carbon steel with surface treatment
H	Stainless steel with surface treatment
Z	Other, special

Note: High-precision grade and medium preload of random-matching type are not available in stainless steel.

Table 22 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
Ultra precision grade	P3	K3	F3
Super precision grade	P4	K4	F4
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN
High precision grade (random-matching type)	PH	KH	FH
Normal grade (random-matching type)	PC	KC	FC


Note: Refer to pages A38 and A61 for NSK K1 lubrication unit.

10. Dimensions
NS-CL (Medium-load type / Short)
NS-AL (High-load type / Standard)


NS 30 1200 AL C 2 - ** PC Z**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A154.)
- Material/surface treatment code (See Table 21.)
  C: Special high carbon steel (NSK standard), K: Stainless steel
- Number of ball slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 22.)
- Preload code (See page A156.)
  0: Z0, 1: Z1, 3: Z3, T: ZT, Z: ZZ, H: ZH


Front view of AL and CL type



Side view of AL type

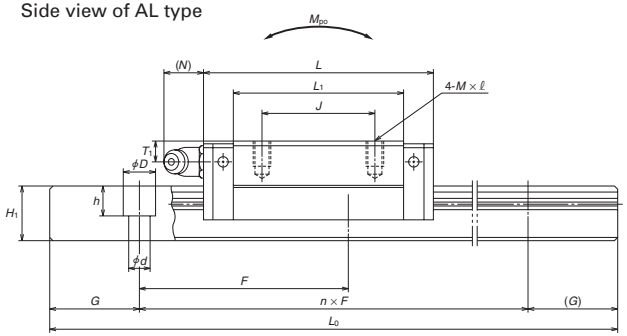

Side view of CL type



Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	M × pitch × ℓ	L_1	K	T	Grease fitting Hole size	T_1	N	Width W_1	Height H_1
NS15CL	24	4.6	9.5	34	40.4	26	—	M4×0.7×6	23.6	19.4	10	ϕ3	6	3	15	12.5
NS15AL					56.8		26		40							
NS20CL	28	6	11	42	47.2	32	—	M5×0.8×7	30	22	12	M6×0.75	5.5	11	20	15.5
NS20AL					65.2		32		48							
NS25CL	33	7	12.5	48	59.6	35	—	M6×1×9	38	26	12	M6×0.75	7	11	23	18
NS25AL					81.6		35		60							
NS30CL	42	9	16	60	67.4	40	—	M8×1.25×12	42	33	13	M6×0.75	8	11	28	23
NS30AL					96.4		40		71							
NS35CL	48	10.5	18	70	77	50	—	M8×1.25×12	49	37.5	14	M6×0.75	8.5	11	34	27.5
NS35AL					108		50		80							


Notes: 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type


Ball slide **NAS 30 AL S Z -K**

- Random-matching ball slide series code
  NAS: NS Series random-matching ball slide
- Size
- Ball slide shape code (See page A154.)
- Material code
  No code: Special high carbon steel (NSK standard), S: Stainless steel
- Preload code
  No code: Fine clearance, Z: Slight preload, H: Medium preload
- Option code
  -K: Equipped with NSK K1
  -F: Fluoride low temperature chrome plating + AS2 grease
  -F50: Fluoride low temperature chrome plating + LG2 grease


AL and CL types



AL type

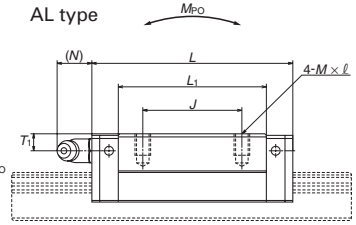


CL type

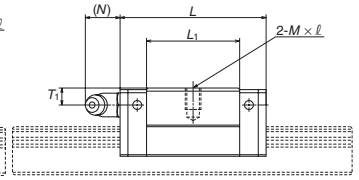

Reference number for rail of random-matching type

Rail **N1S 30 1200 L C N -** ** PC Z**

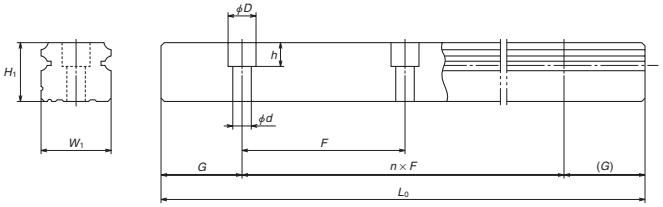- Random-matching rail series code
  N1S: NS Series random-matching rail
- Size
- Rail length (mm)
- Rail shape code
  L: NS15 with mounting holes for M3, NS20 to NS35 standard
  T: NS15 with mounting holes for M4
- Material/surface treatment code (See Table 21.)
- *Butting rail specification
  N: Non-butting. L: Butting specification
  *Please consult with NSK for butting rail specification.
- Design serial number
  Added to the reference number.
- Accuracy code
  PH: High-precision grade
  PC: Normal grade
- Preload code (See page A156.)
  T: Fine clearance.
  Z: Slight preload(common rail for medium preload)



Unit: mm

Rail Pitch F	Mounting bolt hole d × D × h	G (reference)	Max. length L_{0max}. ( ) for stainless	Basic load rating 2)Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (kg)	Rail (kg/m)
60	*4.5×7.5×5.3	20	2 920	7 250	5 750	9 100	45.5	24.5	196	20.5	165	0.14	1.4
	3.5×6×4.5		(1 800)	11 200	8 850	16 900	84.5	77	470	64.5	395	0.20	
60	6×9.5×8.5	20	3 960	10 600	8 400	13 400	91.5	46.5	330	39	279	0.19	2.3
			(3 500)	15 600	12 400	23 500	160	133	755	111	630	0.28	
60	7×11×9	20	3 960	17 700	14 000	20 800	164	91	655	76	550	0.34	3.1
			(3 500)	26 100	20 700	36 500	286	258	1 470	217	1 230	0.51	
80	7×11×9	20	4 000	24 700	19 600	29 600	282	139	1 080	116	905	0.58	4.8
			(3 500)	38 000	30 000	55 000	520	435	2 650	365	2 220	0.85	
80	9×14×12	20	4 000	34 500	27 300	40 000	465	220	1 670	185	1 400	0.86	7.0
			(3 500)	52 500	42 000	74 500	865	695	4 000	580	3 350	1.3	

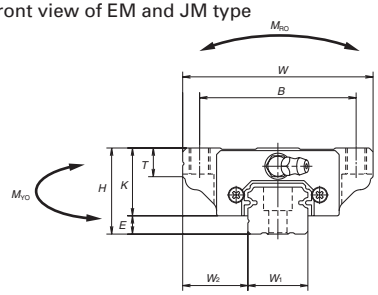
2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life C_{100}; the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.
3) High-precision grade and medium preload of random-matching type are available for special high carbon steel products.
* Standard mounting hole of NS15 rail is for M4 bolts (Hole size: 4.5 × 7.5 × 5.3).
If you require mounting hole for M3 bolts (Hole size: 3.5 × 6 × 4.5), please specify when ordering.

NS-JM (Medium-load type / Short)
NS-EM (High-load type / Standard)


NS 30 1200 EM C 2 - ** PC Z**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A154.)
- Material/surface treatment code (See Table 21.)
  C: Special high carbon steel (NSK standard), K: Stainless steel
- Number of ball slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 22.)
- Preload code (See page A156.)
  0: Z0, 1: Z1, 3: Z3, T: ZT, Z: ZZ, H: ZH


Front view of EM and JM type



Side view of EM type

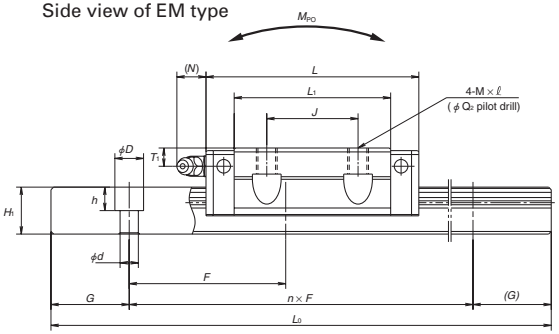

Side view of JM type



Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	M × pitch × ℓ	Q_2	L_1	K	T	Grease fitting Hole size	T_1	N	Width W_1	Height H_1
NS15JM	24	4.6	18.5	52	40.4	41	—	M5×0.8×7	4.4	23.6	19.4	8	ϕ3	6	3	15	12.5
NS15EM					56.8		26			40							
NS20JM	28	6	19.5	59	47.2	49	—	M6×1×9	5.3	30	22	10	M6×0.75	5.5	11	20	15.5
NS20EM					65.2		32	(M6×1×9.5)		48							
NS25JM	33	7	25	73	59.6	60	—	M8×1.25×10	6.8	38	26	11	M6×0.75	7	11	23	18
NS25EM					81.6		35	(M8×1.25×11.5)		60		(12)					
NS30JM	42	9	31	90	67.4	72	—	M10×1.5×12	8.6	42	33	11	M6×0.75	8	11	28	23
NS30EM					96.4		40	(M10×1.5×14.5)		71		(15)					
NS35JM	48	10.5	33	100	77	82	—	M10×1.5×13	8.6	49	37.5	12	M6×0.75	8.5	11	34	27.5
NS35EM					108		50	(M10×1.5×14.5)		80		(15)					


Notes: 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.
2) Parenthesized dimensions are for items made of stainless steel.

Reference number for ball slide of random-matching type


Ball slide **NAS 30 EM S Z -K**

- Random-matching ball slide series code
  NAS: NS Series random-matching ball slide
- Size
- Ball slide shape code (See page A154.)
- Option code
  -K: Equipped with NSK K1
  -F: Fluoride low temperature chrome plating + AS2 grease
  -F50: Fluoride low temperature chrome plating + LG2 grease
- Preload code
  No code: Fine clearance, Z: Slight preload, H: Medium preload
- Material code
  No code: Special high carbon steel (NSK standard), S: Stainless steel


EM and JM types



EM type

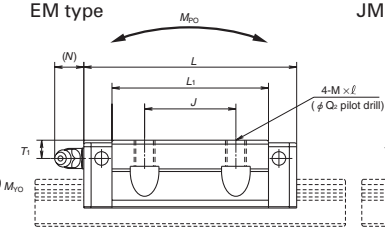


JM type



Reference number for rail of random-matching type

Rail **N1S 30 1200 L C N -** ** PC Z**

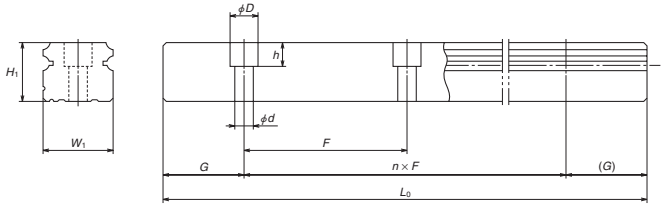- Random-matching rail series code
  N1S: NS Series random-matching rail
- Size
- Rail length (mm)
- Rail shape code
  L: NS15 with mounting holes for M3, NS20 to NS35 standard
  T: NS15 with mounting holes for M4
- Material/surface treatment code (See Table 21.)
- *Butting rail specification
  N: Non-butting. L: Butting specification
  *Please consult with NSK for butting rail specification.
- Design serial number
  Added to the reference number.
- Accuracy code
  PH: High-precision grade
  PC: Normal grade
- Preload code (See page A156.)
  T: Fine clearance.
  Z: Slight preload(common rail for medium preload)




Unit: mm

Rail Pitch F	Mounting bolt hole $d \times D \times h$	G (reference)	Max. length $L_{0max.}$ ( ) for stainless	Basic load rating [3]Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (kg)	Rail (kg/m)
60	*4.5×7.5×5.3	20	2 920	7 250	5 750	9 100	45.5	24.5	196	20.5	165	0.17	1.4
	3.5×6×4.5		(1 800)	11 200	8 850	16 900	84.5	77	470	64.5	395	0.26	
60	6×9.5×8.5	20	3 960	10 600	8 400	13 400	91.5	46.5	330	39	279	0.24	2.3
			(3 500)	15 600	12 400	23 500	160	133	755	111	630	0.35	
60	7×11×9	20	3 960	17 700	14 000	20 800	164	91	655	76	550	0.44	3.1
			(3 500)	26 100	20 700	36 500	286	258	1 470	217	1 230	0.66	
80	7×11×9	20	4 000	24 700	19 600	29 600	282	139	1 080	116	905	0.76	4.8
			(3 500)	38 000	30 000	55 000	520	435	2 650	365	2 220	1.2	
80	9×14×12	20	4 000	34 500	27 300	40 000	465	220	1 670	185	1 400	1.2	7
			(3 500)	52 500	42 000	74 500	865	695	4 000	580	3 350	1.7	

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life C_{100}; the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.
4) High-precision grade and medium preload of random-matching type are available for special high carbon steel products.
* Standard mounting hole of NS15 rail is for M4 bolts (Hole size: 4.5 × 7.5 × 5.3).
If you require mounting hole for M3 bolts (Hole size: 3.5 × 6 × 4.5), please specify when ordering.

A-5-1.4 LW Series

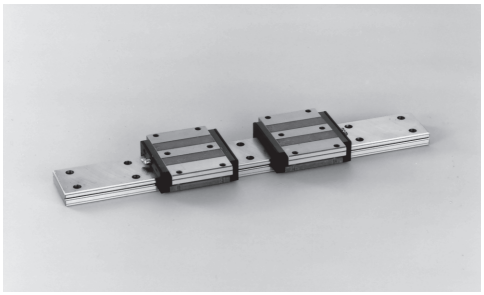

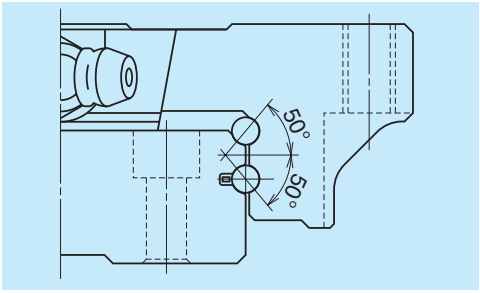


Fig. 1 Balls in contact

1. Features

(1) Ideal for use of single rail

Thanks to the wide rail, rigidity and load carrying capacity are high against moment load from rolling direction. This makes the LW Series ideal for a single rail, compact linear guideway system.

(2) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, increasing load carrying capacity as well as rigidity in vertical direction.

(3) High resistance against impact load

Same as the NH and NS series, the offset Gothic arch grooves support a large load, such as an impact, by four rows.

(4) High accuracy

Fixing master rollers to ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

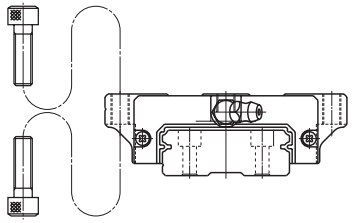

(5) Easy to handle, and designed with safety in mind.

Balls are retained in the retainer and do not fall out when a ball slide is withdrawn from the rail.

(6) Fast delivery

Lineup of random-matching rails and ball slides supports and facilitates fast delivery.

2. Ball slide shape

Ball slide Model	Shape / installation method	Type
EL		EL 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm) over	or less	Accuracy grade: Preloaded assembly (not random matching) High precision P5	Preloaded assembly (not random matching) Precision grade P6	Preloaded assembly (not random matching) Normal grade PN	Random-matching type Normal grade PC
–	50	2	4	5	5
50	80	3	4	5	5
80	125	3	4	5	5
125	200	3.5	5	6	6
200	250	4.5	6	7.5	7.5
250	315	5	6.5	8.5	8.5
315	400	5.5	7	9.5	9.5
400	500	6	7.5	11	11
500	630	6.5	8.5	12	12
630	800	7	9.5	13	13
800	1 000	7.5	10	15	15
1 000	1 250	8.5	12	16	16
1 250	1 600	9.5	13	17	17
1 600	2 000	11	14	19	19
2 000	2 500	12	16	21	21
2 500	3 150	13	18	23	23
3 150	4 000	14	19	25	25

(2) Accuracy standard

The preloaded assembly has three accuracy grades; High precision P5, Precision P6, and Normal PN grades, while the random-matching type has Normal PC grade only.

- **Tolerance of preloaded assembly type**

Table 2

Unit: μm

Characteristics \ Accuracy grade	High precision P5	Precision grade P6	Normal grade PN
Mounting height H Variation of H (All ball slides on a set of rails)	±20 7	±40 15	±80 25
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All ball slides on reference rail)	±25 10	±50 20	±100 30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in **Table 1** and **Fig. 2**		

- **Tolerance of random-matching type: Normal grade PC**

Table 3

Unit: μm

Characteristics \ Model No.	LW17, 21, 27, 35, 50
Mounting height H	±20
Variation of mounting height H	15①
	30②
Mounting width W_2 or W_3	±30
Variation of mounting width W_2 or W_3	25
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	See **Table 1** and **Fig. 2**

Note: ① Variation on the same rail
② Variation on multiple rails


(3) Combination of accuracy and preload

Table 4


		Accuracy grade			
		High precision	Precision grade	Normal grade	Normal grade
Without NSK K1 lubrication unit		P5	P6	PN	PC
With NSK K1 lubrication unit		K5	K6	KN	KC
With NSK K1 for food and medical equipment		F5	F6	FN	FC
Preload	Fine clearance Z0	○	○	○	—
	Slight preload Z1	○	○	○	—
	Medium preload Z3	○	○	—	—
	Random-matching type with fine clearance ZT	—	—	—	○
	Random-matching type with slight preload ZZ	—	—	—	○

Note: Z3 medium preload is only applicable to models of LW35 and LW50.

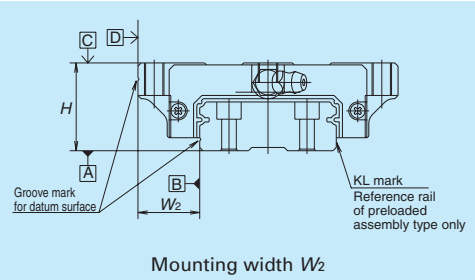(4) Assembled accuracy



Mounting width W_2

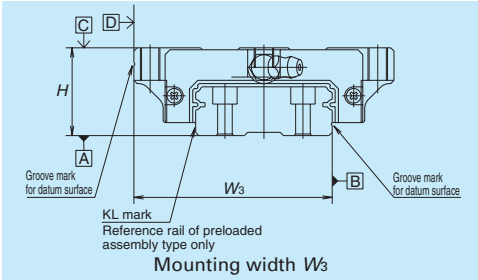

Mounting width W_3

Fig. 2

(5) Preload and rigidity

We offer five levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with Random-matching type of Fine clearance ZT and Slight preload ZZ. Rigidities are for the median of the preload range.

- **Preload and rigidity of preloaded assembly**

Table 5

Model No.	Preload (N)		Rigidity (N/μm) Vertical direction		Lateral direction	
	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3
LW17 EL	0 – 245	–	156	–	112	–
LW21 EL	0 – 294	–	181	–	130	–
LW27 EL	0 – 390	–	226	–	167	–
LW35 EL	0 – 490	785	295	440	213	315
LW50 EL	0 – 590	1 470	345	600	246	425

Note: Clearance for Fine clearance Z0 is 0 to 3μm. Therefore, preload is zero. However, Z0 of PN grade is 0 to 15μm.

- **Clearance and preload of random-matching type**

Table 6 Unit: μm

Model No.	Fine clearance ZT	Slight preload ZZ
LW17	–3 – 15	–3.5 – 0
LW21	–3 – 15	–3.5 – 0
LW27	–4 – 15	–4 – 0
LW35	–5 – 15	–5 – 0
LW50	–5 – 15	–7 – 0

Note: Minus sign denotes elastic deformation of balls representing.

4. Maximum rail length

- **Table 7** shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 7 Length limitations of rails Unit: mm

Series	Size / Material	17	21	27	35	50
LW	Special high carbon steel	1 000	1 600	2 000	2 000	2 000

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

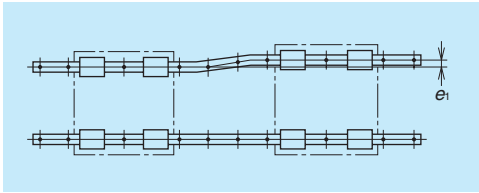


Fig. 3

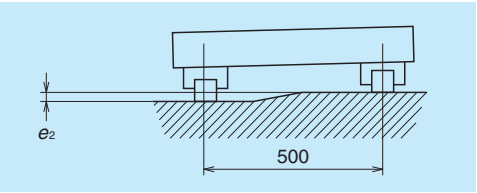


Fig. 4

Table 8 Unit: μm

Value	Preload	Model No. LW17	LW21	LW27	LW35	LW50
Permissible values of parallelism in two rails e_1	Z0, ZT	20	20	25	38	50
	Z1, ZZ	9	9	13	23	34
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	100 μm/500 mm				
	Z1, ZZ	45 μm/500 mm				

(2) Shoulder height of the mounting surface and corner radius r




Fig. 5 Shoulder for the rail datum surface




Fig. 6 Shoulder for the ball slide datum surface

Table 9 Unit: mm

Model No.	Corner radius (maximum) r_a	r_b	Shoulder height H'	H''
LW17	0.3	0.3	2.2	4
LW21	0.3	0.3	2.5	5
LW27	0.5	0.5	3.5	5
LW35	0.5	0.8	3.5	5
LW50	0.8	0.8	4	6

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 7 and **Table 10** show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

Please ask NSK for stainless lubrication accessories.

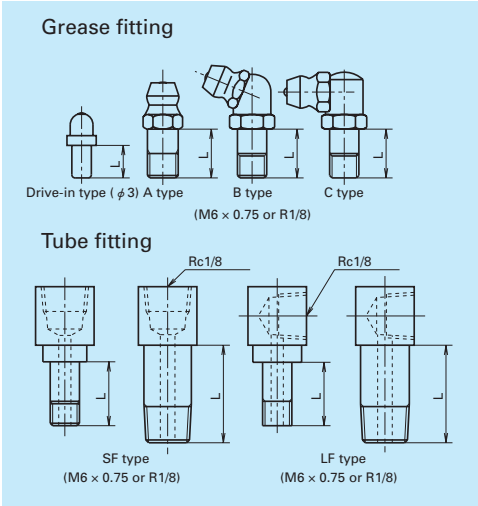


Fig. 7 Grease fitting and tube fitting

Table 10 Unit: mm

Model No.	Dust-proof specification	Dimension L		
		Grease fitting /Drive-in type	Tube fitting	
			SF type	LF type
LW17	Standard	5	–	–
	With NSK K1	10	–	–
	Double seal	*	–	–
	Protector	*	–	–
LW21	Standard	5	–	–
	With NSK K1	12	–	–
	Double seal	10	–	–
	Protector	10	–	–
LW27	Standard	5	5	5
	With NSK K1	12	12	12
	Double seal	10	9	9
	Protector	10	9	9
LW35	Standard	5	6	6
	With NSK K1	14	14	13
	Double seal	10	10	9
	Protector	10	10	9
LW50	Standard	8	13.5	17
	With NSK K1	18	18	19
	Double seal	14	16	17
	Protector	14	13.5	17

*) A connector is required for the grease fitting. Please contact NSK.

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We may mount them on a side of end cap for LW27, 35, and 50 as an option. (**Fig. 8**)

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector for a connection to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

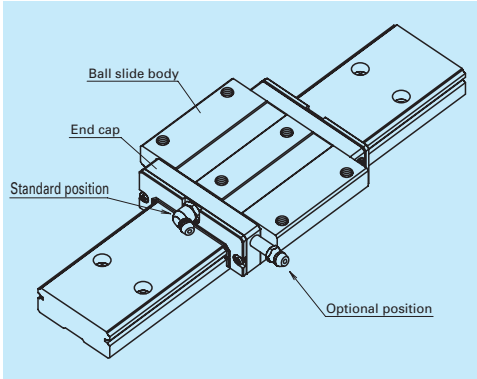


Fig. 8 Mounting position of lubrication accessories

7. Dust-proof components

(1) Standard Specification

The LW Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the series has an end seal on both ends and bottom seals at the bottom.

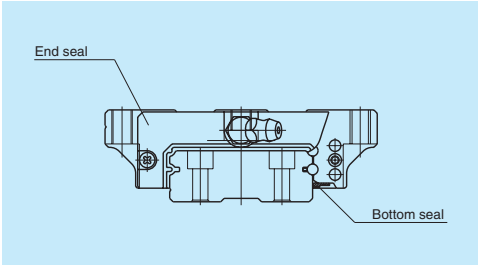


Fig. 9

Table 11 Seal friction per ball slide (maximum value) Unit: N

Series \ Size	17	21	27	35	50
LW	6	8	12	16	20

(2) NSK K1™ lubrication unit

Table 12 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

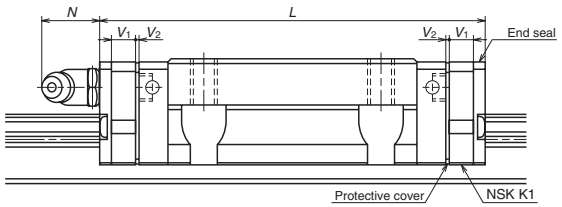


Table 12 Dimension when equipped with the NSK K1 lubrication unit Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V_1	Protective cover thickness V_2	Protruding area of the grease fitting N
LW17	Standard	EL	51.4	61.6	4.5	0.6	(5)
LW21	Standard	EL	58.8	71.4	5.5	0.8	(13)
LW27	Standard	EL	74	86.6	5.5	0.8	(13)
LW35	Standard	EL	108	123	6.5	1.0	(13)
LW50	Standard	EL	140.6	155.6	6.5	1.0	(14)

Note: 1) NSK K1 for food and medical equipments are available for the models of LW17 to LW35.
2) When equipped with NSK K1, ball slide length = (standard ball slide length) + (V_1 thickness of single K1 unit) × (number of K1 units) + (V_2 thickness of the protective cover) × 2.

(3) Double seal

Use a double seal set as showing in **Table 13**, when installing an extra seal to completed standard products. (**Fig. 10**)
When installing a grease fitting after the installation of double seals, a connector as showing **Fig.10** is required.

(4) Protector

Use a protector set as showing **Table 14**, when installing a protector to completed standard products. (**Fig.11**)
When installing a grease fitting after the installation of protectors, a connector as showing **Fig.11** is required.

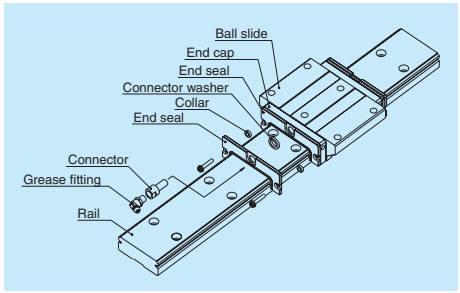


Fig. 10 Double seal

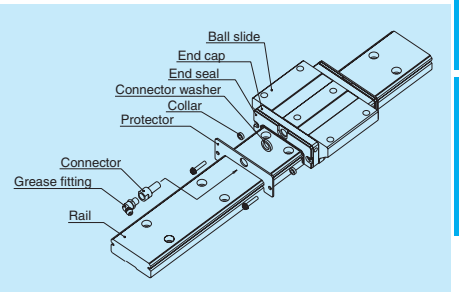


Fig. 11 Protector seal

Table 13 Double-seal set

Model No.	Reference No.		Increased thickness V_3 (mm)
	Without connector	With connector	
LW17	LW17WS-01	*	2.6
LW21	LW21WS-01	LW21WSC-01	2.8
LW27	LW27WS-01	LW27WSC-01	2.5
LW35	LW35WS-01	LW35WSC-01	3
LW50	LW50WS-01	LW50WSC-01	3.6

*) For installation of a connector to a drive-in type grease fitting, contact NSK.

Table 14 Protector set

Model No.	Reference No.		Increased thickness V_4 (mm)
	Without connector	With connector	
LW17	LW17PT-01	*	3.2
LW21	LW21PT-01	LW21PTC-01	3.2
LW27	LW27PT-01	LW27PTC-01	2.9
LW35	LW35PT-01	LW35PTC-01	3.6
LW50	LW50PT-01	LW50PTC-01	4.2

*) For installation of a connector to a drive-in type grease fitting, contact NSK.

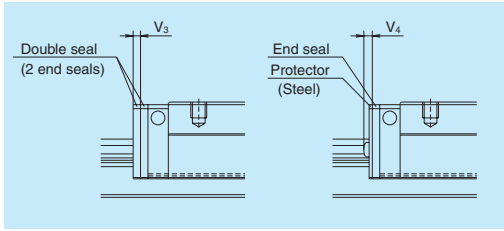


Fig. 12

(5) Cap to plug the rail mounting bolt hole

Table 15 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
LW17, LW21, LW27	M4	LG-CAP/M4	20
LW35	M6	LG-CAP/M6	20
LW50	M8	LG-CAP/M8	20

(6) Bellows

· Make tap holes to the rail end face to fix the bellows mounting plate. NSK processes tap holes to the rail end face when ordered with a linear guide.

Dimension tables of bellows
LW series

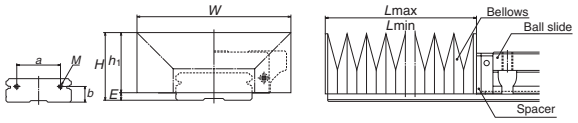


Fig. 13

Bellows reference number

J A W 21 L 08

- J: Bellows
- A: Bellows for the ends; B: Middle bellows
- W: Bellows for LW series
- 21: Size number of linear guide
- L: N: High type L: Low type
- 08: Number of BL (fold number)

Table 16 Dimensions of bellows

Unit: mm

Model No.	*H*	h_1	*E*	*W*	*P*	*a*	*b*	BL minimum length	Tap (*M*) x depth
JAW17N	25.5	23	2.5	68	15	22	6	17	M3 × 6
JAW21N	29	26	3	75	17	26	7	17	M3 × 6
JAW27N	37	33	4	85	20	28	10	17	M3 × 6
JAW35L	34	30	4	100	14	48	12	17	M4 × 8
JAW35N	41	37		115	20				
JAW50L	46.5	42	4.5	135	20	70	14	17	M4 × 8
JAW50N	56.5	52		160	30				

Table 17 Numbers of folds (BL) and length of bellows

Unit: mm


Model No.	Number of BL	2	4	6	8	10	12	14	16	18	20
	*L*min	34	68	102	136	170	204	238	272	306	340
JAW17N	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	*L*max	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
JAW21N	Stroke	204	408	612	816	1 020	1 224	1 428	1 632	1 836	2 040
	*L*max	238	476	714	952	1 190	1 428	1 666	1 904	2 142	2 380
JAW27N	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
	*L*max	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
JAW35L	Stroke	162	324	486	648	810	972	1 134	1 296	1 458	1 620
	*L*max	196	392	588	784	980	1 176	1 372	1 568	1 764	1 960
JAW35N	Stroke	218	436	654	872	1 090	1 308	1 526	1 744	1 962	2 180
	*L*max	252	504	756	1 008	1 260	1 512	1 764	2 016	2 268	2 520
JAW50L	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
	*L*max	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
JAW50N	Stroke	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
	*L*max	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200

Note: The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of even number BL on the both sides, then by dividing the sum by 2.


8. Reference number


Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

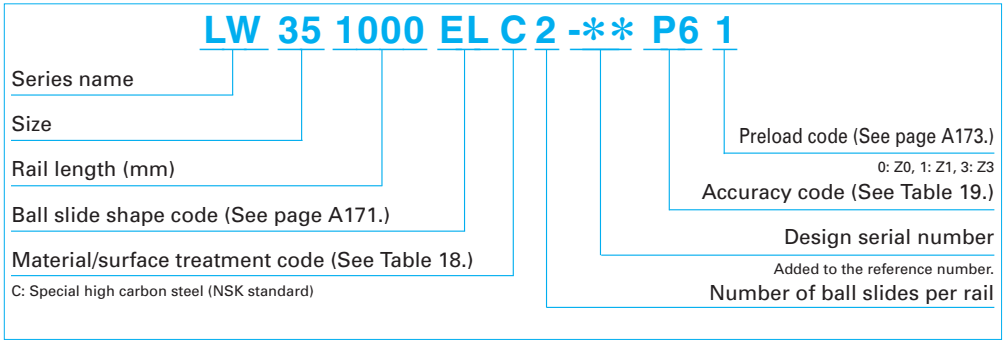(1) Reference number for preloaded assembly



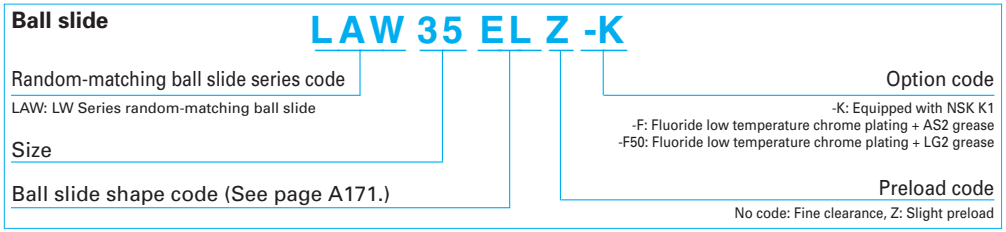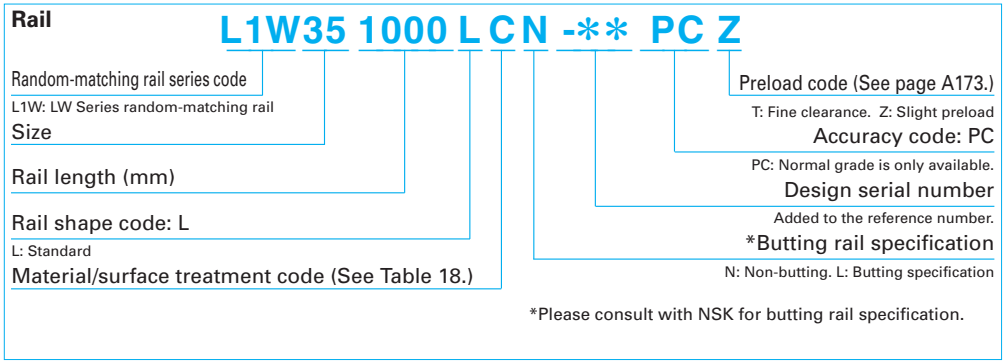(2) Reference number for random-matching type





The reference number coding for the assembly of random-matching type is the same as that of preloaded assembly. However, only preload codes of "fine clearance T" and "slight preload Z" are available (refer to page A173).
Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 18 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
D	Special high carbon steel with surface treatment
Z	Other, special

Table 19 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN
Normal grade (random-matching type)	PC	KC	FC

Note: Refer to pages A38 and A61 for NSK K1 lubrication unit.

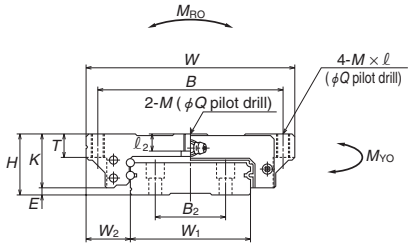
(9) Dimensions

LW-EL


LW 35 1000 EL C 2 - PC Z**

- Series name: LW
- Size: 35
- Rail length (mm): 1000
- Ball slide shape code (See page A171.): EL
- Material/surface treatment code (See Table 18.): C
  - C: Special high carbon steel (NSK standard)
- Number of ball slides per rail: 2
- Design serial number: -** (Added to the reference number.)
- Accuracy code (See Table 19.): PC
- Preload code (See page A173.): Z
  - 0: Z0, 1: Z1, 3: Z3, T: ZT, Z: ZZ

Front view



Side view

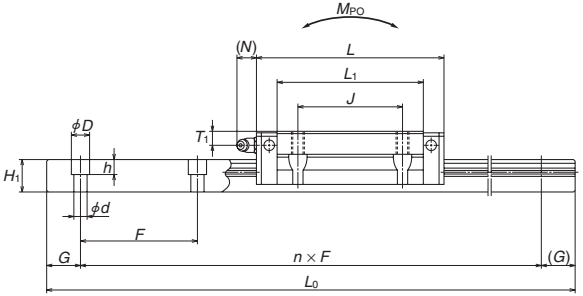



Model No.	Assembly			Ball slide												Rail	
	Height			Width	Length	Mounting hole								Grease fitting			Width	Height
	H	E	W_2	W	L	B	J	M × pitch × ℓ	ℓ_2	Q	L_1	K	T	Hole size	T_1	N	W_1	H_1
LW17EL	17	2.5	13.5	60	51.4	53	26	M4×0.7×6	3.2	3.3	35	14.5	6	φ3	4	3	33	8.7
LW21EL	21	3	15.5	68	58.8	60	29	M5×0.8×8	3.7	4.4	41	18	8	M6×0.75	4.5	11	37	10.5
LW27EL	27	4	19	80	74	70	40	M6×1×10	6	5.3	56	23	10	M6×0.75	6	11	42	15
LW35EL	35	4	25.5	120	108	107	60	M8×1.25×14	9	6.8	84	31	14	M6×0.75	8	11	69	19
LW50EL	50	4.5	36	162	140.6	144	80	M10×1.5×18	14	8.6	108	45.5	18	Rc1/8	14	14	90	24

Reference number for ball slide of random-matching type

LAW 35 EL Z -K

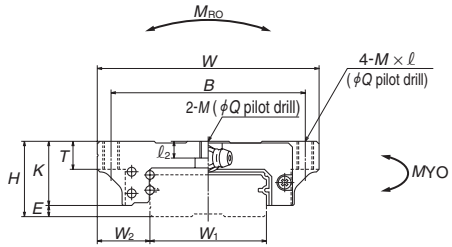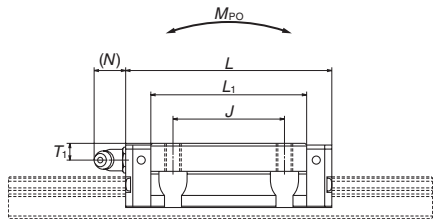- Random-matching ball slide series code: LAW
  - LAW: LW Series random-matching ball slide
- Size: 35
- Ball slide shape code (See page A171.): EL
- Preload code: Z
  - No code: Fine clearance, Z: Slight preload
- Option code: -K
  - -K: Equipped with NSK K1
  - -F: Fluoride low temperature chrome plating + AS2 grease
  - -F50: Fluoride low temperature chrome plating + LG2 grease







Reference number for rail of random-matching type

Rail L1W35 1000 L C N - PC Z**

- Random-matching rail series code: L1W
  - L1W: LW Series random-matching rail
- Size: 35
- Rail length (mm): 1000
- Rail shape code: L
  - L: Standard
- Material/surface treatment code (See Table 18.): C
- *Butting rail specification: N
  - N: Non-butting. L: Butting specification
- Design serial number: -** (Added to the reference number.)
- Accuracy code: PC
  - PC: Normal grade is only available.
- Preload code (See page A173.): Z
  - T: Fine clearance. Z: Slight preload

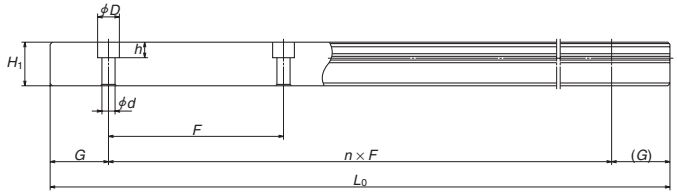*Please consult with NSK for butting rail specification.





Unit: mm


Rail					Basic load rating							Weight	
	Pitch	Mounting bolt hole	G	Max. length $L_{0max.}$ ( ) for stainless	1) Dynamic [50km]	1) Dynamic [100km]	Static	Static moment (N·m)				Ball slide	Rail
									M_{PO}		M_{YO}		
B_2	F	d × D × h	(reference)		C_{50}(N)	C_{100}(N)	C_0 (N)	M_{RO}	One slide	Two slides	One slide	Two slides	(kg)	(kg/m)
18	40	4.5×7.5×5.3	15	1 000	5 600	4 450	11 300	135	44	288	37	242	0.2	2.1
22	50	4.5×7.5×5.3	15	1 600	6 450	5 150	13 900	185	65.5	400	55	335	0.3	2.9
24	60	4.5×7.5×5.3	20	2 000	12 800	10 200	26 900	400	171	970	143	815	0.5	4.7
40	80	7×11×9	20	2 000	33 000	26 400	66 500	1 690	645	3 550	545	2 990	1.5	9.6
60	80	9×14×12	20	2 000	61 500	48 500	117 000	3 900	1 530	8 200	1 280	6 900	4.0	15.8

Note: The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}: the basic dynamic load rating for 50 km rated fatigue life C_{100}: the basic dynamic load rating for 100 km rated fatigue life

1. PU Series A187
2. LU Series A197
3. PE Series A209
4. LE Series A219
5. Miniature LH Series A233
6. LL Series A243

A-5-2 Miniature Series

A-5-2.1 PU Series (Miniature type)

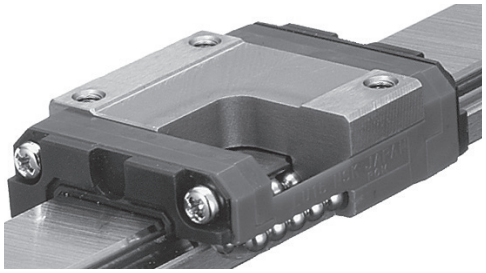

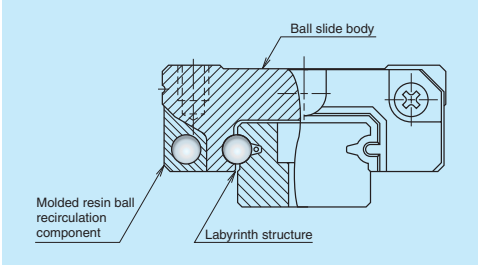


Fig. 1

1. Features

(1) Motion performance

Newly designed recirculation component facilitates smooth circulation of steel balls.

(2) Lightweight

The ball slide is fabricated to be approximately 20% lighter than LU Series by the application of resin to a part of its body.

(3) Reduced noise intensity

Resin components applied in ball circulating circuits reduce collision noise between steel balls and the inner wall of circulating circuits.

(4) Low dust generation

The structure is designed to prevent dust generation.

(5) Excellent dust-proofing

It is designed to minimize the clearance between the side of rails and the inner walls of the slide, and prevent foreign matters from entering the ball slide.

(6) High corrosion resistance

High corrosion-resistant martensite stainless steel is incorporated as a standard feature to provides excellent corrosion resistance.

(7) Easy to handle

Safety design includes a retainer that prevents steel balls from dropping out of the ball slide even when the slide is removed from the rail.




(8) Long-term maintenance-free

Superb features of NSK K1 Lubrication unit realize a long-term, maintenance-free operation.

(9) Fast delivery

Lineup of random-matching rails and ball slides facilitates fast delivery. (PU09 to PU15)

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)	
		Standard type	High-load type
		Standard	Long
AR TR AL UR BL		TR, AR, AL 	UR, BL 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm) over	or less	Preloaded assembly type (not random matching) Super precision P4	High precision P5	Precision grade P6	Normal grade PN	Random-matching type Normal grade PC
–	50	2	2	4.5	6	6
50 –	80	2	3	5	6	6
80 –	125	2	3.5	5.5	6.5	6.5
125 –	200	2	4	6	7	7
200 –	250	2.5	5	7	8	8
250 –	315	2.5	5	8	9	9
315 –	400	3	6	9	11	11
400 –	500	3	6	10	12	12
500 –	630	3.5	7	12	14	14
630 –	800	4.5	8	14	16	16
800 –	1 000	5	9	16	18	18
1 000 –	1 250	6	10	17	20	20

(2) Accuracy standard

The preloaded assembly has four accuracy grades; Super precision P4, High precision P5, Precision grade P6, and normal grade PN, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type while **Table 3** shows the accuracy standard for the random-matching types.

• Tolerance of preloaded assembly

Table 2 Unit: μm

Characteristics \ Accuracy grade	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H Variation of H (All ball slides on a set of rails)	±10 5	±15 7	±20 15	±40 25
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All ball slides on reference rail)	±15 7	±20 10	±30 20	±50 30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in **Table 1** and **Fig. 2**			

• Tolerance of random-matching type: Normal grade PC

Table 3 Unit: μm

Characteristics \ Model No.	PU09, 12 and 15
Mounting height H	±20
Variation of mounting height H	15① 30②
Mounting width W_2 or W_3	±20
Variation of mounting width W_2 or W_3	20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in **Table 1** and **Fig. 2**

Notes: ① Variation on the same rail ② Variation on multiple rails

(3) Assembled accuracy

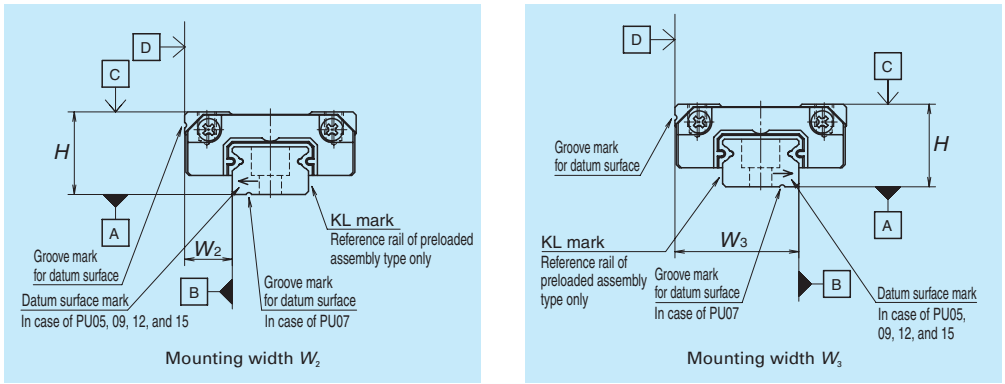


Fig. 2

Note: Please refer to page A67 for marks on the datum surfaces.

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0 for preloaded assembly type, along with Fine clearance ZT for random-matching type. Values for preload and rigidity of the preloaded assembly type are shown in **Table 4**. Rigidities are for the median of the preload range.

• Preload and rigidity of preloaded assembly

Table 4

	Model No.	Preload (N)	Rigidity (N/μm)
		Slight preload (Z1)	Slight preload (Z1)
Standard type	PU05TR	0 – 3	17
	PU07AR	0 – 8	22
	PU09TR	0 – 10	30
	PU12TR	0 – 17	33
	PU15AL	0 – 33	45
High-load type	PU09UR	0 – 14	46
	PU12UR	0 – 25	52
	PU15BL	0 – 51	75

Note: Clearance of Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero.

• Clearance of random-matching type

Table 5 Unit: μm

	Model No.	Fine clearance ZT
Standard type	PU09TR	3 or less
	PU12TR	
	PU15AL	
High-load type	PU09UR	5 or less
	PU12UR	
	PU15BL	

4. Maximum rail length

Table 6 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 6 Length limitations of rails

Unit: mm

Series	Material \ Size	05	07	09	12	15
PU	Stainless steel	210	375	600	800	1 000

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

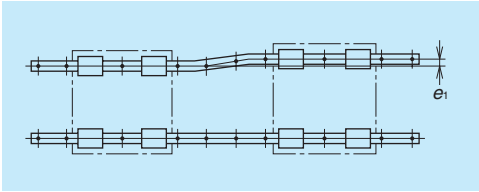


Fig. 3

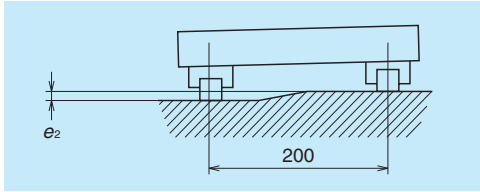


Fig. 4

Table 7

Unit: μm

Value	Preload	Model No.				
		PU05	PU07	PU09	PU12	PU15
Permissible values of parallelism in two rails e_1	Z0, ZT	10	12	15	20	25
	Z1	7	10	13	15	21
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	150 μm/200 mm				
	Z1	90 μm/200 mm				

(2) Shoulder height of the mounting surface and corner radius r




Fig. 5 Shoulder for the rail datum surface




Fig. 6 Shoulder for the ball slide datum surface

Table 8


Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H′	H″*
PU05	0.2	0.2	0.7	2.3
PU07	0.2	0.3	1.2	2.5
PU09	0.3	0.3	1.9	2.6
PU12	0.3	0.3	2.5	3.4
PU15	0.3	0.5	3.5	4.4

*) H″ is the minimum recommended value based on the dimension T in dimension table.

6. Lubrication accessory

Model of PU15 can select drive-in type grease fitting as an option.
For the models of PU05 to PU12, apply grease directly to the ball grooves of rail using a point nozzle.



Drive-in type

7. Dust-proof components

(1) Standard specification

An end seal provided to both ends of a ball slide as a standard feature.
Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value)

Unit: N

Series \ Size	05	07	09	12	15
PU	0.3	0.3	0.5	0.5	0.5

(2) NSK K1™ lubrication unit

Table 10 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

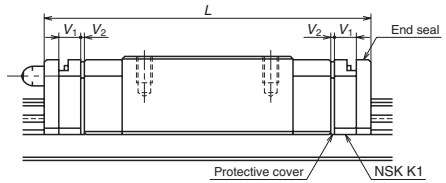


Table 10 Dimensions when equipped with the NSK K1 lubrication unit Unit: mm


Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length equipped with two NSK K1 L	Thickness of NSK K1, V_1	Thickness of protective cover, V_2
PU05	Standard	TR	19.4	24.4	2	0.5
PU07	Standard	AR	23.4	29.4	2.5	0.5
PU09	Standard	TR	30	36.4	2.7	0.5
	Long	UR	41	47.4		
PU12	Standard	TR	35	42	3	0.5
	Long	UR	48.7	55.7		
PU15	Standard	AL	43	51.2	3.5	0.6
	Long	BL	61	69.2		

Note: When equipped with NSK K1, ball slide length = (standard ball slide length) + (V_1 thickness of single K1 unit) × (number of K1 units) + (V_2 thickness of the protective cover) × 2.

8. Reference number


Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

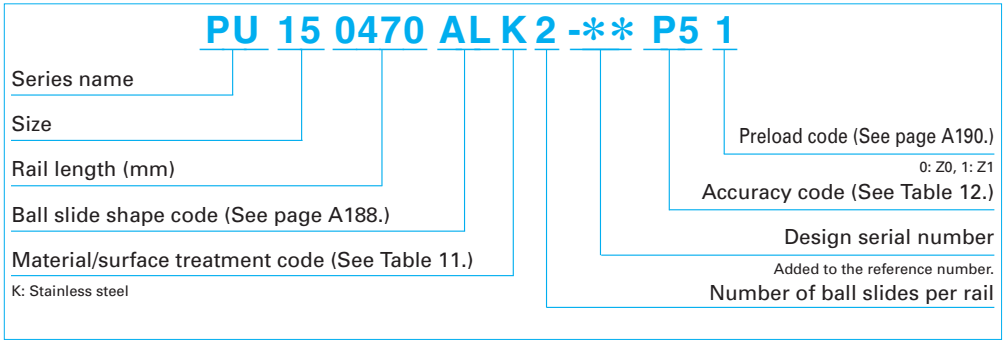(1) Reference number for preloaded assembly




(2) Reference number for random-matching type

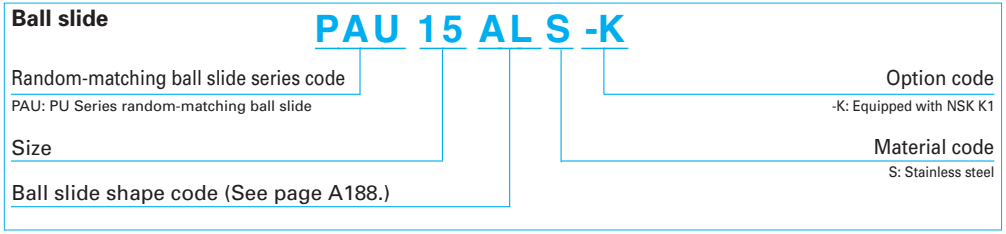Ball slide



Rail

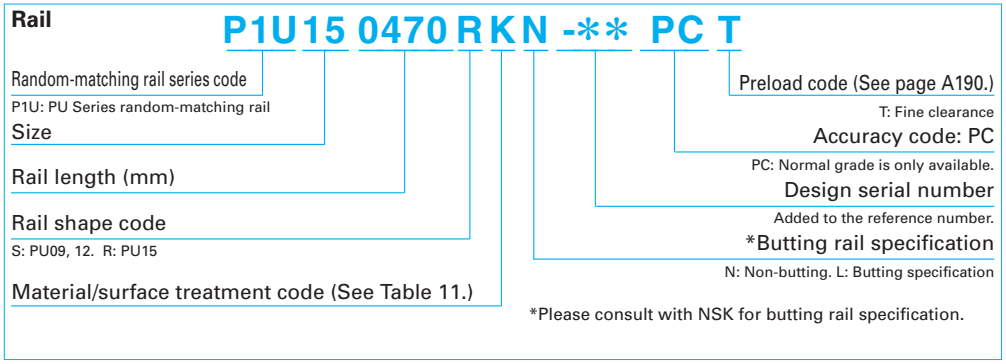

The reference number coding for the assembly of random-matching type is the same as that of preloaded assembly. However, only preload code of "fine clearance T" is available (refer to page A190).
Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 11 Material/surface treatment code

Code	Description
K	Stainless steel
H	Stainless steel with surface treatment
Z	Other, special

Table 12 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
Super precision grade	P4	K4	F4
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN
Normal grade (random-matching type)	PC	KC	FC

Note: Refer to pages A38 and A61 for the NSK K1 lubrication unit.


9. Dimensions

PU-TR, AR, AL (Standard type / Standard)
PU-UR, BL (High-load type / Long)

PU 15 0470 AL K 2 - ** PC T**


- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A188.)
- Material/surface treatment code (See Table 11.)
  K: Stainless steel
- Number of ball slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 12.)
- Preload code (See page A190.)
  0: Z0, 1: Z1, T: ZT

Side view




PU05


Front view




PU05, 07, 09, 12

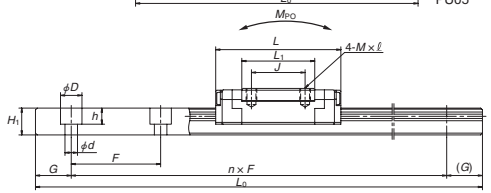

PU07, 09, 12



PU15

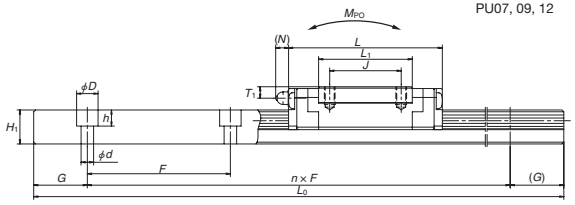

PU15


Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	M×pitch×ℓ	L_1	K	T	Oil hole Hole size	T_1	N	Width W_1	Height H_1
PU05TR	6	1	3.5	12	19.4	8	—	M2×0.4×1.5	11.4	5	2.3	φ0.9	1.5	—	5	3.2
PU07AR	8	1.5	5	17	23.4	12	8	M2×0.4×2.4	13.3	6.5	2.45	φ1.5	1.8	—	7	4.7
PU09TR	10	2.2	5.5	20	30	15	10	M3×0.5×3	19.6	7.8	2.6	—	—	—	9	5.5
PU09UR					41		16		30.6							
PU12TR	13	3	7.5	27	35	20	15	M3×0.5×3.5	20.4	10	3.4	—	—	—	12	7.5
PU12UR					48.7		20		34.1							
PU15AL	16	4	8.5	32	43	25	20	M3×0.5×5	26.2	12	4.4	φ3	3.2	(3.6)	15	9.5
PU15BL					61		25		44.2							

Notes: 1) The ball slide of PU05TR has only two mounting tap holes in the center.

Reference number for ball slide of random-matching type

PAU 15 AL S -K

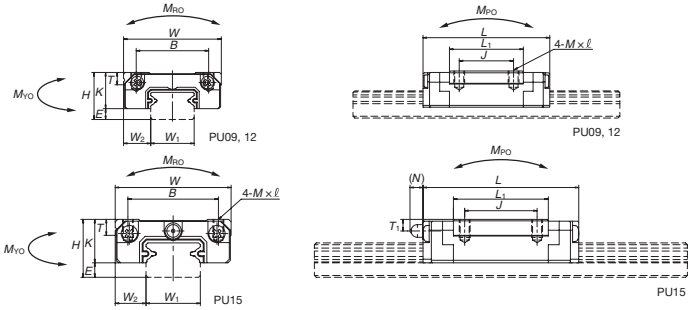- Random-matching ball slide series code
  PAU: PU Series random-matching ball slide
- Size
- Ball slide shape code (See page A188.)
- Option code
  -K: Equipped with NSK K1
- Material code
  S: Stainless steel



PU09, 12

PU09, 12

PU15


PU15

Reference number for rail of random-matching type

Rail P1U15 0470 R K N - ** PC T**

- Random-matching rail series code
  P1U: PU Series random-matching rail
- Size
- Rail length (mm)
- Rail shape code
  S: PU09, 12. R: PU15
- Material/surface treatment code (See Table 11.)
- *Butting rail specification
  N: Non-butting. L: Butting specification
- Design serial number
  Added to the reference number.
- Accuracy code: PC
  PC: Normal grade is only available.
- Preload code (See page A190.)
  T: Fine clearance

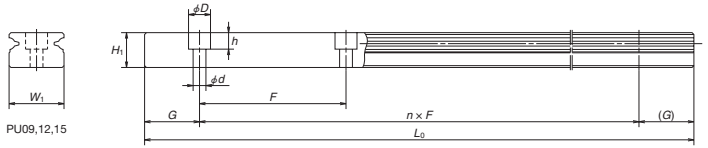*Please consult with NSK for butting rail specification.




PU09,12,15

Unit: mm

Rail Pitch F	Mounting bolt hole d×D×h	G (reference)	Maximum length L_{0max}	Basic load rating 2) Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (g)	Rail (g/100mm)
15	2.3×3.3×0.8	5	210	520	410	775	2.06	1.28	9.90	1.28	9.90	4	11
15	2.4×4.2×2.3	5	375	1 090	860	1 370	5.20	2.70	21.8	2.70	21.8	8	23
20	3.5×6×4.5	7.5	600	1 490	1 180	2 150	9.90	6.10	41.0	6.10	41.0	16	35
				2 100	1 670	3 500	16.2	15.6	88.0	15.6	88.0	25	
25	3.5×6×4.5	10	800	2 830	2 250	3 500	21.1	11.4	73.5	11.4	73.5	32	65
				4 000	3 150	5 700	34.5	28.3	174	28.3	174	53	
40	3.5×6×4.5	15	1 000	5 550	4 400	6 600	49.5	25.6	190	25.6	190	59	105
				8 100	6 400	11 300	84.5	69.5	435	69.5	435	100	

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}: the basic dynamic load rating for 50 km rated fatigue life C_{100}: the basic dynamic load rating for 100 km rated fatigue life
3) To fix rail of PU05TR, use M2 x 0.4 cross-recessed pan head machine screw for precision instrument.
(JCIS 10-70 No. 0 pan head machine screw No.1.)
(JCIS: Japanese Camera Industrial Standard.)

A-5-2.2 LU Series (Miniature type)

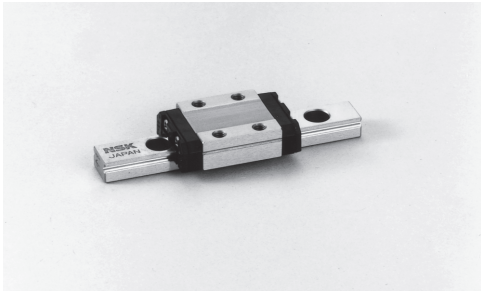

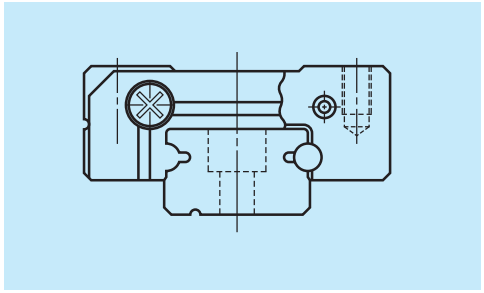


Fig. 1 LU Series

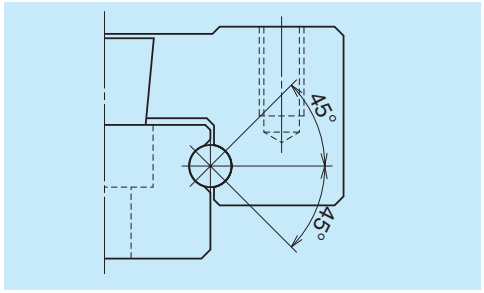


Fig. 2 Balls are in contact.

1. Features

(1) Super-small type

This compact guide owes its design to the single ball groove on both right and left sides (Gothic arch) .

(2) Equal load carrying capacity in vertical and lateral directions

The contact angle is set at 45 degrees, thus facilitating the equal load carrying capacity in vertical and lateral directions. This also provides equal rigidity in both directions.

(3) Stainless steel is also standardized

Items made of the martensitic stainless steel are available as standard.




(4) Some series have a ball retainer

Ball slide types AR and TR come with a ball retainer. Balls are retained in the retainer and do not fall out when the ball slide is withdrawn from the rail. (Ball slides of random-matching type as well as LU15 come with ball retainer.)

(5) Fast delivery

Random-matching of rails and ball slides are available. (LU09 to LU15)

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)	
		Standard type	High-load type
		Standard	Long
AL TL AR TR BL UL		AL, TL, TR, AR 	BL, UL 

Specification	Detail	Type	
Mounting hole	Normal	AL, AR	BL
	Large	TL, TR	UL
Ball retainer	Without	AL*, TL	BL*, UL
	With	AR, TR	–

*) LU15 is equipped with ball retainer

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm) over	or less	Preloaded assembly type (not random matching) Super precision P4	High precision P5	Precision grade P6	Normal grade PN	Random-matching type Normal grade PC
–	50	2	2	4.5	6	6
50 –	80	2	3	5	6	6
80 –	125	2	3.5	5.5	6.5	6.5
125 –	200	2	4	6	7	7
200 –	250	2.5	5	7	8	8
250 –	315	2.5	5	8	9	9
315 –	400	3	6	9	11	11
400 –	500	3	6	10	12	12
500 –	630	3.5	7	12	14	14
630 –	800	4.5	8	14	16	16
800 –	1000	5	9	16	18	18
1000 –	1250	6	10	17	20	20

(2) Accuracy standard

The preloaded assembly type has four accuracy grades; Super precision P4, High precision P5, Precision P6, and Normal grade PN, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type, while **Table 3** shows the accuracy standard for the random-matching type.

• Tolerance of preloaded assembly

Table 2 Unit: μm


Characteristics \ Accuracy grade	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H Variation of H (All ball slides on a set of rails)	±10 5	±15 7	±20 15	±40 25
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All ball slides on reference rail)	±15 7	±20 10	±30 20	±50 30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Refer to **Table 1** and **Fig. 3**			

• Tolerance of random-matching type: Normal grade PC


Table 3 Unit: μm

Characteristics \ Accuracy grade	LU09, 12, 15
Mounting height H	±20
Variation of mounting height H	40
Mounting width W_2 or W_3	±20
Variation of mounting width W_2 or W_3	40
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Refer to **Table 1** and **Fig. 3**

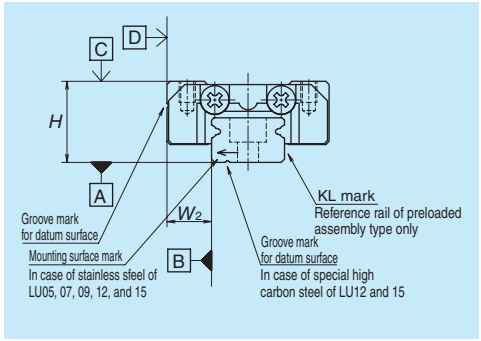(3) Assembled accuracy



Mounting width W_2

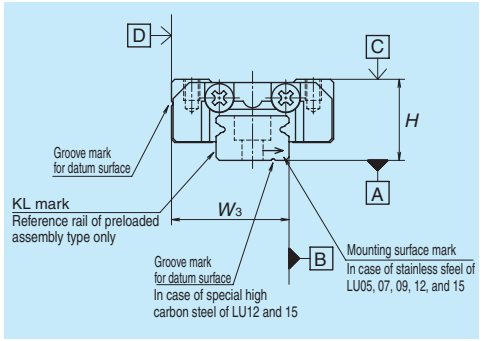

Mounting width W_3

Fig. 3

Note: Please refer to page A67 for marks on the datum surfaces.

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0, along with random-matching type of Fine clearance ZT. Values for preload and rigidity of the preloaded assembly type are shown in **Table 4**. Rigidities are for the median of the preload range.

• Preload and rigidity of preloaded assembly

Table 4

	Model No.	Preload (N) Slight preload (Z1)	Rigidity (N/μm) Slight preload (Z1)
Standard type	LU05 TL	0 – 3	15
	LU07 AL	0 – 8	22
	LU09 AL, TL	0 – 12	26
	LU09 AR, TR	0 – 10	30
	LU12 AL, TL	0 – 17	33
	LU12 AR, TR	0 – 17	33
	LU15 AL	0 – 33	45
High-load type	LU09 BL, UL	0 – 17	43
	LU12 BL, UL	0 – 25	52
	LU15 BL	0 – 51	75

Note: Clearance of Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero. However, the clearance of the Z0 of PN grade is 3 to 10 μm.

• Clearance of random-matching type

Table 5 Unit: μm

Model No.	Fine clearance ZT
LU09	0 – 15
LU12	
LU15	

4. Maximum rail length

Table 6 shows the limitations of rail length.

However, the limitations vary by accuracy grades.

Table 6 Length limitation of rails Unit: mm

Series	Material \ Size	05	07	09	12	15
LU	Special high carbon steel	–	–	1 200	1 800	2 000
	Stainless steel	210	375	600	800	1 000

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

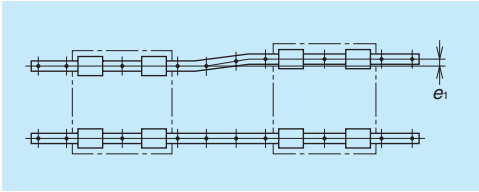


Fig. 4

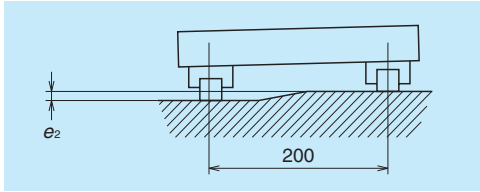


Fig. 5

Table 7

Unit: μm

Value	Preload	Model No.				
		LU05	LU07	LU09	LU12	LU15
Permissible values of parallelism in two rails e_1	Z0, ZT	10	12	15	20	25
	Z1	7	10	13	15	21
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	150 μm/200 mm				
	Z1	90 μm/200 mm				

(2) Shoulder height of the mounting surface and corner radius r




Fig. 6 Shoulder for the rail datum surface




Fig. 7 Shoulder for the ball slide datum surface

Table 8

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
LU05	0.2	0.2	0.7	2
LU07	0.2	0.3	1.2	3
LU09	0.3	0.3	1.9	3
LU12	0.3	0.3	2.5	4
LU15	0.3	0.5	3.5	5

6. Lubrication accessories

There is no standard grease fitting for LU05 to LU15.

For the LU Series, apply grease directly to the ball grooves of rail using a point nozzle.

7. Dust-proof components

(1) Standard specification

End seal: Provided to both ends of the ball slide as a standard feature.

LU05TL, LU07AL, LU09AL, and LU09TL can install the end seal as an option.

• Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value)

Unit: N

Series \ Size	05	07	09	12	15
LU	0.3	0.3	0.5	0.5	0.5

(2) NSK K1™ lubrication unit

The installed dimensions of the NSK K1 lubrication unit are shown in **Table 10**.

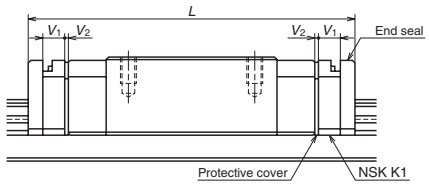


Table 10 Dimensions when equipped with the NSK K1 lubrication unit

Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V_1	Protective cover thickness V_2
LU05	Standard	TL	18*	24.4	2.0	0.5
LU07	Standard	AL	20.4*	29.4	2.5	0.5
LU09	Standard	AR, TR	30	36.4	2.7	0.5
	Standard	AL, TL	26.8*	34.2		
	Long	BL, UL	41	47.4		
LU12	Standard	AR, TR	35.2	42.2	3.0	0.5
	Standard	AL, TL	34	41		
	Long	BL, UL	47.5	54.5		
LU15	Standard	AL	43.6	51.8	3.5	0.6
	Long	BL	61	69.2		

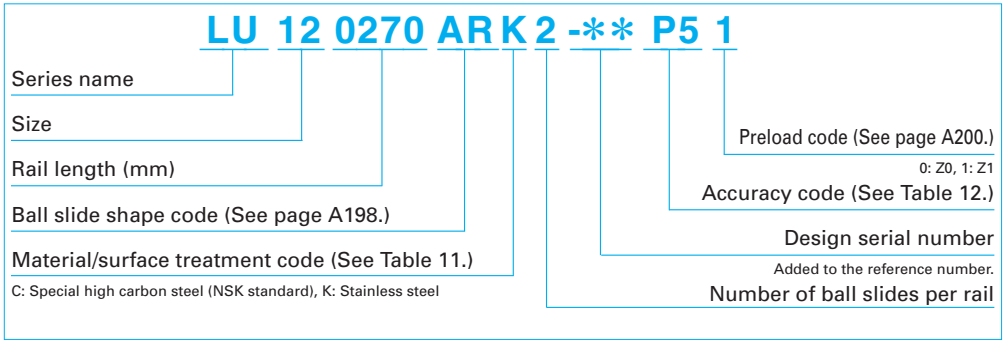
*) Standard ball slide length of LU05TL, LU07AL, LU09AL and LU09TL does not include the thickness of the end seal (1.5 mm). However, it includes the height of the screw head for end cap installation (Included length – LU05, 0.8 mm; LU07, no projection; LU09, 1 mm)

Note: When equipped with NSK K1, ball slide length = (standard ball slide length) + (V_1 thickness of single K1 unit) × (number of K1 units) + (V_2 thickness of the protective cover) × 2.

8. Reference number


Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly




(2) Reference number for random-matching type

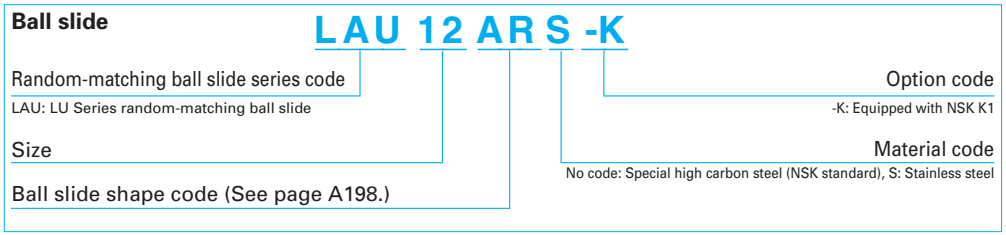Ball slide



Rail

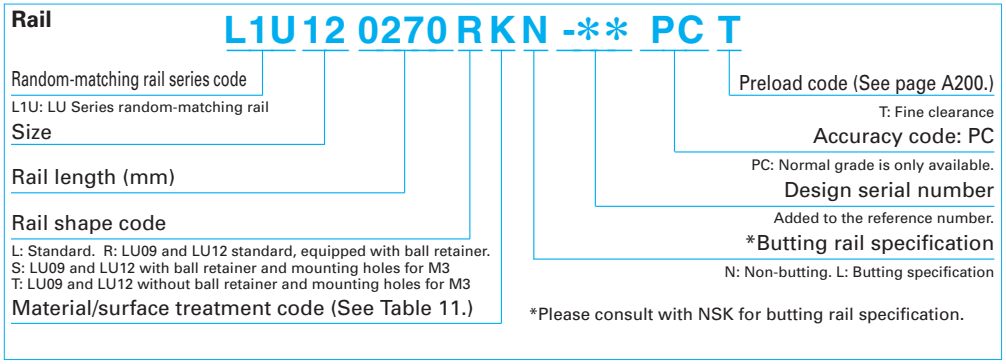

*Please consult with NSK for butting rail specification.

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only the preload code of "Fine clearance T" is available (refer to page A200).

Table 11 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
K	Stainless steel
D	Special high carbon steel with surface treatment
H	Stainless steel with surface treatment
Z	Other, special

Table 12 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Super precision grade	P4	K4
High precision grade	P5	K5
Precision grade	P6	K6
Normal grade	PN	KN
Normal grade (random-matching type)	PC	KC

Note: Refer to page A38 for NSK K1 lubrication unit.


9. Dimensions

LU-AL (Standard type / Standard, LU15 is equipped with ball retainer)
LU-TL (Standard type / Standard, Large mounting hole)
LU-AR (Standard type / Standard, With ball retainer)
LU-TR (Standard type / Standard, Large mounting hole, with ball retainer)


LU 12 0270 AR K 2 - PC T**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A198.)
- Material/surface treatment code (See Table 11.)
  C: Special high carbon steel (NSK standard), K: Stainless steel
- Number of ball slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 12.)
- Preload code (See page A200.)
  0: Z0, 1: Z1, T: ZT

Front view




LU05TL, LU07AL
LU09AL, TL




LU09AR, TR
LU12AL, TL, AR, TR
LU15AL


Side view



LU05TL

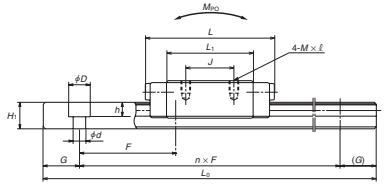

LU07AL
LU09AL, TL

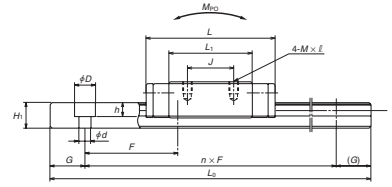

LU09AR, TR
LU12AL, TL, AR, TR
LU15AL

Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	M × pitch × ℓ	L_1	K	Width W_1	Height H_1	Pitch F
LU05TL	6	1	3.5	12	18	8	—	M2×0.4×1.5	12	5	5	3.2	15
LU07AL	8	1.5	5	17	20.4	12	8	M2×0.4×2.4	13.6	6.5	7	4.7	15
LU09AL **LU09TL**	10	2.2	5.5	20	26.8	15	13 10	M2×0.4×2.5 M3×0.5×3	18	7.8	9	5.5	20
LU09AR **LU09TR**	10	2.2	5.5	20	30	15	13 10	M2×0.4×2.5 M3×0.5×3	20	7.8	9	5.5	20
LU12AL **LU12TL**	13	3	7.5	27	34	20	15	M2.5×0.45×3 M3×0.5×3.5	21.8	10	12	7.5	25
LU12AR **LU12TR**	13	3	7.5	27	35.2	20	15	M2.5×0.45×3 M3×0.5×3.5	21.8	10	12	7.5	25
LU15AL	16	4	8.5	32	43.6	25	20	M3×0.5×4	27	12	15	9.5	40

Notes 1) LU05TL, LU07AL, LU09TL, LU09AR, LU09TR, LU12AR and LU12TR come in stainless steel only.
2) Ball slide of LU05TL has only two mounting tap holes in the center.
3) End seals of LU05TL, LU07AL, LU09AL and LU09TL are available on request.


Reference number for ball slide of random-matching type

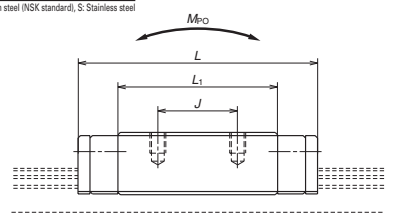
Random matching with retainer: LU09 - 12 are AR/TR, LU15 is AL.

LAU-AR (With ball retainer)
LAU-TR (Large mounting hole, with ball retainer)
LAU-AL (LU15 is equipped with ball retainer)

LAU 12 AR S -K

- Random-matching ball slide series code
  LAU: LU Series random-matching ball slide
- Size
- Ball slide shape code (See page A198.)
- Material code
  No code: Special high carbon steel (NSK standard), S: Stainless steel
- Option code
  -K: Equipped with NSK K1






Reference number for rail of random-matching type

L1U 12 0270 R K N - PC T**

- Random-matching rail series code
  L1U: LU Series random-matching rail
- Size
- Rail length (mm)
- Rail shape code
  L: Standard. R:LU09 and LU12 standard equipped with ball retainer.
  S: LU09 and LU12 with ball retainer and mounting holes for M3
  T: LU09 and LU12 without ball retainer and mounting holes for M3
- Material/surface treatment code (See Table 11.)
- *Butting rail specification
  N: Non-butting. L: Butting specification
- Design serial number
  Added to the reference number.
- Accuracy code: PC
  PC: Normal grade is only available.
- Preload code (See page A200.)
  T: Fine clearance

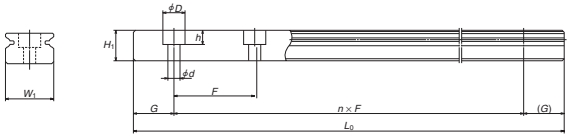*Please consult with NSK for butting rail specification.



Unit: mm

Rail Mounting bolt hole d × D × h	G (reference)	Max. length L_{0max}. ( ) for stainless	Basic load rating [5]Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (g)	Rail (g/100 mm)
2.3×3.3×1.5	5	— (210)	545	435	740	1.93	1.22	8.85	1.22	8.85	4	11
2.4×4.2×2.3	5	— (375)	1 090	865	1 370	4.90	2.66	18.6	2.66	18.6	10	23
2.6×4.5×3 3.5×6×4.5	7.5	1 200 (600)	1 760	1 400	2 220	10.2	6.10	38.5	6.10	38.5	17	35
2.6×4.5×3 3.5×6×4.5	7.5	— (600)	1 490	1 180	2 150	9.9	6.10	41.0	6.10	41.0	19	35
3×5.5×3.5 3.5×6×4.5	10	1 800 (800)	2 830	2 250	3 500	21.1	11.4	78.5	11.4	78.5	38	65
3×5.5×3.5 3.5×6×4.5	10	— (800)	2 830	2 250	3 500	21.1	11.4	81.5	11.4	81.5	38	65
3.5×6×4.5	15	2 000 (1 000)	5 550	4 400	6 600	49.5	25.6	193	25.6	193	70	105


4) To fix rail of LU05TL, use M2 × 0.4 cross-recessed pan head machine screw for precision instrument.
(JCIS 10-70 No. 0 pan head machine screw No.1.)
(JCIS: Japanese Camera Industrial Standard.)
5) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}: the basic dynamic load rating for 50 km rated fatigue life C_{100}: the basic dynamic load rating for 100 km rated fatigue life

LU-BL (High-load type / Long)
LU-UL (High-load type / Long, large mounting hole)


LU 12 0270 BL K 2 - P5 1**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A198.)
- Material/surface treatment code (See Table 11.)
  C: Special high carbon steel (NSK standard), K: Stainless steel
- Number of ball slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 12.)
- Preload code (See page A200.)
  0: Z0, 1: Z1

Front view



Side view

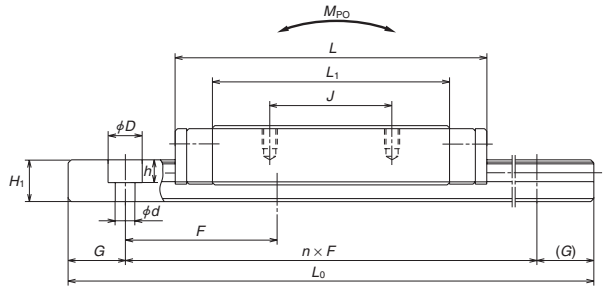


Unit: mm

Model No.	Assembly			Ball slide							Rail								Weight	
	Height			Width	Length	Mounting hole					Width	Height	Pitch	Mounting bolt hole	G	Max. length	Basic load rating			Static moment (N·m)				Ball slide	Rail
																	[3]Dynamic		Static						
																	[50km]	[100km]							
	H	E	W_2	W	L	B	J	M × pitch × ℓ	L_1	K	W_1	H_1	F	d × D × h	(reference)	$L_{0max.}$ ( ) for stainless	C_{50}(N)	C_{100}(N)	C_0 (N)	M_{RO}	M_{PO}		M_{YO}		(g)	(g/100 mm)
																					One slide	Two slides	One slide	Two slides		
LU09BL	10	2.2	5.5	20	41	15	16	M2×0.4×2.5	31.2	7.8	9	5.5	20	2.6×4.5×3	7.5	1 200 (600)	2 600	2 070	3 900	17.9	17.2	98.0	17.2	98.0	29	35
LU09UL								M3×0.5×3						3.5×6×4.5												
LU12BL	13	3	7.5	27	47.5	20	20	M2.5×0.45×3	35.3	10	12	7.5	25	3×5.5×3.5	10	1 800 (800)	4 000	3 150	5 700	34.5	28.3	169	28.3	169	59	65
LU12UL								M3×0.5×3.5						3.5×6×4.5												
LU15BL	16	4	8.5	32	61	25	25	M3×0.5×4	44.4	12	15	9.5	40	3.5×6×4.5	15	2 000 (1 000)	8 100	6 400	11 300	84.5	69.5	435	69.5	435	107	105

Notes 1) LU09UL is available only in stainless steel.
2) LU15BL is equipped with ball retainer.

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life C_{100}; the basic dynamic load rating for 100 km rated fatigue life

A-5-2.3 PE Series (Miniature wide type)

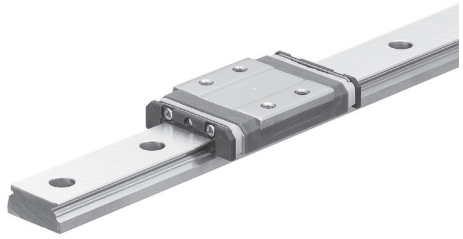

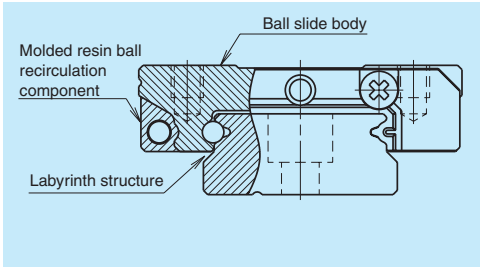


Fig. 1

1. Features

(1) Ideal for use of single rail

The PE Series linear guides are miniature and wide rail type. Thanks to the wide rail, load carrying capacity is high against moment load from rolling direction.

(2) Motion performance

Newly designed recirculation component facilitates smooth circulation of steel balls.

(3) Lightweight

The ball slide is fabricated to be approximately 20% lighter than that of the LE Series by the application of resin to a part of its body.

(4) Reduced noise intensity

Resin components applied in ball circulating circuits reduce collision noise between steel balls and the inner wall of circulating circuits.

(5) Low dust generation

The structure is designed to prevent dust generation.

(6) Excellent dust-proofing

It is designed to minimize the clearance between the side of rails and the inner walls of the slide, and prevent foreign matters from entering the ball slide.

(7) High corrosion resistance

High corrosion-resistant martensite stainless steel incorporated as a standard feature provides excellent resistance to corrosion.

(8) Easy to handle

Safety design includes a retainer that prevents steel balls from dropping out of the ball slide even when the slide is removed from the rail.




(9) Long-term maintenance-free

Equipped with NSK K1 Lubrication Unit realizes long-term, maintenance-free use.

(10) Fast delivery

Lineup of random-matching rails and ball slides in the series supports random matching and facilitates fast delivery. (PE09 to PE15)

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)	
		Standard type	High-load type
		Standard	Long
AR TR UR BR		AR, TR 	UR, BR 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm) over	or less	Preloaded assembly type (not random matching) Super precision P4	High precision P5	Precision grade P6	Normal grade PN	Random-matching type Normal grade PC
–	50	2	2	4.5	6	6
50	80	2	3	5	6	6
80	125	2	3.5	5.5	6.5	6.5
125	200	2	4	6	7	7
200	250	2.5	5	7	8	8
250	315	2.5	5	8	9	9
315	400	3	6	9	11	11
400	500	3	6	10	12	12
500	630	3.5	7	12	14	14
630	800	4.5	8	14	16	16
800	1 000	5	9	16	18	18
1 000	1 250	6	10	17	20	20

(2) Accuracy standard

The preloaded assembly type has four accuracy grades; Super precision P4, High precision P5, Precision P6, and Normal PN grades, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type while **Table 3** shows the accuracy standard for the random-matching types.

• Tolerance of preloaded assembly

Table 2 Unit: μm

Characteristics \ Accuracy grade	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H Variation of H (All ball slides on a set of rails)	±10 5	±15 7	±20 15	±40 25
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All ball slides on reference rail)	±15 7	±20 10	±30 20	±50 30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in **Table 1** and **Fig. 2**			


• Tolerance of random-matching type: Normal grade PC

Table 3 Unit: μm


Characteristics \ Model No.	PE09, 12 and 15
Mounting height H	±20
Variation of mounting height H	15① 30②
Mounting width W_2 or W_3	±20
Variation of mounting width W_2 or W_3	20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in **Table 1** and **Fig. 2**

Note: ① Variation on the same rail ② Variation on multiple rails

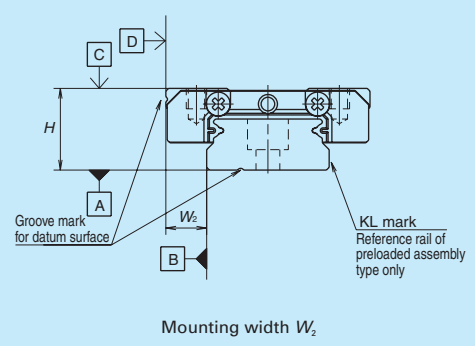(3) Assembled accuracy



Mounting width W_2

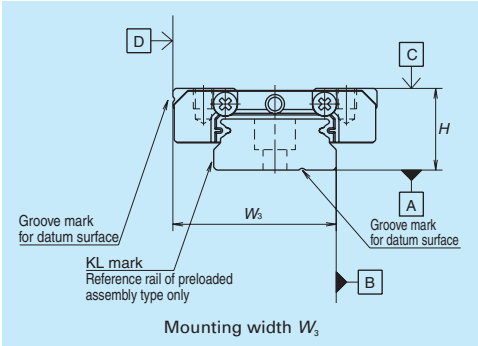

Mounting width W_3

Fig. 2

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0, along with random-matching type of Fine clearance ZT. Values for preload and rigidity of the preloaded assembly types are shown in **Table 4**. Rigidities are for the median of the preload range.

• Preload and rigidity of preloaded assembly

Table 4

	Model No.	Preload (N)	Rigidity (N/μm)
		Slight preload (Z1)	Slight preload (Z1)
Standard type	PE05AR	0 – 28	45
	PE07TR	0 – 29	46
	PE09TR	0 – 37	61
	PE12AR	0 – 40	63
	PE15AR	0 – 49	66
High-load type	PE09UR	0 – 54	86
	PE12BR	0 – 59	97
	PE15BR	0 – 75	114

Note: Clearance of Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero.

• Clearance of random-matching type

Table 5 Unit: μm

	Model No.	Fine clearance ZT
Standard type	PE09TR	3 or less
	PE12AR	
	PE15AR	
High-load type	PE09UR	5 or less
	PE12BR	
	PE15BR	

4. Maximum rail length

Table 6 shows the limitations of rail length.

However, the limitations vary by accuracy grades.

Table 6 Length limitations of rails

Unit: mm

Series	Material \ Size	05	07	09	12	15
PE	Stainless steel	150	600	800	1 000	1 200

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

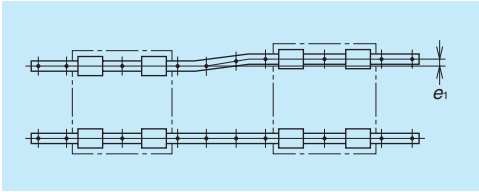


Fig. 3

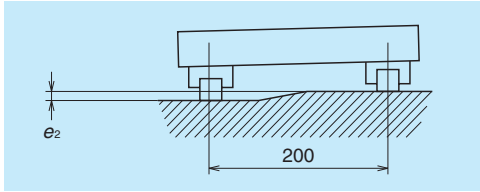


Fig. 4

Table 7 Unit: μm

Value	Preload	Model No.				
		PE05	PE07	PE09	PE12	PE15
Permissible values of parallelism in two rails e_1	Z0, ZT	10	12	15	18	22
	Z1	5	7	10	13	17
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	50 μm/200 mm				
	Z1	35 μm/200 mm				

(2) Shoulder height of the mounting surface and corner radius r




Fig. 5 Shoulder for the rail datum surface




Fig. 6 Shoulder for the ball slide datum surface


Table 8 Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H′	H″*
PE05	0.2	0.2	1.1	2.5
PE07	0.2	0.3	1.7	3
PE09	0.3	0.3	3.5	2.8
PE12	0.3	0.3	3.5	3.2
PE15	0.3	0.5	3.5	4.1

*) H″ is the minimum recommended value based on the dimension T in dimension table.

6. Lubrication accessory

Model of PE15 can select drive-in type grease fitting as an option.
For the model of PE05 to PE12, apply grease directly to the ball grooves of rail using a point nozzle.



Drive-in type

7. Dust-proof components

(1) Standard specification

End seal: Provided to both ends of the ball slide as a standard feature.
Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value) Unit: N

Series \ Size	05	07	09	12	15
PE	0.4	0.4	0.8	1	1.2

(2) NSK K1™ lubrication unit

Table 10 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

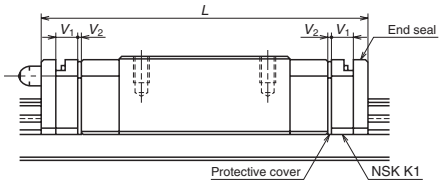


Table 10 Dimensions when equipped with the NSK K1 lubrication unit Unit: mm


Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length equipped with two NSK K1 L	Thickness of NSK K1, V_1	Thickness of protective cover, V_2
PE05	Standard	AR	24.1	28.9	2	0.4
PE07	Standard	TR	31.1	37.1	2.5	0.5
PE09	Standard	TR	39.8	46.8	3	0.5
	Long	UR	51.2	58.2		
PE12	Standard	AR	45	53	3.5	0.5
	Long	BR	60	68		
PE15	Standard	AR	56.6	66.2	4	0.8
	Long	BR	76	85.6		

Note: When equipped with NSK K1, ball slide length = (standard ball slide length) + (V_1 thickness of single K1 unit) × (number of K1 units) + (V_2 thickness of the protective cover) × 2.


8. Reference number


Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

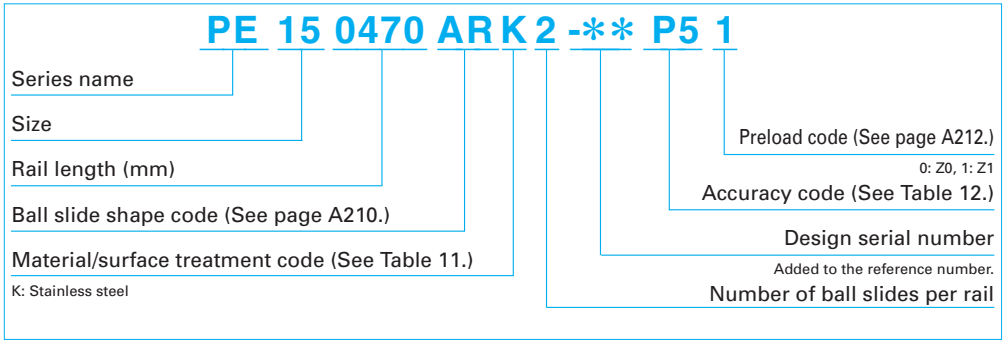(1) Reference number for preloaded assembly



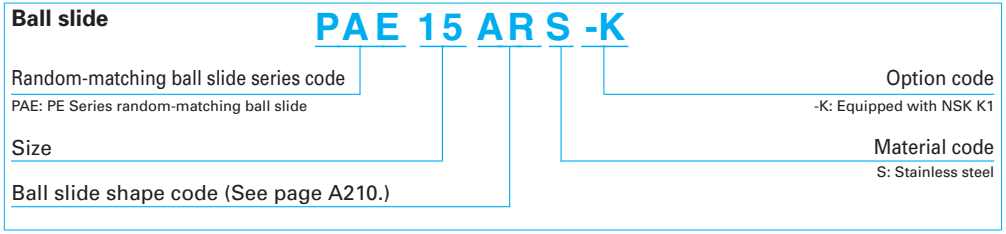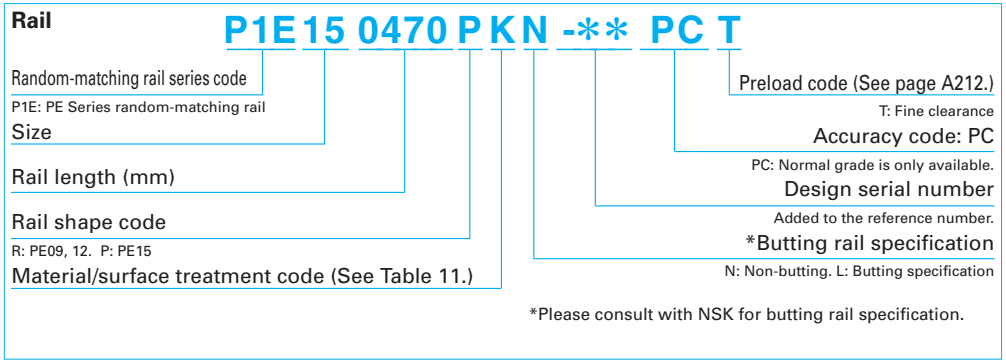(2) Reference number for random-matching type





Reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only preload code of "Fine clearance T" is available (refer to page A212).
Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 11 Material/surface treatment code

Code	Description
K	Stainless steel
H	Stainless steel with surface treatment
Z	Other, special

Table 12 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
Super precision grade	P4	K4	F4
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN
Normal grade (random-matching type)	PC	KC	FC

Note: Refer to pages A38 and A61 for NSK K1 lubrication unit.

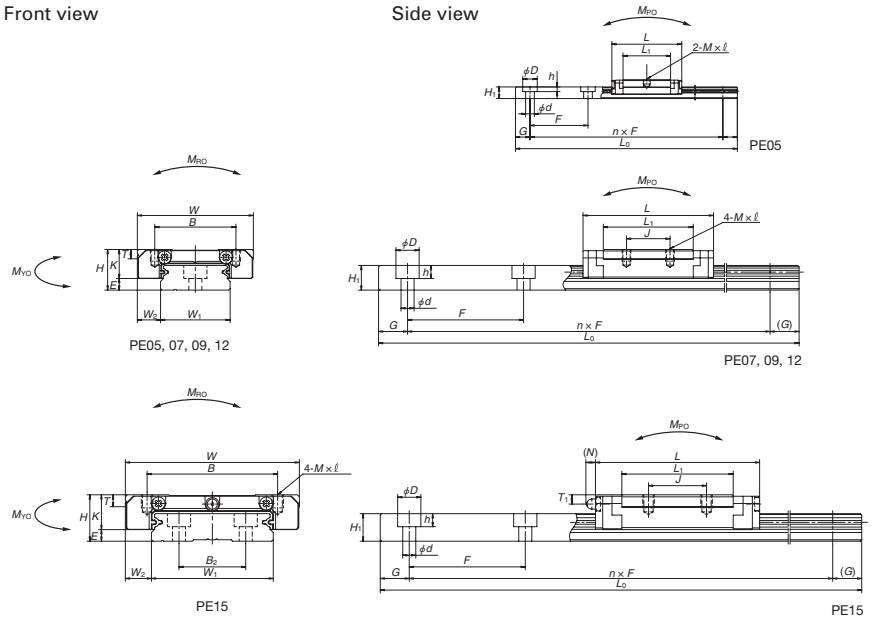
9. Dimensions
PE-AR, TR (Standard type / Standard)
PE-UR, BR (High-load type / Long)

PE 15 0470 AR K 2 - ** PC T**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A210.)
- Material/surface treatment code (See Table 11.)
  K: Stainless steel
- Number of ball slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 12.)
- Preload code (See page A212.)
  0: Z0, 1: Z1, T: ZT

Front view

Side view




Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	M × pitch × ℓ	L_1	K	T	Oil hole Hole size	T_1	N	Width W_1	Height H_1
PE05AR	6.5	1.4	3.5	17	24.1	13	—	M2.5×0.45×1.5	16.4	5.1	2.5	ϕ0.9	1.3	—	10	4
PE07TR	9	2	5.5	25	31.1	19	10	M3×0.5×2.8	20.8	7	3	ϕ1.9	1.9	—	14	5.2
PE09TR	12	4	6	30	39.8	21	12	M3×0.5×3	26.6	8	2.8	ϕ2	2.3	—	18	7.5
PE09UR					51.2	23	24		38							
PE12AR	14	4	8	40	45	28	15	M3×0.5×4	31	10	3.2	ϕ2.5	2.7	—	24	8.5
PE12BR					60		28		46							
PE15AR	16	4	9	60	56.6	45	20	M4×0.7×4.5	38.4	12	4.1	ϕ3	3.2	(3.3)	42	9.5
PE15BR					76		35		57.8							

Notes: 1) Ball slide of PE05AR has only two mounting tap holes in the center.

Reference number for ball slide of random-matching type

PAE 15 AR S -K

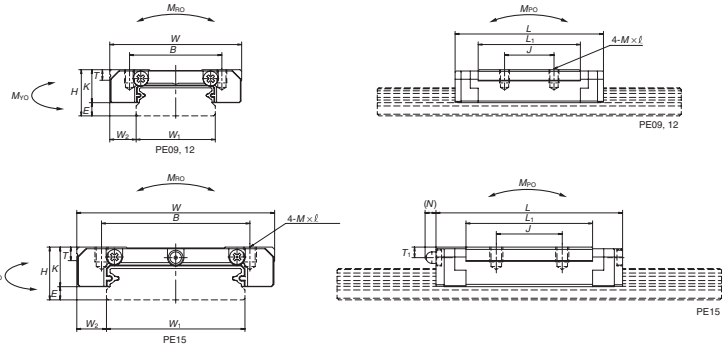- Random-matching ball slide series code
  PAE: PE Series random-matching ball slide
- Size
- Ball slide shape code (See page A210.)
- Option code
  -K: Equipped with NSK K1
- Material code
  S: Stainless steel




Reference number for rail of random-matching type

P1E 15 0470 P K N - ** PC T**

- Random-matching rail series code
  P1E: PE Series random-matching rail
- Size
- Rail length (mm)
- Rail shape code
  R: PE09, 12. P: PE15
- Material/surface treatment code (See Table 11.)
- *Butting rail specification
  N: Non-butting. L: Butting specification
- Design serial number
  Added to the reference number.
- Accuracy code: PC
  PC: Normal grade is only available.
- Preload code (See page A212.)
  T: Fine clearance

*Please consult with NSK for butting rail specification.




Unit: mm

Rail B_2	Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L_{0max}	Basic load rating [2]Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (g)	Rail (g/100 mm)
—	20	3×5×1.6	7.5	150	690	550	1 160	6.00	2.75	17.5	2.75	17.5	7	34
—	30	3.5×6×3.2	10	600	1 580	1 260	2 350	16.7	7.20	46.0	7.20	46.0	19	55
—	30	3.5×6×4.5	10	800	3 000	2 390	4 500	36.5	17.3	113	17.3	113	35	95
					4 000	3 150	6 700	54.5	37.5	210	37.5	210	50	
—	40	4.5×8×4.5	15	1 000	4 350	3 450	6 350	70.5	29.3	180	29.3	180	66	140
					5 800	4 600	9 550	106	63.5	345	63.5	345	98	
23	40	4.5×8×4.5	15	1 200	7 600	6 050	10 400	207	59.0	370	59.0	370	140	275
					10 300	8 200	16 000	320	135	740	135	740	211	

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}: the basic dynamic load rating for 50 km rated fatigue life
C_{100}: the basic dynamic load rating for 100 km rated fatigue life
3) To fix rail of PE05AR, use M2.5 × 0.45 cross-recessed pan head machine screw for precision instrument. (JCIS 10-70 No. 0 pan head machine screw No.3.)
(JCIS: Japanese Camera Industrial Standard.)

A-5-2.4 LE Series (Miniature wide type)

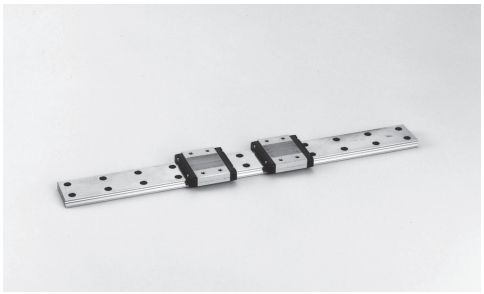

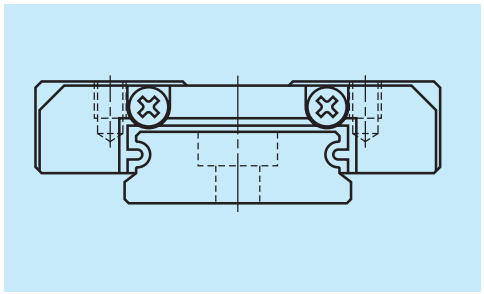


Fig. 1 LE Series

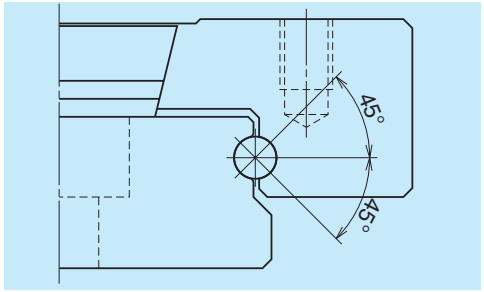


Fig. 2 Balls in contact

1. Features

(1) Ideal for use of single rail

The LE Series linear guides are miniature and wide rail type. Thanks to the wide rail, load carrying capacity is high against moment load from rolling direction.

(2) Equal load carrying capacity in vertical and lateral directions

Contact angle is set at 45 degrees, equally dispersing the load from vertical and lateral directions. This also provides equal rigidity in the two directions.

(3) Guides are super-thin.

Super-thin guides owe their design to the single ball groove on right and left sides (Gothic arch).

(4) High accuracy

Fixing the master rollers to the ball grooves is easy thanks to the Groove arch groove. This makes easy and accurate measuring of ball grooves.

(5) Stainless steel is standard.

Rails and ball slides are made of martensitic stainless steel.





(6) Ball retainer is available in some series.

Some series come with a ball retainer (ball slide shape: AR and TR). Balls are retained in the retainer and do not fall out when a ball slide is withdrawn from the rail (random-maching type ball slides come with a ball retainer).

(7) Fast delivery

Random matching of rails and ball slides are available. (LE09 to LE15)

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)		
		Medium-load type	Standard type	High-load type
		Short	Standard	Long
AL TL AR TR BL UL CL SL		CL, SL 	AL, TL, AR, TR 	BL, UL 

Specification	Detail	Type		
Mounting hole	Normal	CL*	AL, AR	BL*
	Large	SL*	TL, TR	UL*
Ball retainer	Without	CL, SL	AL, TL	BL, UL
	With	—	AR, TR	—

* Only applicable to LE09

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm) over	or less	Preloaded assembly type (not random matching) High precision P5	Precision grade P6	Normal grade PN	Random-matching type Normal grade PC
–	50	2	4.5	6	6
50 –	80	3	5	6	6
80 –	125	3.5	5.5	6.5	6.5
125 –	200	4	6	7	7
200 –	250	5	7	8	8
250 –	315	5	8	9	9
315 –	400	6	9	11	11
400 –	500	6	10	12	12
500 –	630	7	12	14	14
630 –	800	8	14	16	16
800 –	1 000	9	16	18	18
1 000 –	1 250	10	17	20	20

(2) Accuracy standard

The preloaded assembly type has three accuracy grades; High precision P5, Precision P6, and Normal PN grades, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type while **Table 3** shows the accuracy standard for the random-matching type.

• Tolerance of preloaded assembly

Table 2 Unit: μm


Characteristics \ Accuracy grade	High precision P5	Precision grade P6	Normal grade PN
Mounting height H Variation of H (All ball slides on a set of rails)	±15 7	±20 15	±40 25
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All ball slides on reference rail)	±20 10	±30 20	±50 30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Refer to **Table 1** and **Fig. 3**		

• Tolerance of random-matching type: Normal grade PC

Table 3 Unit: μm

Characteristics \ Accuracy grade	LE09, 12, 15
Mounting height H	±20
Variation of mounting height H	40
Mounting width W_2 or W_3	±20
Variation of mounting width W_2 or W_3	40
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Refer to **Table 1** and **Fig. 3**

(3) Assembled accuracy

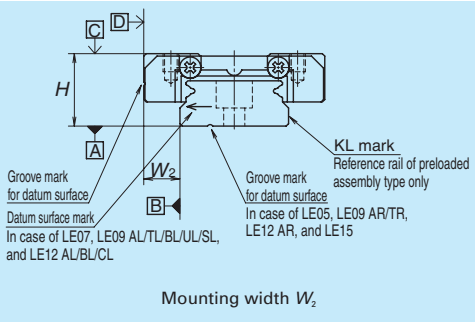

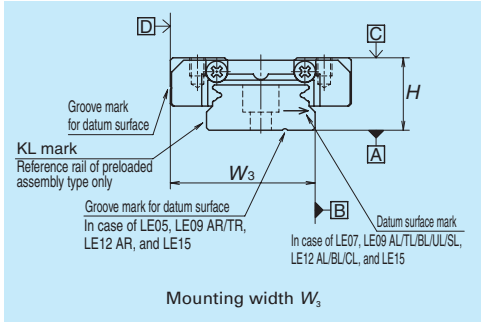


Fig. 3

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0 for the preloaded assembly type, along with Fine clearance ZT for the random-matching type. Values for preload and rigidity of the preloaded assembly type are shown in **Table 4**. Rigidities are for the median of the preload range.

• Preload and rigidity of preloaded assembly

Table 4

	Model No.	Preload (N) Slight preload (Z1)	Rigidity (N/μm) Slight preload (Z1)
Standard type	LE05 AL	0 – 23	36
	LE07 TL	0 – 29	46
	LE09 AL, TL, AR, TR	0 – 37	61
	LE12 AL, AR	0 – 40	63
	LE15 AL, AR	0 – 49	66
Medium-load type	LE05 CL	0 – 18	29
	LE07 SL	0 – 16	28
	LE09 CL, SL	0 – 21	33
	LE12 CL	0 – 23	36
	LE15 CL	0 – 29	44
High-load type	LE07 UL	0 – 43	71
	LE09 BL, UL	0 – 54	86
	LE12 BL	0 – 59	97
	LE15 BL	0 – 75	114

Note: The clearance of Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero. However, the clearance of the Z0 of PN grade is 3 to 10 μm.

• Clearance of random-matching type

Table 5 Unit: μm

Model No.	Fine clearance ZT
LE09	0 – 15
LE12	
LE15	

4. Maximum rail length

Table 6 shows the limitations of rail length. The limitations vary by accuracy grades.

Table 6 Length limitation of rails Unit: mm

Series	Size \ Material	05	07	09	12	15
LE	Stainless steel	150	600	800	1 000	1 200

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

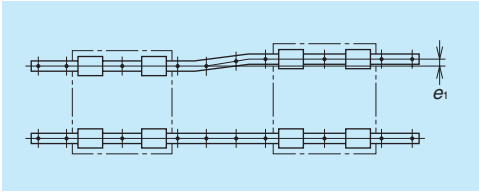


Fig. 4

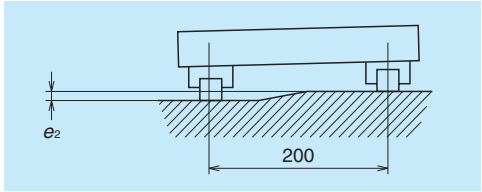


Fig. 5

Table 7

Unit: μm

Value	Preload	Model No.				
		LE05	LE07	LE09	LE12	LE15
Permissible values of parallelism in two rails e_1	Z0, ZT	10	12	15	18	22
	Z1	5	7	10	13	17
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	50 μm/200 mm				
	Z1	35 μm/200 mm				

(2) Shoulder height of the mounting surface and corner radius r




Fig. 6 Shoulder for the rail datum surface




Fig. 7 Shoulder for the ball slide datum surface


Table 8

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
LE05	0.2	0.2	1.1	2
LE07	0.2	0.3	1.7	3
LE09	0.3	0.3	3.5	3
LE12	0.3	0.3	3.5	4
LE15	0.3	0.5	3.5	5

6. Lubrication accessories

Model of LE15AR can select drive-in type grease fitting as option.
There is no standard grease fitting for LE05 to LE12.
For the models of LE05 to LE15 except for LE15AR, apply grease directly to the ball grooves of rail, using a point nozzle.



Drive-in type

7. Dust-proof components

(1) Standard specification

End seal: Provided to both ends of the ball slide as a standard feature.
• Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value)

Unit: N

Series \ Size	05	07	09	12	15
LE	0.4	0.4	0.8	1.0	1.2

(2) NSK K1™ lubrication unit

The installed dimensions of NSK K1 lubrication unit are shown in **Table 10**.

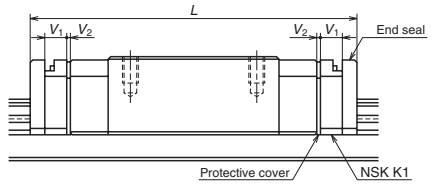


Table 10 Dimensions when equipped with the NSK K1 lubrication unit

Unit: mm


Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V_1	Protective cover thickness V_2
LE07	Standard	TL	31	37	2.5	0.5
	Long	UL	42	48		
	Short	SL	22.4	28.4		
LE09	Standard	AL, TL	39	46	3.0	0.5
	Standard	AR, TR	39.8	46.8		
	Long	BL, UL	50.4	57.4		
	Short	CL, SL	26.4	33.4		
LE12	Standard	AL	44	52	3.5	0.5
	Standard	AR	45	53		
	Long	BL	59	67		
	Short	CL	30.5	38.5		
LE15	Standard	AL	55.0	64.6	4.0	0.8
	Standard	AR	56.6	66.2		
	Long	BL	74.4	84		
	Short	CL	41.4	51		

Note: When equipped with NSK K1, ball slide length = (standard ball slide length) + (V_1 thickness of single K1 unit) × (number of K1 units) + (V_2 thickness of the protective cover) × 2.

8. Reference number


Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

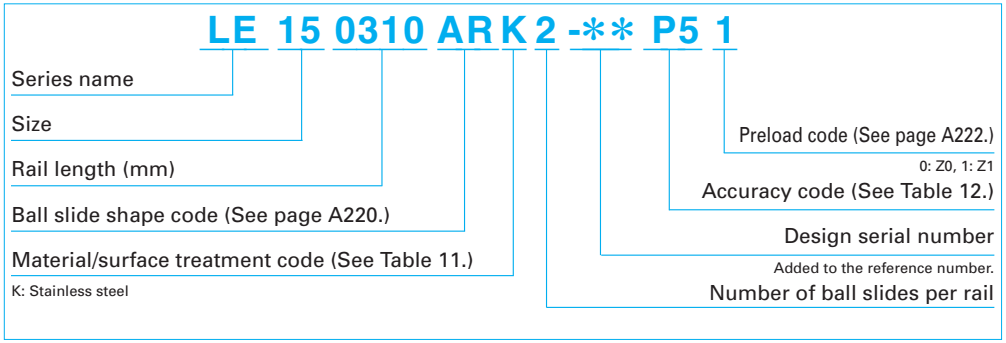(1) Reference number for preloaded assembly




(2) Reference number for random-matching type

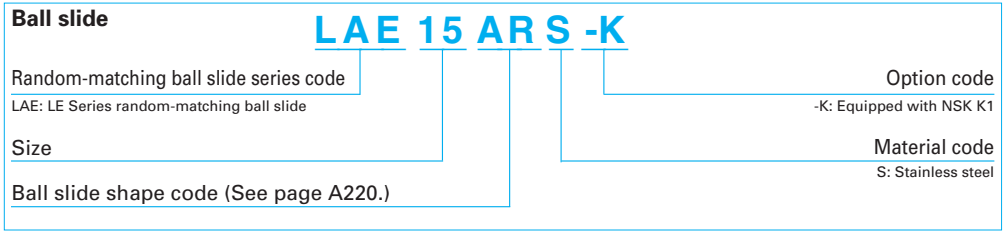Ball slide



Rail

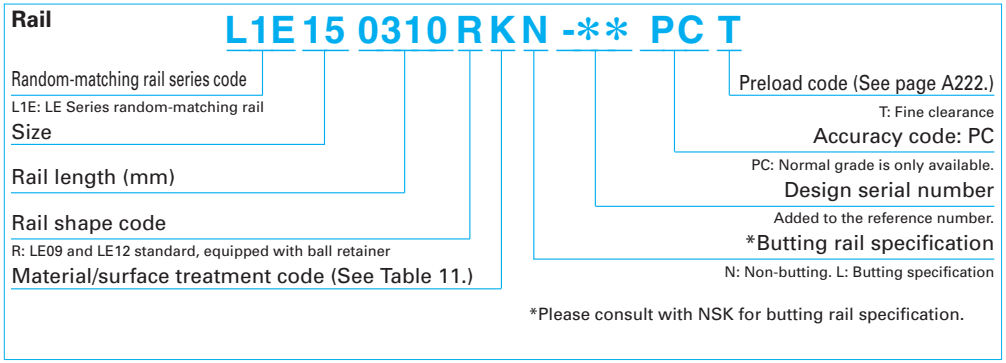

*Please consult with NSK for butting rail specification.

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only the preload code of "Fine clearance T" is available (refer to page A222).

Table 11 Material/surface treatment code

Code	Description
K	Stainless steel
H	Stainless steel with surface treatment
Z	Other, special

Table 12 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
High precision grade	P5	K5
Precision grade	P6	K6
Normal grade	PN	KN
Normal grade (random-matching type)	PC	KC

Note: Refer to page A38 for NSK K1 lubrication unit.


9. Dimensions

LE-AL (Standard type / Standard)
LE-TL (Standard type / Standard, large mounting hole)
LE-AR (Standard type / Standard, with ball retainer)
LE-TR (Standard type / Standard, large mounting hole, with ball retainer)

LE 15 0310 AR K 2 - PC T**


- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A220.)
- Material/surface treatment code (See Table 11.)
  K: Stainless steel
- Number of ball slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 12.)
- Preload code (See page A222.)
  0: Z0, 1: Z1, T: ZT

Front view




LE05, 07, 09, 12


Side view



LE05



LE15

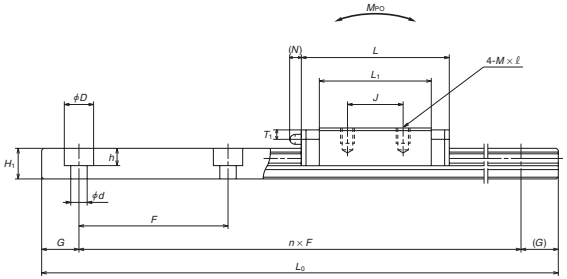

LE07, 09, 12, 15

Model No.	Assembly			Ball slide							Grease fitting							
	Height			Width	Length	Mounting hole					Hole size			Width	Height		Pitch	
	H	E	W_2	W	L	B	J	$M \times$ pitch $\times \ell$	L_1	K		T_1	N	W_1	H_1	B_2	F	
LE05AL	6.5	1.4	3.5	17	24	13	—	M2.5×0.45×2	17	5.1	—	—	—	10	4	—	20	
LE07TL	9	2	5.5	25	31	19	10	M3×0.5×3	21.2	7	—	—	—	14	5.2	—	30	
LE09AL **LE09TL**	12	4	6	30	39	21	12	M2.6×0.45×3 M3×0.5×3	27.6	8	—	—	—	18	7.5	—	30	
LE09AR **LE09TR**	12	4	6	30	39.8	21	12	M2.6×0.45×3 M3×0.5×3	27.6	8	—	—	—	18	7.5	—	30	
LE12AL **LE12AR**	14	4	8	40	44 45	28	15	M3×0.5×4	31	10	—	—	—	24	8.5	—	40	
LE15AL **LE15AR**	16	4	9	60	55 56.6	45	20	M4×0.7×4.5	38.4	12	— φ3	— 3.2	— 3	42	9.5	23	40	

Notes: 1) Ball slide of LE05 has only two mounting tap holes.

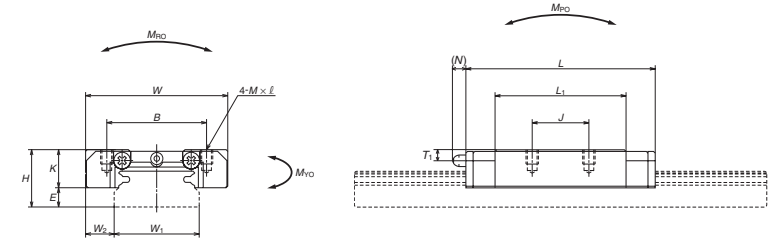
Reference number for ball slide of random-matching type

Random matching with retainer: LAE09AR/TR, LAE12AR, LAE15AR

LAE-AR (With ball retainer)
LAE-TR (Large mounting hole with ball retainer)

LAE 15 AR S -K

- Random-matching ball slide series code
  LAE: LE Series random-matching ball slide
- Size
- Ball slide shape code (See page A220.)
- Material code
  S: Stainless steel
- Option code
  -K: Equipped with NSK K1



Reference number for rail of random-matching type


Rail L1E 15 0310 R K N - PC T**

- Random-matching rail series code
  L1E: LE Series random-matching rail
- Size
- Rail length (mm)
- Rail shape code
  R: LE09 and LE12 standard equipped with ball retainer
- Material/surface treatment code (See Table 11.)
- *Butting rail specification
  N: Non-butting, L: Butting specification
- Design serial number
  Added to the reference number.
- Accuracy code: PC
  PC: Normal grade is only available.
- Preload code (See page A222.)
  T: Fine clearance


*Please consult with NSK for butting rail specification.



LE09, 12



LE15

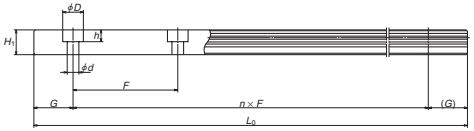

Unit: mm

Rail			Basic load rating								Weight	
Mounting bolt hole	G	Max. length	[2]Dynamic		Static	Static moment (N·m)					Ball slide	Rail
			[50km]	[100km]	C_0	M_{RO}	M_{PO}		M_{YO}			
$d \times D \times h$	(reference)	L_{0max}	C_{50}(N)	C_{100}(N)	(N)		One slide	Two slides	One slide	Two slides	(g)	(g/100 mm)
3×5×1.6	7.5	150	725	575	1 110	5.65	2.58	16.9	2.58	16.9	11	34
3.5×6×3.2	10	600	1 580	1 260	2 350	16.7	7.20	46.0	7.20	46.0	25	55
3.5×6×4.5	10	800	3 000	2 400	4 500	36.5	17.3	110	17.3	110	40	95
3.5×6×4.5	10	800	3 000	2 400	4 500	36.5	17.3	113	17.3	113	40	95
4.5×8×4.5	15	1 000	4 350	3 450	6 350	70.5	29.3	175 180	29.3	175 180	75	140
4.5×8×4.5	15	1 200	7 600	6 050	10 400	207	59.0	360 370	59.0	360 370	150	275

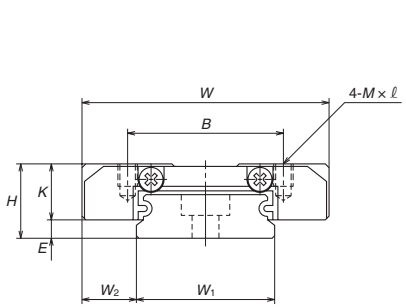
2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}: the basic dynamic load rating for 50 km rated fatigue life C_{100}: the basic dynamic load rating for 100 km rated fatigue life
3) For fixing a rail of LE05AL, use M2.5 × 0.45 cross-recessed pan head machine screw for precision instruments.
(JCIS 10-70: No.0 pan head machine screw No.3) (JCIS: Japanese Camera Industrial Standard)

LE-BL (High-load type / Long)
LE-UL (High-load type / Long, large mounting hole)


LE 15 0310 BL K 2 - ** P5 1**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A220.)
- Material/surface treatment code (See Table 11.)
  - K: Stainless steel
- Number of ball slides per rail
- Design serial number
  - Added to the reference number.
- Accuracy code (See Table 12.)
- Preload code (See page A222.)
  - 0: Z0, 1: Z1

Front view




LE07, 09, 12

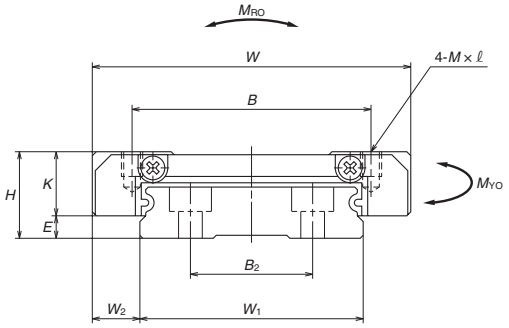

LE15

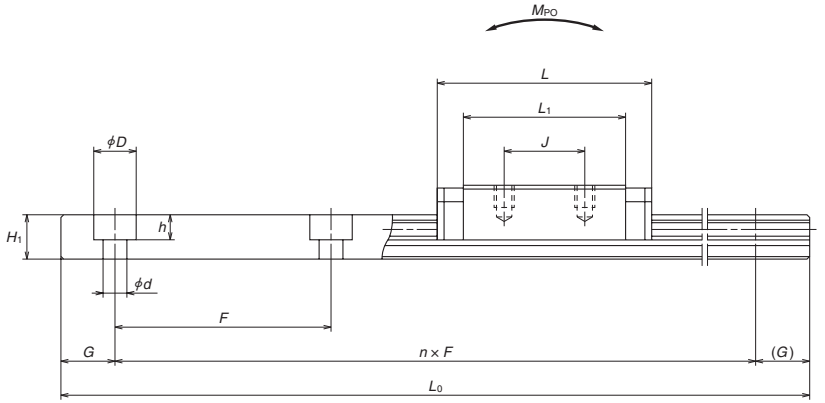Side view



Unit: mm

Model No.	Assembly			Ball slide							Rail					Weight	
	Height			Width	Length	Mounting hole					Width	Height		Pitch			
	H	E	W_2	W	L	B	J	$M \times$ pitch $\times \ell$	L_1	K	W_1	H_1	B_2	F			
LE07UL	9	2	5.5	25	42	19	19	M3×0.5×3	32.2	7	14	5.2	—	30			
LE09BL **LE09UL**	12	4	6	30	50.4	23	24	M2.6×0.45×3 M3×0.5×3	39	8	18	7.5	—	30			
LE12BL	14	4	8	40	59	28	28	M3×0.5×4	46	10	24	8.5	—	40			
LE15BL	16	4	9	60	74.4	45	35	M4×0.7×4.5	57.8	12	42	9.5	23	40			

Rail			Basic load rating								Weight	
Mounting bolt hole	G	Max. length	[1]Dynamic		Static	Static moment (N·m)					Ball slide	Rail
			[50km]	[100km]	C_0	M_{RO}	M_{PO}		M_{YO}			
$d \times D \times h$	(reference)	L_{0max}	C_{50}(N)	C_{100}(N)	(N)		One slide	Two slides	One slide	Two slides	(g)	(g/100 mm)
3.5×6×3.2	10	600	2 180	1 730	3 700	26.4	17.3	94.5	17.3	94.5	39	55
3.5×6×4.5	10	800	4 000	3 150	6 700	54.5	37.5	206	37.5	206	58	95
4.5×8×4.5	15	1 000	5 800	4 600	9 550	106	63.5	340	63.5	340	115	140
4.5×8×4.5	15	1 200	10 300	8 200	16 000	320	135	725	135	725	235	275

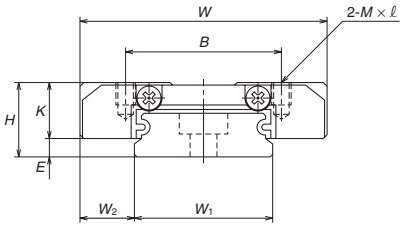
Note: 1) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}: the basic dynamic load rating for 50 km rated fatigue life
C_{100}: the basic dynamic load rating for 100 km rated fatigue life

LE-CL (Medium-load type / Short)
LE-SL (Medium-load type / Short, large mounting hole)


LE 15 0310 CL K 2 - P5 1**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A220.)
- Material/surface treatment code (See Table 11.)
  - K: Stainless steel
- Number of ball slides per rail
- Design serial number
  - Added to the reference number.
- Accuracy code (See Table 12.)
- Preload code (See page A222.)
  - 0: Z0, 1: Z1

Front view




LE05, 07, 09, 12

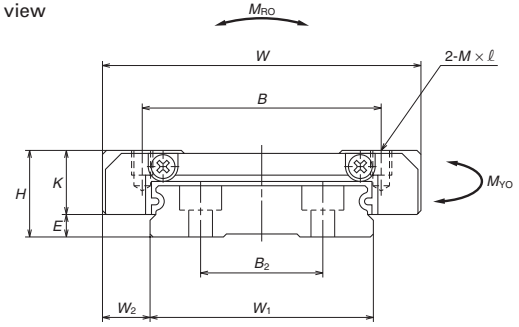

LE15

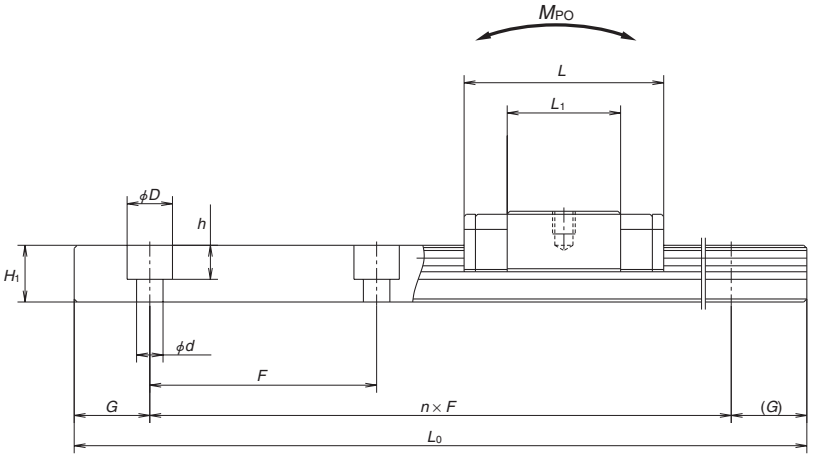Side view



Unit: mm


Model No.	Assembly			Ball slide							Rail				Weight	
	Height			Width	Length	Mounting hole					Width	Height		Pitch		
	H	E	W_2	W	L	B	J	$M \times$ pitch $\times \ell$	L_1	K	W_1	H_1	B_2	F		
LE05CL	6.5	1.4	3.5	17	20	13	—	M2.5×0.45×2	13	5.1	10	4	—	20		
LE07SL	9	2	5.5	25	22.4	19	—	M3×0.5×3	12.6	7	14	5.2	—	30		
LE09CL **LE09SL**	12	4	6	30	26.4	21	—	M2.6×0.45×3 M3×0.5×3	15	8	18	7.5	—	30		
LE12CL	14	4	8	40	30.5	28	—	M3×0.5×4	17.5	10	24	8.5	—	40		
LE15CL	16	4	9	60	41.4	45	—	M4×0.7×4.5	24.8	12	42	9.5	23	40		

Notes: 1) Ball slide of CL and SL types have only two mounting tap holes in the center.

Rail			Basic load rating								Weight	
Mounting bolt hole	G	Max. length	[2]Dynamic		Static	Static moment (N·m)					Ball slide	Rail
			[50km]	[100km]	C_0	M_{RO}	M_{PO}		M_{YO}			
$d \times D \times h$	(reference)	L_{0max}	C_{50}(N)	C_{100}(N)	(N)		One slide	Two slides	One slide	Two slides	(g)	(g/100 mm)
3×5×1.6	7.5	150	595	470	835	4.25	1.51	10.0	1.51	10.0	8	34
3.5×6×3.2	10	600	980	775	1 170	8.35	2.01	18.5	2.01	18.5	17	55
3.5×6×4.5	10	800	1 860	1 480	2 240	18.2	4.85	41.0	4.85	41.0	25	95
4.5×8×4.5	15	1 000	2 700	2 140	3 150	35.0	8.15	67.0	8.15	67.0	50	140
4.5×8×4.5	15	1 200	5 000	3 950	5 650	113	19.4	162	19.4	162	110	275

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}: the basic dynamic load rating for 50 km rated fatigue life C_{100}: the basic dynamic load rating for 100 km rated fatigue life
3) For fixing a rail of LE05CL, use cross-recessed pan head machine screw for precision instruments M2.5 × 0.45 (JCIS 10-70: Japan Camera Industry Association, No.0, class 3).

A-5-2.5 Miniature LH Series

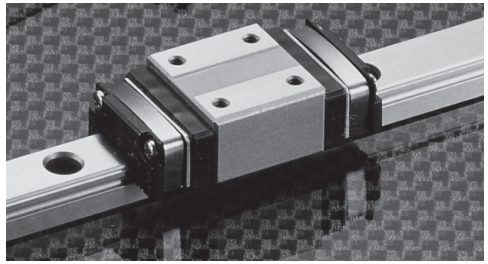

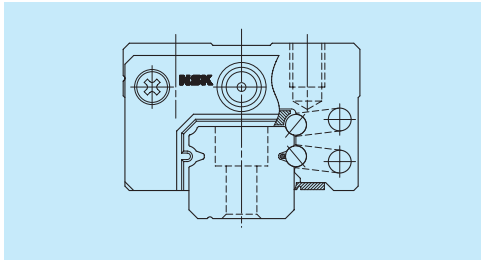


Fig. 1 LH Series

1. Features

(1) High self-aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, and thus reducing moment rigidity.
This increases the capacity to absorb errors in installation.

(2) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, and thus increasing load carrying capacity as well as rigidity in vertical direction.

(3) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in **Fig. 2**. The vertical load is generally carried by the top ball rows, where balls are contacting at two points. Because of this design, the bottom ball rows will carry load when a large impact load is applied vertically as shown in **Fig. 3**. This assures high resistance to the impact load.

(4) High accuracy

As showing in **Fig. 4**, fixing the master rollers to the ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(5) High corrosion resistance

High corrosion-resistant martensite stainless steel is incorporated as a standard feature to provides excellent corrosion resistance.

(6) Easy to handle

Safety design includes a retainer that prevents steel balls from dropping out of the ball slide even when the slide is removed from the rail. (LH10-12)

(7) Long-term maintenance-free

Superb features of NSK K1 Lubrication unit realize a long-term, maintenance-free operation.

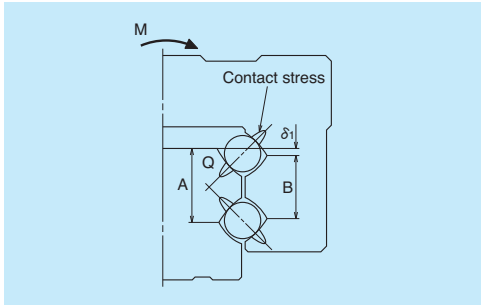


Fig. 2 Enlarged illustration of the offset Gothic arch groove

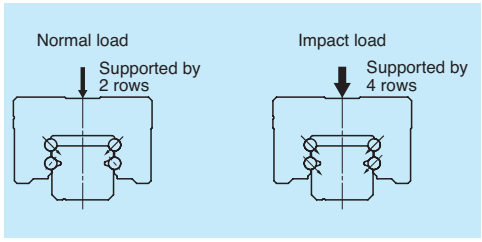


Fig. 3 When load is applied

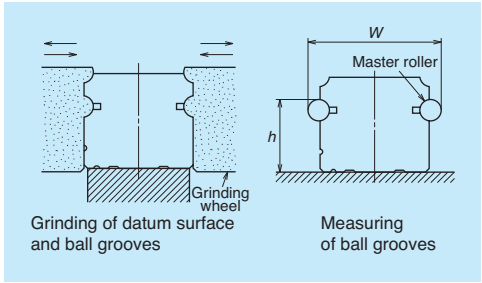




Fig. 4 Rail grinding and measuring

2. Ball slide shape

Ball slide Model	Shape/installation method	Type
AN		AN 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1 Unit: μm

Rail length (mm) over	or less	Preloaded assembly: Super precision P4	High precision P5	Precision grade P6	Normal grade PN
–	50	2	2	4.5	6
50	80	2	3	5	6
80	125	2	3.5	5.5	6.5
125	200	2	4	6	7
200	250	2.5	5	7	8
250	315	2.5	5	8	9
315	400	3	6	9	11
400	500	3	6	10	12
500	630	3.5	7	12	14
630	800	4.5	8	14	16

(2) Accuracy standard

The preloaded assembly has four accuracy grades; Super precision P4, High precision P5, Precision P6 and Normal PN grades.

• **Tolerance of preloaded assembly**

Table 2 Unit: μm

Characteristics \ Accuracy grade	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H	±10	±20	±40	±80
Variation of H (All ball slides on a set of rails)	3	5	7	15
Mounting width W_2 or W_3	±10	±15	±25	±50
Variation of W_2 or W_3 (All ball slides on reference rail)	5	7	10	20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in **Table 1**, **Fig. 5**			

(3) Combinations of accuracy and preload

Table 3

		Accuracy grade			
		Super precision	High precision	Precision grade	Normal grade
Without NSK K1 lubrication unit		P4	P5	P6	PN
With NSK K1 lubrication unit		K4	K5	K6	KN
With NSK K1 for food and medical equipment		F4	F5	F6	FN
Preload	Fine clearance Z0	○	○	○	○
	Slight preload Z1	○	○	○	○

(4) Assembled accuracy

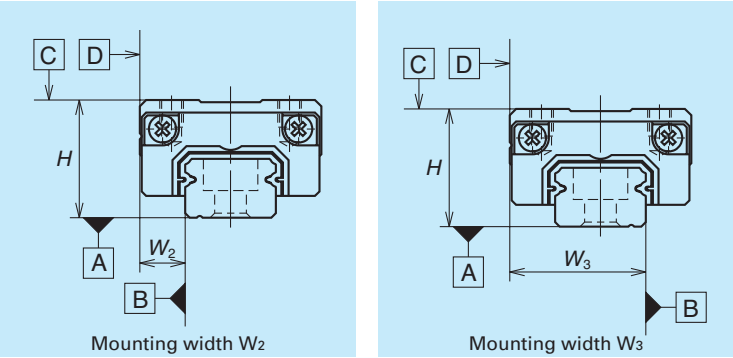


Fig. 5

(5) Preload and rigidity

We offer two levels of preload: Slight preload Z1 and Fine clearance Z0.

• **Preload and rigidity of preloaded assembly**

Table 4

Model No.	Preload (N)	Rigidity (N/μm)	
		Vertical direction	Lateral direction
	Slight preload Z1	Slight preload Z1	Slight preload Z1
LH08AN	5	33	23
LH10AN	9	44	31
LH12AN	22	68	47

Note: Clearance for Fine clearance Z0 is 0 to 3μm. Therefore, preload is zero. However, Z0 of PN grade is 0 to 5μm.

4. Maximum rail length

Table 5 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grades.

Table 5 Length limitations of rails

Unit: mm

Series	Size / Material	08	10	12
LH	Stainless steel	375	600	800

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

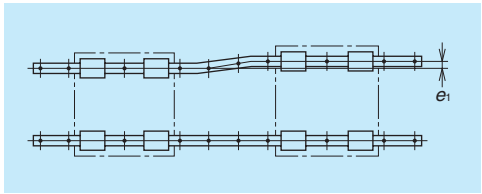


Fig. 6

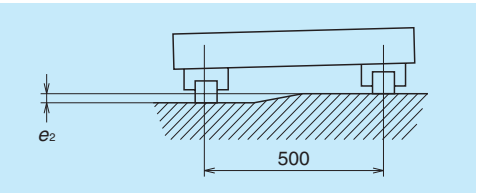


Fig. 7

Table 6

Unit: μm

Value	Preload	Model No.		
		LH08	LH10	LH12
Permissible values of parallelism in two rails e_1	Z0	9	12	19
	Z1	8	11	18
Permissible values of parallelism (height) in two rails e_2	Z0	375μm/500mm		
	Z1	330μm/500mm		

(2) Shoulder height of the mounting surface and corner radius r




Fig. 8 Shoulder for the rail datum surface




Fig. 9 Shoulder for the ball slide datum surface

Table 7

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
LH08	0.3	0.5	1.8	3
LH10	0.3	0.5	2.1	4
LH12	0.5	0.5	2.7	4

6. Lubrication accessory

Model of LH12 can select drive-in type grease fitting as an option.
For the models of LH08 to LH10, apply grease directly to the ball grooves of rail using a point nozzle.



Fig. 10

7. Dust-proof components

(1) Standard specification

The LH Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.
However, the bottom seals are not used to LH08 and 10.

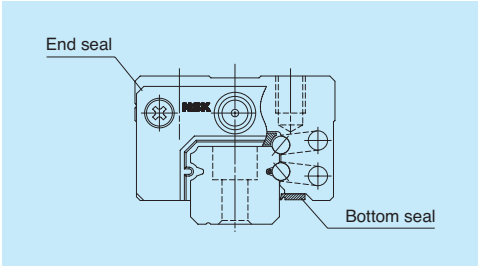


Fig. 11

Table 8 Seal friction per ball slide (maximum value)

Unit: N

Series \ Size	08	10	12
LH	0.5	1	1.5

(2) NSK K1™ lubrication unit

Table 9 shows the dimension of linear guides equipped with the NSK K1 lubrication unit

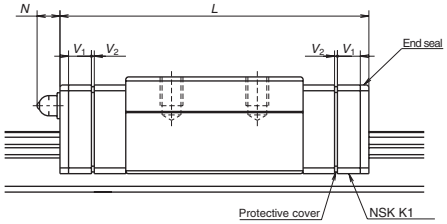


Table 9 Dimensions when equipped with the NSK K1 lubrication unit Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V_1	Protective cover thickness V_2	Protruding area of the grease fitting N
LH08	Standard	AN	24	31	3	0.5	—
LH10	Standard	AN	31	40	4	0.5	—
LH12	Standard	AN	45	54	4	0.5	(4)

Notes: 1) NSK K1 for food and medical equipment are available for LH12.
2) When equipped with NSK K1, ball slide length = (standard ball slide length) + (V_1 thickness of single K1 unit) × (number of K1 units) + (V_2 thickness of the protective cover) × 2.

(3) Cap to plug the rail mounting bolt hole

Table 10 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
LH12	M3	LG-CAP/M3	20

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

LH 12 0800 AN K 2 - ** **P5 1**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A234.)
- Material/surface treatment code (See Table 11.)
  K: Stainless steel
- Number of ball slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 12.)
- Preload code (See page A235.)
  0: Z0, 1: Z1

Table 11 Material/surface treatment code

Code	Description
K	Stainless steel
H	Stainless steel with surface treatment
Z	Other, special

Table 12 Accuracy code


Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
Super precision grade	P4	K4	F4
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN


Note: Refer to pages A38 and A61 for NSK K1 lubrication unit.

9. Dimensions

LH 12 0800 AN K 2 - P5 1**

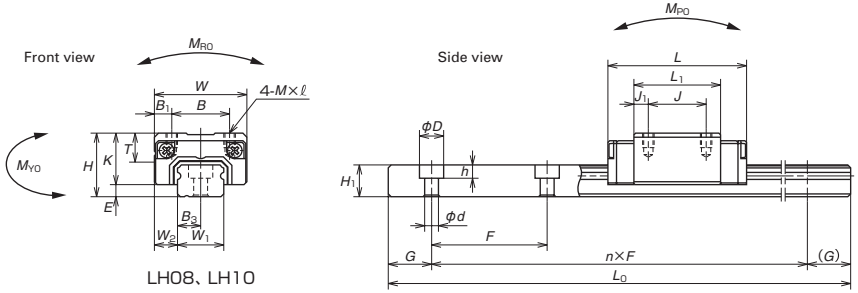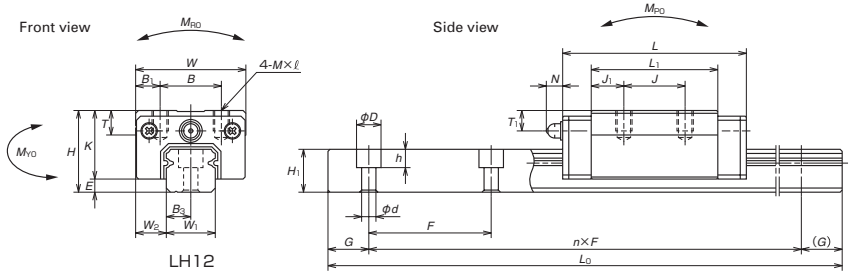- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A234.)
- Material/surface treatment code (See Table 11.)
  K: Stainless steel
- Number of ball slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 12.)
- Preload code (See page A235.)
  0: Z0, 1: Z1






Unit: mm

Model No.	Assembly			Ball slide											Rail				Basic load rating								Weight	
	Height			Width	Length	Mounting hole						Grease fitting			Width	Height	Pitch	Mounting bolt hole	G	Max. length	[2]Dynamic		Static	Static moment (N·m)					Ball slide	Rail
																					[50km]	[100km]								
	H	E	W_2	W	L	B	J	M × pitch × ℓ	L_1	K	T	Hole size	T_1	N	W_1	H_1	F	d × D × h	(reference)	L_{0max}	C_{50}(N)	C_{100}(N)	C_0 (N)	M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	(g)	(g/100 mm)
LH08AN	11	2.1	4	16	24	10	10	M2×0.4×2.5	15	8.9	—	—	—	—	8	5.5	20	2.4×4.2×2.3	7.5	375	1 240	985	2 630	7.25	4.55	32.5	3.8	27.2	13	31
LH10AN	13	2.4	5	20	31	13	12	M2.6×0.45×3	20.2	10.6	6	—	—	—	10	6.5	25	3.5×6×3.5	10	600	2 250	1 790	4 500	16.2	10.5	73.0	8.8	61.0	26	44
LH12AN	20	3.2	7.5	27	45	15	15	M4×0.7×5	31	16.8	6	ϕ3	5	4	12	10.5	40	3.5×6×4.5	15	800	5 650	4 500	11 300	47.5	41.5	254	35	214	82	88

Notes: 1) LH08 does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life C_{100} ; the basic dynamic load rating for 100 km rated fatigue life

A-5-2.6 LL Series

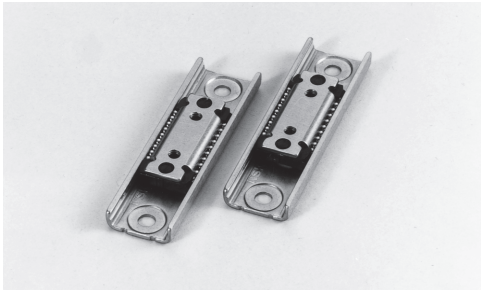

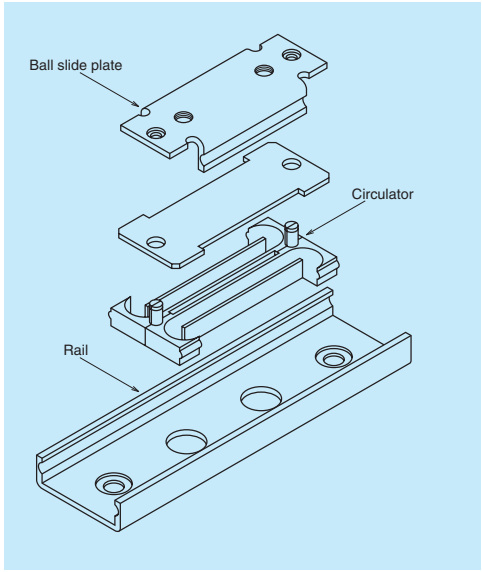


Fig. 1 LL Series structure

1. Features

(1) Super light-weight

This compact guide has a single ball groove on both right and left sides (Gothic arch). Rails and ball slides are made of stainless steel plate, therefore they are lightweight.


(2) Compact

The ball groove is made outside the ball slide to reduce overall size and to obtain high speed.

(3) High corrosion resistance

High corrosion resistant martensitic stainless steel is used as standard material.

2. Ball slide model

Ball slide model	Shape/installation method
PL	

3. Accuracy and preload

(1) Accuracy standard

The LL Series has a Normal grade PN as the accuracy grade.
Table 1 shows the tolerance.

Table 1 Tolerance of Normal grade (PN)

Unit: μm

Characteristic \ Model No.	LL15
Mounting height	±20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	20 (See **Fig. 2.**)

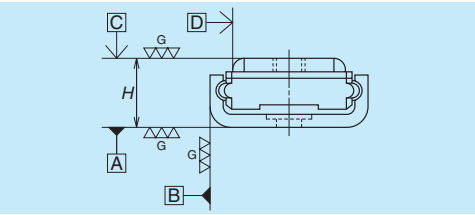


Fig. 2 Standard LL

(2) Preload

We offer clearance for the LL Series.
Table 2 shows the specification of clearance.

Table 2 Radial clearance

Unit: μm

Model No.	Clearance
LL15	0 – 10

4. Maximum rail length

Table 3 Length limitation of rails

Unit: mm

Series	Size / Material	15				
LL	Stainless steel	40	60	75	90	120

5. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

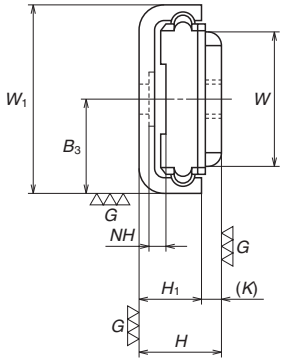
LL 15 0060 PL K 1 - ** PN 0**

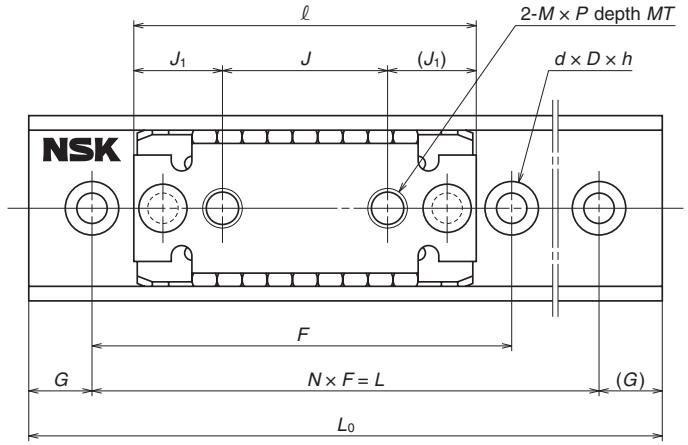
- LL 15 — Series name
- 0060 — Size
- PL — Rail length (mm)
- K — Ball slide shape code (See page A243.)
- 1 — Material / surface treatment code: K
  K: Stainless steel
- -** — Number of ball slides per rail
  Added to the reference number.
- PN — Design serial number
  PN: Normal grade is only available.
- 0 — Accuracy code: PN
  0: Z0
- Preload code: 0

6. Dimensions

LL 15 0060 PL K 1 - ** PN 0**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A243.)
- Material / surface treatment code: K
  K: Stainless steel
- Number of ball slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code: PN
  PN: Normal grade is only available.
- Preload code: 0
  0: Z0





Unit: mm

Model No.	Assembly		Ball slide										Rail					Basic load rating						Ball dia.	Weight	
	Height		Width	Length	Mounting hole					Height	Pitch		Mounting bolt hole				Length	[5] Dynamic		Static	Static moment				Ball slide	Rail
																		[50km]	[100km]							
	H	W_1	W	ℓ	J	M × pitch	MT	J_1	K	H_1	F	N	$d \times D \times h$	NH	B_3	G	L_0	C_{50}(N)	C_{100}(N)	C_0 (N)	M_{RO} (N·m)	M_{PO} (N·m)	M_{YO} (N·m)	D_W	(g)	(g)
LL15	6.5	15	10.6	27	13	M3×0.5	1.2	7	1.5	5	30	1	2.4×5×0.4	1.2	7.5	5	40	880	700	785	7	3	3	2	6	9
											40	1				10	60									11
											30	2				7.5	75									13
											40	2				5	90									16
											50	2				10	120									21

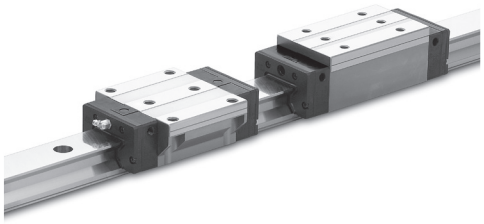
Notes:
1) The LL Series does not have a ball retainer. Be aware that the balls fall out when the ball slide is withdrawn from the rail.
2) Seals are not available. Please provide the dust-prevention measures on the equipment.
3) Do not use an installation screw on the ball slide which exceeds the dimension MT (maximum screw-in depth) in the dimension table.
4) To fix the rail, use M2 × 0.4 cross recessed machine screw for precision instrument.
(JCIS10-70 No.0 pan head machine screw No.1)
(JCIS: Japanese Camera Industrial Standard)

5) C_{50}; the basic dynamic load rating for 50 km rated fatigue life
C_{100}; the basic dynamic load rating for 100 km rated fatigue life

1. RA Series A249
2. RB Series A271
3. LA Series A287

A-5-3 High Rigidity Series

A-5-3.1 RA Series



1. Features

(1) Super-high load capacity

By installing rollers that are the largest possible diameter and length within the existing standard cross-section dimension in a rational layout based on our advanced analysis technology, we have realized the world's highest load capacity,* far superior to conventional roller guides. Super-long life is achieved and impact load can be sufficiently handled.

* As of September 1, 2003; NSK's reserch and comparison on the existing products of the same sizes.

(2) Super-high rigidity

Using NSK's advanced analysis technology, we pursued a complete, optimal design, down to the detailed shape of roller slides and rails, thereby realizing super-high rigidity superior to that of competitor's roller guides.

(3) Super-high motion accuracy

NSK has developed its own unique method of simulating rolling element passage vibration and method of designing optimal roller slide specifications for damping roller passage vibration. These developments have dramatically enhanced roller slide motion accuracy for the RA series.

(4) Smooth motion

Installation of a retaining piece between rollers restrains the roller skew peculiar to roller slides, thereby achieving smooth motion.

(5) Low friction

Using rollers for rolling elements helps minimize dynamic friction.

(6) Random matching

Random-matching of rails and roller slides are available. (RA25 to RA65)

(7) Specification with highly dustproof V1 seal

Specification with newly developed, highly dustproof V1 seal which is the end seal with enhanced abrasion resistance is also available. (RA35 – 55)

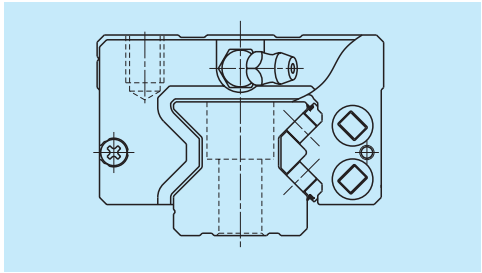


Fig. 1 RA Series

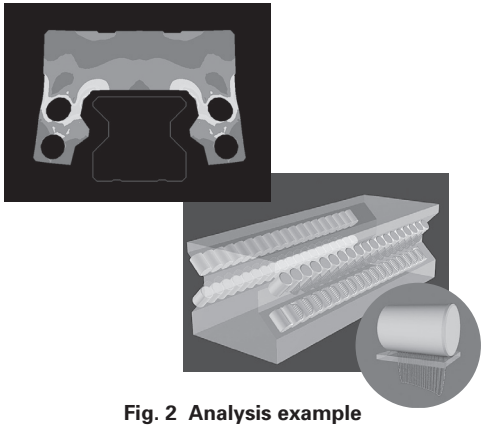


Fig. 2 Analysis example

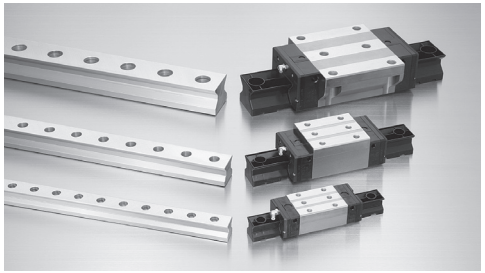











Fig. 3 Random-matching type

2. Roller slide shape

Roller slide model	Shape/installation method	Type (Upper row, Rating: Lower row, Roller slide length)	
		High-load type	Super-high-load type
		Standard	Long
AN BN		AN 	BN 
AL BL		AL 	BL 
EM GM		EM 	GM 

3. Accuracy and preload

(1) Running parallelism of roller slide

Table 1

Unit: μm

Rail length (mm) over	Rail length (mm) or less	Accuracy grade: Preloaded assembly (not random matching) Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Random-matching type High precision PH
–	50	2	2	2	4	2
50	80	2	2	3	4	3
80	125	2	2	3	4	3
125	200	2	2	3.5	5	3.5
200	250	2	2.5	4.5	6	4.5
250	315	2	2.5	5	6.5	5
315	400	2	3	5.5	7	5.5
400	500	2	3	6	7.5	6
500	630	2	3.5	6.5	8.5	6.5
630	800	2	4	7	9.5	7
800	1 000	2.5	4.5	7.5	10	7.5
1 000	1 250	3	5	8.5	12	8.5
1 250	1 600	3.5	5.5	9.5	13	9.5
1 600	2 000	4	6.5	11	14	11
2 000	2 500	4.5	7.5	12	16	12
2 500	3 150	5.5	8.5	13	18	13
3 150	4 000	6	9.5	14	19	14

(2) Accuracy standard

The preloaded assembly has four accuracy grades; Ultra precision P3, Super precision P4, High precision P5, and Precision P6 grades, while the random-matching type has High precision PH grade only.

• **Tolerance of preloaded assembly**

Table 2 Unit: μm

Characteristics \ Accuracy grade	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6
Mounting height H	±8	±10	±20	±40
Variation of H (All roller slides on a set of rails)	3	5	7	15
Mounting width W_2 or W_3	±10	±15	±25	±50
Variation of W_2 or W_3 (All roller slides on reference rail)	3	7	10	20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in **Table 1** and **Fig. 4**			

• **Tolerance of random-matching type**

Table 3 Unit: μm

Characteristics \ Accuracy grade	High precision PH
Mounting height H	±20
Variation of mounting height H	15① 25②
Mounting width W_2 or W_3	±25
Variation of mounting width W_2 or W_3	20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	See **Table 1** and **Fig. 4**

Note: ① Variation on the same rail ② Variation on multiple rails

(3) Combination of accuracy and preload

Table 4

		Accuracy grade				
		Ultra precision	Super precision	High precision	Precision grade	High precision
	Without NSK K1 lubrication unit	P3	P4	P5	P6	PH
	With NSK K1 lubrication unit	K3	K4	K5	K6	KH
Preload	Slight preload Z1	○	○	○	○	—
	Medium preload Z3	○	○	○	○	—
	Random-matching type with slight preload ZZ	—	—	—	—	○
	Random-matching type with medium preload ZH	—	—	—	—	○

(4) Assembled accuracy

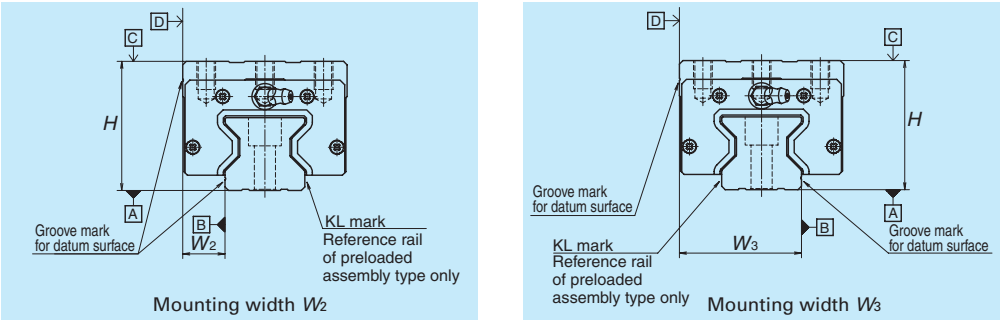


Fig. 4

(5) Preload and rigidity

Four types of preload are available: Medium preload Z3 and Slight preload Z1 for preloaded assembly, and Medium preload ZH and slight preload ZZ for Random-matching type.

• **Preload of preloaded assembly**

Table 5

	Model No.	Preload (N)	
		Slight preload (Z1)	Medium preload (Z3)
High-load type	RA15 AN, AL, EM	—	1 030
	RA20 AN, EM	—	1 920
	RA25 AN, AL, EM	880	2 920
	RA30 AN, AL, EM	1 170	3 890
	RA35 AN, AL, EM	1 600	5 330
	RA45 AN, AL, EM	2 780	9 280
	RA55 AN, AL, EM	3 800	12 900
	RA65 AN, EM	6 500	21 000
Super-high-load type	RA15 BN, BL, GM	—	1 300
	RA20 BN, GM	—	2 400
	RA25 BN, BL, GM	1 060	3 540
	RA30 BN, BL, GM	1 430	4 760
	RA35 BN, BL, GM	2 020	6 740
	RA45 BN, BL, GM	3 500	11 600
	RA55 BN, BL, GM	5 000	16 800
	RA65 BN, GM	8 500	28 800



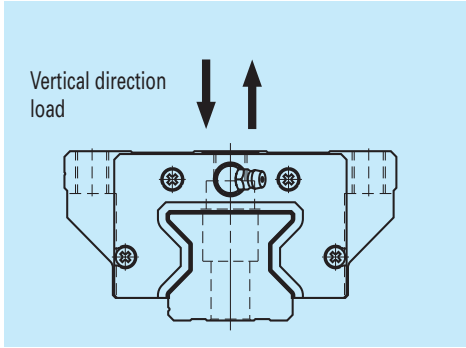


Fig. 5 Direction of load

• **Rigidity of medium preload**

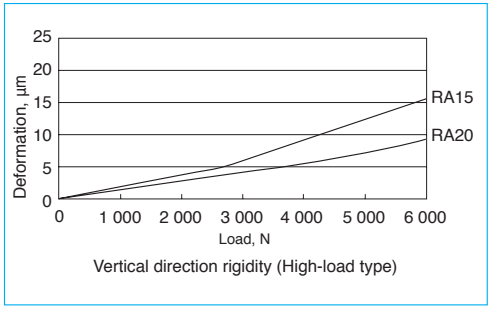

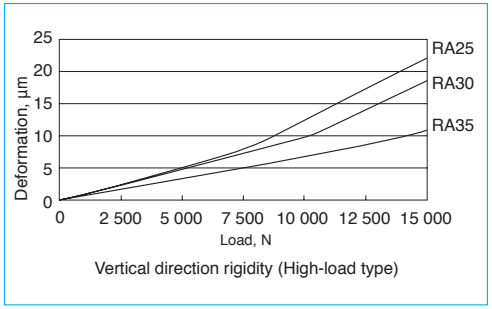



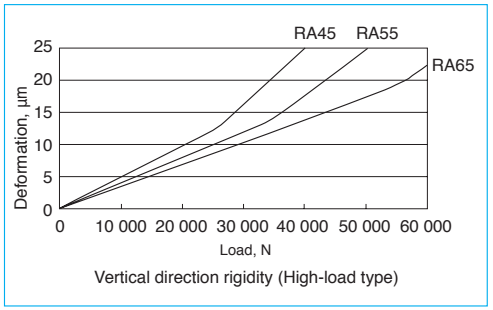


Fig. 6 Vertical direction theoretical rigidity line: High-load type (Roller slide shape: AN, AL, EM)

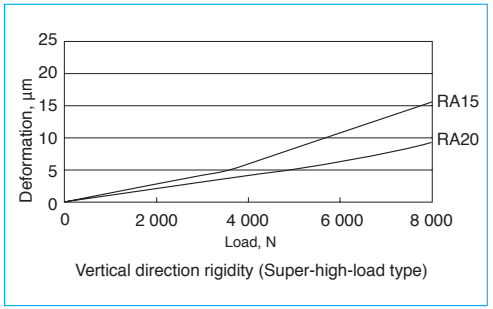

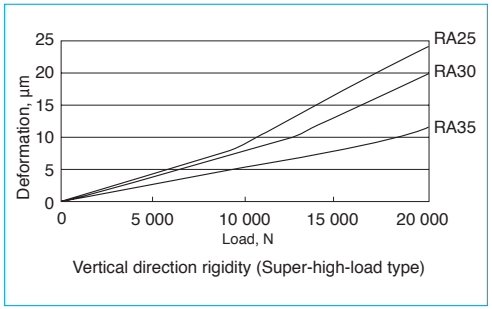

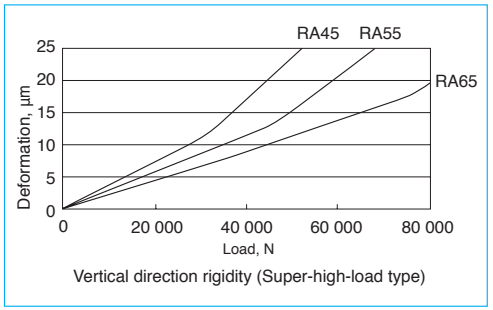


Fig. 7 Vertical direction theoretical rigidity line: Super-high-load type (Roller slide shape: BN, BL, GM)

4. Maximum rail length

Table 6 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grades.

Table 6 Length limitation of rails

Unit: mm

Series \ Size	15	20	25	30	35	45	55	65
RA	2 000	3 000	3 900	3 900	3 900	3 650	3 600	3 600

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

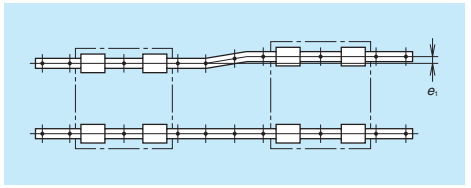


Fig. 8

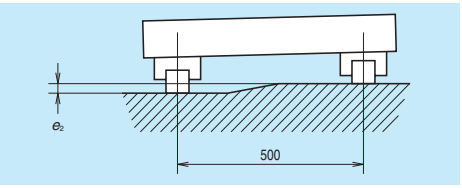


Fig. 9

Table 7

Unit: µm

Value	Preload	Model No. RA15	RA20	RA25	RA30	RA35	RA45	RA55	RA65
Permissible values of parallelism in two rails e_1	Z1, ZZ	—	—	14	18	21	27	31	49
	Z3 , ZH	5	7	9	11	13	17	19	30
Permissible values of parallelism (height) in two rails e_2	Z1, ZZ	—		290 µm / 500 mm					
	Z3 , ZH	150 µm / 500 mm							

(2) Shoulder height of the mounting surface and corner radius r




Fig. 10 Shoulder for the rail datum surface




Fig. 11 Shoulder for the roller slide datum surface

Table 8

Unit: mm

Model No.	Corner radius (maximum) r_a	r_b	Shoulder height H'	H''
RA15	0.5	0.5	3	4
RA20	0.5	0.5	4	5
RA25	0.5	1	4	5
RA30	1	1	5	6
RA35	1	1	5	6
RA45	1.5	1	6	8
RA55	1.5	1.5	7	10
RA65	1.5	1.5	11	11

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 14 and **Table 11** show grease fittings and tube fittings.

(2) Mounting position of lubrication accessories

- The standard position of grease fittings and tube fittings is the end face of roller slide. We can mount them on a side of end cap for an option. (**Fig. 12**) Please consult NSK for installation of grease or tube fittings to the roller slide body or the side of end cap.
- A lubrication hole can also be provided on the top of the end cap. **Fig.13**, **Table 9** and **Table 10** show the mounting position. A spacer is required for AN and BN shape roller slides. The spacers are available from NSK.
- When using a piping unit with thread of M6 × 1, you require a connector to connect it to a grease fitting mounting hole with M6 × 0.75. The connectors are available from NSK.

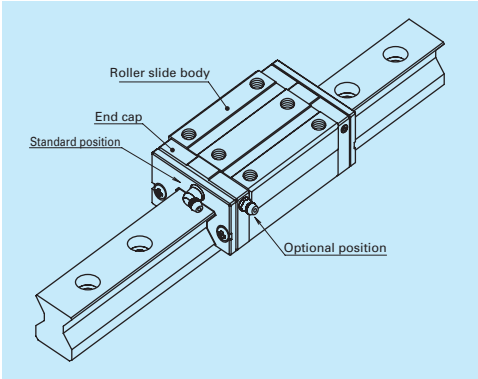


Fig. 12 Mounting position of lubrication accessories

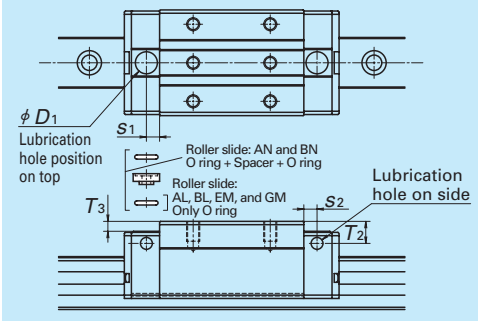


Fig.13 Top and side lubrication hole positions

Table 9 Top and side lubrication hole positions

Unit: mm

Model No.	Roller slide model	Grease fitting size	s_2	T_2	O ring (JIS)	Spacer	D_1	s_1	T_3
RA15	AN, BN	φ3	4	7	P5	Necessary	8.2	4.4	4.2
RA20		φ3	4	4	P6	—	9.2	5.4	0.2
RA25		M6×0.75	6	10	P7	Necessary	10	6	4.5
RA30		M6×0.75	5	10	P7+P5	Necessary	10.4	6	3.5
RA35		M6×0.75	5.5	15	P7+P5	Necessary	10.4	7	7.4
RA45		Rc 1/8	7.2	20	P7+P5	Necessary	10.4	7.2	10.4
RA55		Rc 1/8	7.2	21	P7+P5	Necessary	10.4	7.2	10.4
RA65		Rc 1/8	7.2	19	P7	—	10.4	7.2	0.4

Note: Grease fitting and tube fitting cannot be mounted on the top of the end cap.

Table 10 Top and side lubrication hole positions

Unit: mm

Model No.	Roller slide model	Grease fitting size	s_2	T_2	O ring (JIS)	D_1	s_1	T_3
RA15	AL, BL, EM, GM	φ3	4	3	P5	8.2	4.4	0.2
RA20	EM, GM	φ3	4	4	P6	9.2	5.4	0.2
RA25	AL, BL, EM, GM	M6×0.75	6	6	P7	10	6	0.5
RA30		M6×0.75	5	7	P7	10.4	6	0.5
RA35		M6×0.75	5.5	8	P7	10.4	7	0.4
RA45		Rc 1/8	7.2	10	P7	10.4	7.2	0.4
RA55		Rc 1/8	7.2	11	P7	10.4	7.2	0.4
RA65	EM, GM	Rc 1/8	7.2	19	P7	10.4	7.2	0.4

Note: Grease fitting and tube fitting cannot be mounted on the top of the end cap.

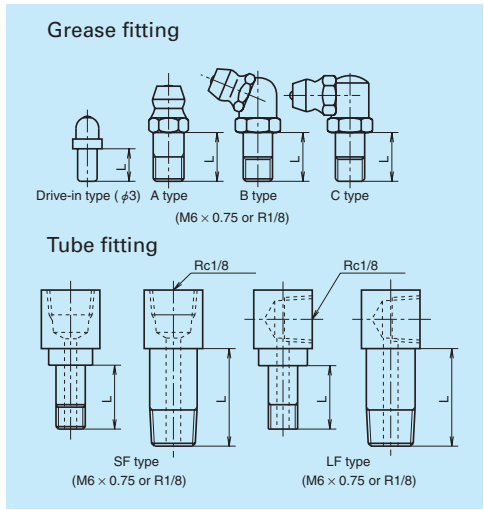


Fig. 14 Grease fitting and tube fitting

7. Dust-proof components

(1) Standard specification

The RA series is equipped with end, inner* and bottom seals to prevent foreign matter from entering the inside of the roller slide. Under normal applications, the RA series can be used without modification.

For severe usage conditions, optional rail covers** are available. Contact NSK for information on how to mount the cover.

*) Inner seals for the models of RA15 and RA20 are available as options.

**) The rail cover is available to the models of RA25 to RA65.

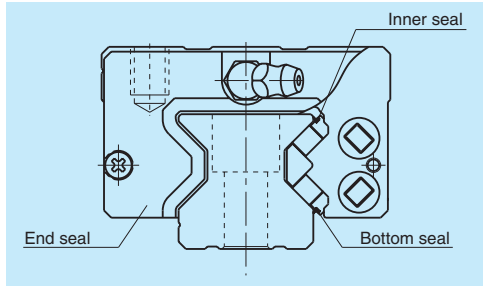


Fig. 15

Table 11

Unit: mm

Model No.	Dust-proof specification	Dimension L: Grease fitting /Drive-in type	Dimension L: Tube fitting SF type	Dimension L: Tube fitting LF type
RA15	Standard	5	–	–
	With NSK K1	10	–	–
	Double seal	8	–	–
	Protector	8	–	–
RA20	Standard	5	–	–
	With NSK K1	10	–	–
	Double seal	8	–	–
	Protector	10	–	–
RA25	Standard	5	5	5
	With NSK K1	12	12	12
	Double seal	10	9	9
	Protector	10	9	9
RA30	Standard	5	6	6
	With NSK K1	14	14	15
	Double seal	12	12	11
	Protector	12	10	11
RA35	Standard	5	6	6
	With NSK K1	14	14	15
	Double seal	12	12	11
	Protector	12	10	11
RA45	Standard	8	13.5	17
	With NSK K1	18	20	21.5
	Double seal	14	16	17
	Protector	14	16	17
RA55	Standard	8	13.5	17
	With NSK K1	18	20	21.5
	Double seal	14	16	17
	Protector	14	16	17
RA65	Standard	8	13.5	17
	With NSK K1	20	20	20
	Double seal	14	18	17
	Protector	14	16	17

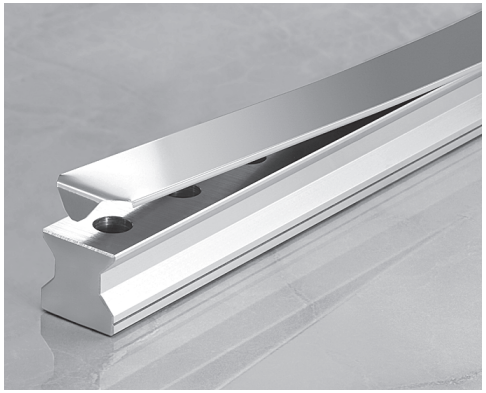


Fig. 16 Rail cover

Table 12 Seal friction per roller slide (maximum value)

Unit: N

Series \ Size	15	20	25	30	35	45	55	65
RA	4	5.5	5	5	6	8	8	14

(2) NSK K1™ lubrication unit

Table 13 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

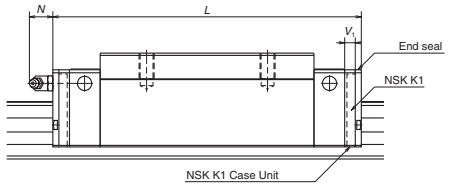


Table 13 Dimensions when equipped with the NSK K1 lubrication unit Unit: mm

Model No.	Roller slide length	Roller slide model	Standard roller slide length	With two NSK K1	Thickness of NSK K1 V_1	Protruding area of the grease fitting N
RA15	Standard	AN, AL, EM	70	79	4.5	(3)
	Long	BN, BL, GM	85.4	94.4		
RA20	Standard	AN, EM	86.5	95.5	4.5	(3)
	Long	BN, GM	106.3	115.3		
RA25	Standard	AN, AL, EM	97.5	107.5	5	(11)
	Long	BN, BL, GM	115.5	125.5		
RA30	Standard	AN, AL, EM	110.8	122.8	6	(11)
	Long	BN, BL, GM	135.4	147.4		
RA35	Standard	AN, AL, EM	123.8	136.8	6.5	(11)
	Long	BN, BL, GM	152	165		
RA45	Standard	AN, AL, EM	154	168	7	(14)
	Long	BN, BL, GM	190	204		
RA55	Standard	AN, AL, EM	184	198	7	(14)
	Long	BN, BL, GM	234	248		
RA65	Standard	AN, EM	228.4	243.4	7.5	(14)
	Long	BN, GM	302.5	317.5		

Note: When equipped with NSK K1, roller slide length = (standard roller slide length) + (V_1 thickness of NSK K1 Case Unit) × (number of NSK K1 Case Unit)

(3) Double seal and protector

For RA Series, double seal and protector can be installed only before shipping from the factory. **Table 14** shows the increased thickness when end seal and protector are installed.

Table 14 Unit: mm

Model No.	Thickness of end seal V_3	Thickness of protector V_4
RA15	3	2.7
RA20	3	3.3
RA25	3.2	3.3
RA30	3.4	3.6
RA35	3.4	3.6
RA45	4	4.2
RA55	4	4.2
RA65	5	5.5

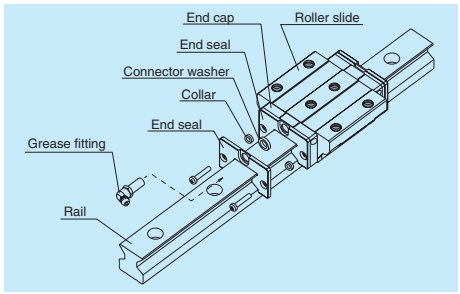


Fig. 17 Double seal

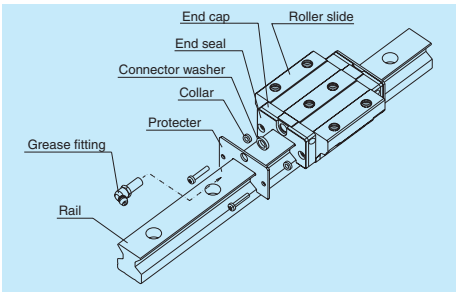


Fig. 18 Protector

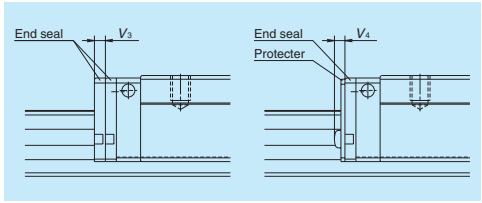


Fig. 19

(4) Rail cover

When the rail cover is used, use the cover bracket to secure the rail cover. **Fig.20** shows the dimensions for the cover bracket. The required room at the end of the rail is:

- Inside: 10.5 mm or less
- Outside: 4 mm or less (Common to the models of RA25 to RA65)
  Please confirm the interference with your machine at the stroke end.
- Machine stroke
- Room for the end of the rail

The height of the rail with the rail cover is shown in **Table 15**.

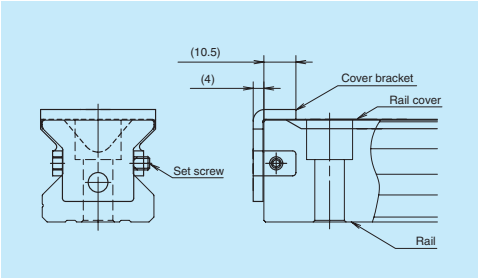


Fig. 20 End configuration of rail equipped with the rail cover

Table 15 Height of rails equipped with rail cover Unit: mm

Model No.	Standard height H_1	Cover installation
RA25	24	24.2
RA30	28	28.2
RA35	31	31.25
RA45	38	38.3
RA55	43.5	43.8
RA65	55	55.3

(5) Cap to plug the rail mounting bolt hole

Table 16 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
RA15	M4	LG-CAP/M4	20
RA20	M5	LG-CAP/M5	20
RA25	M6	LG-CAP/M6	20
RA30, RA35	M8	LG-CAP/M8	20
RA45	M12	LG-CAP/M12	20
RA55	M14	LG-CAP/M14	20
RA65	M16	LG-CAP/M16	20

(6) Specification with highly dustproof V1 seal and V1 bottom seal

RA25, RA30, RA35, RA45, RA55, and RA65 also have the specification with newly developed, highly dustproof V1 seal which is the end seal with enhanced abrasion resistance.

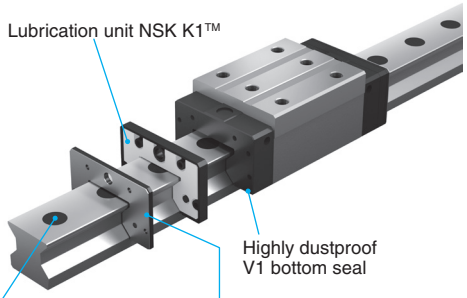
Highly dustproof V1 Seal made of new materials and in a new shape for better abrasion resistance prevents foreign matter getting into the roller slide for a long period.

RA35, RA45, RA55, and RA65 also have prepared highly dustproof V1 bottom seal. In addition, outstanding lubrication effects by NSK K1 further improves the durability.


High dustproof V1 bottom seal and NSK K1 can be selected individually according to the application.

The bolt hole caps whose shape is partly changed eliminate building up of foreign matter in and around the rail mounting holes and prevent foreign matter from entering into the roller slide. Otherwise, the rail cover with higher dustproofness can be selected.


See A256 for the details of the rail cover.



Highly dustproof V1 seal

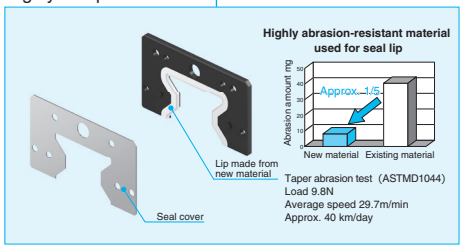

Bolt-hole caps



●Durability test under extreme conditions - no lubrication

The durability of the seal lip has been greatly improved by adopting new materials and optimizing the seal lip shape.

Test sample: RA35

Lubrication: No lubrication (on the seal)

Travel speed: 30 m/min Travel distance: 40 km


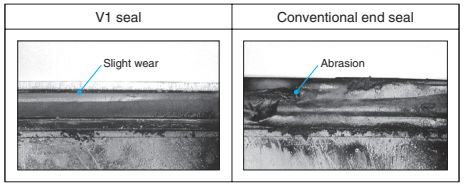


Table 17 shows the dimension for roller slide with V1 seal.

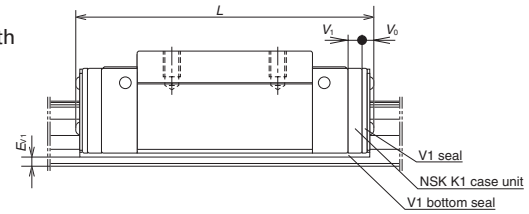

Since the sealing property (resistance to foreign matter) is affected by usage or the lubrication environment, please conduct an evaluation test for your particular application.

Table 17 Unit: mm

Model No.	Roller slide length	Roller slide type	Standard roller slide length L	Roller slide length equipped with V1 seal and NSK K1 L	Slide bottom face height equipped with V1 bottom seal E_{V1}	Thickness of V1 seal V_0	Thickness of K1 case unit V_1
RA25	Standard	AN, AL, EM	97.5	111.3	—	5.1	5
	Long	BN, BL, GM	115.5	129.3			
RA30	Standard	AN, AL, EM	110.8	126.8	—	5.4	6
	Long	BN, BL, GM	135.4	151.4			
RA35	Standard	AN, AL, EM	123.8	140.8	min 3.7	5.4	6.5
	Long	BN, BL, GM	152	169			
RA45	Standard	AN, AL, EM	154	173.2	min 5.2	6.6	7
	Long	BN, BL, GM	190	209.2			
RA55	Standard	AN, AL, EM	184	203.2	min 6.2	6.6	7
	Long	BN, BL, GM	234	253.2			
RA65	Standard	AN, EM	228.4	251.2	min 10.2	8.9	7.5
	Long	BN, GM	302.5	325.3			

●Design Precautions

Because the product is used under severe operating conditions that require highly dustproof VI seals, please inform NSK about your service conditions using the technical data sheet on page A152.

(7) Bellows

Installation of bellows

*** Fixing to the roller slide**

- Remove two machine screws which secure the end seal. (For RA15, hold the end cap by hand. Otherwise, the end cap is detached from the slide, and the roller inside may spill over.)
- Insert a spacer to the securing hole of the end seal, fasten the mounting plate at the end of the bellows using a slightly longer machine screw. (For RA15, insert a flat spacer between the end seal and the mounting plate at the end of the bellows.)

*** Fixing to the rail**

- For fixing to the rail, make tap holes to the rail end surface. Fix the bellows mounting plate with machine screws to the rail end surface through these tap holes. NSK processes the tap holes to the rail end surface when ordered with a linear guide.

Calculating length of bellows

- The formulas for calculating length of bellows for the end are as follows.

Stroke $St = L_{max} - L_{min}$

Length when stretched to the maximum length

$L_{max} = f_b \cdot P \times$ Number of folds

Length when contracted to the minimum length

$L_{min} = 2.5 \times$ Number of folds + 3

Values of f_b and P are shown in the bellows dimension table. Based on these above formulas, calculate the number of folds as follows.

$$\text{Number of folds} = \frac{St - 3}{f_b \cdot P - 2.5}$$

Round up the calculated value so that the number of folds will be n + 0.5 (n: the natural number).

For the length of a middle bellows, please ask NSK.

Bellow reference number

J A R 35 N

- J: Bellows
- A: Bellows for the end; B: Middle bellows
- R: Bellows for RA series
- 35: Size number of linear guide
- N: High type L: Low type

*Let NSK know the reference number and stroke.

Dimension table of bellows RA series

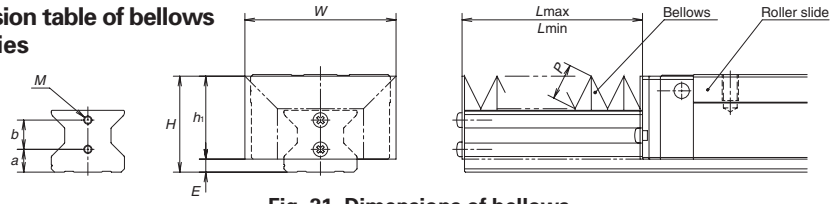


Fig. 21 Dimensions of bellows

Table 18 Dimensions of bellows

Unit: mm(excluding f_b)

Model No.	*H*	h_1	*E*	*W*	*P*	f_b	*a*	*b*	Tap (*M*) × depth
JAR15L	23.5	19.5	4	33	7	1.2	7	6.3	M3 × 5
JAR15N	27	23		39	10	1.3			
JAR20N	29	24	5	43	8	1.3	8.5	9	M3 × 5
JAR25L	35	30	5	55	10	1.3	8.5	12	M3 × 5
JAR25N	39	34		61	14	1.4			
JAR30L	41	34.5	6.5	60	12	1.3	11	12.5	M4 × 6
JAR30N	44	37.5		66	15	1.4			
JAR35L	47	40.5	6.5	72	15	1.4	11	15	M4 × 6
JAR35N	54	47.5		82	20	1.5			
JAR45L	59	51	8	93	20	1.5	14	18	M5 × 8
JAR45N	69	61		113	30	1.5			
JAR55L	69	60	9	101	20	1.5	15	22	M5 × 8
JAR55N	79	70		121	30	1.5			
JAR65N	89	76	13	131	30	1.5	21	26	M6 × 10

Note: f_b is a dimensionless number

8. Dynamic friction force

- Dynamic friction force indications per roller slide are shown in Table 19.
- In assuming the actual usage conditions, the dynamic friction force of the standard product is the value when the dust-proof specification of the slide is standard (with two end seals, inner seal and bottom seal) and standard grease (AS2 grease) is packed.
  However, since the inner seal of RA15 and RA20 is optional, the inner seal is not attached to the standard dustproof specification.
- When using options, the dynamic friction force of each option (in case of highly dustproof V1 seal, the difference from the standard end seal) is added to that of the standard product.
- Dynamic friction force varies with grease.

Table 19 Dynamic friction force

Unit: N


Model	Roller slide model		Dynamic friction force of standard item (with AS2 grease packed in)		Highly dustproof V1 seal	Highly dustproof V1 bottom seal	NSK K1
		Slide shape		For standard seal friction force			
RA15	High-load type	AN, AL, EM	21	3	—	—	3
	Super-high-load type	BN, BL, GM	24				
RA20	High-load type	AN, EM	22	3.5	—	—	3
	Super-high-load type	BN, GM	28				
RA25	High-load type	AN, AL, EM	27	5	6	—	4
	Super-high-load type	BN, BL, GM	34				
RA30	High-load type	AN, AL, EM	33	5	8	—	4
	Super-high-load type	BN, BL, GM	42				
RA35	High-load type	AN, AL, EM	42	6	10	17	5
	Super-high-load type	BN, BL, GM	53			21	
RA45	High-load type	AN, AL, EM	56	8	15	21	7
	Super-high-load type	BN, BL, GM	69			26	
RA55	High-load type	AN, AL, EM	80	8	20	25	8
	Super-high-load type	BN, BL, GM	95			32	
RA65	High-load type	AN, EM	120	14	25	31	8
	Super-high-load type	BN, GM	138			41	

Notes: 1) The value of the dynamic friction force of each part is the increment when two pieces per slide are mounted.
2) Values in Table 19 are indications. Please refer to them.

9. Reference number


Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

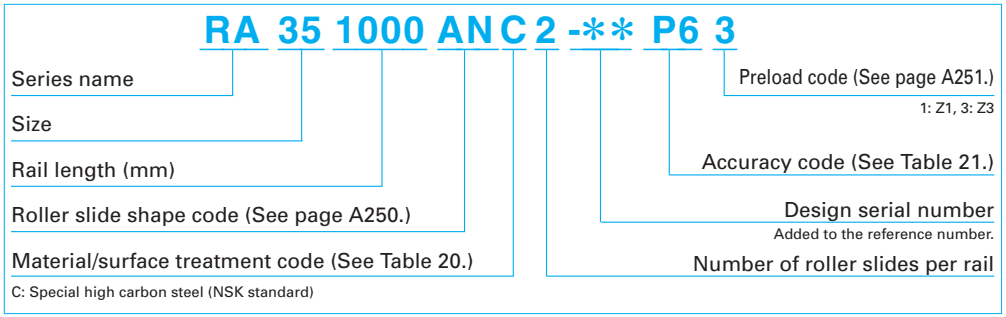(1) Reference number for preloaded assembly




(2) Reference number for random-matching type

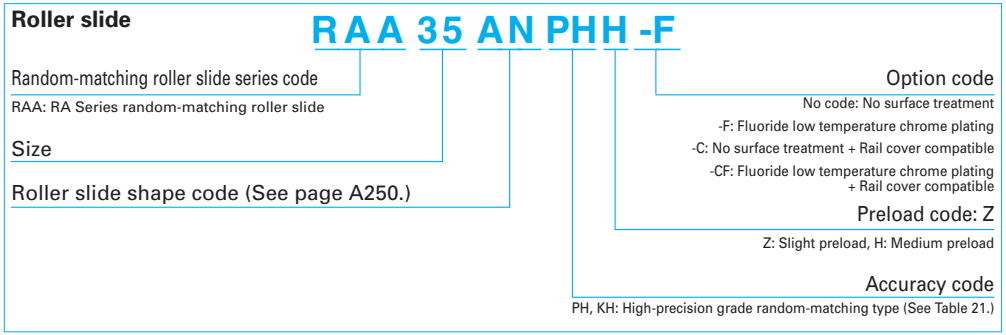Roller slide



Rail

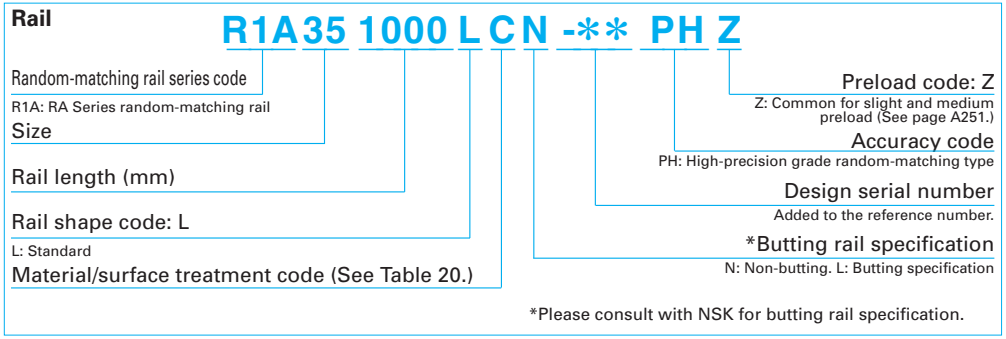

*Please consult with NSK for butting rail specification.

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, the applicable preload codes are "slight preload Z" and "medium preload H". (See page A251.)
Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 20 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
D	Special high carbon steel with surface treatment
P	Special high carbon steel with V1 seal
R	Special high carbon steel with surface treatment and V1 seal
Z	Other, special

Note : P and R are not available for random-matching slides and rails.

Table 21 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Ultra precision grade	P3	K3
Super precision grade	P4	K4
High precision grade	P5	K5
Precision grade	P6	K6
High precision grade (Random-matching type)	PH	KH

Note: Refer to pages A38 for NSK K1 lubrication unit.

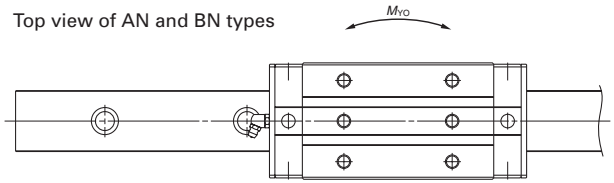
10. Dimensions

RA-AN (High-load type / Standard)
RA-BN (Super-high-load type / Long)


RA 35 1000 AN C 2 - PH H**

- Series name: RA
- Size: 35
- Rail length (mm): 1000
- Roller slide shape code (See page A250.): AN
- Material/surface treatment code (See Table 20.): C
  - C: Special high carbon steel (NSK standard)
- Number of roller slides per rail: 2
- Design serial number: -**
  - Added to the reference number.
- Accuracy code (See Table 21.): PH
- Preload code (See page A251.): H
  - 1: Z1, 3: Z3, Z: ZZ, H: ZH


Top view of AN and BN types



Front view of AN and BN types



Side view of AN and BN types

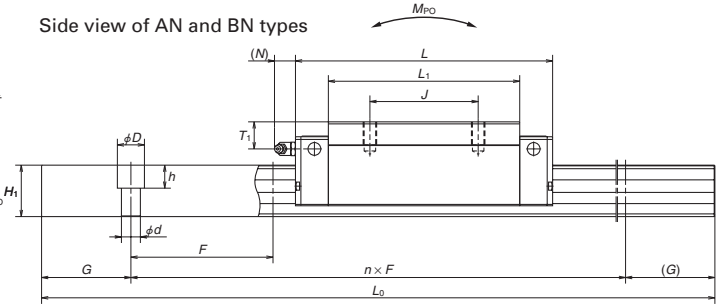

Model No.	Assembly Height H	E	W_2	Roller slide Width W	Length L	Mounting hole B	J	M × pitch × ℓ	L_1	K	T	Grease fitting Hole size	T_1	N	Width W_1	Height H_1
RA15AN	28	4	9.5	34	70	26	26	M4×0.7×6	44.8	24	8	ϕ3	8	3	15	16.3
RA15BN					85.4				60.2							
RA20AN	30	5	12	44	86.5	32	36	M5×0.8×6	57.5	25	12	ϕ3	4	3	20	20.8
RA20BN					106.3		50		77.3							
RA25AN	40	5	12.5	48	97.5	35	35	M6×1×9	65.5	35	12	M6×0.75	10	11	23	24
RA25BN					115.5		50		83.5							
RA30AN	45	6.5	16	60	110.8	40	40	M8×1.25×11	74	38.5	14	M6×0.75	10	11	28	28
RA30BN					135.4		60		98.6							
RA35AN	55	6.5	18	70	123.8	50	50	M8×1.25×12	83.2	48.5	15	M6×0.75	15	11	34	31
RA35BN					152		72		111.4							
RA45AN	70	8	20.5	86	154	60	60	M10×1.5×17	105.4	62	17	Rc1/8	20	14	45	38
RA45BN					190		80		141.4							
RA55AN	80	9	23.5	100	184	75	75	M12×1.75×18	128	71	18	Rc1/8	21	14	53	43.5
RA55BN					234		95		178							
RA65AN	90	13	31.5	126	228.4	76	70	M16×2×20	155.4	77	22	Rc1/8	19	14	63	55
RA65BN					302.5		120		229.5							


Notes: 1) Select either one of two *F* dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of *F* is applied.

Reference number for roller slide of random-matching type


Roller slide **RAA 35 AN PH H -F**

- Random-matching roller slide series code: RAA
  - RAA: RA Series random-matching roller slide
- Size: 35
- Roller slide shape code (See page A250.): AN
- Option code: -F
  - No code: No surface treatment
  - -F: Fluoride low temperature chrome plating
  - -C: No surface treatment + Rail cover compatible
  - -CF:Fluoride low temperature chrome plating + Rail cover compatible
- Preload code: Z: H
  - Z: Slight preload, H: Medium preload
- Accuracy code: PH
  - PH, KH: High-precision grade random-matching type (See Table 21.)


AN and BN types



AN type




BN type

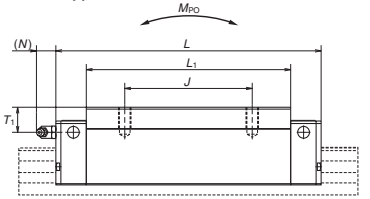


Reference number for rail of random-matching type

Rail **R1A35 1000 L C N -** PH Z**

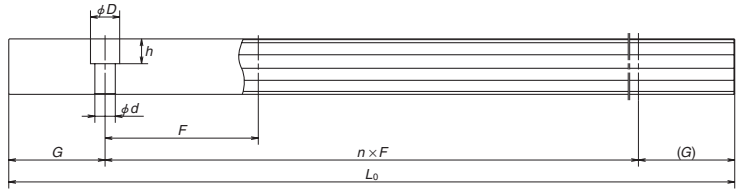- Random-matching rail series code: R1A
  - R1A: RA Series random-matching rail
- Size: 35
- Rail length (mm): 1000
- Rail shape code: L
  - L: Standard
- Material/surface treatment code (See Table 20.): C
- *Butting rail specification: N
  - N: Non-butting. L: Butting specification
  - *Please consult with NSK for butting rail specification.
- Design serial number: -**
  - Added to the reference number.
- Accuracy code: PH
  - PH: High-precision grade random-matching type
- Preload code: Z
  - Z: Common for slight and medium preload (See A251.)





Unit: mm

Rail Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L_{0max}	Basic load rating [3]Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Roller slide (kg)	Rail (kg/m)
60	4.5×7.5×5.3	20	2 000	12 600	10 300	27 500	260	210	1 320	210	1 320	0.21	1.6
(30)				16 000	13 000	37 000	350	375	2 130	375	2 130	0.30	
60	6×9.5×8.5	20	3 000	23 600	19 200	52 500	665	505	3 100	505	3 100	0.38	2.6
(30)				29 500	24 000	70 000	890	900	5 000	900	5 000	0.50	
30	7×11×9	20	3 900	36 000	29 200	72 700	970	760	4 850	760	4 850	0.60	3.4
(60)				43 500	35 400	92 900	1 240	1 240	7 200	1 240	7 200	0.91	
40	9×14×12	20	3 900	47 800	38 900	93 500	1 670	1 140	7 100	1 140	7 100	1.0	4.9
(80)				58 500	47 600	121 000	2 170	1 950	11 500	1 950	11 500	1.3	
40	9×14×12	20	3 900	65 500	53 300	129 000	2 810	1 800	11 000	1 800	11 000	1.6	6.8
(80)				82 900	67 400	175 000	3 810	3 250	17 800	3 250	17 800	2.1	
52.5	14×20×17	22.5	3 650	114 000	92 800	229 000	6 180	4 080	24 000	4 080	24 000	3.0	10.9
(105)				143 000	116 000	305 000	8 240	7 150	39 000	7 150	39 000	4.1	
60	16×23×20	30	3 600	159 000	129 000	330 000	10 200	7 060	41 000	7 060	41 000	4.9	14.6
(120)				207 000	168 000	462 000	14 300	13 600	72 000	13 600	72 000	6.7	
75	18×26×22	35	3 600	259 000	210 000	504 000	19 200	12 700	78 500	12 700	78 500	9.3	22.0
(150)				355 000	288 000	756 000	28 700	28 600	153 000	28 600	153 000	12.2	

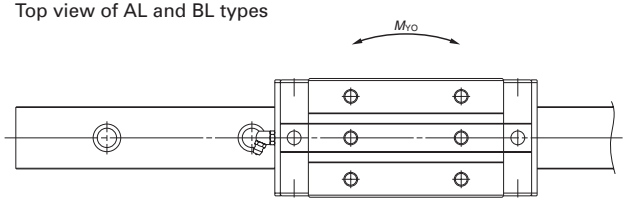
2) The random-matching type is available for the models of RA25 to RA65.
3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life
C_{100}; the basic dynamic load rating for 100 km rated fatigue life

RA-AL (High-load type / Standard)
RA-BL (Super-high-load type / Long)


RA 35 1000 AL C 2 - PH H**

- Series name: RA
- Size: 35
- Rail length (mm): 1000
- Roller slide shape code (See page A250.): AL
- Material/surface treatment code (See Table 20.): C
  - C: Special high carbon steel (NSK standard)
- Number of roller slides per rail: 2
- Design serial number: -** (Added to the reference number.)
- Accuracy code (See Table 21.): PH
- Preload code (See page A251.): H
  - 1: Z1, 3: Z3, Z: ZZ, H: ZH


Top view of AL and BL types



Front view of AL and BL types



Side view of AL and BL types

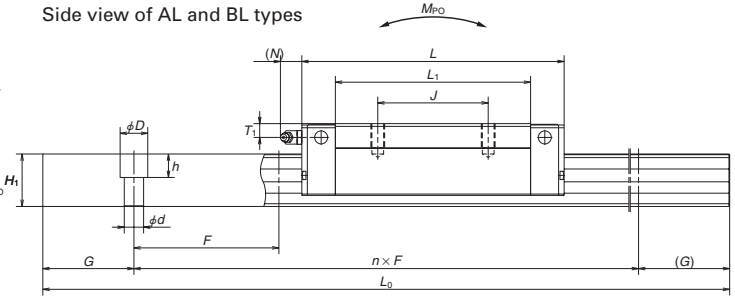

Model No.	Assembly Height H	E	W_2	Roller slide Width W	Length L	Mounting hole B	J	M× pitch × ℓ	L_1	K	T	Grease fitting Hole size	T_1	N	Width W_1	Height H_1
RA15AL	24	4	9.5	34	70	26	26	M4×0.7×5.5	44.8	20	8	ϕ3	4	3	15	16.3
RA15BL					85.4				60.2							
RA25AL	36	5	12.5	48	97.5	35	35	M6×1×8	65.5	31	12	M6×0.75	6	11	23	24
RA25BL					115.5		50		83.5							
RA30AL	42	6.5	16	60	110.8	40	40	M8×1.25×11	74	35.5	14	M6×0.75	7	11	28	28
RA30BL					135.4		60		98.6							
RA35AL	48	6.5	18	70	123.8	50	50	M8×1.25×12	83.2	41.5	15	M6×0.75	8	11	34	31
RA35BL					152		72		111.4							
RA45AL	60	8	20.5	86	154	60	60	M10×1.5×16	105.4	52	17	Rc1/8	10	14	45	38
RA45BL					190		80		141.4							
RA55AL	70	9	23.5	100	184	75	75	M12×1.75×18	128	61	18	Rc1/8	11	14	53	43.5
RA55BL					234		95		178							


Notes: 1) Select either one of two *F* dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of *F* is applied.

Reference number for roller slide of random-matching type


Roller slide RAA 35 AL PH H -F

- Random-matching roller slide series code: RAA
  - RAA: RA Series random-matching roller slide
- Size: 35
- Roller slide shape code (See page A250.): AL
- Option code: -F
  - No code: No surface treatment
  - -F: Fluoride low temperature chrome plating
  - -C: No surface treatment + Rail cover compatible
  - -CF: Fluoride low temperature chrome plating + Rail cover compatible
- Preload code: H
  - Z: Slight preload, H: Medium preload
- Accuracy code: PH
  - PH, KH: High-precision grade random-matching type (See Table 21.)


AL and BL types



AL type



BL type

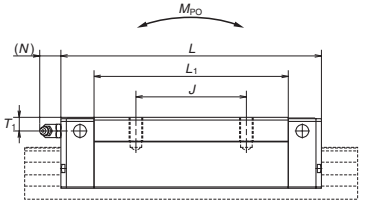



Reference number for rail of random-matching type

Rail R1A35 1000 L C N - PH Z**

- Random-matching rail series code: R1A
  - R1A: RA Series random-matching rail
- Size: 35
- Rail length (mm): 1000
- Rail shape code: L
  - L: Standard
- Material/surface treatment code (See Table 20.): C
- *Butting rail specification: N
  - N: Non-butting. L: Butting specification
- Design serial number: -** (Added to the reference number.)
- Accuracy code: PH
  - PH: High-precision grade random-matching type.
- Preload code: Z
  - Z: Common for slight and medium preload (See A251.)

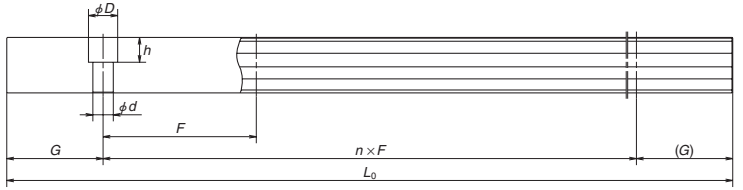*Please consult with NSK for butting rail specification.





Unit: mm

Rail Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L_{0max}	Basic load rating [3]Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Roller slide (kg)	Rail (kg/m)
60	4.5×7.5×5.3	20	2 000	12 600	10 300	27 500	260	210	1 320	210	1 320	0.17	1.6
(30)				16 000	13 000	37 000	350	375	2 130	375	2 130	0.25	
30	7×11×9	20	3 900	36 000	29 200	72 700	970	760	4 850	760	4 850	0.45	3.4
(60)				43 500	35 400	92 900	1 240	1 240	7 200	1 240	7 200	0.80	
40	9×14×12	20	3 900	47 800	38 900	93 500	1 670	1 140	7 100	1 140	7 100	0.85	4.9
(80)				58 500	47 600	121 000	2 170	1 950	11 500	1 950	11 500	1.1	
40	9×14×12	20	3 900	65 500	53 300	129 000	2 810	1 800	11 000	1 800	11 000	1.2	6.8
(80)				82 900	67 400	175 000	3 810	3 250	17 800	3 250	17 800	1.7	
52.5	14×20×17	22.5	3 650	114 000	92 800	229 000	6 180	4 080	24 000	4 080	24 000	2.5	10.9
(105)				143 000	116 000	305 000	8 240	7 150	39 000	7 150	39 000	3.4	
60	16×23×20	30	3 600	159 000	129 000	330 000	10 200	7 060	41 000	7 060	41 000	4.1	14.6
(120)				207 000	168 000	462 000	14 300	13 600	72 000	13 600	72 000	5.7	


2) The random-matching type is available for the models of RA25 to RA55.
3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life
C_{100}; the basic dynamic load rating for 100 km rated fatigue life

RA-EM (High-load type / Standard)
RA-GM (Super-high-load type / Long)

RA 35 1000 EM C 2 - ** PH H**


- Series name
- Size
- Rail length (mm)
- Roller slide shape code (See page A250.)
- Material/surface treatment code (See Table 20.)
  C: Special high carbon steel (NSK standard)
- Number of roller slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 21.)
- Preload code (See page A251.)
  1: Z1, 3: Z3, Z: ZZ, H: ZH

Front view of EM and GM types




RA15, 20, 25, 30

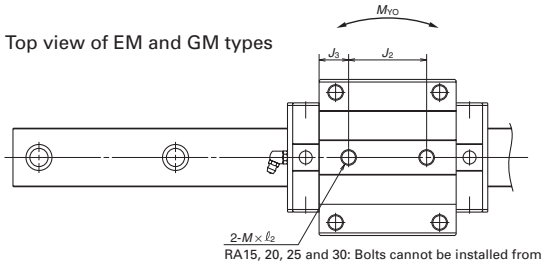Top view of EM and GM types




RA15, 20, 25 and 30: Bolts cannot be installed from the underside.



RA35, 45, 55, 65

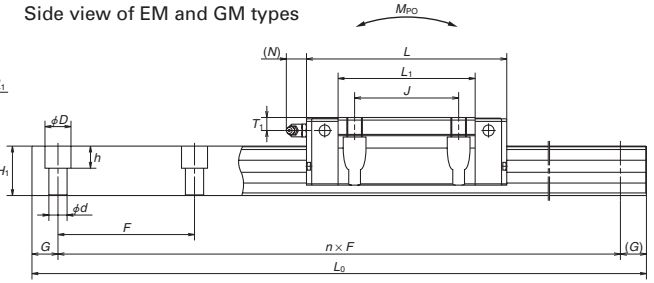Side view of EM and GM types



Model No.	Assembly Height H	E	W_2	Roller slide Width W	Length L	Mounting hole B	J	J_2	M × pitch × ℓ_1(ℓ_2)	Q_2	L_1	K	T	Grease fitting Hole size	T_1	N
RA15EM	24	4	16	47	70	38	30	26	M5×0.8×8.5 (6.5)	4.4	44.8	20	8	ϕ3	4	3
RA15GM					85.4						60.2					
RA20EM	30	5	21.5	63	86.5	53	40	35	M6×1×9.5 (8)	5.3	57.5	25	10	ϕ3	4	3
RA20GM					106.3						77.3					
RA25EM	36	5	23.5	70	97.5	57	45	40	M8×1.25×10 (11)	6.8	65.5	31	11	M6×0.75	6	11
RA25GM					115.5						83.5					
RA30EM	42	6.5	31	90	110.8	72	52	44	M10×1.5×12 (12.5)	8.6	74	35.5	11	M6×0.75	7	11
RA30GM					135.4						98.6					
RA35EM	48	6.5	33	100	123.8	82	62	52	M10×1.5×13 (7)	8.6	83.2	41.5	12	M6×0.75	8	11
RA35GM					152						111.4					
RA45EM	60	8	37.5	120	154	100	80	60	M12×1.75×15 (10.5)	10.5	105.4	52	13	Rc1/8	10	14
RA45GM					190						141.4					
RA55EM	70	9	43.5	140	184	116	95	70	M14×2×18 (13)	12.5	128	61	15	Rc1/8	11	14
RA55GM					234						178					
RA65EM	90	13	53.5	170	228.4	142	110	82	M16×2×24 (18.5)	14.6	155.4	77	22	Rc1/8	19	14
RA65GM					302.5						229.5					


Notes: 1) Select either one of two *F* dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of *F* is applied.

Reference number for roller slide of random-matching type


Roller slide **RAA 35 EM PH H -F**

- Random-matching roller slide series code
  RAA: RA Series random-matching roller slide
- Size
- Roller slide shape code (See page A250.)
- Option code
  No code: No surface treatment
  -F: Fluoride low temperature chrome plating
  -C: No surface treatment + Rail cover compatible
  -CF: Fluoride low temperature chrome plating + Rail cover compatible
- Preload code: Z
  Z: Slight preload, H: Medium preload.
- Accuracy code
  PH, KH: High-precision grade random-matching type (See table 21.)


EM and GM types



EM type




GM type



Reference number for rail of random-matching type

Rail **R1A35 1000 L C N -** ** PH Z**

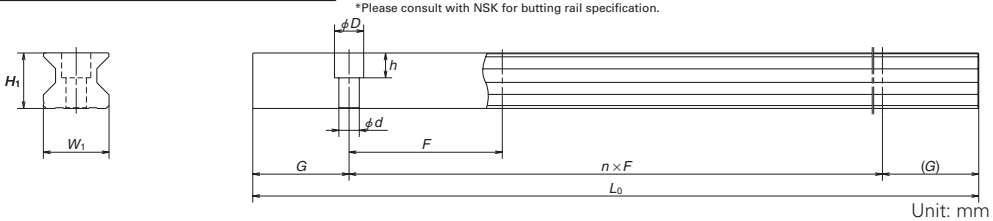- Random-matching rail series code
  R1A: RA Series random-matching rail
- Size
- Rail length (mm)
- Rail shape code: L
  L: Standard
- Material/surface treatment code (See Table 20.)
- *Butting rail specification
  N: Non-butting. L: Butting specification
  *Please consult with NSK for butting rail specification.
- Design serial number
  Added to the reference number.
- Accuracy code
  PH: High-precision grade random-matching type.
- Preload code: Z
  Z: Common for slight and medium preload (See A251)




Unit: mm

Rail Width W_1	Height H_1	Pitch F	Mounting bolt hole d × D × h	G reference	Maximum length L_{0max}	Basic load rating [3]Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Roller slide (kg)	Rail (kg/m)
15	16.3	60	4.5x7.5x5.3	20	2 000	12 600	10 300	27 500	260	210	1 320	210	1 320	0.21	1.6
		(30)				16 000	13 000	37 000	350	375	2 130	375	2 130	0.28	
20	20.8	60	6x9.5x8.5	20	3 000	23 600	19 200	52 500	665	505	3 100	505	3 100	0.45	2.6
		(30)				29 500	24 000	70 000	890	900	5 000	900	5 000	0.65	
23	24	30	7x11x9	20	3 900	36 000	29 200	72 700	970	760	4 850	760	4 850	0.80	3.4
		(60)				43 500	35 400	92 900	1 240	1 240	7 200	1 240	7 200	1.1	
28	28	40	9x14x12	20	3 900	47 800	38 900	93 500	1 670	1 140	7 100	1 140	7 100	1.3	4.9
		(80)				58 500	47 600	121 000	2 170	1 950	11 500	1 950	11 500	1.7	
34	31	40	9x14x12	20	3 900	65 500	53 300	129 000	2 810	1 800	11 000	1 800	11 000	1.7	6.8
		(80)				82 900	67 400	175 000	3 810	3 250	17 800	3 250	17 800	2.3	
45	38	52.5	14x20x17	22.5	3 650	114 000	92 800	229 000	6 180	4 080	24 000	4 080	24 000	3.2	10.9
		(105)				143 000	116 000	305 000	8 240	7 150	39 000	7 150	39 000	4.3	
53	43.5	60	16x23x20	30	3 600	159 000	129 000	330 000	10 200	7 060	41 000	7 060	41 000	5.4	14.6
		(120)				207 000	168 000	462 000	14 300	13 600	72 000	13 600	72 000	7.5	
63	55	75	18x26x22	35	3 600	259 000	210 000	504 000	19 200	12 700	78 500	12 700	78 500	12.2	22.0
		(150)				355 000	288 000	756 000	28 700	28 600	153 000	28 600	153 000	16.5	

2) The random-matching type is available for the models of RA25 to RA65.
3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life
C_{100}; the basic dynamic load rating for 100 km rated fatigue life

A-5-3.2 RB Series

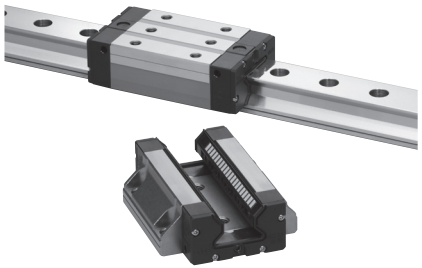

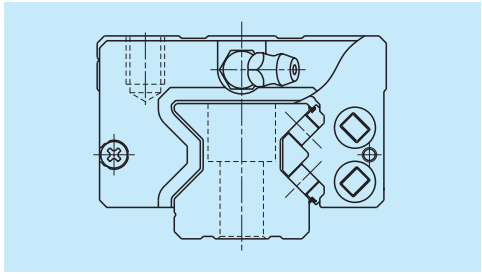


Fig. 1 RB Series

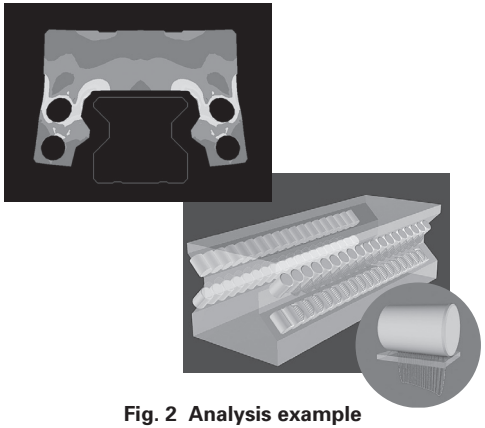


Fig. 2 Analysis example

1. Features

(1) Super-low type

With low mounting height, the RB series is effective for compact machine design.

(2) Super-high load capacity

The RB series can contribute to lower center of gravity of machines, while maintaining the load capacity of the RA series.

(3) Super-high rigidity

Using NSK's advanced analysis technology, we pursued a complete, optimal design, down to the detailed shape of roller slides and rails, thereby realizing super-high rigidity superior to that of competitor's roller guides.

(4) Super-high motion accuracy

NSK has developed its own unique method of simulating rolling element passage vibration and method of designing optimal roller slide specifications for damping roller passage vibration. These developments have dramatically enhanced roller slide motion accuracy for the RB series.










(5) Smooth motion

Installation of a retaining piece between rollers restrains the roller skew peculiar to roller slides, thereby achieving smooth motion.

(6) Low friction

Using rollers for rolling elements helps minimize dynamic friction.

2. Roller slide shape

Roller slide model	Shape/installation method	Type (Upper row, Rating: Lower row, Roller slide length)	
		High-load type	Super-high-load type
		Standard	Long
AL TL BL UL		AL・TL (excluding RB55AL)  RB55AL 	BL (excluding RB55 and RB65)  UL  RB55BL・RB65BL 
EM GM		EM 	GM 

3. Accuracy and preload

(1) Running parallelism of roller slide

Table 1

Unit: μm

Rail length(mm) over	Rail length(mm) or less	Preloaded assembly (not random matching) Ultra precision P3	Super precision P4	High precision P5	Precision grade P6
–	50	2	2	2	4
50	80	2	2	3	4
80	125	2	2	3	4
125	200	2	2	3.5	5
200	250	2	2.5	4.5	6
250	315	2	2.5	5	6.5
315	400	2	3	5.5	7
400	500	2	3	6	7.5
500	630	2	3.5	6.5	8.5
630	800	2	4	7	9.5
800	1 000	2.5	4.5	7.5	10
1 000	1 250	3	5	8.5	12
1 250	1 600	3.5	5.5	9.5	13
1 600	2 000	4	6.5	11	14
2 000	2 500	4.5	7.5	12	16
2 500	3 150	5.5	8.5	13	18
3 150	4 000	6	9.5	14	19

(2) Accuracy standard

The preloaded assembly has four accuracy grades; Ultra precision P3, Super precision P4, High precision P5, and Precision P6 grades.

• **Tolerance of preloaded assembly**

Table 2 Unit: μm

Characteristics \ Accuracy grade	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6
Mounting height *H* Variation of *H* (All roller slides on a set of rails)	±8 3	±10 5	±20 7	±40 15
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All roller slides on reference rail)	±10 3	±15 7	±25 10	±50 20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in **Table 1** and **Fig. 4**			

(3) Assembled accuracy

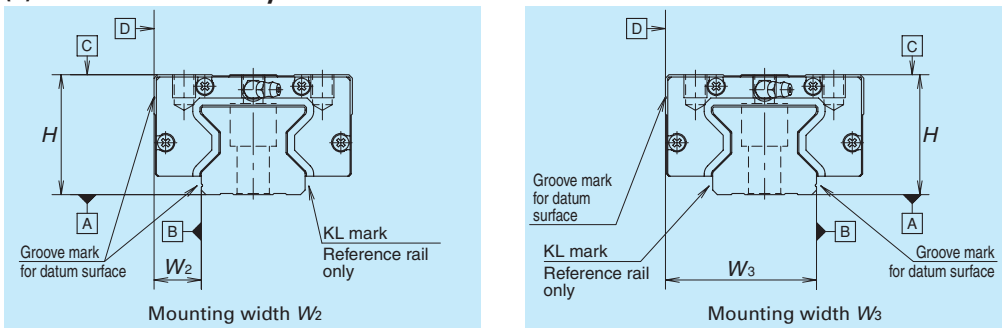


Fig. 3

(4) Preload and rigidity

One type of preload is available: Medium preload Z3 for preloaded assembly.

Table 3

	Model No.	Preload (N) Medium preload (Z3)
High-load type	RB30 AL, EM	3 890
	RB35 AL, EM	5 330
	RB45 AL, EM	9 280
	RB55 AL, TL, EM	12 900
	RB65 AL, EM	21 000
Super-high-load type	RB30 BL, GM	4 760
	RB35 BL, GM	6 740
	RB45 BL, GM	11 600
	RB55 BL, UL, GM	16 800
	RB65 BL, UL, GM	28 800

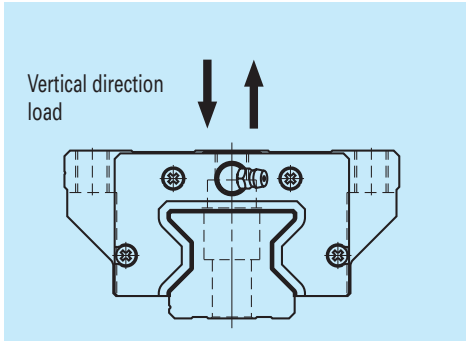


Fig. 4 Direction of load

• **Rigidity of medium preload**

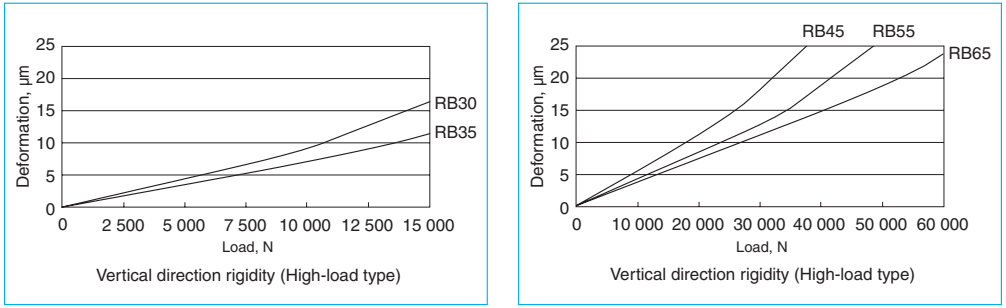


Fig. 5 Vertical direction theoretical rigidity line: High-load type (Roller slide shape: AL, TL, EM)

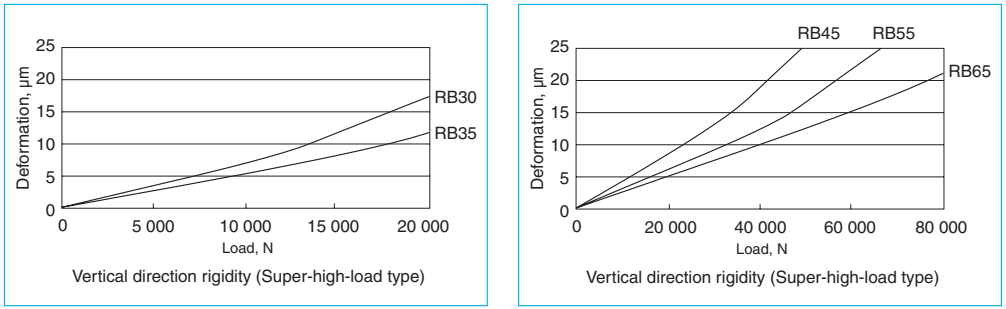


Fig. 6 Vertical direction theoretical rigidity line: Super-high-load type (Roller slide shape: BL, UL, GM)

4. Maximum rail length

Table 4 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grades.

Table 4 Length limitation of rails Unit: mm

Series \ Size	30	35	45	55	65
RB	3 900	3 900	3 650	3 600	3 600

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

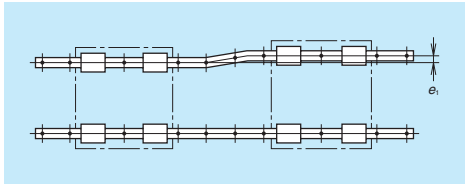


Fig. 7

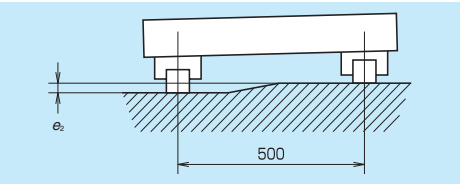


Fig. 8

Table 5 Unit: μm

Value	Model No.				
	RB30	RB35	RB45	RB55	RB65
Permissible values of parallelism in two rails e_1	11	13	17	19	30
Permissible values of parallelism (height) in two rails e_2	150 μm / 500 mm				

(2) Shoulder height of the mounting surface and corner radius r




Fig. 9 Shoulder for the rail datum surface




Fig. 10 Shoulder for the roller slide datum surface

Table 6 Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
RB30	1	1	5	6
RB35	1	1	5	6
RB45	1.5	1	6	8
RB55	1.5	1.5	7	10
RB65	1.5	1.5	8	11

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 13 and **Table 8** show grease fittings and tube fittings.

(2) Mounting position of lubrication accessories

- The standard position of grease fittings and tube fittings is the end face of roller slide. We can mount them on a side of end cap for an option. (**Fig. 11**) Please consult NSK for installation of grease or tube fittings to the roller slide body or the side of end cap.
- A lubrication hole can also be provided on the top of the end cap. **Fig.12** and **Table 7** show the mounting position.
- When using a piping unit with thread of M6 × 1, you require a connector to connect it to a grease fitting mounting hole with M6 × 0.75. The connectors are available from NSK.

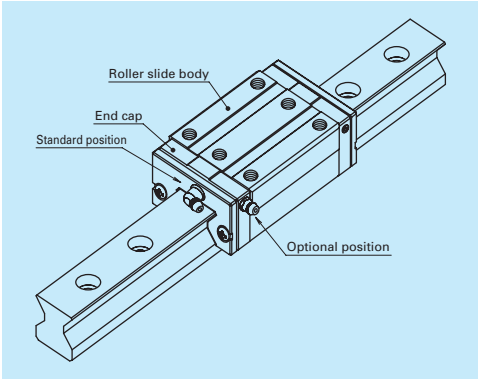


Fig. 11 Mounting position of lubrication accessories

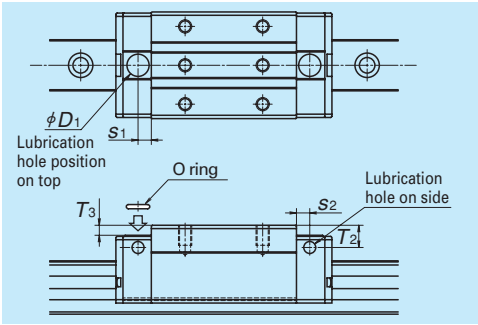


Fig.12 Top and side lubrication hole positions

Table 7 Top and side lubrication hole positions Unit: mm

Model No.	Grease fitting size	s_2	T_2	O ring (JIS)	D_1	s_1	T_3
RB30	M6×0.75	5	6.5	P7	10.4	6	0.5
RB35	M6×0.75	5.5	6.5	P7	10.4	7	0.4
RB45	M6×0.75	7.2	6.5	P7	10.4	7.2	0.4
RB55	M6×0.75	7.2	8	P7	10.4	7.2	0.4
RB65	M6×0.75	7.2	10	P7	10.4	7.2	0.4

Note: Grease fitting and tube fitting cannot be mounted on the top of the end cap.

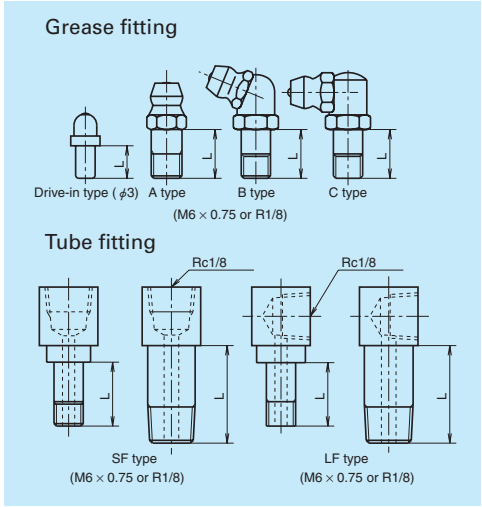


Fig. 13 Grease fitting and tube fitting

Table 8 Unit: mm

Model No.	Dust-proof specification	Dimension L		
		Grease fitting /Drive-in type	Tube fitting SF type	Tube fitting LF type
RB30	Standard	5	–	–
	With NSK K1	10	–	–
	Double seal	8	–	–
	Protector	8	–	–
RB35	Standard	5	5	5
	With NSK K1	14	15	16
	Double seal	12	12	12
	Protector	12	12	12
RB45	Standard	5	5	5
	With NSK K1	14	15	16
	Double seal	12	12	12
	Protector	12	12	12
RB55	Standard	8	13.5	17
	With NSK K1	18	20	21.5
	Double seal	14	16	17
	Protector	14	16	17
RB65	Standard	8	13.5	17
	With NSK K1	20	20	20
	Double seal	14	18	17
	Protector	14	16	17

7. Dust-proof components

(1) Standard specification

The RB series is equipped with end, inner and bottom seals to prevent foreign matter from entering the inside of the roller slide. Under normal applications, the RB series can be used without modification.

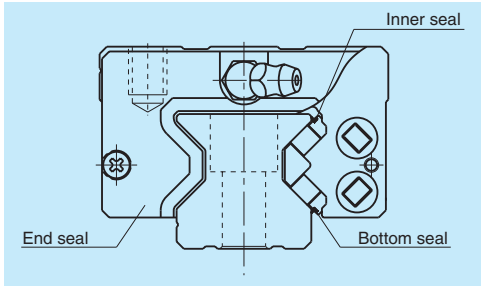


Fig. 14

Table 9 Seal friction per roller slide (maximum value) Unit: N

Series \ Size	30	35	45	55	65
RB	5	6	8	8	14

(2) NSK K1™ lubrication unit

Table 10 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

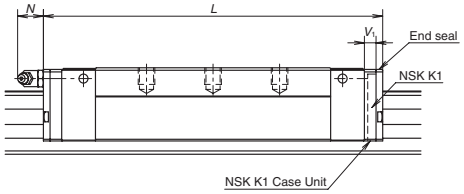


Table 10 Dimensions when equipped with the NSK K1 lubrication unit Unit: mm

Model No.	Roller slide length	Roller slide model	Standard roller slide length	With two NSK K1	Thickness of NSK K1 V_1	Protruding area of the grease fitting N
RB30	Standard	AL, EM	110.8	122.8	6	(11)
	Long	BL, GM	135.4	147.4		
RB35	Standard	AL, EM	123.8	136.8	6.5	(11)
	Long	BL, GM	152	165		
RB45	Standard	AL, EM	154	168	7	(14)
	Long	BL, GM	190	204		
RB55	Standard	AL, TL, EM	184	198	7	(14)
	Long	BL, UL, GM	234	248		
RB65	Standard	AL, EM	228.4	243.4	7.5	(14)
	Long	BL, UL, GM	302.5	317.5		

Note: When equipped with NSK K1, roller slide length = (standard roller slide length) + (V_1 thickness of NSK K1 Case Unit) × (number of NSK K1 Case Unit)

(3) Double seal and protector

For RB Series, double seal and protector can be installed only before shipping from the factory.
Table 11 shows the increased thickness when end seal and protector are installed.

Table 11 Unit: mm

Model No.	Thickness of end seal V_3	Thickness of protector V_4
RB30	3.4	3.6
RB35	3.4	3.6
RB45	4	4.2
RB55	4	4.2
RB65	5	5.5

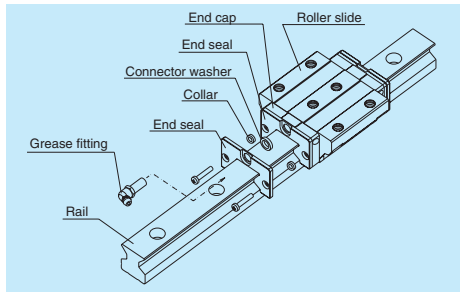


Fig. 15 Double seal

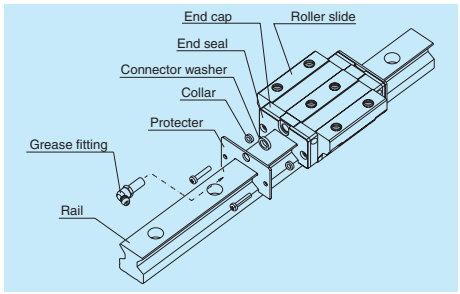


Fig. 16 Protector

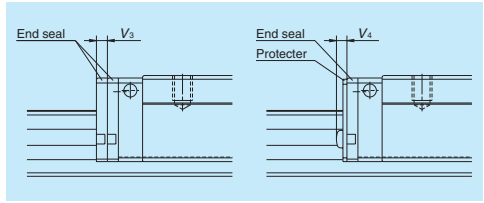


Fig. 17

(4) Cap to plug the rail mounting bolt hole

Table 12 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
RB30, RB35	M8	LG-CAP/M8	20
RB45	M12	LG-CAP/M12	20
RB55	M14	LG-CAP/M14	20
RB65	M16	LG-CAP/M16	20

(5) Bellows

Consult NSK when attaching bellows.

8. Dynamic friction force

- Dynamic friction force indications per roller slide are shown in **Table 13**.
- These values are assumed under actual condition with standard specification (two end seals, inner seal and bottom seal equipped) packed with standard grease (NSK Grease AS2)
- Dynamic friction force varies with grease.

Table 13 Dynamic friction force

Unit: N

Model No.	High-load type	Super-high-load type
RB30	33	42
RB35	42	53
RB45	56	69
RB55	80	95
RB65	120	138

Note: Values in Table 13 are indications.
Please refer to them.

9. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

RB 35 1000 AL C 2 - ** **P5 3**

- Series name
- Size
- Rail length (mm)
- Roller slide shape code (See page A272.)
- Material/surface treatment code (See Table 14.)
  C: Special high carbon steel (NSK standard)
- Number of roller slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 15.)
- Preload code
  3: Z3

Table 14 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
D	Special high carbon steel with surface treatment
Z	Other, special

Table 15 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Ultra precision grade	P3	K3
Super precision grade	P4	K4
High precision grade	P5	K5
Precision grade	P6	K6


Note: Refer to pages A38 for NSK K1 lubrication unit.

10. Dimensions
RB-AL·TL (High-load type / Standard)
RB-BL·UL (Super-high-load type / Long)


RB 35 1000 AL C 2 - ** P5 3**

- Series name
- Size
- Rail length (mm)
- Roller slide shape code (See page A272.)
- Material/surface treatment code (See Table 14.)
  C: Special high carbon steel (NSK standard)
- Number of roller slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 15.)
- Preload code
  3: Z3


Top view of RB55AL



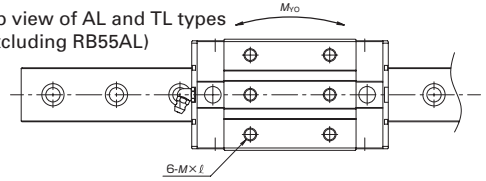
Top view of AL and TL types
(excluding RB55AL)



Front view




Side view of AL and TL types

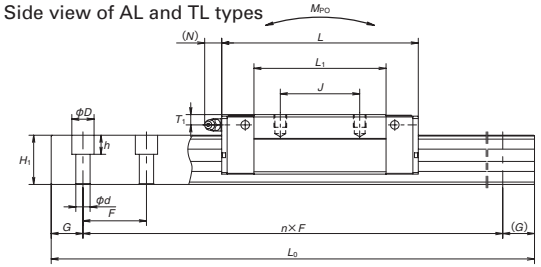


Model No.	Assembly Height H	Assembly E	Assembly W_2	Roller slide Width W	Roller slide Length L	Mounting hole B	Mounting hole J	Mounting hole Number of holes	Mounting hole M×pitch×ℓ	L_1	K	T	Grease fitting Hole size	Grease fitting T_1	Grease fitting N	Width W_1
RB30AL	38	6.5	16	60	110.8	40	40	6	M8×1.25×7	74	31.5	14	φ3	5	2.6	28
RB30BL					135.4		60	8		98.6						
RB35AL	44	6.5	18	70	123.8	50	50	6	M8×1.25×8	83.2	37.5	15	M6×0.75	6.5	11	34
RB35BL					152		72	8		111.4						
RB45AL	52	8	20.5	86	154	60	60	6	M10×1.5×10	105.4	44	17	M6×0.75	6.5	14	45
RB45BL					190		80	8		141.4						
RB55AL	63	9	23.5	100	184	65 75	75	4	M12×1.75×12	128	54	18	Rc1/8	8.5	14	53
RB55TL																
RB55BL					234	65 75	95	6		178						
RB55UL																
RB65AL	75	10	31.5	126	228.4	76	70 110 120	6	M16×2×16	155.4	65	22	Rc1/8	10	14	63
RB65BL					302.5					229.5						
RB65UL																

Notes: 1) Select either one of two F dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of F is applied.

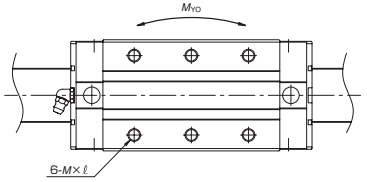
Top view of RB55BL and RB65BL




Top view of UL type

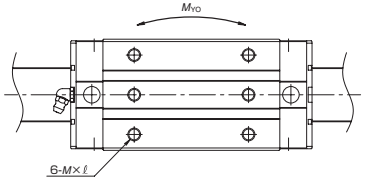

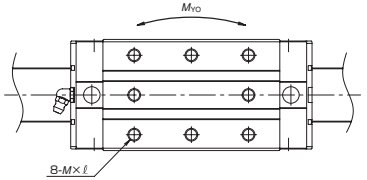Top view of BL type (excluding RB55 and RB65)



Side view of BL type

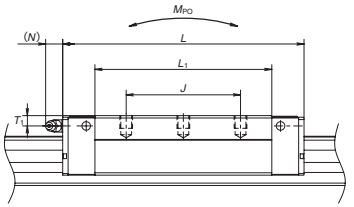

Unit: mm

Rail Height H_1	Rail Pitch F	Rail Mounting bolt hole d×D×h	Rail G (reference)	Rail Maximum length L_{0max}	Basic load rating [2]Dynamic [50km] C_{50}(N)	Basic load rating [2]Dynamic [100km] C_{100}(N)	Basic load rating Static C_0 (N)	Basic load rating Static moment (N·m) M_{RO}	Basic load rating Static moment (N·m) M_{PO} One slide	Basic load rating Static moment (N·m) M_{PO} Two slides	Basic load rating Static moment (N·m) M_{YO} One slide	Basic load rating Static moment (N·m) M_{YO} Two slides	Weight Roller slide (kg)	Weight Rail (kg/m)
28	40 (80)	9×14×12	20	3 900	47 800 58 500	38 900 47 600	93 500 121 000	1 670 2 170	1 140 1 950	7 100 11 500	1 140 1 950	7 100 11 500	0.71 0.91	4.9
31	40 (80)	9×14×12	20	3 900	65 500 82 900	53 300 67 400	129 000 175 000	2 810 3 810	1 800 3 250	11 000 17 800	1 800 3 250	11 000 17 800	1.0 1.5	6.8
38	52.5 (105)	14×20×17	22.5	3 650	114 000 143 000	92 800 116 000	229 000 305 000	6 180 8 240	4 080 7 150	24 000 39 000	4 080 7 150	24 000 39 000	1.9 2.6	10.9
43.5	60 (120)	16×23×20	30	3 600	159 000 207 000	129 000 168 000	330 000 462 000	10 200 14 300	7 060 13 600	41 000 72 000	7 060 13 600	41 000 72 000	3.4 4.7	14.6
52	75 (150)	18×26×22	35	3 600	259 000 355 000	210 000 288 000	504 000 756 000	19 200 28 700	12 700 28 600	78 500 153 000	12 700 28 600	78 500 153 000	7.2 9.5	20.5


2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life
C_{100}; the basic dynamic load rating for 100 km rated fatigue life

RB-EM (High-load type / Standard)
RB-GM (Super-high-load type / Long)


RB 35 1000EM C 2 - ** **P5 3**

- Series name
- Size
- Rail length (mm)
- Roller slide shape code (See page A272.)
- Material/surface treatment code (See Table 14.)
  C: Special high carbon steel (NSK standard)
- Number of roller slides per rail
- Design serial number
  Added to the reference number.
- Accuracy code (See Table 15.)
- Preload code
  3: Z3


Front view of EM and GM types




Top view of EM type

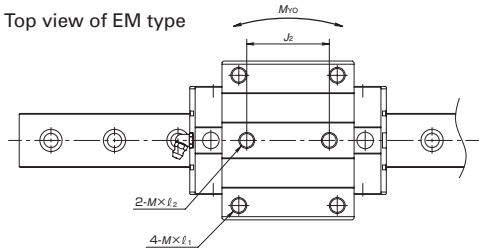


Side view of EM type

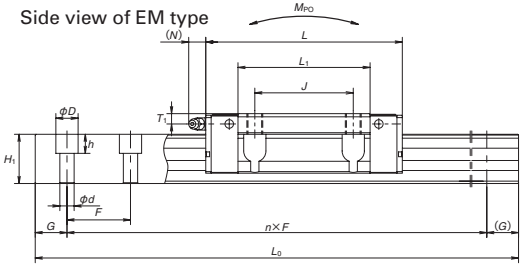

Top view of GM type

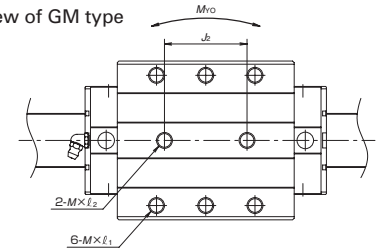

Side view of GM type

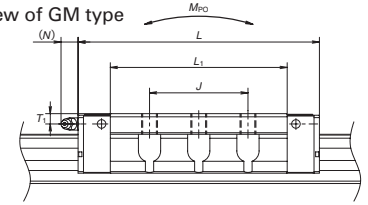

Unit: mm


Model No.	Assembly			Roller slide													Width
	Height			Width	Length	Mounting hole								Grease fitting			
	H	E	W_2	W	L	B	J	J_2	Number of holes	$M\times$pitch$\times\ell_1(\ell_2)$	Q	L_1	K	T	Hole size	T_1	N	W_1
RB30EM	38	6.5	31	90	110.8	72	52	44	6	M10×1.5×12 (8.5)	8.6	74	31.5	11	ϕ3	5	2.6	28
RB30GM					135.4				8			98.6						
RB35EM	44	6.5	33	100	123.8	82	62	52	6	M10×1.5×13 (11.5)	8.6	83.2	37.5	12	M6×0.75	6.5	11	34
RB35GM					152				8			111.4						
RB45EM	52	8	37.5	120	154	100	80	60	6	M12×1.75×15 (12.5)	10.5	105.4	44	13	M6×0.75	6.5	14	45
RB45GM					190				8			141.4						
RB55EM	63	9	43.5	140	184	116	95	70	6	M14×2×18 (18)	12.5	128	54	15	Rc1/8	8.5	14	53
RB55GM					234				8			178						
RB65EM	75	10	53.5	170	228.4	142	110	82	6	M16×2×24 (21)	14.6	155.4	65	15	Rc1/8	10	14	63
RB65GM					302.5				8			229.5						

Notes: 1) Select either one of two F dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of F is applied.

Rail					Basic load rating							Weight	
Height	Pitch	Mounting bolt hole	G	Maximum length	[2]Dynamic		Static	Static moment (N·m)				Roller slide	Rail
					[50km]	[100km]	C_0	M_{RO}	M_{PO}		M_{YO}		
H_1	F	$d\times D\times h$	(reference)	L_{0max}	C_{50}(N)	C_{100}(N)	(N)		One slide	Two slides	One slide	Two slides	(kg)	(kg/m)
28	40	9×14×12	20	3900	47 800	38 900	93 500	1 670	1 140	7 100	1 140	7 100	1.1	4.9
	(80)				58 500	47 600	121 000	2 170	1 950	11 500	1 950	11 500	1.5	
31	40	9×14×12	20	3900	65 500	53 300	129 000	2 810	1 800	11 000	1 800	11 000	1.5	6.8
	(80)				82 900	67 400	175 000	3 810	3 250	17 800	3 250	17 800	2.0	
38	52.5	14×20×17	22.5	3650	114 000	92 800	229 000	6 180	4 080	24 000	4 080	24 000	2.5	10.9
	(105)				143 000	116 000	305 000	8 240	7 150	39 000	7 150	39 000	3.4	
43.5	60	16×23×20	30	3600	159 000	129 000	330 000	10 200	7 060	41 000	7 060	41 000	4.7	14.6
	(120)				207 000	168 000	462 000	14 300	13 600	72 000	13 600	72 000	6.6	
52	75	18×26×22	35	3600	259 000	210 000	504 000	19 200	12 700	78 500	12 700	78 500	9.7	20.5
	(150)				355 000	288 000	756 000	28 700	28 600	153 000	28 600	153 000	13.2	

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life
C_{100}; the basic dynamic load rating for 100 km rated fatigue life

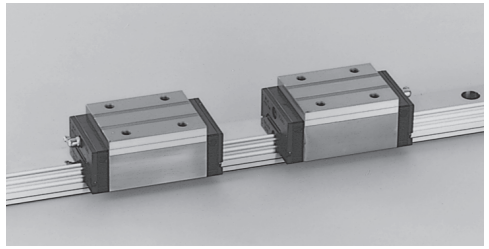A-5-3.3 LA Series



1. Features

(1) High rigidity and high load carrying capacity

A set of three ball grooves is made on both sides of ball slide and a rail. This contributes to the increased rigidity and load carrying capacity. The top and bottom groove are formed in the circular arc with a closer radius of ball, which ensures great rigidity and load carrying capacity. With the Gothic arch center groove, rigidity and load carrying capacity are further increased.

(2) Moderate friction

A well-balanced combination of 2-point contacts at the top and bottom grooves and 4 points contact at the center groove provides moderate friction while ensuring rigidity by appropriate preload.

(3) Four-way equal load distribution

The contact angle of balls is set at 45 degrees in all grooves, thereby dispersing the load equally to four rows irrespective of load direction. This realizes equal rigidity and load carrying capacity in vertical and lateral directions and provides well-balanced design.

(4) Strong against shock load

Load from any direction, vertical and lateral, is received by four ball rows at all times. The number of the ball rows which receive the load is larger than in other linear guides, making this series stronger against shock load.

(5) High accuracy

As showing in **Fig. 4**, fixing the measuring rollers is easy thanks to the Gothic arch groove of the central ball groove. This benefits an accurate and measuring of ball groove for a highly precise and stable manufacturing.

(6) The dust protection design

The rail's cross section is designed as simple as possible, thereby improving the sealing efficiency combined with the enhanced sealing function. In addition, optional inner seals are available.

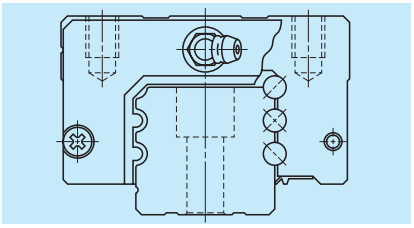


Fig. 1 LA Series

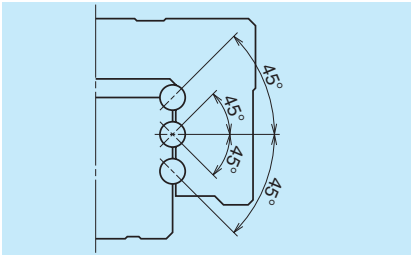


Fig. 2 Super rigidity design

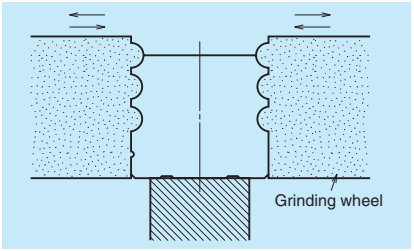


Fig. 3 Rail grinding

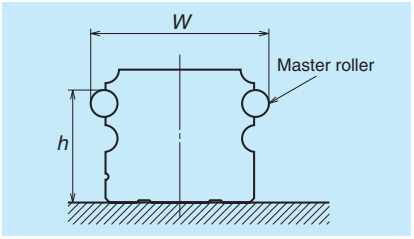














Fig. 4 Measuring groove accuracy

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)	
		High-load type	Super-high-load type
		Standard	Long
AN BN		AN 	BN 
AL BL		AL 	BL 
EL GL		EL 	GL 
FL HL		FL 	HL 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length(mm) over	Rail length(mm) or less	Accuracy grade: Preloaded assembly (not random matching) Ultra precision P3	Super precision P4	High precision P5	Precision grade P6
–	50	2	2	2	4
50	80	2	2	3	4
80	125	2	2	3	4
125	200	2	2	3.5	5
200	250	2	2.5	4.5	6
250	315	2	2.5	5	6.5
315	400	2	3	5.5	7
400	500	2	3	6	7.5
500	630	2	3.5	6.5	8.5
630	800	2	4	7	9.5
800	1 000	2.5	4.5	7.5	10
1 000	1 250	3	5	8.5	12
1 250	1 600	3.5	5.5	9.5	13
1 600	2 000	4	6.5	11	14
2 000	2 500	4.5	7.5	12	16
2 500	3 150	5.5	8.5	13	18
3 150	4 000	6	9.5	14	19

(2) Accuracy standard

The LA Series has four accuracy grades: Ultra precision P3, Super precision P4, High precision P5, and Precision grade P6.

Table 2 Unit: μm

Characteristics \ Accuracy grade	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6
Mounting height *H* Variation of *H* (All ball slides on a set of rails)	±8 3	±10 5	±20 7	±40 15
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All ball slides on reference rail)	±10 3	±15 7	±25 10	±50 20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in **Table 1** and **Fig. 5**			

(3) Assembled accuracy

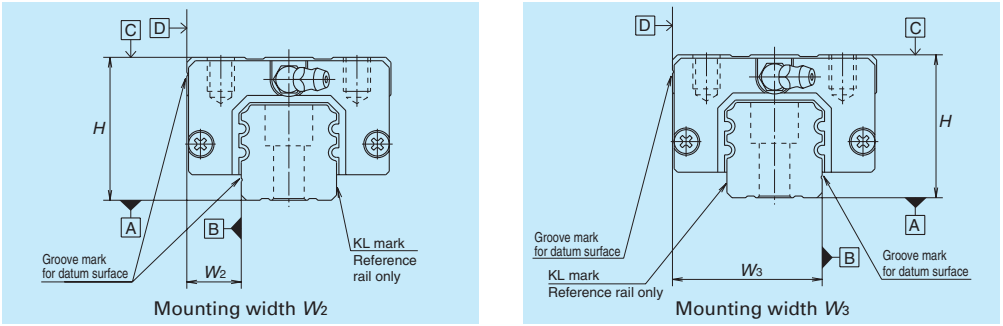


Fig. 5

4. Preload and rigidity

Table 3 shows preload and rigidity of LA Series.

The LA Series has two types of preload specification: Medium preload Z3 and Heavy preload Z4.

Table 3

	Model No.	Preload (N)		Rigidity (N/μm)	
		Medium preload Z3	Heavy preload Z4	Medium preload Z3	Heavy preload Z4
High-load type	LA25 AL, AN, EL, FL	1 670	2 110	475	550
	LA30 AL, AN, EL, FL	2 450	3 150	705	835
	LA35 AL, AN, EL, FL	3 450	4 300	825	970
	LA45 AL, AN, EL, FL	5 050	6 350	1 100	1 240
	LA55 AL, AN, EL, FL	8 100	10 200	1 400	1 540
	LA65 AN, EL, FL	13 800	18 800	1 730	2 030
Super-high-load type	LA25 BL, BN, GL, HL	2 260	2 840	700	820
	LA30 BL, BN, GL, HL	3 250	4 050	1 000	1 180
	LA35 BL, BN, GL, HL	4 450	5 650	1 200	1 400
	LA45 BL, BN, GL, HL	6 150	7 750	1 450	1 640
	LA55 BL, BN, GL, HL	9 550	12 100	1 840	2 020
	LA65 BN, GL, HL	18 000	24 400	2 450	2 840

4. Maximum rail length

Table 4 shows the limitations of rail length. However, the limitations vary by accuracy grades.

Table 4 Length limitations of rails Unit: mm

Series \ Size	25	30	35	45	55	65
LA	3 960	4 000	4 000	3 990	3 960	3 900

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

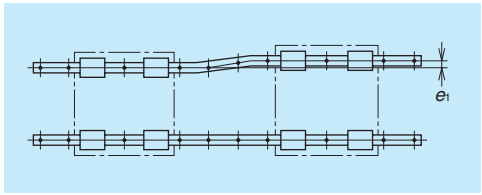


Fig. 6

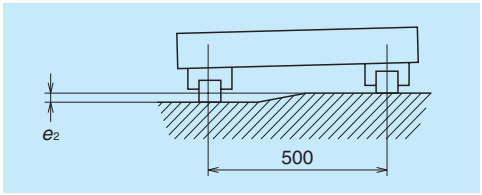


Fig. 7

Table 5 Unit: μm

Value	Preload	Model No.					
		LA25	LA30	LA35	LA45	LA55	LA65
Permissible values of parallelism in two rails e_1	Z3	15	17	20	25	30	40
	Z4	13	15	17	20	25	30
Permissible values of parallelism (height) in two rails e_2	Z3, Z4	185 μm/500 mm					

(2) Shoulder height of the mounting surface and corner radius r




Fig. 8 Shoulder for the rail datum surface




Fig. 9 Shoulder for the ball slide datum surface

Table 6 Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
LA25	0.5	0.5	5	5
LA30	0.5	0.5	6	6
LA35	0.5	0.5	6	6
LA45	0.7	0.7	8	8
LA55	0.7	0.7	10	10
LA65	1	1	11	11

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 10 and **Table 7** show grease fittings and tube fittings.

(2) Mounting position of lubrication accessories

- The standard position of grease fittings is the end face of ball slide. We mount them on a side of end cap for an option. (**Fig. 11**) .
- Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.
- When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

Table 7 Unit: mm

Model No.	Dust-proof specification	Dimension L		
		Grease fitting	Tube fitting	
			SF type	LF type
LA25	Standard	5	5	5
	With NSK K1	14	12	12
	Double seal	10	9	9
	Protector	10	9	9
LA30	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	11	11
LA35	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	11	11
LA45	Standard	8	13.5	17
	With NSK K1	18	22	21.5
	Double seal	14	18	17
	Protector	14	16	17
LA55	Standard	8	13.5	17
	With NSK K1	18	22	21.5
	Double seal	14	18	17
	Protector	14	16	17
LA65	Standard	8	13.5	17
	With NSK K1	22	24	25.5
	Double seal	16	20	19
	Protector	16	16	17

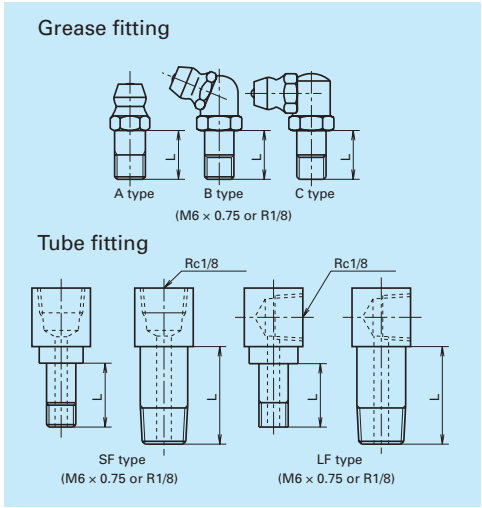


Fig. 10 Grease fitting and tube fitting

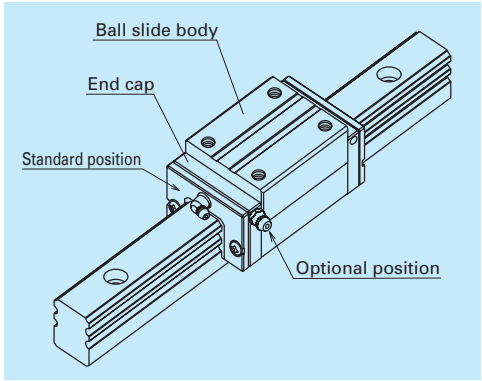


Fig. 11 Mounting position of lubrication accessories

7. Dust-proof components

(1) Standard Specification

The LA Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.

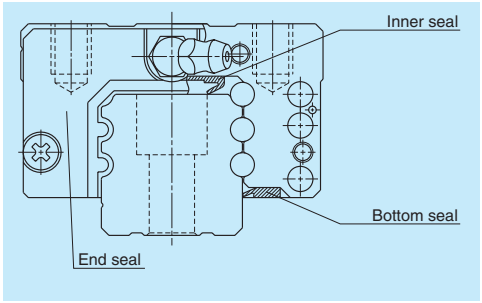


Fig. 12

Table 8 Seal friction per ball slide (maximum value) Unit: N

Series \ Size	25	30	35	45	55	65
LA	11	11	12	17	17	23

(2) NSK K1™ lubrication unit

Table 9 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

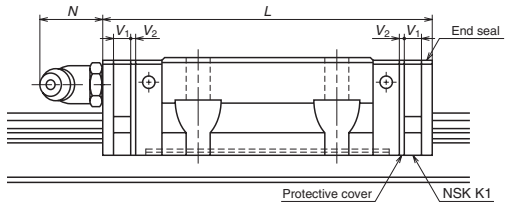


Table 9 Dimensions when equipped with the NSK K1 lubrication unit Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V_1	Protective cover thickness V_2	Protruding area of the grease fitting N
LA25	Standard	AL, AN, EL, FL	79.8	91.8	5.0	1.0	(14)
	Long	BL, BN, GL, HL	107.8	119.8			
LA30	Standard	AL, AN, EL, FL	100.2	113.2	5.5	1.0	(14)
	Long	BL, BN, GL, HL	126.2	139.2			
LA35	Standard	AL, AN, EL, FL	110.6	123.6	5.5	1.0	(14)
	Long	BL, BN, GL, HL	144.6	157.6			
LA45	Standard	AL, AN, EL, FL	141.4	156.4	6.5	1.0	(15)
	Long	BL, BN, GL, HL	173.4	188.4			
LA55	Standard	AL, AN, EL, FL	165.4	180.4	6.5	1.0	(15)
	Long	BL, BN, GL, HL	203.4	218.4			
LA65	Standard	AN, EL, FL	196.2	214.2	8.0	1.0	(16)
	Long	BN, GL, HL	256.2	274.2			

Note: When equipped with NSK K1, ball slide length = (standard ball slide length) + (V_1 thickness of single K1 unit) × (number of K1 units) + (V_2 thickness of the protective cover) × 2.

(3) Double seal and protector

For the LA Series, a double seal and a protector can be installed only before shipping from the factory. Please consult with NSK when the double seal and the protectors are required.

Table 10 shows the increased thickness of V_3 and V_4 when end seals and protectors are installed (**Fig. 15**).

Table 10

Unit: mm

Model No.	Thickness of end seal: V_3	Thickness of protector: V_4
LA25	3.2	3.6
LA30	4.4	4.2
LA35	4.4	4.2
LA45	5.5	4.9
LA55	5.5	4.9
LA65	6.5	5.5

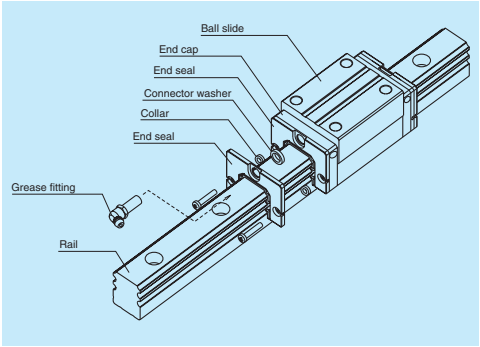


Fig. 13 Double seal

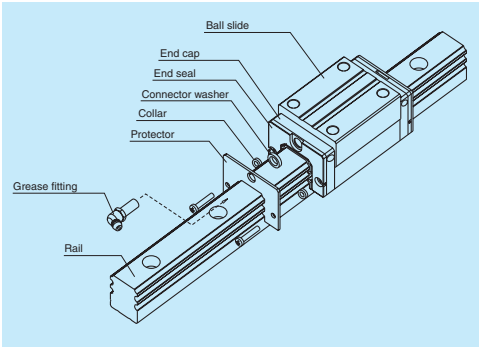


Fig. 14 Protector

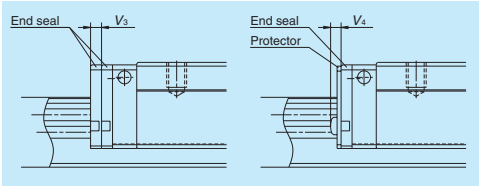


Fig. 15

(4) Cap to plug the rail mounting bolt hole

Table 11 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
LA25	M6	LG-CAP/M6	20
LA30, LA35	M8	LG-CAP/M8	20
LA45	M12	LG-CAP/M12	20
LA55	M14	LG-CAP/M14	20
LA65	M16	LG-CAP/M16	20

(5) Bellows

Make tap holes to the rail end face to fix the bellows mounting plate.

NSK processes tap holes to the rail end face when ordered with a linear guide.

Dimension tables of bellows
LA Series

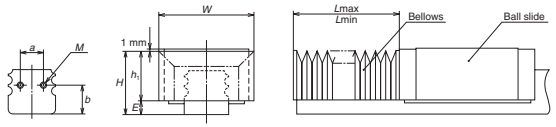


Fig. 16 Dimensions of bellows

Bellows reference number

J A A 30 L 08

- Bellows
- A: Bellows for the ends
- B: Middle bellows
- Bellows for LA series
- Number of BL (fold number)
- N: High type L: Low type
- Size number of linear guide

Table 12 Dimensions of bellows

Unit: mm

Model No.	*H*	h_1	*E*	*W*	*P*	*a*	*b*	Length of BL	Tap (M) × depth
JAA25L	35	29.5	5.5	55	12	12	13.8	17	M3 × 5
JAA25N	39	33.5	5.5	61	15	12	13.8	17	M3 × 5
JAA30L	41	33.5	7.5	60	12	14	17.5	17	M4 × 6
JAA30N	44	36.5	7.5	66	15	14	17.5	17	M4 × 6
JAA35L	47	39.5	7.5	72	15	15	18.8	17	M4 × 6
JAA35N	54	46.5	7.5	82	20	15	18.8	17	M4 × 6
JAA45L	59	49	10	93	20	25	22.5	17	M5 × 8
JAA45N	69	59	10	113	30	25	22.5	17	M5 × 8
JAA55L	69	57	12	101	20	35	27.1	17	M5 × 8
JAA55N	79	67	12	121	30	35	27.1	17	M5 × 8
JAA65N	89	75	14	131	30	40	33.3	17	M6 × 12

Table 13 Numbers of folds (BL) and length of bellows

Unit: mm

Type	Model No.	Length of BL	2	4	6	8	10	12	14	16	18	20
		L_{min}	34	68	102	136	170	204	238	272	306	340
Low type	JAA25L	Stroke	134	268	402	536	670	804	938	1 072	1 206	1 340
		L_{max}	168	336	504	672	840	1 008	1 176	1 344	1 512	1 680
High type	JAA25N	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
		L_{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
Low type	JAA30L	Stroke	134	268	402	536	670	804	938	1 072	1 206	1 340
		L_{max}	168	336	504	672	840	1 008	1 176	1 344	1 512	1 680
High type	JAA30N	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
		L_{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
Low type	JAA35L	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
		L_{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
High type	JAA35N	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
		L_{max}	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
Low type	JAA45L	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
		L_{max}	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
High type	JAA45N	Stroke	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
		L_{max}	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200
Low type	JAA55L	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
		L_{max}	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
High type	JAA55N	Stroke	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
		L_{max}	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200
Low/high type	JAA65N*	Stroke	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
		L_{max}	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200

* Bellows for LA65 is for both low and high types.

Note : The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of the even number BL on the both sides, then by dividing the sum by 2.

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

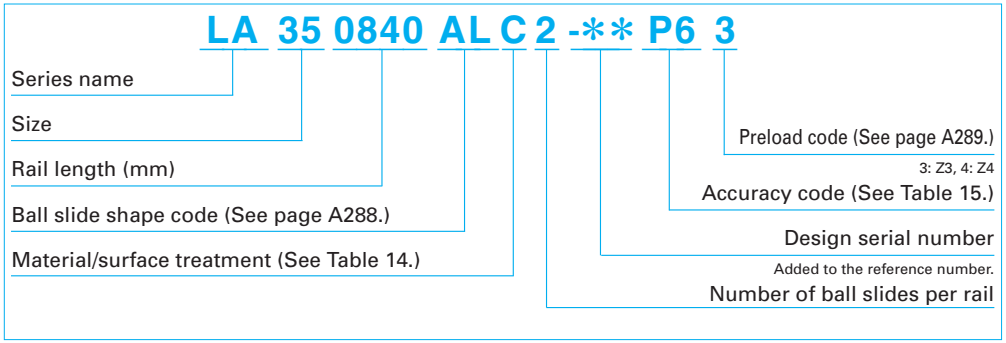


Table 14 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
D	Special high carbon steel with surface treatment
Z	Other, special

Table 15 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Ultra precision grade	P3	K3
Super precision grade	P4	K4
High precision grade	P5	K5
Precision grade	P6	K6

Note: Refer to pages A38 for NSK K1 lubrication unit.


9. Dimensions

LA-AL (High-load type / Standard)
LA-BL (Super-high-load type / Long)


LA 35 0840 AL C 2 - ** P6 3**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A288.)
- Material/surface treatment (See Table 14.)
- Number of ball slides per rail
- Added to the reference number.
- Design serial number
- Accuracy code (See Table 15.)
- 3: Z3, 4: Z4
- Preload code (See page A289.)


Front view of AL and BL types



Side view of AL type

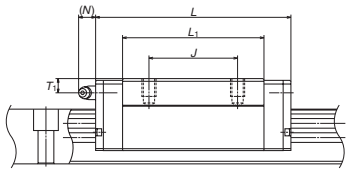

Side view of BL type

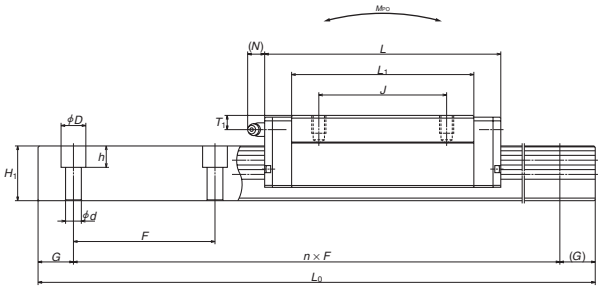

Unit: mm

Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	M × pitch × ℓ	L_1	K	T	Grease fitting Hole size	T_1	N	Width W_1	Height H_1
LA25AL	36	5.5	12.5	48	79.8	35	35	M6×1×7	58	30.5	8	M6×0.75	6	11	23	22
LA25BL					107.8		50		86							
LA30AL	42	7.5	16	60	100.2	40	40	M8×1.25×10	72	34.5	11	M6×0.75	6.5	11	28	28
LA30BL					126.2		60		98							
LA35AL	48	7.5	18	70	110.6	50	50	M8×1.25×10	80	40.5	15	M6×0.75	8	11	34	30.8
LA35BL					144.6		72		114							
LA45AL	60	10	20.5	86	141.4	60	60	M10×1.5×16	105	50	17	Rc1/8	10	13	45	36
LA45BL					173.4		80		137							
LA55AL	70	12	23.5	100	165.4	75	75	M12 × 1.75×16	126	58	18	Rc1/8	11	13	53	43.2
LA55BL					203.4		95		164							

Notes: 1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Rail Pitch F	Mounting bolt hole d × D × h	G (reference)	Max. length L_{0max}	Basic load rating 2)Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (kg)	Rail (kg/m)
60	7×11×9	20	3 960	30 000	23 900	50 000	290	410	2 490	410	2 490	0.5	3.7
				40 500	32 500	77 000	445	935	5 000	935	5 000	0.8	
80	9×14×12	20	4 000	47 000	37 000	77 500	535	820	4 800	820	4 800	0.8	5.8
				58 000	46 000	105 000	725	1 470	8 050	1 470	8 050	1.2	
80	9×14×12	20	4 000	61 500	49 000	98 000	845	1 130	6 750	1 130	6 750	1.3	7.7
				80 500	64 000	143 000	1 240	2 330	12 500	2 330	12 500	1.6	
105	14×20×17	22.5	3 990	91 000	72 000	148 000	1 840	2 210	12 900	2 210	12 900	2.5	12.0
				111 000	88 000	197 000	2 460	3 850	20 600	3 850	20 600	3.2	
120	16×23×20	30	3 960	139 000	111 000	215 000	3 150	3 800	22 000	3 800	22 000	3.9	17.2
				172 000	137 000	292 000	4 250	6 800	36 000	6 800	36 000	5.1	


2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life
C_{100}; the basic dynamic load rating for 100 km rated fatigue life

LA-AN (High-load type / Standard)
LA-BN (Super-high-load type / Long)


LA 35 0840 AN C 2 - ** P6 3**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A288.)
- Material/surface treatment (See Table 14.)
- Number of ball slides per rail
  - Added to the reference number.
- Design serial number
- Accuracy code (See Table 15.)
  - 3: Z3, 4: Z4
- Preload code (See page A289.)


Front view of AN and BN types



Side view of AN type

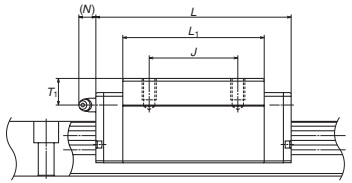

Side view of BN type

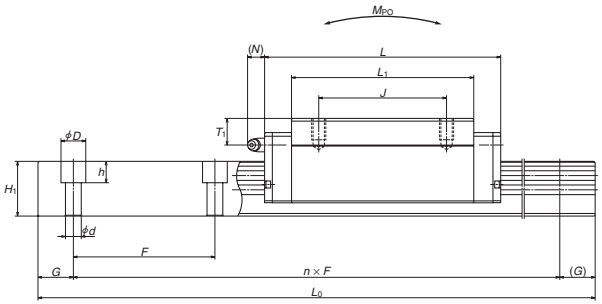

Unit: mm

Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	M × pitch × ℓ	L_1	K	T	Grease fitting Hole size	T_1	N	Width W_1	Height H_1
LA25AN	40	5.5	12.5	48	79.8	35	35	M6×1×10	58	34.5	12	M6×0.75	10	11	23	22
LA25BN					107.8		50		86							
LA30AN	45	7.5	16	60	100.2	40	40	M8×1.25×11	72	37.5	14	M6×0.75	9.5	11	28	28
LA30BN					126.2		60		98							
LA35AN	55	7.5	18	70	110.6	50	50	M8×1.25×12	80	47.5	15	M6×0.75	15	11	34	30.8
LA35BN					144.6		72		114							
LA45AN	70	10	20.5	86	141.4	60	60	M10×1.5×16	105	60	17	Rc1/8	20	13	45	36
LA45BN					173.4		80		137							
LA55AN	80	12	23.5	100	165.4	75	75	M12×1.75×18	126	68	18	Rc1/8	21	13	53	43.2
LA55BN					203.4		95		164							
LA65AN	90	14	31.5	126	196.2	76	70	M16×2×19	147	76	22	Rc1/8	19	13	63	55
LA65BN					256.2		120		207							

Notes: 1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Rail Pitch F	Mounting bolt hole d × D × h	G (reference)	Max. length L_{0max}	Basic load rating [2]Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (kg)	Rail (kg/m)
60	7×11×9	20	3 960	30 000	23 900	50 000	290	410	2 490	410	2 490	0.6	3.7
				40 500	32 500	77 000	445	935	5 000	935	5 000	0.9	
80	9×14×12	20	4 000	47 000	37 000	77 500	535	820	4 800	820	4 800	0.9	5.8
				58 000	46 000	105 000	725	1 470	8 050	1 470	8 050	1.3	
80	9×14×12	20	4 000	61 500	49 000	98 000	845	1 130	6 750	1 130	6 750	1.5	7.7
				80 500	64 000	143 000	1 240	2 330	12 500	2 330	12 500	2.1	
105	14×20×17	22.5	3 990	91 000	72 000	148 000	1 840	2 210	12 900	2 210	12 900	3.0	12.0
				111 000	88 000	197 000	2 460	3 850	20 600	3 850	20 600	3.9	
120	16×23×20	30	3 960	139 000	111 000	215 000	3 150	3 800	22 000	3 800	22 000	4.7	17.2
				172 000	137 000	292 000	4 250	6 800	36 000	6 800	36 000	6.1	
150	18×26×22	35	3 900	260 000	206 000	420 000	7 300	9 050	51 000	9 050	51 000	7.7	25.9
				340 000	269 000	615 000	10 700	18 700	95 000	18 700	95 000	10.8	


2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life
C_{100}; the basic dynamic load rating for 100 km rated fatigue life

LA-EL (High-load type / Standard)
LA-GL (Super-high-load type / Long)


LA 35 0840 EL C 2 - ** P6 3**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A288.)
- Material/surface treatment (See Table 14.)
- Number of ball slides per rail
- Added to the reference number.
- Design serial number
- Accuracy code (See Table 15.)
- 3: Z3, 4: Z4
- Preload code (See page A289.)


Front view of EL and GL types



Side view of EL type

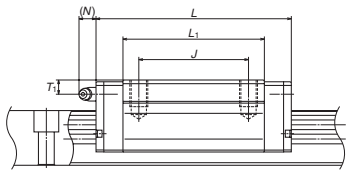

Side view of GL type

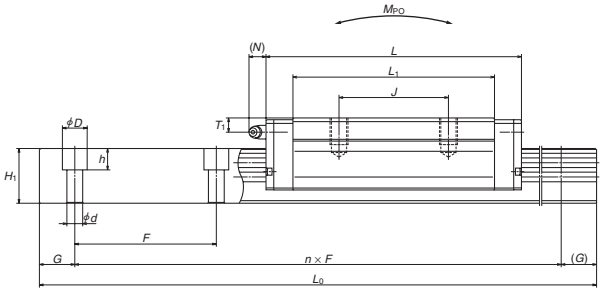

Unit: mm

Model No.	Assembly			Ball slide											Rail				Basic load rating										Weight	
	Height			Width	Length	Mounting hole						Grease fitting			Width	Height	Pitch	Mounting bolt hole	G	Max. length	[2]Dynamic		Static	Static moment (N·m)					Ball slide	Rail
																					[50km]	[100km]								
	H	E	W_2	W	L	B	J	M × pitch × ℓ	L_1	K	T	Hole size	T_1	N	W_1	H_1	F	d × D × h	(reference)	L_{0max}	C_{50}(N)	C_{100}(N)	C_0 (N)	M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	(kg)	(kg/m)
LA25EL	36	5.5	23.5	70	79.8	57	45	M8×1.25×12	58	30.5	11	M6×0.75	6	11	23	22	60	7×11×9	20	3 960	30 000	23 900	50 000	290	410	2 490	410	2 490	0.8	3.7
LA25GL					107.8				86												40 500	32 500	77 000	445	935	5 000	935	5 000	1.1	
LA30EL	42	7.5	31	90	100.2	72	52	M10×1.5×16	72	34.5	11	M6×0.75	6.5	11	28	28	80	9×14×12	20	4 000	47 000	37 000	77 500	535	820	4 800	820	4 800	1.3	5.8
LA30GL					126.2				98												58 000	46 000	105 000	725	1 470	8 050	1 470	8 050	1.8	
LA35EL	48	7.5	33	100	110.6	82	62	M10×1.5×15	80	40.5	12	M6×0.75	8	11	34	30.8	80	9×14×12	20	4 000	61 500	49 000	98 000	845	1 130	6 750	1 130	6 750	1.9	7.7
LA35GL					144.6				114												80 500	64 000	143 000	1 240	2 330	12 500	2 330	12 500	2.6	
LA45EL	60	10	37.5	120	141.4	100	80	M12×1.75×18	105	50	13	Rc1/8	10	13	45	36	105	14×20×17	22.5	3 990	91 000	72 000	148 000	1 840	2 210	12 900	2 210	12 900	3.3	12.0
LA45GL					173.4				137												111 000	88 000	197 000	2 460	3 850	20 600	3 850	20 600	4.3	
LA55EL	70	12	43.5	140	165.4	116	95	M14×2×21	126	58	15	Rc1/8	11	13	53	43.2	120	16×23×20	30	3 960	139 000	111 000	215 000	3 150	3 800	22 000	3 800	22 000	5.5	17.2
LA55GL					203.4				164												172 000	137 000	292 000	4 250	6 800	36 000	6 800	36 000	7.2	
LA65EL	90	14	53.5	170	196.2	142	110	M16×2×24	147	76	22	Rc1/8	19	13	63	55	150	18×26×22	35	3 900	260 000	206 000	420 000	7 300	9 050	51 000	9 050	51 000	11.0	25.9
LA65GL					256.2				207												340 000	269 000	615 000	10 700	18 700	95 000	18 700	95 000	15.5	

Notes: 1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.


2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life
C_{100}; the basic dynamic load rating for 100 km rated fatigue life

LA-FL (High-load type / Standard)
LA-HL (Super-high-load type / Long)


LA 35 0840 FL C 2 - ** P6 3**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A288.)
- Material/surface treatment (See Table 14.)
- Number of ball slides per rail
- Added to the reference number. Design serial number
- Accuracy code (See Table 15.)
- 3: Z3, 4: Z4 Preload code (See page A289.)


Front view of FL and HL types



Side view of FL type

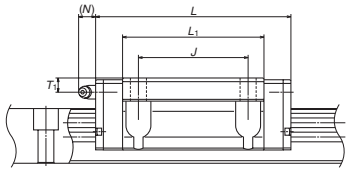

Side view of HL type

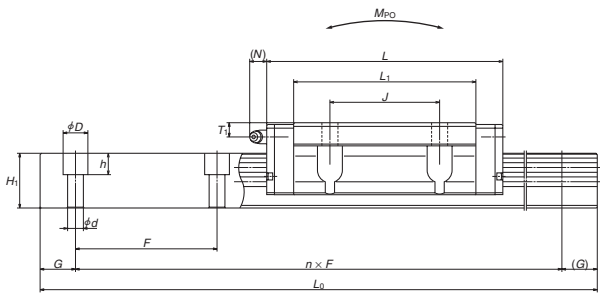

Unit: mm

Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	M × pitch × ℓ	L_1	K	T	Grease fitting Hole size	T_1	N	Width W_1	Height H_1
LA25FL	36	5.5	23.5	70	79.8	57	45	7×10	58	30.5	11	M6×0.75	6	11	23	22
LA25HL					107.8				86							
LA30FL	42	7.5	31	90	100.2	72	52	9×12	72	34.5	11	M6×0.75	6.5	11	28	28
LA30HL					126.2				98							
LA35FL	48	7.5	33	100	110.6	82	62	9×13	80	40.5	12	M6×0.75	8	11	34	30.8
LA35HL					144.6				114							
LA45FL	60	10	37.5	120	141.4	100	80	11×15	105	50	13	Rc1/8	10	13	45	36
LA45HL					173.4				137							
LA55FL	70	12	43.5	140	165.4	116	95	14×18	126	58	15	Rc1/8	11	13	53	43.2
LA55HL					203.4				164							
LA65FL	90	14	53.5	170	196.2	142	110	16×23	147	76	22	Rc1/8	19	13	63	55
LA65HL					256.2				207							

Notes: 1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Rail Pitch F	Mounting bolt hole d × D × h	G (reference)	Max. length L_{0max}	Basic load rating [2]Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (kg)	Rail (kg/m)
60	7×11×9	20	3 960	30 000	23 900	50 000	290	410	2 490	410	2 490	0.8	3.7
				40 500	32 500	77 000	445	935	5 000	935	5 000	1.1	
80	9×14×12	20	4 000	47 000	37 000	77 500	535	820	4 800	820	4 800	1.3	5.8
				58 000	46 000	105 000	725	1 470	8 050	1 470	8 050	1.8	
80	9×14×12	20	4 000	61 500	49 000	98 000	845	1 130	6 750	1 130	6 750	1.9	7.7
				80 500	64 000	143 000	1 240	2 330	12 500	2 330	12 500	2.6	
105	14×20×17	22.5	3 990	91 000	72 000	148 000	1 840	2 210	12 900	2 210	12 900	3.3	12.0
				111 000	88 000	197 000	2 460	3 850	20 600	3 850	20 600	4.3	
120	16×23×20	30	3 960	139 000	111 000	215 000	3 150	3 800	22 000	3 800	22 000	5.5	17.2
				172 000	137 000	292 000	4 250	6 800	36 000	6 800	36 000	7.2	
150	18×26×22	35	3 900	260 000	206 000	420 000	7 300	9 050	51 000	9 050	51 000	11.0	25.9
				340 000	269 000	615 000	10 700	18 700	95 000	18 700	95 000	15.5	

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life
C_{100}; the basic dynamic load rating for 100 km rated fatigue life

1. HA Series A307
2. HS Series A321

A-5-4 High-Accuracy Series

A-5-4.1 HA Series



1. Features

(1) High motion accuracy

High motion accuracy is achieved in both narrow and wide ranges by the adoption of ultra-long ball slides and the optimum design of the ball recirculation component.

(2) Ball passage vibration reduced to one-third of our conventional models

Our extensive performance tests show ball passage vibration has been reduced to one-third of our conventional models, dramatically improving straightness in table unit.

(3) Installation of rail with greater accuracy

Increased counterbore depth of the rail mounting hole reduces rail deflection, which is caused by bolt tightening when fixing the rail to the mounting base to 50% or less. This feature restrains the pitching motion of ball slide whose frequency matches to the mounting hole pitch.

In addition, the length of mounting hole pitch has been reduced by one-half of the conventional models, so the rail can be more accurately installed in position.

(4) High rigidity and load capacity with lower friction

High rigidity, high load capacity and low friction are achieved by increasing the number of balls.

(5) Compact design

Reduced body size enables more compact machinery.

(6) Four-way equal load distribution

Contact angle is set at 45 degrees in all grooves, dispersing the load to four ball rows irrespective of load direction. This realizes equal rigidity and load carrying capacity in vertical and lateral directions and provides well-balanced design.

(7) Strong against shock load

Load from any direction, vertical and lateral, is received by four ball rows at all times. The number of the ball row which receives the load is larger than in other linear guides, making this series stronger against shock load.

(8) High accuracy at manufacturing

Fixing the measuring rollers to the ball grooves is easy thanks to the Gothic arch groove. Ball-groove measuring is accurate and simple. This benefits a highly precise and stable manufacturing.

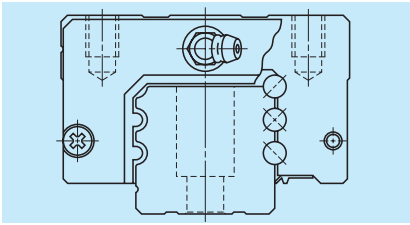


Fig. 1 HA Series

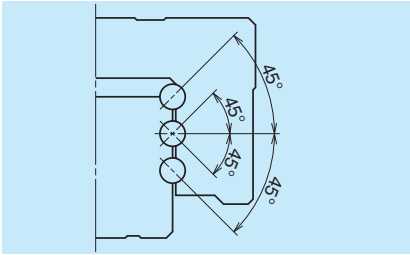


Fig. 2 Super rigidity design

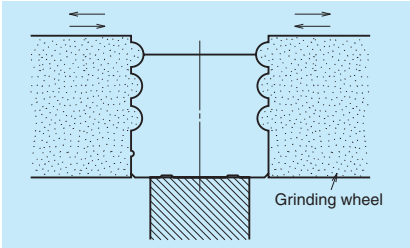


Fig. 3 Rail grinding

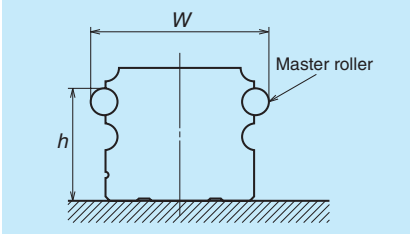


Fig. 4 Measuring groove accuracy

Measurement results of ball passage vibration

Ball passage vibration can translate into posture changes in the ball slide which result from ball passage (circulation). In the HA Series, this vibration has been substantially reduced to one-third of conventional models.



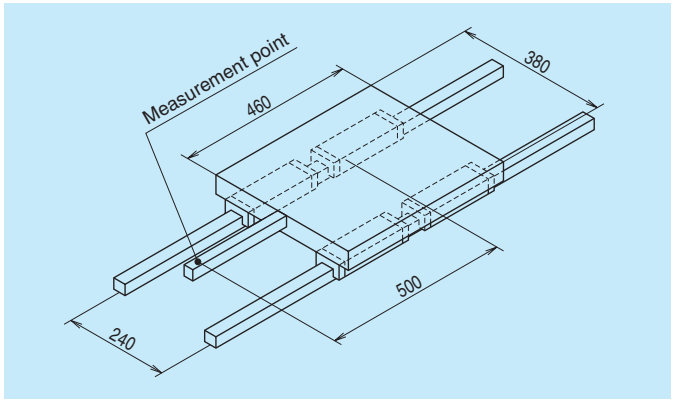


Fig. 5 Schematic view of measurement of ball passage vibration

HA Series

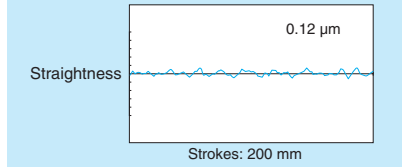Model No.: HA30
Preload: Z3
Table dimensions: 460 mm × 380 mm






The same table is used.

Conventional Series

Model No.: LA30
Preload: Z3
Table dimensions: 460 mm × 380 mm



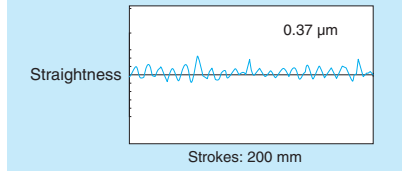








Fig. 6 Measurement results of HA Series and conventional Series

2. Ball slide shape

Ball slide Model	Shape/installation method	Type
AN		AN 
AL		AL 
EM		EM 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1 Unit: μm

Rail length(mm) over	or less	Accuracy grade: Preloaded assembly — Ultra precision P3	Super precision P4	High precision P5
–	200	2	2	3.5
200	250	2	2.5	4.5
250	315	2	2.5	5
315	400	2	3	5.5
400	500	2	3	6
500	630	2	3.5	6.5
630	800	2	4	7
800	1 000	2.5	4.5	7.5
1 000	1 250	3	5	8.5
1 250	1 600	3.5	5.5	9.5
1 600	2 000	4	6.5	11
2 000	2 500	4.5	7.5	12
2 500	3 150	5.5	8.5	13
3 150	4 000	6	9.5	14

(2) Accuracy standard

Three accuracy grades are available: Ultra precision P3, Super precision P4 and High precision P5.

Table 2 Unit: μm

Characteristics \ Accuracy grade	Ultra precision P3	Super precision P4	High precision P5
Mounting height H Variation of H (All ball slides on a set of rails)	±8 3	±10 5	±20 7
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All ball slides on reference rail)	±10 3	±15 7	±25 10
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Refer to **Table 1** and **Fig. 7**		

(3) Assembled accuracy

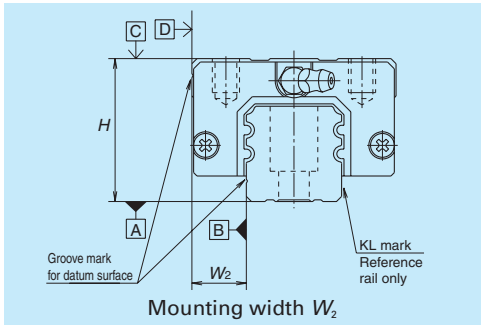


Fig. 7

(4) Preload and rigidity

Slight preload Z1 and Medium preload Z3 are available for preload, which can be selected for specific applications.

Table 3

Model No.	Preload (N)		Rigidity (N/μm)	
	Slight preload (Z1)	Medium preload (Z3)	Slight preload (Z1)	Medium preload (Z3)
HA25	735	2 990	635	1 030
HA30	1 030	4 400	880	1 270
HA35	1 470	6 100	1 030	1 620
HA45	1 960	8 150	1 230	2 060
HA55	3 150	13 100	1 520	2 450

4. Maximum rail length

Table 4 shows the limitations of rail length.
However, the limitations vary by accuracy grades.

Table 4 Length limitations of rails Unit: mm

Series \ Size	25	30	35	45	55
HA	3 960	4 000	4 000	3 990	3 960

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

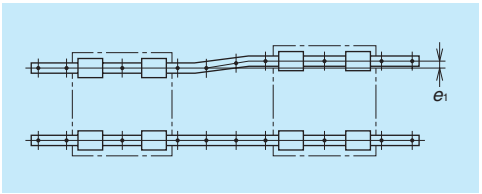


Fig. 8

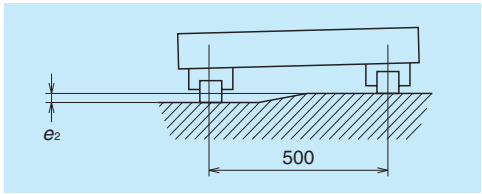


Fig. 9

Table 5

Unit: μm

Value	Preload	Model No.				
		HA25	HA30	HA35	HA45	HA55
Permissible values of parallelism in two rails e_1	Z1	20	20	23	26	34
	Z3	15	14	17	19	25
Permissible values of parallelism (height) in two rails e_2	Z1,Z3	250 μm/500 mm				

(2) Shoulder height of the mounting surface and corner radius r




Fig. 10 Shoulder for the rail datum surface




Fig. 11 Shoulder for the ball slide datum surface

Table 6

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
HA25	0.5	0.5	5	5
HA30	0.5	0.5	6	6
HA35	0.5	0.5	6	6
HA45	0.7	0.7	8	8
HA55	0.7	0.7	10	10

6. Lubrication components

Refer to pages A38 and D13 for linear guide lubrication.

(1) Types of lubrication accessories

Fig. 12 and **Table 7** show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

When you require stainless lubrication accessories, please ask NSK.

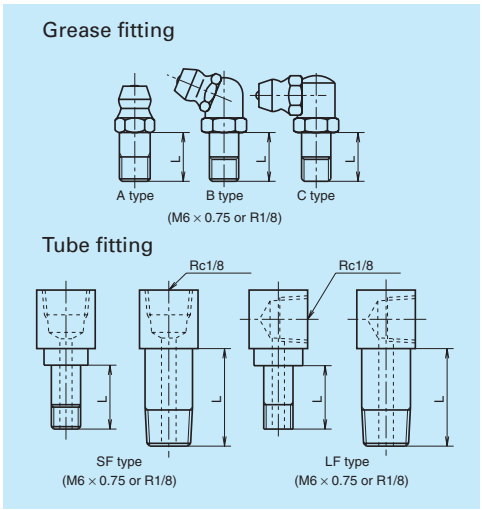


Fig. 12 Grease fitting and tube fitting

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on the side of end cap for an option. (**Fig. 13**)

Please consult NSK for installation of grease or tube fittings to the ball slide body or the side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

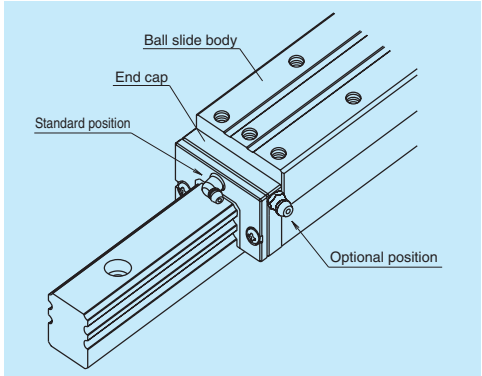


Fig. 13 Mounting position of lubrication accessories

Table 7

Unit: mm

Model No.	Dust-proof specification	Dimension L		
		Grease fitting	Tube fitting	
			SF type	LF type
HA25	Standard	5	5	5
	With NSK K1	14	12	12
	Double seal	10	9	9
	Protector	10	9	9
HA30	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	11	11
HA35	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	11	11
HA45	Standard	8	13.5	17
	With NSK K1	18	22	21.5
	Double seal	14	18	17
	Protector	14	16	17
HA55	Standard	8	13.5	17
	With NSK K1	18	22	21.5
	Double seal	14	18	17
	Protector	14	16	17

7. Dust-proof components

(1) Standard Specification

The HA Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, bottom seals at the bottom, and an inner seal in inside.

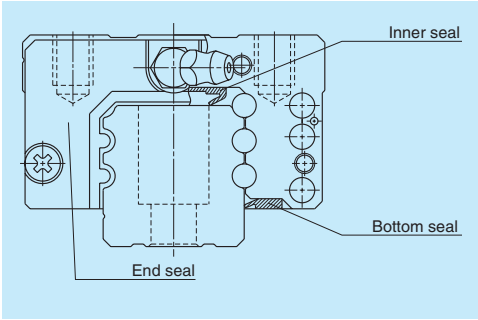


Fig. 14

Table 8 Seal friction per ball slide (maximum value)

Unit: N

Series \ Size	25	30	35	45	55
HA	17	17	19	21	22

(2) NSK K1™ lubrication unit

Table 9 shows the dimensions of linear guides equipped with the NSK K1 lubrication unit.

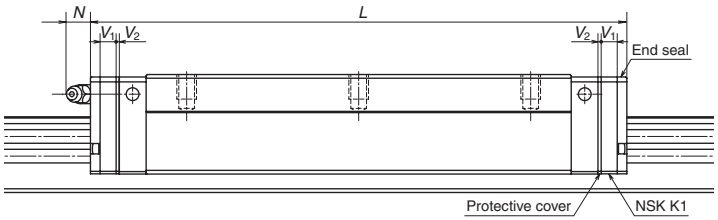


Table 9 Dimensions when equipped with the NSK K1 lubrication unit

Unit: mm

Model No.	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 *L*	Per NSK K1 thickness V_1	Protective cover thickness V_2	Protruding area of the grease fitting *N*
HA25	AN, EM	147.8	159.8	5.0	1.0	(14)
HA30	AN, EM	177.2	190.2	5.5	1.0	(14)
HA35	AN, AL, EM	203.6	216.6	5.5	1.0	(14)
HA45	AN, AL, EM	233.4	248.4	6.5	1.0	(15)
HA55	AN,AL, EM	284.4	299.4	6.5	1.0	(15)

Note: When equipped with NSK K1, ball slide length = (standard ball slide length) + (V_1 thickness of single K1 unit) × (number of K1 units) + (V_2 thickness of the protective cover) × 2.

(3) Double seal and protector

For the HA Series, double seal and protectors can be installed only before shipping from the factory. Please consult with NSK when you require dust tight protection.

Table 10 shows the increased thickness of V_3, and V_4 when the end seal and the protector are installed.

Table 10

Unit: mm

Model No.	Thickness of end seal: V_3	Thickness of protector: V_4
HA25	3.2	3.6
HA30	4.4	4.2
HA35	4.4	4.2
HA45	5.5	4.9
HA55	5.5	4.9

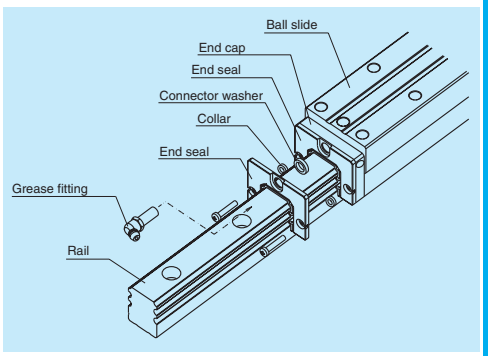


Fig. 15 Double seal

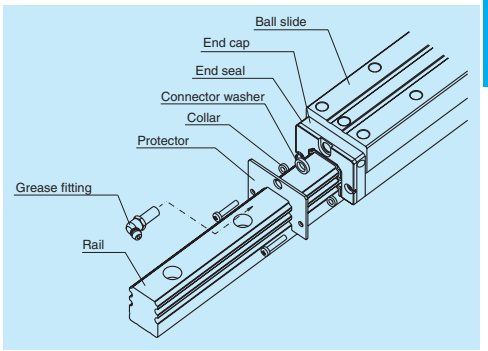


Fig. 16 Protector

(4) Caps to plug the rail mounting bolt hole

Table 11 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
HA25	M6	LG-CAP/M6	20
HA30, HA35	M8	LG-CAP/M8	20
HA45	M12	LG-CAP/M12	20
HA55	M14	LG-CAP/M14	20

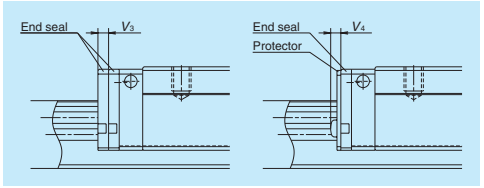


Fig. 17

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

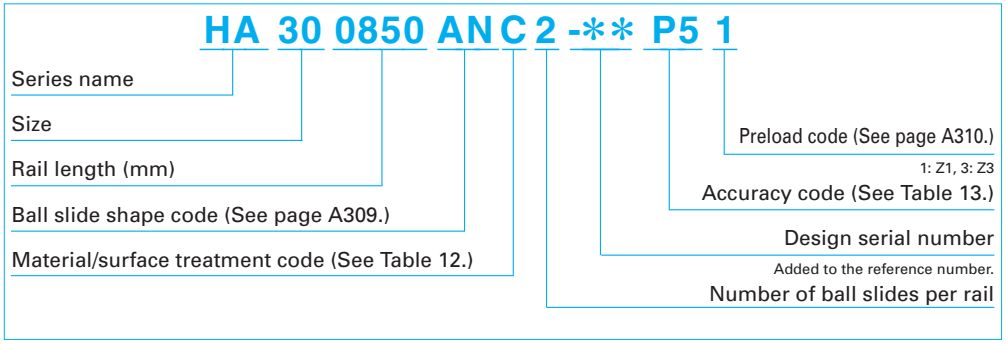


Table 12 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
D	Special high carbon steel with surface treatment
Z	Other, special

Table 13 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Ultra precision grade	P3	K3
Super precision grade	P4	K4
High precision grade	P5	K5


Note: Refer to page A38 for NSK K1 lubrication unit.

9. Dimensions
HA-AN
HA-AL


HA 30 0850 AN C 2 - P5 1**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A309.)
- Material/surface treatment code (See Table 12.)
- Number of ball slides per rail
- Design serial number (Added to the reference number.)
- Accuracy code (See Table 13.)
- Preload code (See page A310.) 1: Z1, 3: Z3


Front view of AL type




Side view of AL type

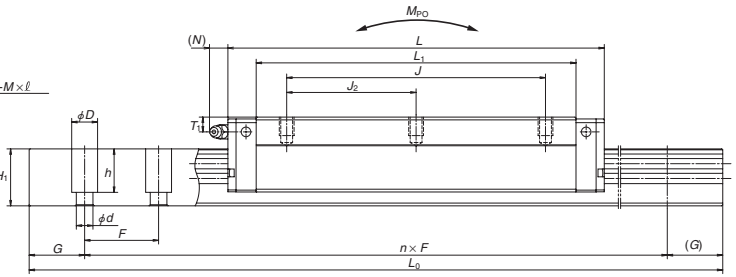

Front view of AN type



Side view of AN type

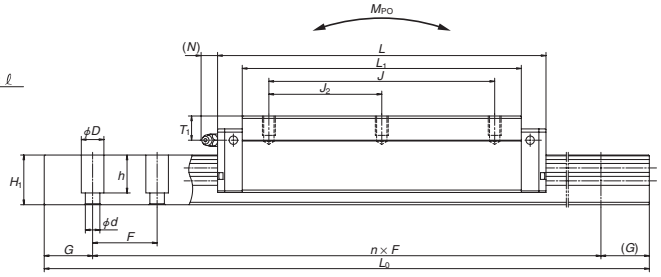

Unit: mm

Model No.	Assembly			Ball slide											Rail	
	Height			Width	Length	Mounting hole						Grease fitting			Width	Height
	H	E	W_2	W	L	B	J	J_2	$M\times$ pitch $\times\ell$	L_1	K	T	Hole size	T_1	N	W_1	H_1
HA25AN	40	5.5	12.5	48	147.8	35	100	50	M6×1.0×10	126	34.5	12	M6×0.75	10	11	23	22
HA30AN	45	7.5	16	60	177.2	40	120	60	M8×1.25×11	149	37.5	14	M6×0.75	9.5	11	28	28
HA35AN	55	7.5	18	70	203.6	50	140	70	M8×1.25×12	173	47.5	15	M6×0.75	15	11	34	30.8
HA35AL	48								M8×1.25×10		40.5			8			
HA45AN	70	10	20.5	86	233.4	60	160	80	M10×1.5×16	197	60	17	Rc1/8	20	13	45	36
HA45AL	60										50			10			
HA55AN	80	12	23.5	100	284.4	75	206	103	M12×1.75×18	245	68	18	Rc1/8	21	13	53	43.2
HA55AL	70								M12×1.75×16		58			11			

Notes: 1) The HA Series does not have a ball retainer. Be aware that the balls fall out when a ball slide is withdrawn from the rail.

Rail				Basic load rating								Weight	
Pitch	Mounting bolt hole	G	Maximum length	[2]Dynamic		Static	Static moment (N·m)					Ball slide	Rail
				[50km]	[100km]	C_0	M_{RO}	M_{PO}		M_{YO}			
F	$d\times D\times h$	(reference)	L_{0max}	C_{50}(N)	C_{100}(N)	(N)		One slide	Two slides	One slide	Two slides	(kg)	(kg/m)
30	7×11×16.5	20	3 960	54 000	43 000	115 000	670	2 060	10 100	2 060	10 100	1.2	3.7
40	9×14×21	20	4 000	79 500	63 500	166 000	1 140	3 550	17 400	3 550	17 400	1.8	5.8
40	9×14×23.5	20	4 000	111 000	88 000	226 000	1 950	5 650	27 100	5 650	27 100	3.0	7.7
												2.6	
52.5	14×20×27	22.5	3 990	147 000	117 000	295 000	3 700	8 450	40 500	8 450	40 500	6.0	12.0
												5.0	
60	16×23×32.5	30	3 960	232 000	184 000	445 000	6 500	15 400	75 000	15 400	75 000	9.4	17.2
												7.8	

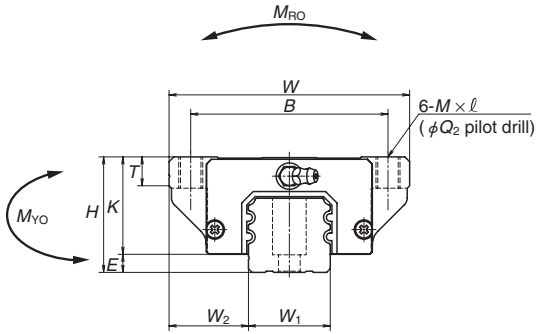
2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}: the basic dynamic load rating for 50 km rated fatigue life C_{100}: the basic dynamic load rating for 100 km rated fatigue life

HA-EM


HA 30 0850 EM C 2 - P5 1**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A309.)
- Material/surface treatment code (See Table 12.)
- Number of ball slides per rail
- Design serial number — Added to the reference number.
- Accuracy code (See Table 13.)
- Preload code (See page A310.) — 1: Z1, 3: Z3

Front view of EM type



Side view of EM type

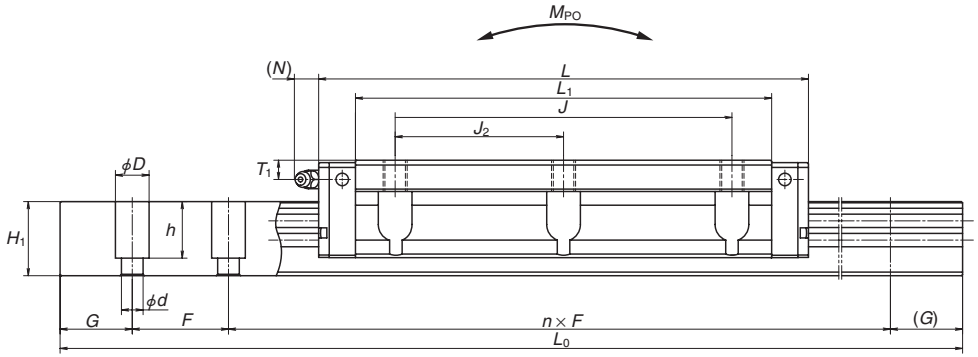

Unit: mm

Model No.	Assembly Height H	E	W_2	Ball slide Width W	Length L	Mounting hole B	J	J_2	M × pitch × ℓ	Q_2	L_1	K	T	Grease fitting Hole size	T_1	N	Rail Width W_1	Height H_1
HA25EM	36	5.5	23.5	70	147.8	57	100	50	M8×1.25×10	6.8	126	30.5	11	M6×0.75	6	11	23	22
HA30EM	42	7.5	31	90	177.2	72	120	60	M10×1.5×12	8.6	149	34.5	11	M6×0.75	6.5	11	28	28
HA35EM	48	7.5	33	100	203.6	82	140	70	M10×1.5×13	8.6	173	40.5	12	M6×0.75	8	11	34	30.8
HA45EM	60	10	37.5	120	233.4	100	160	80	M12×1.75×15	10.5	197	50	13	Rc1/8	10	13	45	36
HA55EM	70	12	43.5	140	284.4	116	206	103	M14×2×18	12.5	245	58	15	Rc1/8	11	13	53	43.2

Notes: 1) HA Series does not have a ball retainer. Be aware that the balls fall out when a ball slide is withdrawn from the rail.

Rail Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L_{0max}	Basic load rating [2]Dynamic [50km] C_{50}(N)	[100km] C_{100}(N)	Static C_0 (N)	Static moment (N·m) M_{RO}	M_{PO} One slide	M_{PO} Two slides	M_{YO} One slide	M_{YO} Two slides	Weight Ball slide (kg)	Rail (kg/m)
30	7×11×16.5	20	3 960	54 000	43 000	115 000	670	2 060	10 100	2 060	10 100	1.6	3.7
40	9×14×21	20	4 000	79 500	63 500	166 000	1 140	3 550	17 400	3 550	17 400	2.6	5.8
40	9×14×23.5	20	4 000	111 000	88 000	226 000	1 950	5 650	27 100	5 650	27 100	3.8	7.7
52.5	14×20×27	22.5	3 990	147 000	117 000	295 000	3 700	8 450	40 500	8 450	40 500	6.6	12.0
60	16×23×32.5	30	3 960	232 000	184 000	445 000	6 500	15 400	75 000	15 400	75 000	11	17.2

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life C_{100}; the basic dynamic load rating for 100 km rated fatigue life

A-5-4.2 HS Series



1. Features

(1) High motion accuracy
High motion accuracy is achieved in both narrow and wide ranges by adopting ultra-long ball slides and optimum design features for the ball recirculation component.

(2) Ball passage vibration reduced to one-third of our conventional models
Tests show ball passage vibration has been reduced to one-third of our conventional models, dramatically improving straightness in table unit.

(3) Installation of rail with greater accuracy
Increased counterbore depth of the rail mounting hole reduces rail deflection, which is caused by bolt tightening when fixing the rail to the mounting base, to 50% or less. This feature restrains the pitching motion of ball slide whose frequency matches to the mounting hole pitch.
In addition, the mounting hole pitch has been reduced by one-half of the conventional models, so the rail can be more accurately installed in position.

(4) High rigidity and load capacity with lower friction
High rigidity, high load capacity and low friction are achieved by increasing the number of balls.

(5) Compact design
Reduced body size enables more compact machinery.

(6) High load carrying capacity to vertical direction
The contact angle is set at 50 degrees, increasing load carrying capacity as well as rigidity against the load in vertical direction.

(7) High resistance against impact load
The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in **Fig. 2**. The vertical load is usually carried by top two ball rows at where balls are contacting at two points. Because of this design, the bottom ball rows will carry the load when a large impact load is applied as shown in **Fig. 3**. This assures high resistance to the impact load.

(8) High accuracy at manufacturing
As showing in **Fig. 4**, fixing the measuring rollers to the ball groove is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(9) Improve rating life dramatically
New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased.
As compared with the conventional products, the load rating capacity has increased to 1.3 times, while the life span has increased to twice[*1].
∗1: Representative values of series.

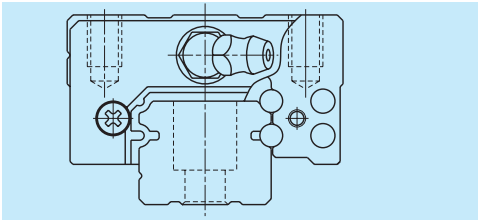


Fig. 1 HS Series

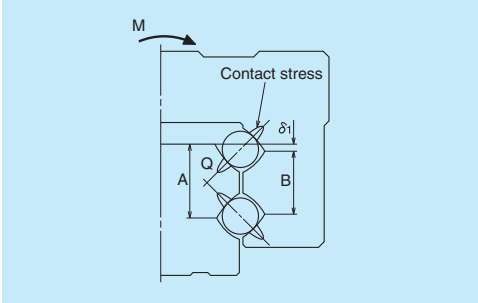


Fig. 2 Enlarged illustration: Offset Gothic arch

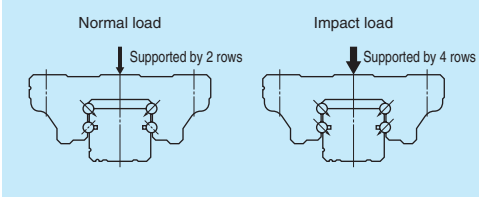


Fig. 3 When load is applied

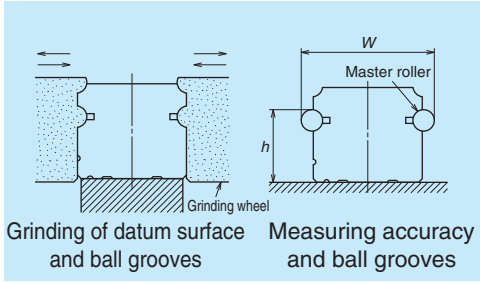


Fig. 4 Rail-grinding and measuring

Measurement results of ball passage vibration

Ball passage vibration can translate into posture changes in the ball slide which result from ball passage (circulation). In the HS Series, this vibration has been substantially reduced to one-third of conventional models.

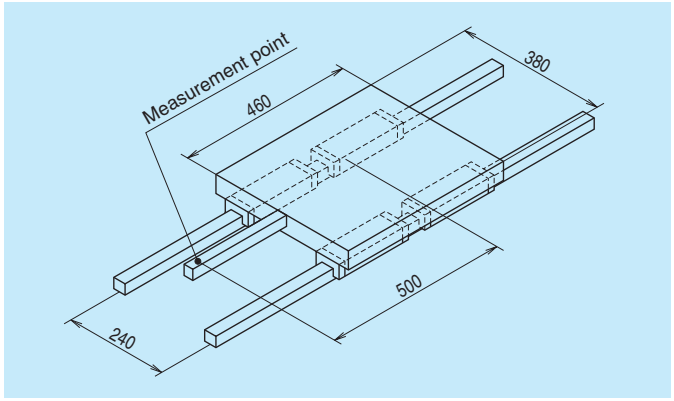


Fig. 5 Schematic view of measurement of ball passage vibration

HS Series

Model No.: HS30
Preload: Z1
Table dimensions: 460 mm × 380 mm

Conventional Series

Model No.: LS30
Preload: Z1
Table dimensions: 460 mm × 380 mm

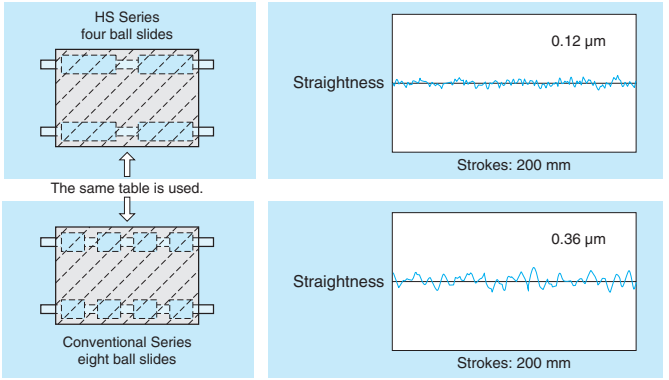






Fig. 6 Measurement results of HS Series and conventional Series

2. Ball slide shape

Ball slide Model	Shape/installation method	Type
AL		AL 
EM		EM 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length(mm) over	Rail length(mm) or less	Accuracy grade: Preloaded assembly — Ultra precision P3	Super precision P4	High precision P5
–	200	2	2	3.5
200	250	2	2.5	4.5
250	315	2	2.5	5
315	400	2	3	5.5
400	500	2	3	6
500	630	2	3.5	6.5
630	800	2	4	7
800	1 000	2.5	4.5	7.5
1 000	1 250	3	5	8.5
1 250	1 600	3.5	5.5	9.5
1 600	2 000	4	6.5	11
2 000	2 500	4.5	7.5	12
2 500	3 150	5.5	8.5	13
3 150	4 000	6	9.5	14

(2) Accuracy Standard


Three accuracy grades are available: Ultra precision P3, Super precision P4 and High precision P5.

Table 2


Unit: μm

Characteristics \ Accuracy grade	Ultra precision P3	Super precision P4	High precision P5
Mounting height H Variation of H (All ball slides on a set of rails)	±8 3	±10 5	±20 7
Mounting width W_2 or W_3 Variation of W_2 or W_3 (All ball slides on reference rail)	±10 3	±15 7	±25 10
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Refer to **Table 1** and **Fig. 7**		

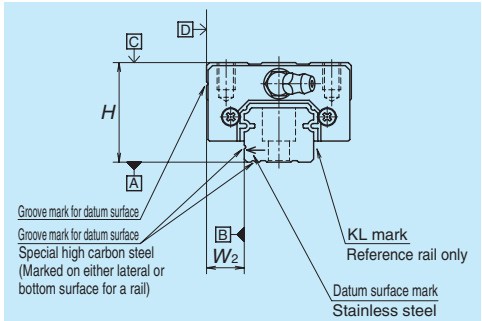(3) Assembled accuracy



Mounting width W_2

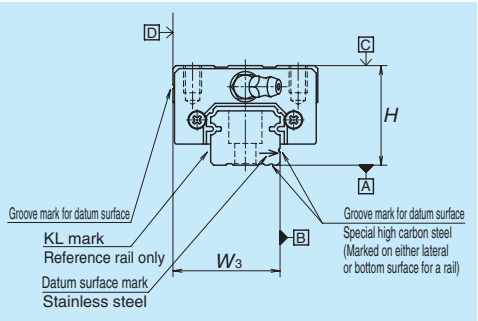

Mounting width W_3

Fig. 7

(4) Preload and rigidity

Slight preload Z1 and Medium preload Z3 are available for preload, which can be selected for specific applications.

Table 3

Model No.	Preload (N)		Rigidity (N/μm)			
			Vertical direction		Lateral direction	
	Slight preload (Z1)	Medium preload (Z3)	Slight preload (Z1)	Medium preload (Z3)	Slight preload (Z1)	Medium preload (Z3)
HS15	98	785	260	530	173	355
HS20	147	1 030	305	600	212	415
HS25	245	1 620	385	735	263	505
HS30	390	2 550	505	965	345	665
HS35	590	3 550	610	1 140	415	780

4. Maximum rail length

Table 4 shows the limitation. The dimension in parenthesis is for stainless steel products. However, the limitations vary by accuracy grades.

Table 4 Length limitation of rails

Unit: mm

Series \ Size	15	20	25	30	35
HS	2 000 (1 300)	3 960 (3 500)	3 960 (3 500)	4 000 (3 500)	4 000 (3 500)

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

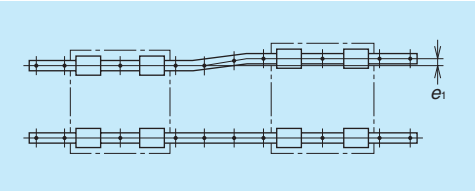


Fig. 8

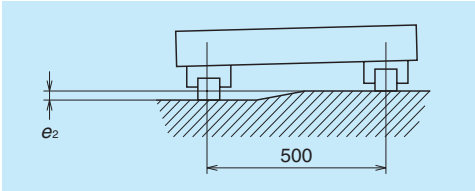


Fig. 9

Table 5

Unit: μm

Value	Preload	Model No.				
		HS15	HS20	HS25	HS30	HS35
Permissible values of parallelism in two rails e_1	Z1	18	20	26	31	37
	Z3	12	14	18	22	26
Permissible values of parallelism (height) in two rails e_2	Z1, Z3	330 μm/500 mm				

(2) Shoulder height of the mounting surface and corner radius r




Fig. 10 Shoulder for the rail datum surface




Fig. 11 Shoulder for the ball slide datum surface

Table 6

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
HS15	0.5	0.5	4	4
HS20	0.5	0.5	4.5	5
HS25	0.5	0.5	5	5
HS30	0.5	0.5	6	6
HS35	0.5	0.5	6	6

6. Lubrication components

Refer to pages A38 and D13 for linear guide lubrication.

(1) Types of lubrication accessories

Fig. 12 and **Table 7** show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

When you require stainless lubrication accessories, please ask NSK.

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on the side of end cap for an option. (**Fig. 13**)

Please consult NSK for installation of grease or tube fittings to the ball slide body or the side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

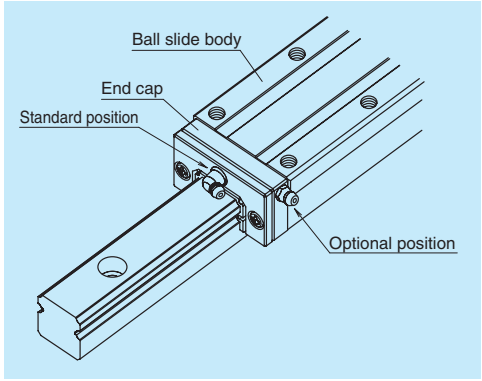


Fig. 13 Mounting position of lubrication accessories

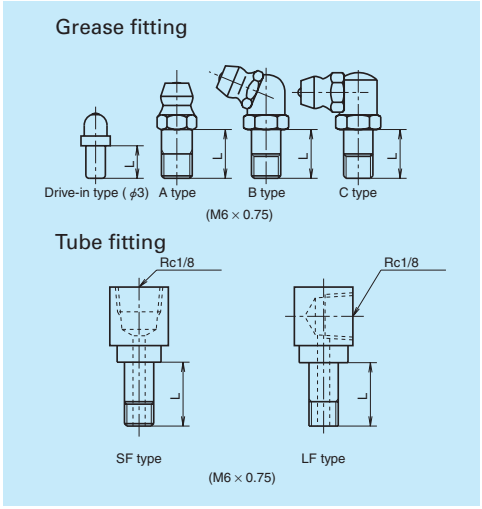


Fig. 12 Grease fitting and tube fitting

Table 7

Unit: mm

Model No.	Dust-proof specification	Dimension L		
		Grease fitting /Drive-in type	Tube fitting SF type	Tube fitting LF type
HS15	Standard	5	–	–
	With NSK K1	10	–	–
	Double seal	*	–	–
	Protector	*	–	–
HS20	Standard	5	–	–
	With NSK K1	10	–	–
	Double seal	8	–	–
	Protector	8	–	–
HS25	Standard	5	6	6
	With NSK K1	12	11	11
	Double seal	10	9	9
	Protector	10	9	9
HS30	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	10	11
HS35	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	10	11

*) A connector is required for this model. Please contact NSK.

7. Dust-proof components

(1) Standard Specification

The HS Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends.

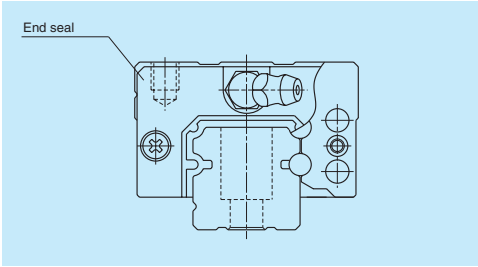


Fig. 14

Table 8 Seal friction per ball slide (maximum): end seal only

Unit: N

Series \ Size	15	20	25	30	35
HS	3	3	3	3	4

(2) NSK K1™ lubrication unit

Refer to **Table 9** for dimension of linear guides equipped with the NSK K1 lubrication unit.

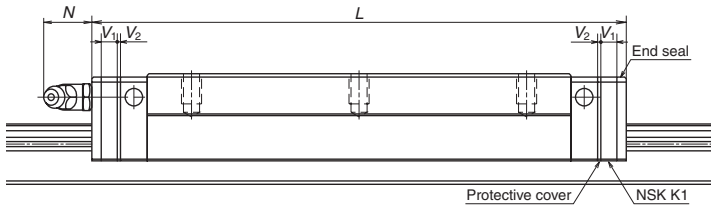


Table 9 Dimensions when equipped with the NSK K1 lubrication unit

Unit: mm

Model No.	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 *L*	Per NSK K1 thickness V_1	Protective cover thickness V_2	Protruding area of the grease fitting *N*
HS15	AL, EM	106	115.6	4.0	0.8	(5)
HS20	AL, EM	119.7	130.3	4.5	0.8	(14)
HS25	AL, EM	148	158.6	4.5	0.8	(14)
HS30	AL, EM	176.1	188.1	5.0	1.0	(14)
HS35	AL, EM	203.6	216.6	5.5	1.0	(14)

Note: When equipped with NSK K1, ball slide length = (standard ball slide length) + (V_1 thickness of single K1 unit) × (number of K1 units) + (V_2 thickness of the protective cover) × 2.

(3) Double seal and protector

For the HS Series, double seal and protectors can be installed only before shipping from the factory. Please consult with NSK when you require dust tight protection.

Table 10 shows the increased thickness of V_3 and V_4 when the end seal and the protector are installed.

Table 10

Unit: mm

Model No.	Thickness of end seal: V_3	Thickness of protector: V_4
HS15	2.8	3
HS20	2.5	2.7
HS25	2.8	3.2
HS30	3.6	4.2
HS35	3.6	4.2

(4) Caps to plug the rail mounting bolt hole

Table 11 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
HS15	M3	LG-CAP/M3	20
HS15	M4	LG-CAP/M4	20
HS20	M5	LG-CAP/M5	20
HS25, HS30	M6	LG-CAP/M6	20
HS35	M8	LG-CAP/M8	20

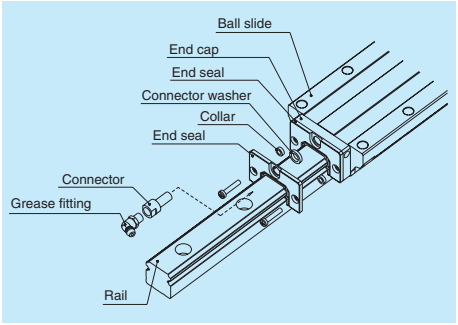


Fig. 15 Double seal

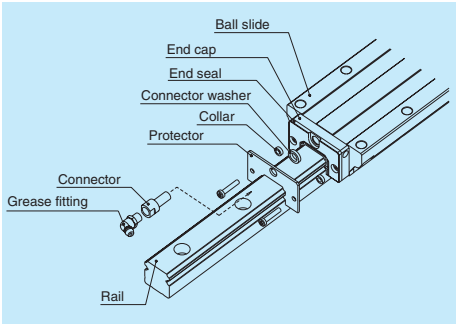


Fig. 16 Protector

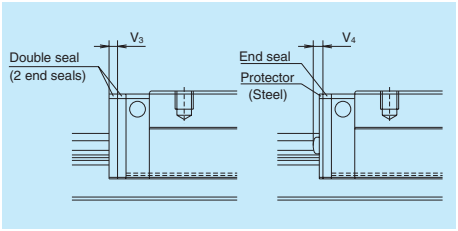


Fig. 17

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.
Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

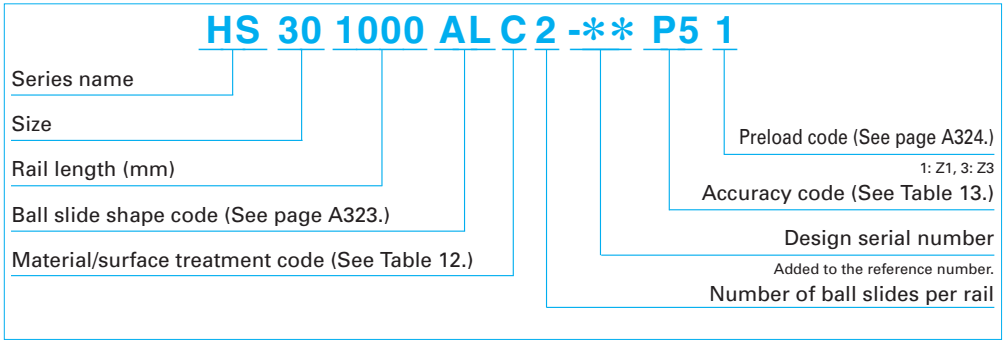


Table 12 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
K	Stainless steel
D	Special high carbon steel with surface treatment
H	Stainless steel with surface treatment
Z	Other, special

Table 13 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Ultra precision grade	P3	K3
Super precision grade	P4	K4
High precision grade	P5	K5

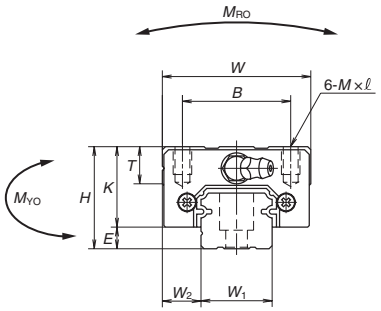
Note: Refer to page A38 for NSK K1 lubrication unit.

9. Dimensions
HS-AL


HS 30 1000 AL C 2 - P5 1**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A323.)
- Material/surface treatment code (See Table 12.)
- Number of ball slides per rail
- Design serial number (Added to the reference number.)
- Accuracy code (See Table 13.)
- Preload code (See page A324.) 1: Z1, 3: Z3

Front view of AL types



Side view of AL type

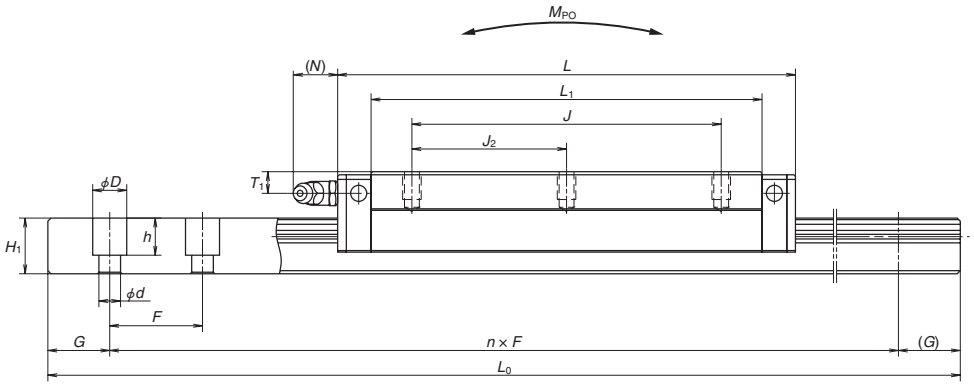

Unit: mm

Model No.	Assembly			Ball slide											Width	Height
	Height			Width	Length	Mounting hole							Grease fitting				
	H	E	W_2	W	L	B	J	J_2	M × pitch × ℓ	L_1	K	T	Hole size	T_1	N	W_1	H_1
HS15AL	24	4.6	9.5	34	106	26	60	30	M4×0.7×6	89.2	19.4	10	ϕ3	6	3	15	12.5
HS20AL	28	6	11	42	119.7	32	80	40	M5×0.8×7	102.5	22	12	M6×0.75	5.5	11	20	15.5
HS25AL	33	7	12.5	48	148	35	100	50	M6×1×9	126.4	26	12	M6×0.75	7	11	23	18
HS30AL	42	9	16	60	176.1	40	120	60	M8×1.25×12	150.7	33	13	M6×0.75	8	11	28	23
HS35AL	48	10.5	18	70	203.6	50	140	70	M8×1.25×12	175.6	37.5	14	M6×0.75	8.5	11	34	27.5

Notes: 1) The HS Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
2) External appearance of stainless steel ball slides differ from those of carbon steel ball slide.

Rail				Basic load rating							Weight	
Pitch	Mounting bolt hole	G	Max. length $L_{0max.}$ ( ) for stainless	[3]Dynamic [50km]	[3]Dynamic [100km]	Static	Static moment (N·m)				Ball slide	Rail
								M_{PO}		M_{YO}		
F	d × D × h	(reference)		C_{50}(N)	C_{100}(N)	C_0 (N)	M_{RO}	One slide	Two slides	One slide / Two slides	(kg)	(kg/m)
30	*4.5×7.5×8.5 3.5×6×8.5	20	2 000 (1 300)	20 500	16 300	40 000	199	395	1 990	335 / 1 670	0.34	1.4
30	6×9.5×10.5	20	3 960 (3 500)	27 300	21 600	52 000	350	590	2 930	495 / 2 460	0.52	2.3
30	7×11×12	20	3 960 (3 500)	44 500	35 000	78 000	605	1 090	5 450	910 / 4 600	0.85	3.1
40	7×11×16	20	4 000 (3 500)	68 000	54 000	127 000	1 190	2 120	10 600	1 780 / 8 850	1.7	4.8
40	9×14×20	20	4 000 (3 500)	94 500	75 000	172 000	1 980	3 350	16 600	2 820 / 13 900	2.5	7.0

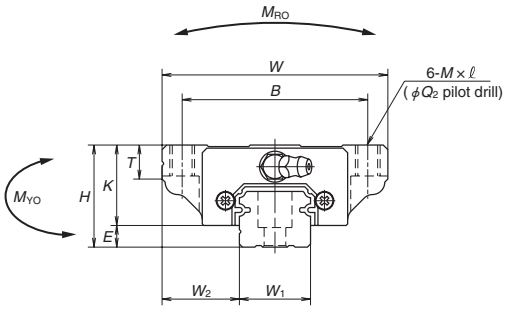
3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life C_{100}; the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.
4) Parenthesized dimensions are applicable to stainless steel products.
*) Standard rail mounting bolt hole for HS15 is specified as hole for M4 (4.5 × 7.5 × 8.5). Please contact us to request a different hole for M3 (3.5 × 6 × 8.5).

HS-EM


HS 30 1000 EM C 2 - ** P5 1**

- Series name
- Size
- Rail length (mm)
- Ball slide shape code (See page A323.)
- Material/surface treatment code (See Table 12.)
- Number of ball slides per rail
- Design serial number (Added to the reference number.)
- Accuracy code (See Table 13.)
- Preload code (See page A324.) (1: Z1, 3: Z3)

Front view of EM type



Side view of EM type

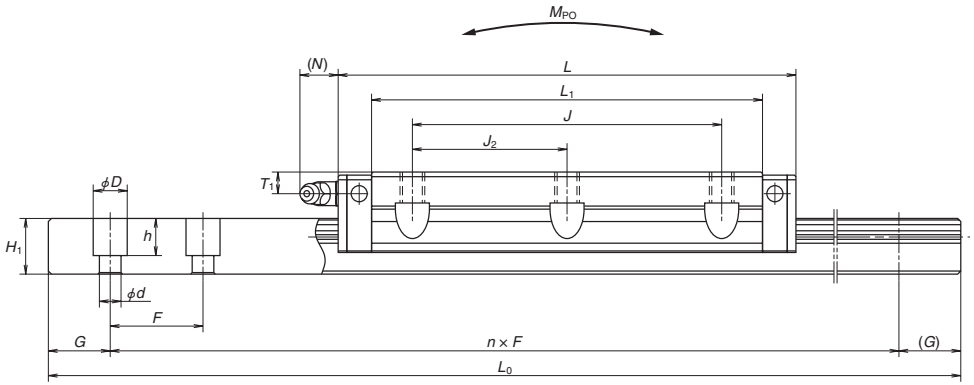

Unit: mm

Model No.	Assembly			Ball slide													Rail		Weight	
	Height			Width	Length	Mounting hole								Grease fitting			Width	Height		
	H	E	W_2	W	L	B	J	J_2	M × pitch × ℓ	Q_2	L_1	K	T	Hole size	T_1	N	W_1	H_1		
HS15EM	24	4.6	18.5	52	106	41	60	30	M5×0.8×7	4.4	89.2	19.4	8	φ3	6	3	15	12.5		
HS20EM	28	6	19.5	59	119.7	49	80	40	M6×1×9 (M6×1×9.5)	5.3	102.5	22	10	M6×0.75	5.5	11	20	15.5		
HS25EM	33	7	25	73	148	60	100	50	M8×1.25×10 (M8×1.25×11.5)	6.8	126.4	26	11 (12)	M6×0.75	7	11	23	18		
HS30EM	42	9	31	90	176.1	72	120	60	M10×1.5×12 (M10×1.5×14.5)	8.6	150.7	33	11 (15)	M6×0.75	8	11	28	23		
HS35EM	48	10.5	33	100	203.6	82	140	70	M10×1.5×13 (M10×1.5×14.5)	8.6	175.6	37.5	12 (15)	M6×0.75	8.5	11	34	27.5		

Rail				Basic load rating								Weight	
Pitch	Mounting bolt hole	G	Max. length $L_{0max.}$ ( ) for stainless	[3]Dynamic [50km]	[100km]	Static	Static moment (N·m)					Ball slide	Rail
								M_{PO}		M_{YO}			
F	d × D × h	(reference)		C_{50}(N)	C_{100}(N)	C_0 (N)	M_{RO}	One slide	Two slides	One slide	Two slides	(kg)	(kg/m)
30	*4.5×7.5×8.5 3.5×6×8.5	20	2 000 (1 300)	20 500	16 300	40 000	199	395	1 990	335	1 670	0.45	1.4
30	6×9.5×10.5	20	3 960 (3 500)	27 300	21 600	52 000	350	590	2 930	495	2 460	0.67	2.3
30	7×11×12	20	3 960 (3 500)	44 500	35 000	78 000	605	1 090	5 450	910	4 600	1.3	3.1
40	7×11×16	20	4 000 (3 500)	68 000	54 000	127 000	1 190	2 120	10 600	1 780	8 850	2.4	4.8
40	9×14×20	20	4 000 (3 500)	94 500	75 000	172 000	1 980	3 350	16 600	2 820	13 900	3.4	7.0

Notes: 1) The HS Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
2) External appearance of stainless steel ball slides differ from those of carbon steel ball slide.

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C_{50}; the basic dynamic load rating for 50 km rated fatigue life C_{100}; the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.
4) Parenthesized dimensions are applicable to stainless steel products.
*) Standard rail mounting bolt hole for HS15 is specified as hole for M4 (4.5 × 7.5 × 8.5). Please contact us to request a different hole for M3 (3.5 × 6 × 8.5).

A-6 Other Linear Rolling Guide Products

A-6-1 Linear Rolling Bushing

1. Features

(1) Low friction

Low friction owes to its design: Balls come into point contacts with raceway surface: the balls smoothly re-circulate. There is very little stick slip.

(2) Low noise

Noise level is low due to the ball retainer which is made of a synthetic resin.

(3) High precision

Due to NSK's superb quality control, precision is guaranteed.

(4) Dust prevention

Series with seal is available. The seal has small friction, and is highly durable. Highly dust-preventive double-lip system has been adopted.

(5) Superb durability

The material of outer sleeve is vacuum degassed, highly pure, and is heat-treated with good expertise.

2. Models

There are two models

(1) Standard type LB (Fig. 1)

This model is the most commonly used, and is the only model that comes with a seal and in super precision grade.



Fig. 1 Standard type LB

(2) Adjustable clearance type LB-T (Fig. 2)

A part of the outer sleeve is cut open toward the axial direction. Used with a housing which can adjust inside diameter, it makes minute adjustment of the clearance between the linear shaft and the inscribed circle (an imaginary circle that connects the summit of the ball) of linear rolling bushing.



Fig. 2 Adjustable Clearance type LB-T

3. Accuracy

(1) Accuracy grades

- Standard type LB·····High precision grade S, and super precision grade SP are available.
- Space adjustment type LB-T·····High precision grade S is available.

(2) Tolerance of rolling linear bushing, linear shaft and housing

Table 1 Tolerance for inscribed circle of the linear rolling bushing and shaft diameter

Unit: μm

Nominal dimension/ inscribed circle diameter /shaft diameter (mm)		Tolerance/inscribed circle diameter*1				Tolerance/width *B*		Tolerance/slot distance of retaining rings *Bn*		Recommended tolerance/ shaft diameter			
		High precision grade S		Super high precision grade SP		High precision grade S Super high precision grade SP		High precision grade S Super high precision grade SP		High precision grade S		Super high precision grade SP	
over	or less	upper	lower	upper	lower	upper	lower	upper	lower	upper	lower	upper	lower
2.5	6	0	-8	0	-5	0	-120	+240	-240	-6	-14	-4	-9
6	10									-6	-15	-4	-10
10	18									-6	-17	-4	-12
18	30	0	-10	0	-6					-6	-19	-4	-13
30	50	0	-12	0	-8					-7	-23	-5	-16

Table 2 Tolerance of linear rolling bush outside diameter, and housing inside diameter

Unit: μm

Nominal dimension/ outside diameter/housing inside diameter (mm)		Tolerance/outside diameter D*1				Eccentricity*2	Tolerance/housing inside diameter			
		High precision grade S		Super high precision grade SP		Super high precision grade SP	High precision grade S		Super high precision grade SP	
over	or less	upper	lower	upper	lower	Maximum	upper	lower	upper	lower
2.5	6	0	-10	0	-7	8	+12	0	+8	0
6	10						+15	0	+9	0
10	18						+18	0	+11	0
18	30	0	-12	0	-8	9	+21	0	+13	0
30	50	0	-14	0	-9	10	+25	0	+16	0

*1) For adjustable clearance type, figures indicate tolerances before the cut is made.

*2) Eccentricity means the run-out of offset between the centers of outer sleeve diameter and inscribed circle diameter.

4. Composition of Reference Number

Example LB 35 N K Y S

- LB: Linear rolling bushing
- 35: Nominal inscribed circle diameter (linear shaft nominal diameter)
- N: With retaining ring groove
- No code: Without retaining ring groove
- K: No code: Standard type LB; T: Adjustable clearance type LB-T
- Y: Plastic retainer
- S: Accuracy grade — S: High precision grade; SP: Super precision grade
- No code: No seal; D: Single-side seal; DD: Double-side seal

5. Lubrication and Friction

(1) Grease lubrication

① Supply at initial stage

At time of delivery, the linear rolling bushing has a coat of rust preventive agent. Wipe it off with clean kerosene or organic solvent. Dry with an air blower, etc., then apply grease.

Lithium soap based greases with consistency level of 2 are generally used (e.g. NSK Grease LR3, PS2, and AS2).

② Replenishment

- Sealed linear rolling bushing is designed to be a disposal item. Therefore, a replenishing grease is considered to be not required. However, if replenishment becomes necessary due to dirty environment or wear of the seal, remove the linear bushing from the shaft and replenish lubricant in the same manner as the initial lubricating.
- For items without seal, wipe off old grease from the linear shaft, and apply new grease.
- Intervals of replenishments are every 100 km in a dirty environment, 500 km in a slightly dirty environment, 1 000 km or no replenishing for a normal environment.

(2) Oil lubrication

It is not necessary to wash off the rust preventive agent applied before delivery.

Use an oil of ISO viscosity grade VG15-100. Drip the oil on the linear shaft by an oil supply system.

Temperature to use

−30°C to 50°C Viscosity VG15 – 46

50°C to 80°C Viscosity VG46 – 100

Lubricant is removed by the seal if the linear ball bearing has a seal. Therefore, the drip method cannot be used except for single-seal types.

(3) Friction coefficient

The linear rolling bushing has a small dynamic friction coefficient. This contributes to low power loss and temperature rise.

According to **Fig. 3**, dynamic friction coefficient is merely 0.001-0.004. Also, at the speed of under 60 m/min, there is no danger of the temperature rising.

Friction force can be obtained by the following formula.

$$F = \mu \cdot P \quad \cdots\cdots (1)$$

In this formula:

F : Friction force (N)

P : Load (vertical load to the shaft center line) (N)

μ : Friction coefficient (dynamic or static)

For a seal type, a seal resistance of 0.3 to 2.40 N is added to the above.

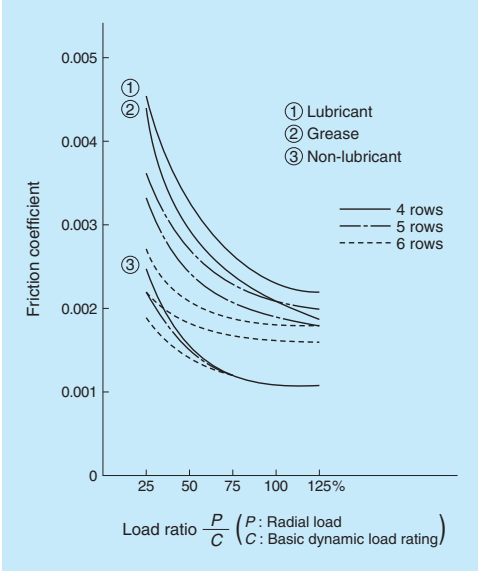


Fig. 3 Dynamic friction coefficient of linear rolling bushing

6. Range of Conditions to Use

Generally, use under the following conditions.

Please consult NSK when values exceed the ranges given below.

Temperature: – 30°C to 80°C

Speed: Up to 120 m/min

(excluding oscillation and short strokes)

7. Preload and Rigidity

The linear rolling bushing is normally used without applying preload. If high positioning accuracy is required, set the clearance between the linear rolling bush and the shaft at the range of 0 to 5 µm. Slight preload is a general rule (1% of basic dynamic load rating C -- see the dimension table).

The dimension table shows theoretical rigidity K when clearance with the shaft is zero, and a load of 0.1 C is applied to the summit of the ball.

Rigidity K_N, when load is not 0.1C, is obtained by the following formula.

$$K_N = K\,(P/0.1C)^{1/3} \quad \cdots\cdots (2)$$

In this formula:

K : Rigidity value in the dimension table (N/µm)

P : Radial load (N)

When the load is applied between the ball raws, the load becomes 1.122 times for 4 ball rows; 0.959 times for 5 ball rows; 0.98 times for 6 ball rows.

8. Basic Load Rating and Rated Life

(1) Basic dynamic load rating

Basic dynamic load rating C is: A radial load which allows 90% of a group of linear rolling bush to run a distance of 50 km without suffering damage when they are moved individually.

There is a relationship as below between C and the life

$$L = 50\, f_L^3 \quad \cdots\cdots (3)$$

$$f_L = C/P \quad \cdots\cdots (4)$$

In this formula:

L : Rated life (km)

P : Radial load (N)

f_L : Life factor (Refer to Fig. 4)

This formula is used provided that the shaft hardness is HRC58 or higher. Rated life is shorter if the shaft is softer. In this case, find the hardness factor f_H from Fig. 5, and multiply the value.

$$f_L = C \cdot f_H/P \quad \cdots\cdots (5)$$

Or

$$C = P \cdot f_L/f_H \quad \cdots\cdots (6)$$

Life in time can be obtained by the following formula, substituting for given stroke length, cycle numbers, and running distance:

$$L_h = (L/1.2 \cdot S \cdot n) \times 10^4 \quad \cdots\cdots (7)$$

In this formula:

L_h : Life hours (h)

L : Rated life (km)

S : Stroke (mm)

n : Cycles per minute (cpm)

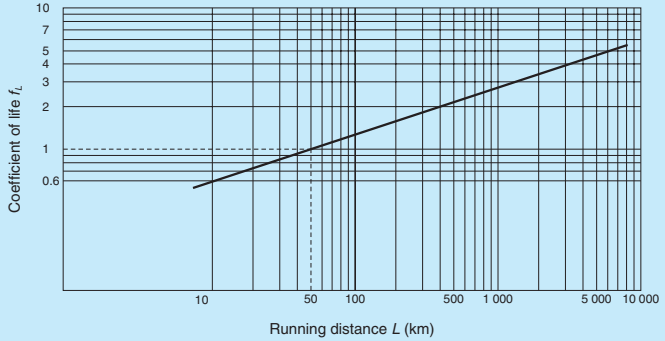


Fig. 4 Relationship between life factor and running distance




Fig. 5 Hardness factor

(2) Basic static load rating

It is a load that the total permanent deformation of outer sleeve, ball and shaft at the contact point, becomes 0.01% of the ball diameter when this load is applied to the rolling bushing. It is understood in general that this is the applicable load limit which causes this much permanent deformation without hampering operation.

(3) Calculation example

What is the appropriate rolling bushing size if required life is 5 000 hours?

Conditions are:

- Three linear rolling bushings are installed in two parallel shafts, and support a reciprocating table.
- Load 450 N is equally distributed to the three bushings.
- The table is required to reciprocate on the shafts at 200 times per minute at a stroke of 70 mm.
- Hardness of the shaft: HRC 55

450/3 = 150 (N)

- Load per linear rolling bushing is:

From Formula (7), the required life when indicated in distance is:

$$L = 5 \times 10^3 \times 1.2 \times 70 \times 200/10^4 = 8.4 \times 10^3 \text{ (km)}$$

From **Fig. 4** and **Fig. 5**,

Life factor $f_L = 5.6$

Hardness factor $f_H = 0.65$

Therefore, from Formula (6),

$$C = P \times f_L / f_H$$

$$= 150 \times 5.6/0.65 = 1\,292 \text{ (N)}$$

Based on the above, select linear rolling bushing LB30NY with shaft diameter of 30 mm, basic dynamic load rating of 1 400 N.

(4) Compensating load rating by ball row position

Load rating of the linear rolling bushing changes by the position of the ball circuit rows.

Permissible load is larger when it is applied to the middle of the ball circuit rows than when it is applied directly above the ball row (**Fig. 6**).

(Radial clearance set at zero in this case.)

Load ratings in the dimension table are in case "A" when it is applied directly above the ball circuit row. If used as in case "B," the load rating becomes larger (refer to **Fig. 6**).

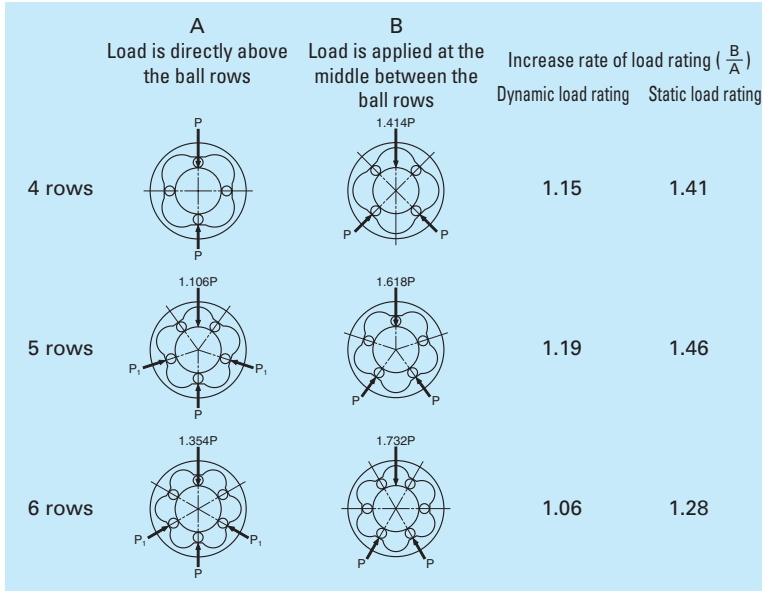


Fig. 6 Increasing rate of load rating by position of ball row (B/A)

9. Shaft Specification

Harden the shaft surface where the balls run with heat treatment to provide the following values.

- Surface hardness: HRC58 or over
- Depth of core hardness at HRC50 or higher
  Depth for LB3; 0.3 mm or deeper
  Depth for LB50; 1.2 mm or deeper

Roughness of the surface should be:

- For SP grade, and "the clearance for fit" with the ball bushing less than 5 µm -
  Less than 0.8 S
- For SP grade with "the clearance" of more than 5 µm, and for S grade -
  Less than 1.2 S

Bending should be:

- LB3 -- 15 µm/100 mm
- LB50 -- 100 µm/1 000 mm

An appropriate clearance for normal use conditions can be obtained when the tolerance in shaft diameter remains within the recommended range (refer to **Table 1** on page A336). For operations which require particular accuracy, select the shaft diameter which creates a clearance in the range of 0 to 0.005 (mm) for example, when assembled with the rolling bushing.

10. Dust Proof

Select a linear rolling bushing with seals to prevent moisture or foreign matters which are floating in the air from entering.

11. Installation

(1) Combination of shaft and linear rolling bushing

When the linear rolling bushing is installed in a linear motion table for its reciprocating movement, it is necessary to prevent the table from rotating.

In general, for this reason, two shafts installed with two linear rolling bushings on each are used.

Fig. 7 is an installation example.

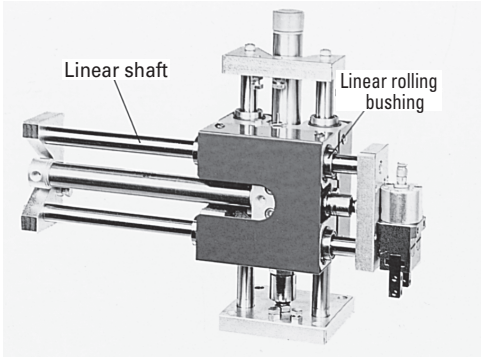


Fig. 7 Installation example

(2) Installation of linear rolling bushing

1) Standard type installation

Fig. 8 shows a method using a retainer ring. Linear rolling bushing can also be secured to the housing using a stop plate and/or screw.

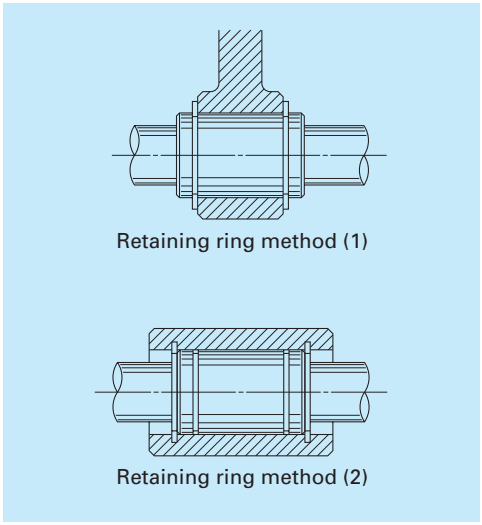


Fig. 8 Installation using retaining rings

a) Housing inside diameter should be of a recommended value (**Table 2**, page A336). The entire rolling bushing contracts and gives excessive preload if: the inside diameter is small; the roundness or cylindricity is excessive. This may result in an unexpected failure.

b) To install linear rolling bushing, use a tool (**Fig. 9**) and squeeze it in, or use a holder and lightly pound it.

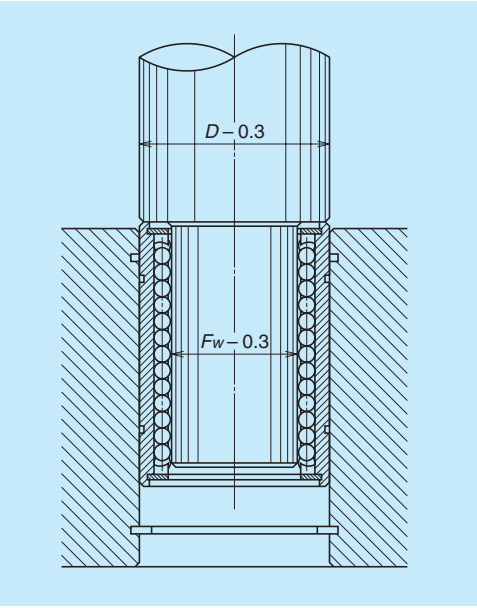


Fig. 9 Tool to install a linear rolling bushing

2) Installation of adjustable clearance type

Use a housing which can adjust the inside diameter of the rolling bushing. This way, the clearance between the rolling bushing and the linear shaft can be easily adjusted. Arrange the cut-open section of the rolling bushing at a 90-degree angle to the housing's cut-open section. This is the most effective way to evenly distribute deformation toward circumferential direction.

The tolerance of shaft diameter of the adjustable clearance type should be within the recommended range (refer to **Table 1** on page A336). As a general rule, set the preload at slight or light volume. (Do not provide excessive preload.) Use a dial gauge to measure and adjust clearance. However, here is an easy method to adjust .

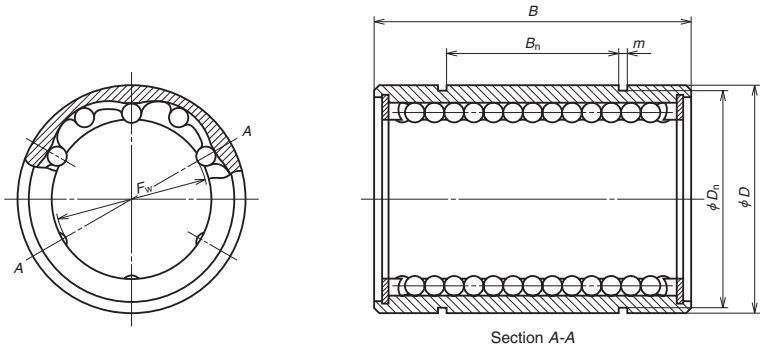
First, loosen the housing until shaft turns freely. Then narrow the clearance gradually. Stop at the point when the shaft rotation becomes heavy. This creates a clearance zero or light preload.

(3) Precaution for installing a shaft in the linear rolling bushing

1) To install two shafts parallel to each other, first install one shaft accurately. Use this as a reference, and install the other parallel to the first shaft. This makes installation easy.
2) Do not incline the shaft when inserting it into the linear rolling bushing. Do not force it to enter by twisting. This deforms the retainer, and causes the balls to fall out.
3) Do not use the shaft for rotating movement after inserting the shaft to the linear rolling bushing. The balls slip and damage the shaft.
4) Do not twist the shaft after it is inserted to the linear rolling bushing. The pressure scars the shaft.

12. Dimension tables

Model LB (standard type), no seal



Section *A-A*


Unit: mm

Model No.	Inscribed circle diameter F_w	Outside diameter D	Length B	Retaining ring groove: Distance B_n	Retaining ring groove: Width m	Retaining ring groove: Bottom diameter D_n	Stiffness*1 (N/μm)	Number of ball circuit	Weight (kg) (Reference only)	Basic dynamic load rating C (N)	Basic static load rating C_0 (N)
LB3Y	3	7	10	—	—	—	3	4	0.0016	20	39
LB4Y	4	8	12	—	—	—	4.5	4	0.0022	29	59
LB6NY	6	12	19	11	1.15	11.5	7	4	0.0074	74	147
LB8ANY*2	8	15	17	9	1.15	14.3	5.5	4	0.0094	78	118
LB8NY	8	15	24	15	1.15	14.3	9.5	4	0.014	118	226
LB10NY	10	19	29	19	1.35	18	12	4	0.025	206	355
LB12NY	12	21	30	20	1.35	20	13	4	0.028	265	500
LB13NY	13	23	32	20	1.35	22	13	4	0.040	294	510
LB16NY	16	28	37	23	1.65	26.6	14	4	0.063	440	635
LB20NY	20	32	42	27	1.65	30.3	19	5	0.088	610	1 010
LB25NY	25	40	59	37	1.9	38	35	6	0.267	1 000	1 960
LB30NY	30	45	64	40	1.9	42.5	41	6	0.305	1 400	2 500
LB35NY	35	52	70	45	2.2	49	48	6	0.440	1 510	2 800
LB40NY	40	60	80	56	2.2	57	54	6	0.520	2 230	4 000
LB50NY	50	80	100	68	2.7	76.5	69	6	1.770	4 100	7 100

*1): Refer to Section (7).

*2): Semi-standard item of which length B is shorter than standard.

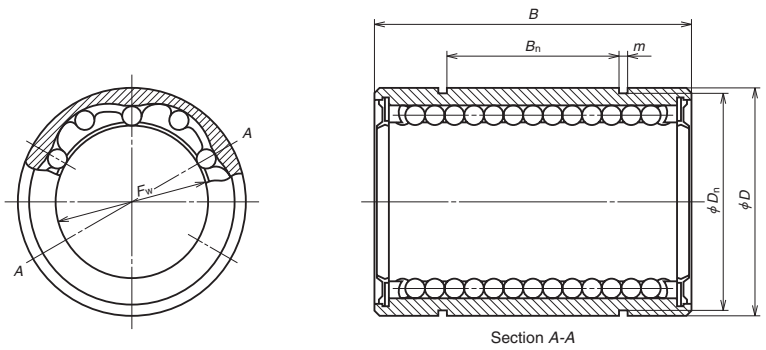Model LB (standard type), with seal




Unit: mm

*Model No.	Inscribed circle diameter F_w	Outside diameter D	Length B	Retaining ring groove Distance B_n	Retaining ring groove Width m	Retaining ring groove Bottom diameter D_n	Number of ball circuit	Weight (kg) (Reference only)	Basic dynamic load rating C (N)	Basic static load rating C_0 (N)
LB6NYDD	6	12	19	11	1.15	11.5	4	0.0074	74	147
LB8ANYDD	8	15	17	9	1.15	14.3	4	0.0094	78	118
LB8NYDD	8	15	24	15	1.15	14.3	4	0.014	118	226
LB10NYDD	10	19	29	19	1.35	18	4	0.025	206	355
LB12NYDD	12	21	30	20	1.35	20	4	0.028	265	500
LB13NYDD	13	23	32	20	1.35	22	4	0.040	294	510
LB16NYDD	16	28	37	23	1.65	26.6	4	0.063	440	635
LB20NYDD	20	32	42	27	1.65	30.3	5	0.088	610	1 010
LB25NYDD	25	40	59	37	1.9	38	6	0.267	1 000	1 960
LB30NYDD	30	45	64	40	1.9	42.5	6	0.305	1 400	2 500
LB35NYDD	35	52	70	45	2.2	49	6	0.440	1 510	2 800
LB40NYDD	40	60	80	56	2.2	57	6	0.520	2 230	4 000
LB50NYDD	50	80	100	68	2.7	76.5	6	1.770	4 100	7 100

*) Single-seal type is indicated as LB-D.

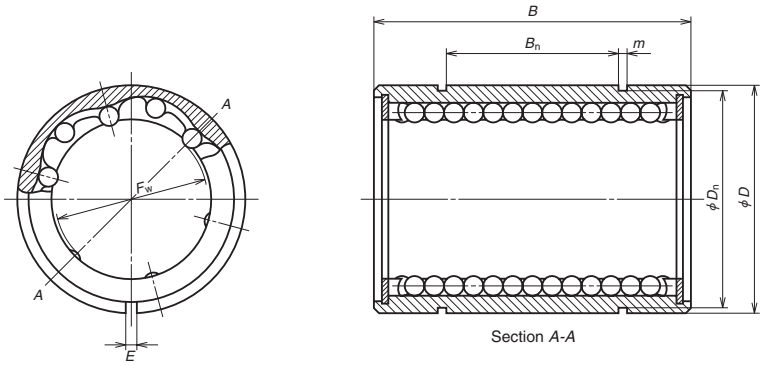Model LB-T (Adjustable clearance type)



Unit: mm

Model No.	Inscribed circle diameter F_w	Outside diameter D	Length B	Opening width E	Retaining ring groove Distance B_n	Retaining ring groove Width m	Retaining ring groove Bottom diameter D_n	Number of ball circuit	Weight (kg) (Reference only)	Basic dynamic load rating C (N)	Basic static load rating C_0 (N)
LB6NTY	6	12	19	0.8	11	1.15	11.5	4	0.0073	74	147
LB8ANTY	8	15	17	1	9	1.15	14.3	4	0.0093	78	118
LB8NTY	8	15	24	1	15	1.15	14.3	4	0.014	118	226
LB10NTY	10	19	29	1.5	19	1.35	18	4	0.025	206	355
LB12NTY	12	21	30	1.5	20	1.35	20	4	0.028	265	500
LB13NTY	13	23	32	1.5	20	1.35	22	4	0.040	294	510
LB16NTY	16	28	37	1.5	23	1.65	26.6	4	0.062	440	635
LB20NTY	20	32	42	2	27	1.65	30.3	5	0.087	610	1 010
LB25NTY	25	40	59	2	37	1.9	38	6	0.265	1 000	1 960
LB30NTY	30	45	64	2	40	1.9	42.5	6	0.302	1 400	2 500
LB35NTY	35	52	70	3	45	2.2	49	6	0.44	1 510	2 800
LB40NTY	40	60	80	3	56	2.2	57	6	0.52	2 230	4 000
LB50NTY	50	80	100	3	68	2.7	76.5	6	1.75	4 100	7 100

A-6-2 Roller Pack

1. Structure

A roller pack comprises a main body which supports load from the guide way block via two rows of rollers; an end cap which changes the direction of the re-circulation of rollers at the end of the main body; a side plate which guides the rollers (**Fig. 1**). Roller pack is one of the linear rolling guides, where rollers are allowed to re-circulate infinitely.

There is a plate spring attached to a side of roller pack to prevent roller pack from falling out when it is turned upside down after assembly.

Other component of the roller pack is spring pin. Spring pin is on the top surface of the roller pack, and makes installation of wedge block and fitting plate easier.

Wedge block is a unit to provide preload (**Fig. 3**) to roller pack; a fitting plate (**Fig. 2**), functioning like a pivot, adjusts misalignment of roller pack automatically. Wedge of wedge block moves up and down to apply preload by turning the adjust screw.

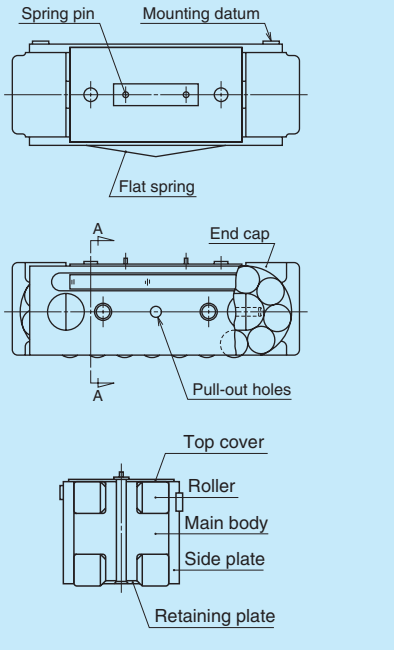


Fig. 1 Roller pack

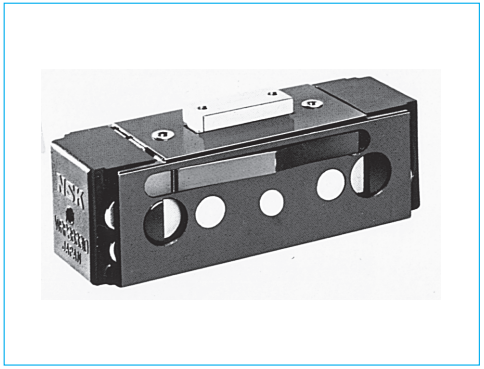


Photo 1 Roller pack

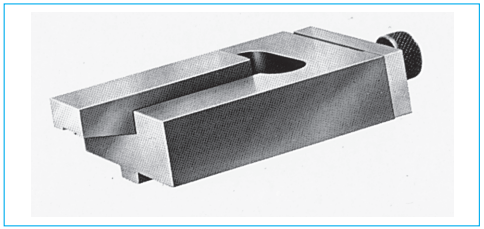


Photo 2 Wedge block

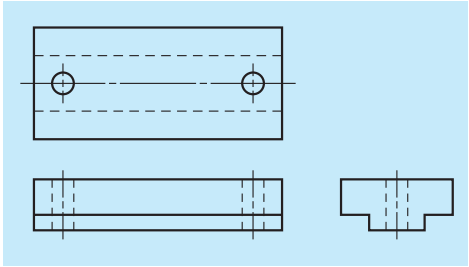


Fig. 2 Fitting plate

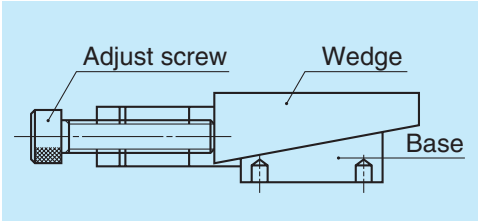


Fig. 3 Wedge block

2. Features

Roller pack has two remarkable characteristics other linear roller guide bearings do not have.

(1) No roller skewing

If the roller is long relative to its diameter, the roller inclines during operation. This phenomenon is called skewing. Skewing causes problems such as sudden rise in friction force. However, a short roller lacks large load carrying capacity. The roller introduced here solved the skewing problem, yet has a large load carrying capacity:
short rollers are combined into double rows.

(2) Load is applied equally.

This is due to a "fitting plate," a result of "changed way of conceiving." Installation is quite easy: Merely place the fitting plate through the two holes to spring pins. The stop pins are inserted to holes on the top surface of the roller pack. The contact area between the fitting plate and the main body is made small. This way, the self-alignment is automatically accomplished by elastic contact of both parts.

This distributes an equal load to the rollers, far extending the life, compared to conventional roller linear guides.

Other characteristics include: Easy to provide preload by the wedge block; can be installed to vertical shaft; and reduction in noise level.

3. Accuracy

The height tolerance of roller pack is 10 μm. Roller packs are grouped into a size difference of every 2 μm (corded by A to E) before delivery (**Table 1**).

Table 1 Height Classification

Unit: μm

Category			Code
over		or less	
+3	–	+5	A
+1	–	+3	B
-1	–	+1	C
-3	–	-1	D
-5	–	-3	E

4. Rigidity

Fig. 4 shows the relationship between load and deformation. This includes deformation caused by contact between: the rollers and main body; the rollers and guide way surface; the main body and fitting plate.

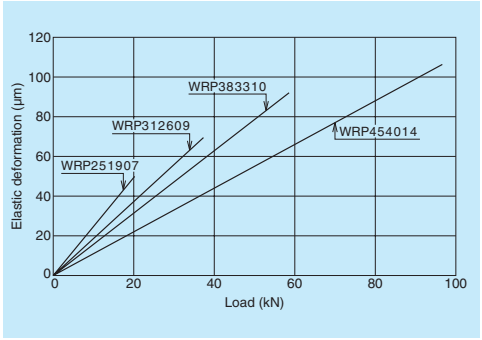


Fig. 4 Elastic deformation of the roller pack

5. Preload

Fig. 5 shows conversions of tightening torque of the wedge block adjust screw into preload volume. Use a dial gauge for accurate measurement.

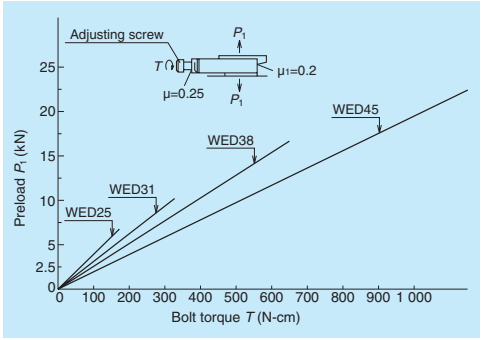


Fig. 5 Tightening torque of the adjust screw, and preload volume

6. Friction and Lubrication

(1) Lubricants and volume

Mineral oils are commonly used. Since roller pack is used under a relatively heavy load, the oil should, ideally, have high viscosity and provide a strong film. Select from JIS viscosity 32-150.

Criteria of oil supply per roller pack Q (cc/h) can be calculated by the following formula.

$$Q \geq S \times 1/4 \quad \cdots\cdots (1)$$

In this formula, S (stroke) is shown in meters. The oil volume, when the stroke is 1 m, per roller pack is more than 0.25 (cc/h). It is more desirable to supply a small amount of oil at short intervals than supplying a large amount at one time. In case of grease lubrication, use a grease of consistency 2. Albania EP2 is widely used.

(2) Friction coefficient

Starting friction coefficient is significantly small at under 0.005.

(3) Seal

It is necessary to install a wiper seal to the guide way surface to prevent foreign matters (swarf from cutting, and other dust) from entering the roller pack to enjoy the full benefit of the designed life of it. The material of the seal should have strong resistance to oil and wear. Felt and synthetic rubber (acrylonitril butadiene rubber) are some of the suitable materials. **Fig. 6** shows a general method to install the seals.

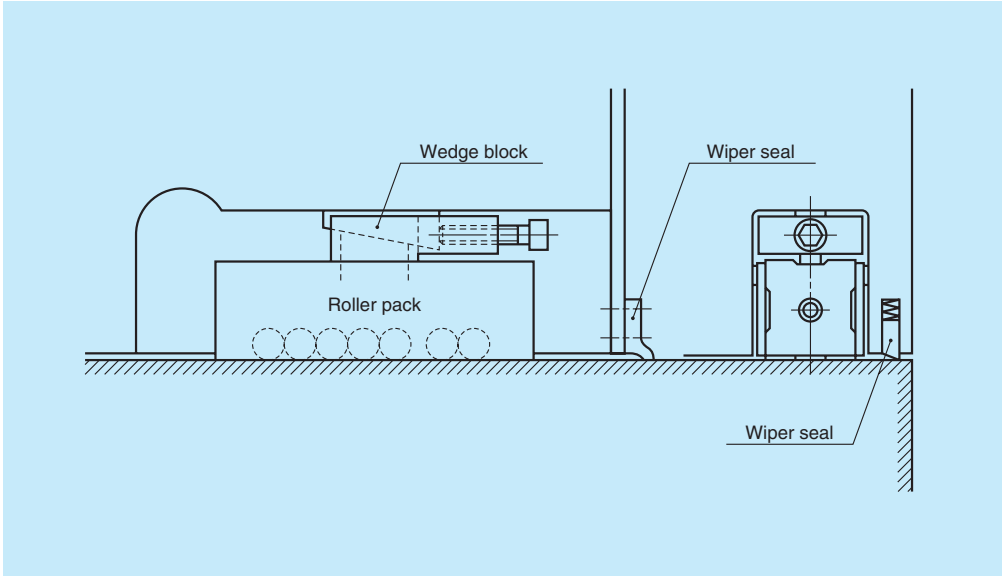


Fig. 6 Installation of seal

7. Installation

(1) Installation and applying preload

As shown in **Fig. 7**, it is basic that a fitting plate is installed on the roller pack which receives load, and a wedge block is installed on the roller pack which receives no load, but is only used for preload. All components should be secured with a stop pin, facing toward the direction of movement. To cut costs for processing, it is recommended to divide the pocket (which contains roller pack) into some blocks and secure them with bolts (**Fig. 7**). Preload is provided by the wedge block. Estimate the actual load beforehand, so the preload shall not be lost when a load is applied. A load variation equivalent to up to two times of the preload volume can be absorbed in this case.

(Take into consideration the rated life in 8. in determining preload volume.)

(2) Accuracy of way block

The following is the ideal accuracy specification and installation accuracy of way block as a guide surface.

Hardness by heat treatment
: More than HRC58 hardened depth 2 mm or more

Surface roughness
: Less than 1.6 S
Parallelism as a single unit: Less than 0.010 mm per meter

Parallelism after installation
: Less than 0.020 mm per meter

Please consult NSK when using cast iron or cast steel guide face.

(3) Pocket accuracy

Accuracy of the pocket in which the roller pack is mounted should satisfy the following conditions.

Pocket width
: Roller pack width + 0.10 to 0.20 mm

Parallelism of the pocket side faces to the guide way face
: Less than 0.010 mm per 100 mm.

Parallelism of the fitting plate (pocket bottom) mounting surface to the guide way face and parallelism of the wedge block mounting surface to the guide way surface :
: Less than 0.040 mm per 100 mm.

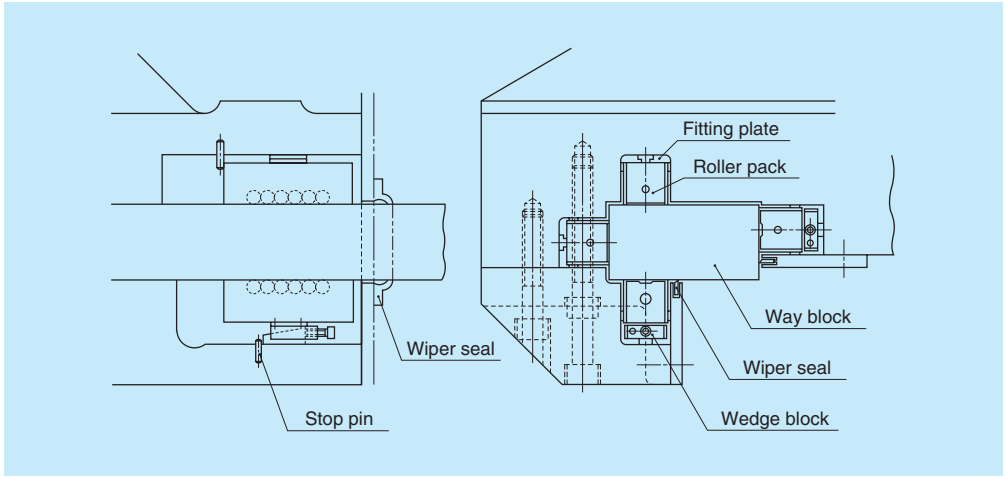


Fig. 7 Design of the roller pack pocket (example)

8. Rated life

Rated life L (km) is shown in the following formula.
In this formula:

$$L = 50 \left(\frac{C}{f_w \cdot F_c} \right)^{\frac{10}{3}} \quad \cdots\cdots (2)$$

C: Basic dynamic load rating (N)

f_w: Load factors. 1.0 to 1.2 at time of smooth operation

F_c: Calculated load (N) applied to the roller pack

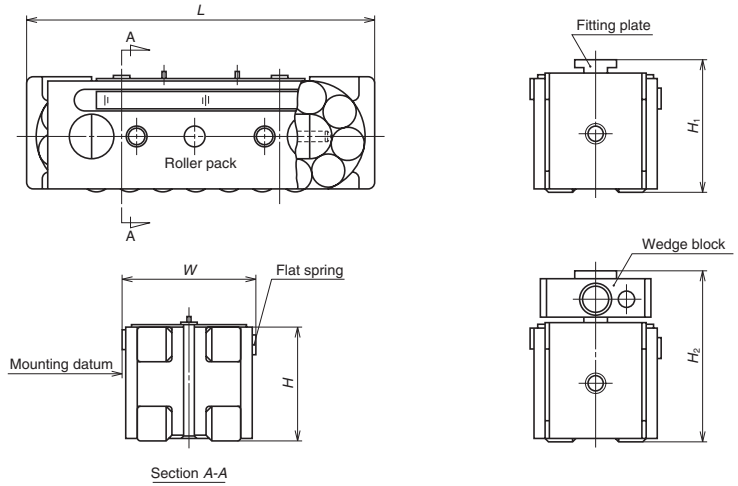
9. Disassembly

Remove the roller pack preloaded by the wedge block in the following manner.

- Loosen the adjust screw of the wedge block. Lightly tap the wedge. In case of light preload, the wedge loosens, and the roller pack can be pulled out.
- When pulling, put the bolt in the tap hole at the end of the end cap, and tug the bolt.
- In case of heavy load, the roller pack could not be pulled out by the above method. Hook a tool to the pull-out hole (**Fig. 1**) on the side plate of the roller pack, and pull out the roller pack.

10. Dimension Table

Roller pack: Model WRP




Unit: mm

Model No.	Width W	Height ±0.005 H	Length L	Applicable fitting plate reference No.	Assembled height H_1	Applicable wedge reference No.	Assembled height H_2	Basic dynamic load rating C (N)	Basic static load rating C_0 (N)
WRP 251907	25	19	65.5	WFT 25	24	WED 25	31 (30.4 – 31.6)	31 000	40 500
WRP 312609	31	26	85	WFT 31	31	WED 31	40 (39.4 – 40.6)	57 000	73 000
WRP 383310	38.1	33.31	104.4	WFT 38	38.91	WED 38	50.8 (50 – 51.5)	91 000	113 000
WRP 454014	45	40	138	WFT 45	45	WED 45	60 (59.2 – 60.8)	151 000	191 000

Note : Numbers in the parentheses in column H_2 show the adjustable height range of the wedge block.

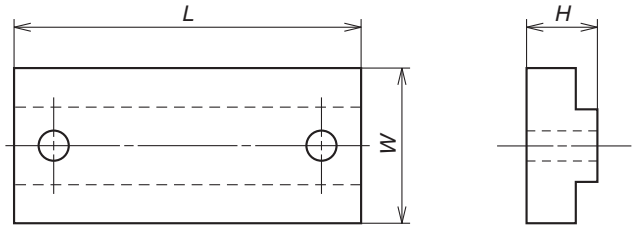
Fitting plate: Model WFT



Unit: mm

Model No.	Width *W*	Height (±0.01) *H*	Length *L*	Applicable roller pack
WFT 25	10	5	20	WRP 251907
WFT 31	12	5	26	WRP 312609
WFT 38	12.8	5.6	29	WRP 383310
WFT 45	16	5	40	WRP 454014

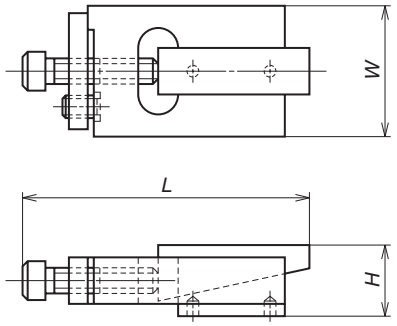Wedge block: Model WED



Unit: mm

Model No.	Width *W*	Height *H*	Length *L*	Applicable roller pack
WED 25	23	12 (11.5 – 12.5)	47	WRP 251907
WED 31	28	14 (13.5 – 14.5)	63	WRP 312609
WED 38	35	17.47 (16.9 – 18.1)	76	WRP 383310
WED 45	40	20 (19.2 – 20.8)	95	WRP 454014

Note : Numbers in the parentheses in column H_2 show adjustable height range of the wedge block.

B BLOCK

Ball Screw

B-1 Selection Guide to NSK Ball Screw

1. Features of NSK Ball Screws B1
2. Structure of a Ball Screw B3
2.1 Ball Recirculation System B4
2.2 Preload System B5
3. Ball Screw Series B7
3.1 Ball Screw Classification B7
3.2 Product Externals B9
4. Procedures to Select Ball Screw B17
4.1 Flow Chart for Selection B17
4.2 Accuracy Grades B19
4.3 Axial Play B20
4.4 Screw Shaft Diameter, Lead, and Stroke B21
4.5 Manufacturing Capability for Screw Shaft B25
4.6 Outside Shapes of Ball Nut B26
4.7 Shaft End Configuration B27
5. When Placing Orders B31
5.1 When Ordering Standard Ball Screws B31
5.2 When Ordering Made-to-Order Ball Screws B33

B-2 Technical Description of Ball Screws

1. Accuracy B37
1.1 Lead Accuracy B37
1.2 Thermal Expansion and Target Value of Specified Travel B40
1.3 Mounting Accuracy and Tolerance of Ball Screws B41
1.4 Automatic Lead Accuracy Measuring System of NSK B43
2. Static Load Limitation B44
2.1 Buckling Load B44
2.2 Yield by Tensional/ Compressive Stress B46
2.3 Permanent Deformation at the Ball Contact Point B46
3. Permissible Rotational Speed B47
3.1 Critical Speed of the Screw Shaft B47
3.2 d•n Value B50
4. Supporting Conditions for Calculation of Buckling Load and Critical Speed B51
5. Life (Dynamic Load Limitation) B53
5.1 Life of Ball Screw B53
5.2 Fatigue Life B53
5.3 Ball Screw and Hardness B55
5.4 Wear Life B55
6. Preload and Rigidity B56
6.1 Elastic Deformation of Preloaded Ball Screw B56
6.2 Rigidity of the Feed Screw System B57
7. Friction Torque and Drive Torque B62
7.1 Friction Torque B62
7.2 Drive Torque B63
8. Even Load Distribution in Ball Nut (In Case of Ball Screws for High-Load Drive) B65
9. Lubrication of Ball Screw B67
10. Dust Prevention for Ball Screw B68
11. Rust Prevention and Surface Treatment of Ball Screws B69
12. Ball Screw Specifications for Special Environments B70
12.1 Clean Environments B70
12.2 Measures for Use Under Vacuum B70
13. Noise and Vibration B71
13.1 Consideration to Lowering Noise B71
13.2 Consideration to Operational Characteristics B72
13.3 Consideration to Ball Screw Support System B72
14. Installation of Ball Screw B73
14.1 Installation Procedure for Machine Tools, Where High Installation Accuracy Is Required B74
14.2 Installation Procedure for General Industrial Machinery B79
15. Precautions for Designing Ball Screw B83
15.1 Safety System B83
15.2 Design Cautions to Assembling Ball Screw B83
15.3 Effective Stroke of Ball Screw B85
15.4 Matching after Delivery B85
15.5 "NSK K1™" Lubrication Unit B85
15.6 Intermediate support B85
16. Shaft End Machining B86
17. Ball Screw Selection Exercise B87
18. Reference B101
19. Guide to Technical Services B102
20. Precautions When Handling Ball Screws B103

B-3 Ball Screw Dimension Table

1. Dimension Table and Reference Number of Standard Ball Screws
1.1 Compact FA Series B107
1.2 High-Speed SS Series B147
1.3 Finished Shaft End
MA Type, Miniature, Fine Lead B159
FA Type for Small Equipment B181
SA Type for Machine Tools B217
1.4 Finished Shaft End
KA Type Stainless Steel Product B273
1.5 Blank Shaft End
MS Type, Miniature, Fine Lead B301
FS Type for Small Equipment B309
SS Type for Machine Tools B321
1.6 Ball Screws for Transfer Equipment B349
1.7 Accessories B389
2. Dimension Table and Reference Number of Standard Nut Ball Screws
2.1 End Deflector Type B431
2.2 Tube Type B437
2.3 Deflector (bridge) Type B469
2.4 End Cap Type B483
3. Dimension Table and Reference Number of Application-Oriented Ball Screws
3.1 HMD Type for High-Speed Machine Tools B493
3.2 HMS Type for High-Speed Machine Tools B497
3.3 HMC Type for High-Speed Machine Tools B501
3.4 BSL™ Type for Miniature Lathes B507
3.5 For High-Load Drives
3.5.1 HTF-SRC Type B511
3.5.2 HTF-SRD Type B515
3.5.3 HTF Type B519
3.6 For Contaminated Environments
3.6.1 VSS Type B535
3.6.2 Ball Screw with X1 Seals for Contaminated Environments and Grease Retention B539
3.7 TW Series for Twin-Drive Systems B545
3.8 For High Precision Machine Tools
3.8.1 Hollow Shaft Ball Screws B546
3.8.2 Nut Cooling Ball Screws B551
3.9 ND Series for Nut-Rotatable Drives B555
3.10 Σ Series for Robots B563
3.11 Ball Screw with L1 Seal designed for Minimal Grease Splatter B575
3.12 Equipped with "NSK K1™" Lubrication Unit B579
3.13 Special Ball Screws B585

B-1 Selection Guide to NSK Ball Screw

B-1-1 Features of NSK Ball Screws

(1) Quick delivery

Standard ball screws are for short lead time.

- Precision ball screws with finished shaft end
  Compact FA Series, MA Type, FA Type, SA Type, KA Type
- Precision ball screws with blank shaft end
  MS Type, FS Type, SS Type, HSS Type
- Ball screws for transfer equipment with finished shaft end
  VFA Type, RMA Type
- Ball screws for transfer equipment with blank shaft end
  RMS Type, R Series

(2) Competitive prices

NSK reduces cost by well-planned mass production of standardized items. We rank the best in the world production of ordered items. We are able to offer our products at competitive prices by producing similar items in the same production group.

(3) Unparalleled accuracy

NSK utilizes its unique grinding technique and measuring equipment for topnotch precision.

(4) Superb durability

NSK uses thoroughly purified alloy steel for superb durability.

(5) No backlash, and unparalleled rigidity

NSK ball screws use Gothic arch grooves as shown in **Fig. 1.1** to minimize the clearance between the balls and grooves. Further, an application of preload makes no backlash possible. As providing controlled preload is easy, appropriate rigidity is obtained.
As the Gothic arch also minimizes the clearance between the balls and the grooves, the backlash is minimized without applying preload.

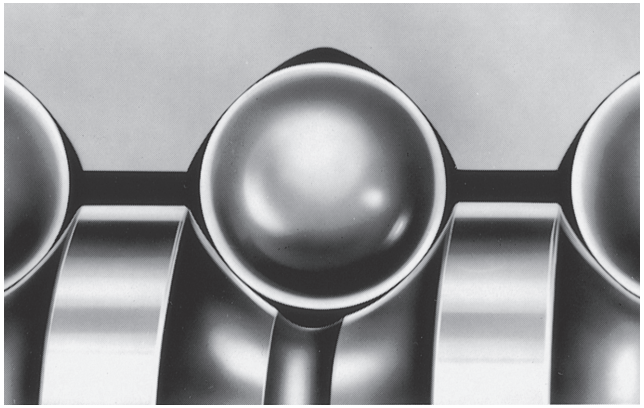


Fig. 1.1 Ball groove profile of NSK ball screw

(6) Smooth movement assures high efficiency

NSK uses the gothic-arch design for the ball grooves. This design prevents the balls from slightly wedging into the grooves of the ball nut and screw shaft and causing minute vibrations. This phenomenon is common with the circular-arc design used by other manufacturers. The gothic arch, along with the low friction inherent in a ball screw, results in a smooth and highly efficient conversion of motion as shown in **Fig. 1.2**"

(7) Optimal units available

Utilizing bearing technology, NSK produces high quality support units (for light load type to be used for small equipment and heavy load type to be used for machine tools) which are exclusive for ball screws. These units are standardized.
NSK also offers quality-assured accessories such as lock nuts to tighten bearings, travel stoppers to prevent overrun, and sealing units to cool hollow shaft ball screws.

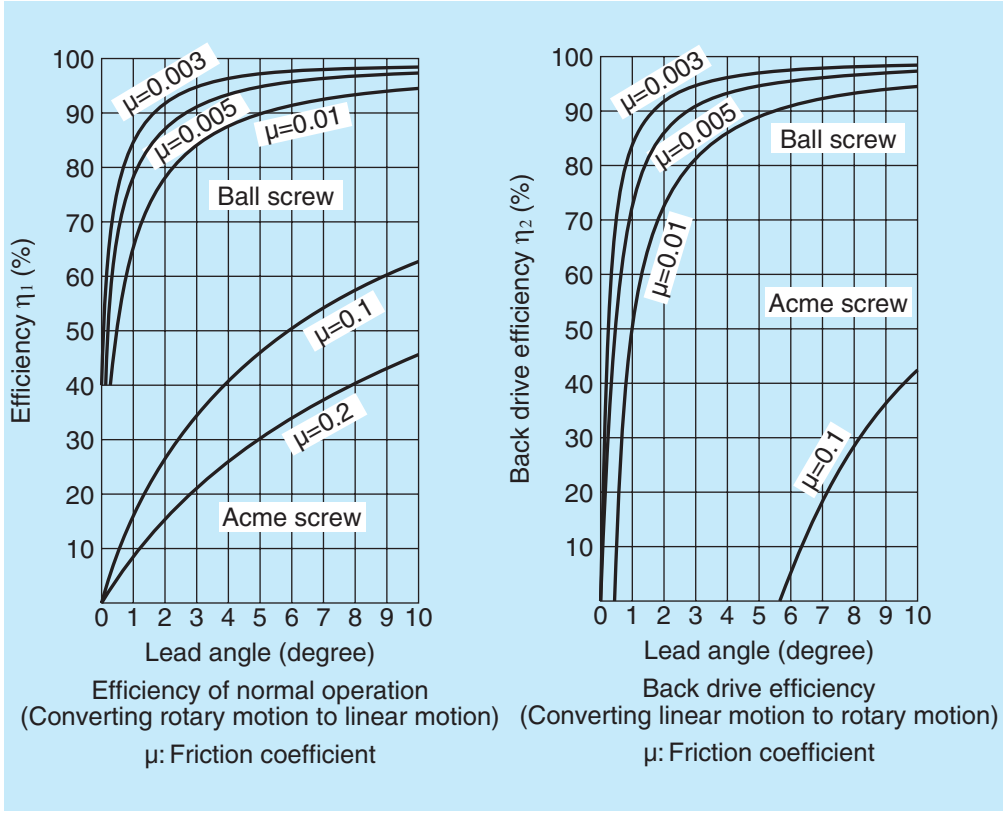




Fig. 1.2 Mechanical efficiency of ball screws

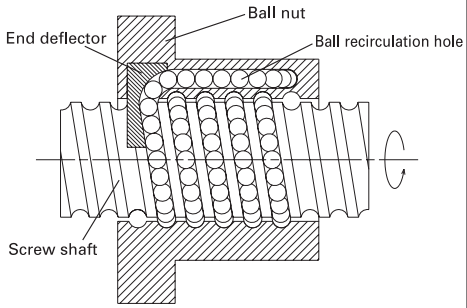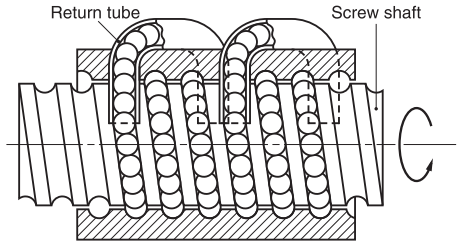B-1-2 Structure of a Ball Screw

Balls are placed between the screw shaft and nut, and roll. This system is called a "ball screw." To keep the balls recirculating continually, this system requires a screw shaft, a nut, balls, and recirculation components as basic items. A ball screw has the following functions.

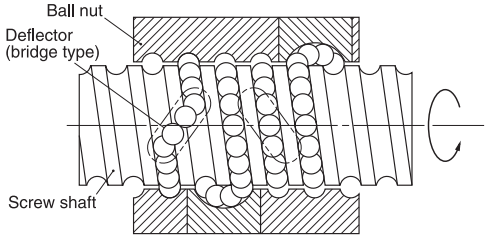
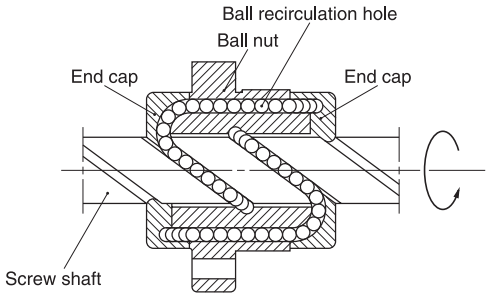
(1) Converting motion: Changing rotary motion to linear motion (normal operation); Changing linear motion to rotary motion efficiently (back-drive operation).
(2) Increasing power: A small torque is converted to a large thrust force.
(3) Positioning: Sets accurate position in linear motion.

Table 2.1 Ball screw recirculation system

End deflector type	Ball return tube type
	
[Structure] Balls are smoothly picked up in the tangential direction at the end of nut, and recirculated via a hole in the nut. If the balls are picked up at the middle of the nut, it is called middle deflector type. [Features] · Small nut outside diameter allows compact nut design. · Low noise, high speed.	[Structure] Balls are recirculating through a pipe (ball return tube) of optimized size, bridging the start and end of recirculation. [Features] · Adapt to various specifications. (screw shaft diameter, lead)

B-1-2.1 Ball Recirculation System










A ball recirculation system is categorically most important, as well as the preload system, to classify the structure of ball screw.
As shown in **Table 2.1**, four types of ball recirculation system are used for the NSK ball screws.

Deflector (bridge) type	End cap type
	
[Structure] Balls are recirculated by a horseshoe shaped deflector bridging the adjacent ball thread grooves. [Features] · Suitable for fine lead ball screws. · Small nut outside diameter, allows compact nut design.	[Structure] Balls are picked up by an end cap placed at both ends of the nut, and recirculated via a hole through the nut. [Features] · Suitable for large lead ball screws. · Not universal due to complex recirculation structure.

B-1-2.2 Preload system


There are four systems to apply preload to NSK ball screws depending on the application.

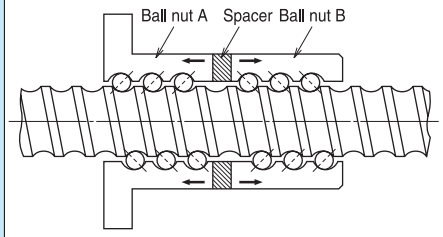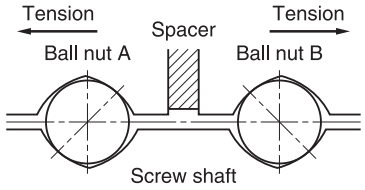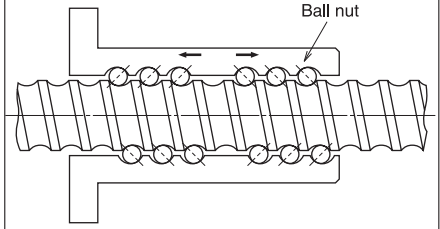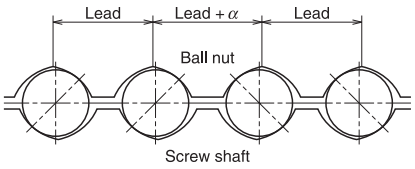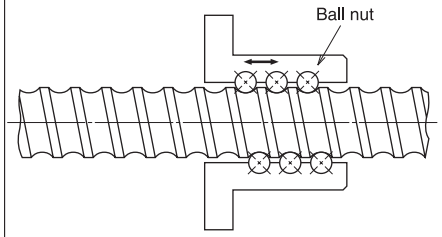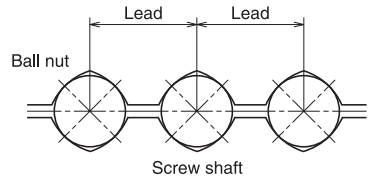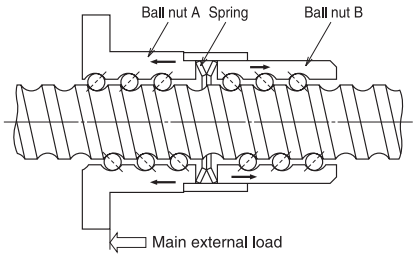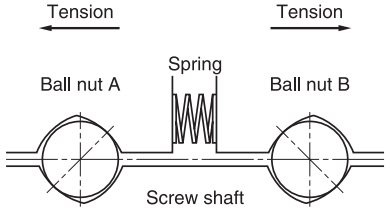
Table 2.2 Preload system for ball screws

Preload system	Double nut preload (D-Preload)	Offset preload (Z-Preload)	Oversize ball preload (P-Preload)	Spring preloaded double nut (J-Preload)
Structure	 	 	  	 
Description	Uses two nuts, and inserts a spacer between them to apply the preload. In general, a spacer is thicker (by the deformation equivalent to the preload) than the actual space between two nuts. However, a thin spacer is inserted in some cases.	To apply preload, the lead near the center of the nut is offset by the volume equivalent to preload (α). This method is like to creating a preload system similar to the double nut preload (D-preload) by a single ball nut, thus enabling a compact nut design.	Balls slightly larger than the ball groove space (over-size balls) are inserted to allow them to contact at four points. Provides better torque characteristics in the low torque range.	A spring is used as a spacer of D-Preload. Must be used with discretion in its varied rigidity by load direction.
Nut length	Long	Medium	Short	Long
Torque characteristics	○	○	○	◎
Rigidity	◎	◎	○	△

B-1-3 Ball Screw Series

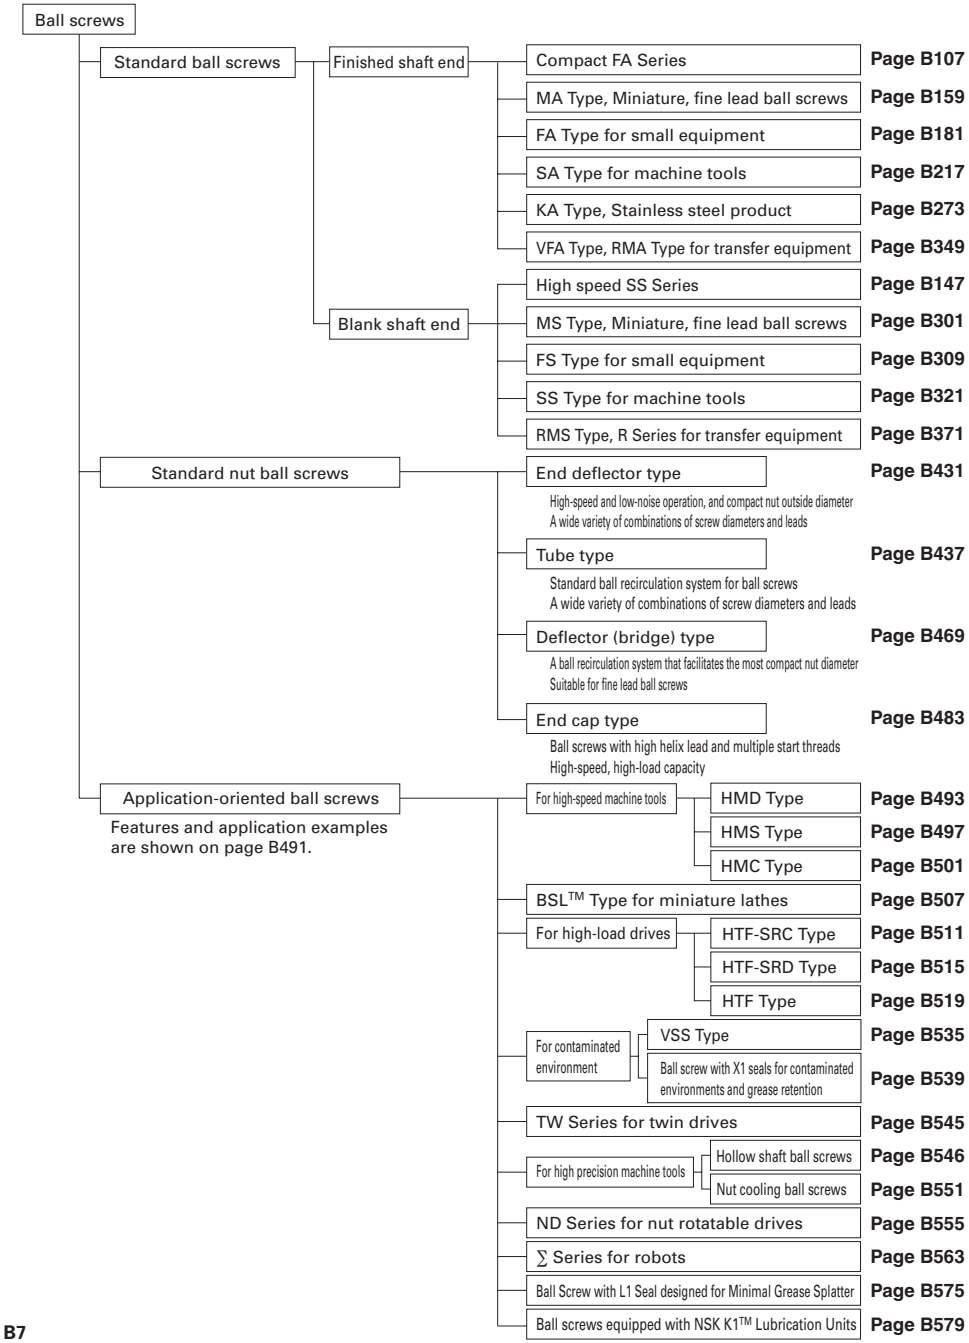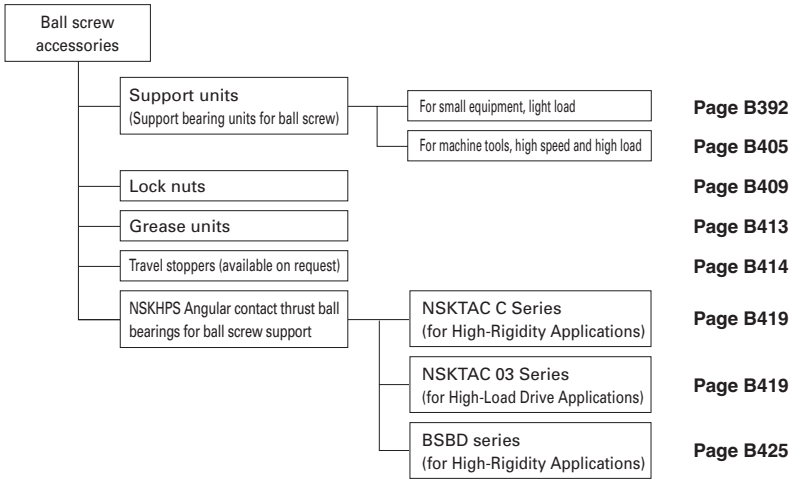B-1-3.1 Ball Screw Classification





Lead classification

Classification	Lead ratio K = lead *l* / shaft diameter *d*
Fine	$K < 0.5$
Medium	$0.5 \leq K < 1$
High helix	$1 \leq K < 2$
Ultra high helix	$2 \leq K$

B-1-3.2 Product Externals

(1) Ball screws

●Standard ball screws

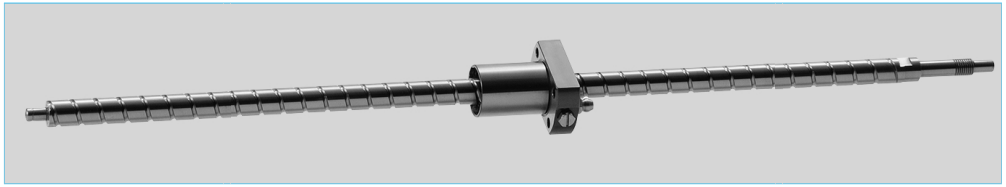


Fig. 3.1 Finished shaft end compact FA Series Page B107

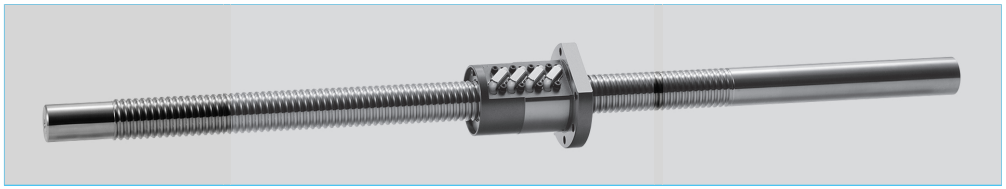


Fig. 3.2 Blank shaft end high-speed SS Series Page B147

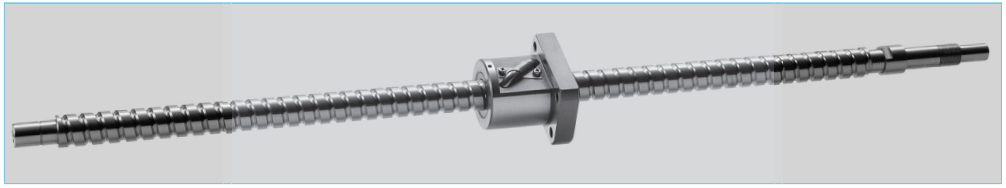


Fig. 3.3 Finished shaft end MA type, FA type and SA type Page B157

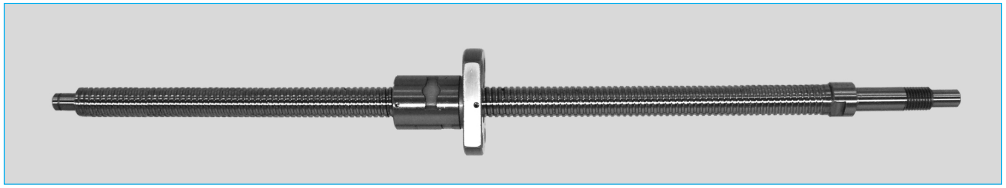


Fig. 3.4 Finished shaft end KA type Page B273

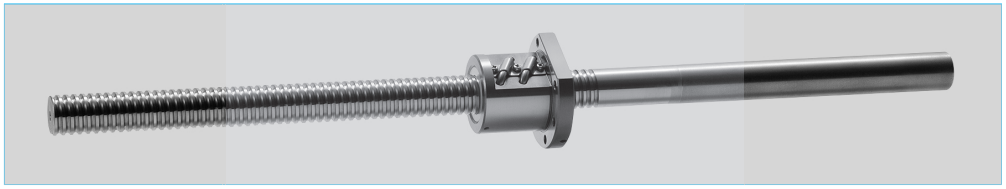


Fig. 3.5 Blank shaft end MS type, FS type and SS type Page B299

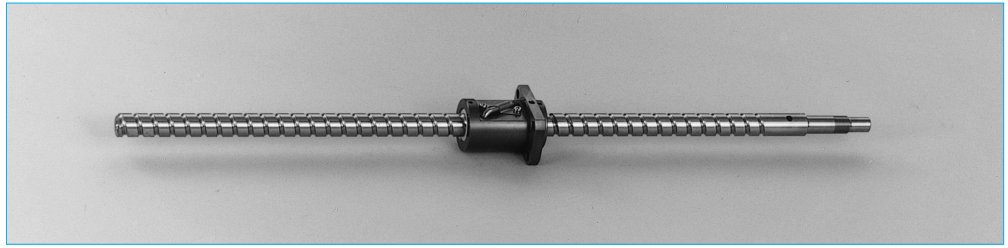


Fig. 3.6 Finished shaft end VFA type for transfer equipment Page B349

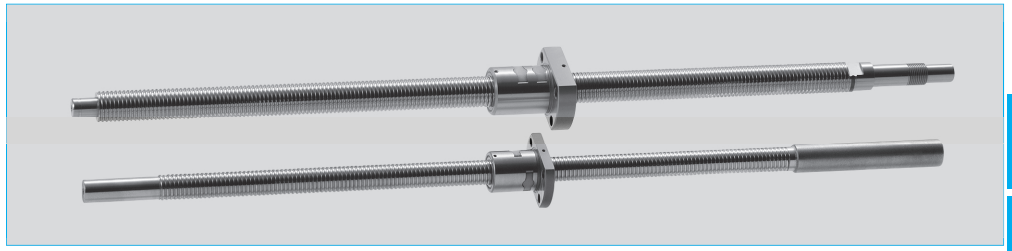


Fig. 3.7 Finished shaft end RMA type and blank shaft end RMS type for transfer equipment Page B349

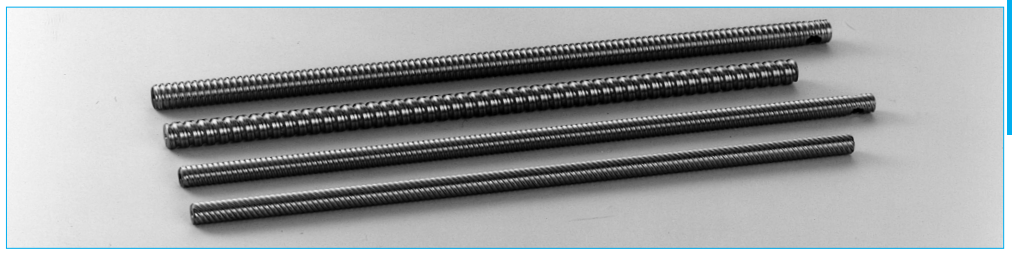


Fig. 3.8 Blank shaft end R series for transfer equipment Page B349

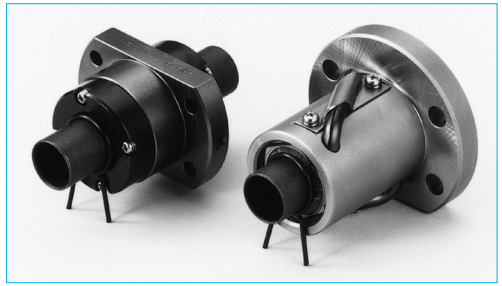


Fig. 3.9 R series nut assembly for transfer equipment Page B349

●Standard nut ball screws

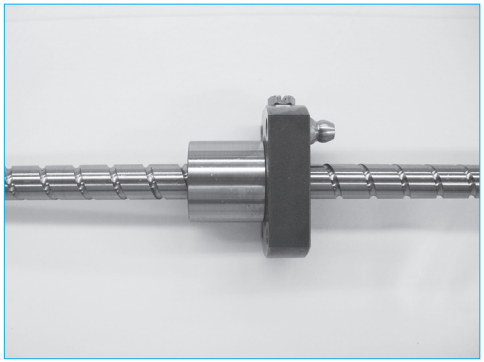


Fig. 3.10 End deflector type Page B431

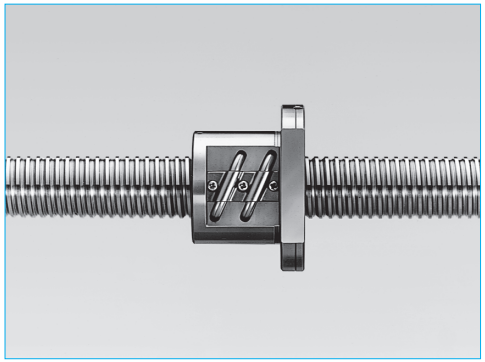


Fig. 3.11 Tube type Page B437

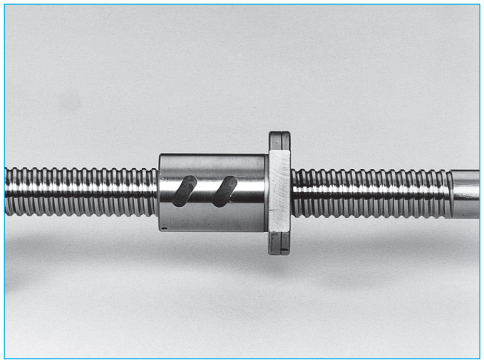


Fig. 3.12 Deflector (bridge) type Page B469

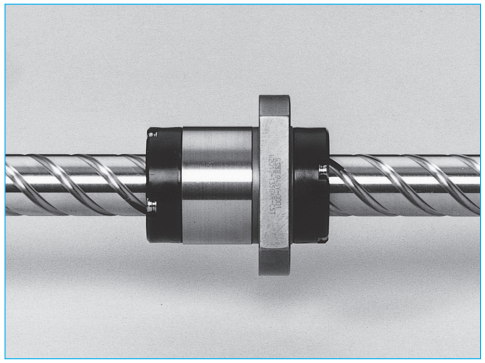


Fig. 3.13 End cap type Page B483

●Application-oriented ball screws

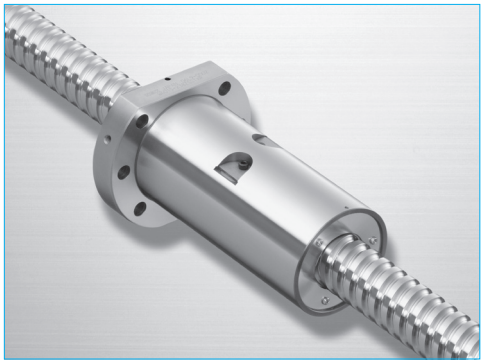


Fig. 3.14 HMD type for high-speed machine tools Page B493

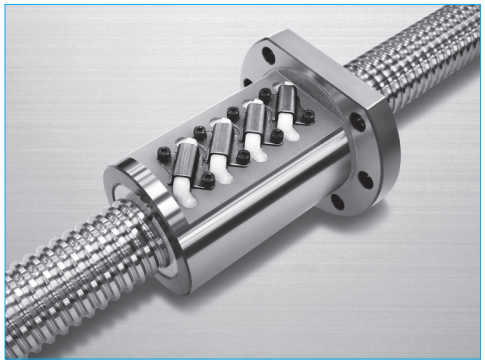


Fig. 3.15 HMS type for high-speed machine tools Page B497

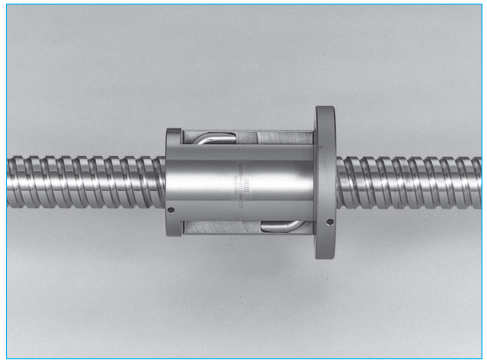


Fig. 3.16 HMC type for high-speed machine tools Page B501

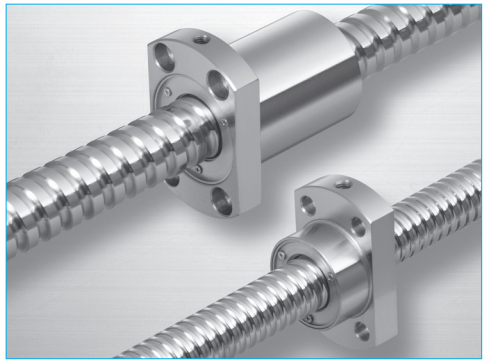


Fig. 3.17 BSL™ type for miniature lathes Page B507

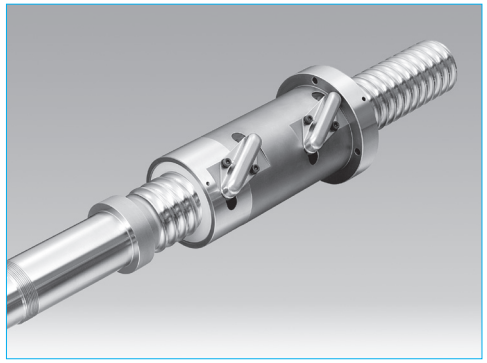


Fig. 3.18 HTF-SRC type for high-load drives Page B511

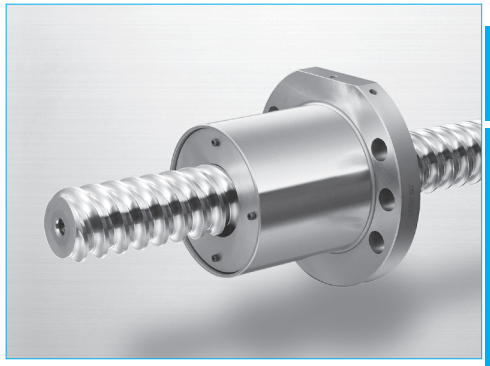


Fig. 3.19 HTF-SRD type for high-load drives Page B515

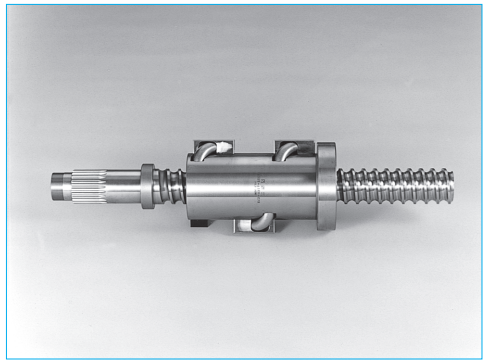


Fig. 3.20 HTF type for high-load drives Page B519

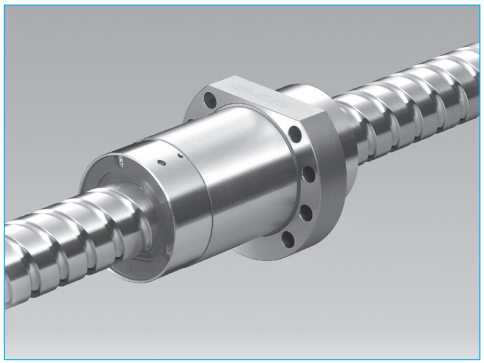


Fig. 3.21 VSS type for contaminated environments Page B535

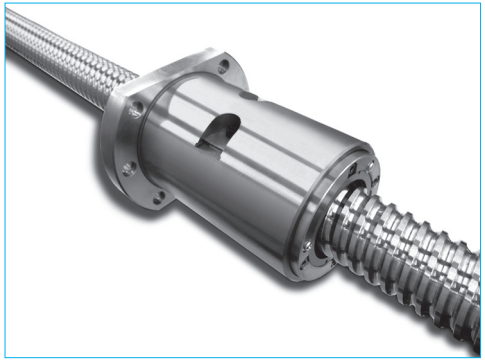


Fig. 3.22 Ball screw with X1 seals for contaminated environments and grease retention Page B539

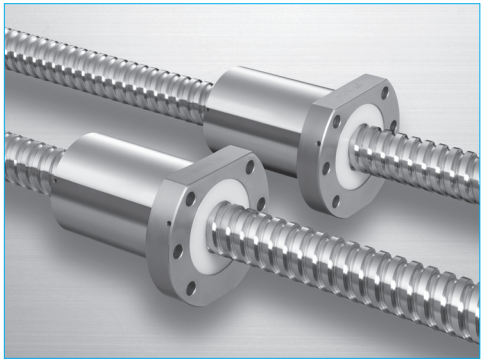


Fig. 3.23 TW series for twin-drive systems Page B545

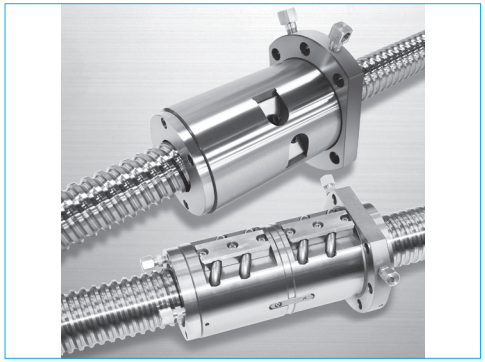


Fig. 3.24 Nut cooling ball screws for high precision machine tools Page B551

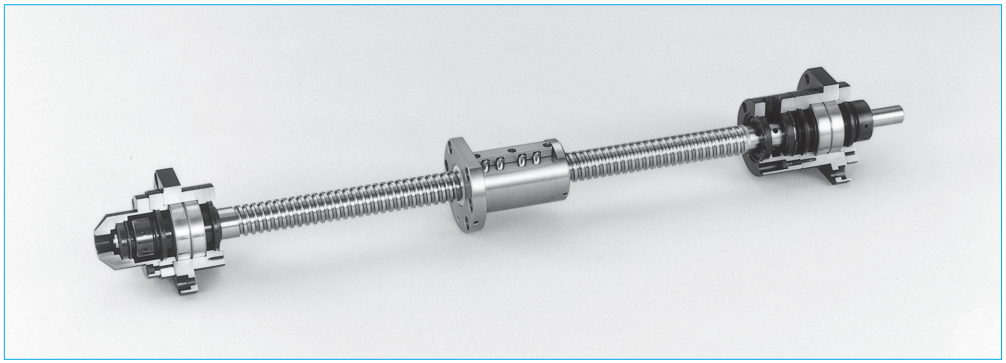


Fig. 3.25 Hollow shaft ball screws for high-precision machine tools Page B546

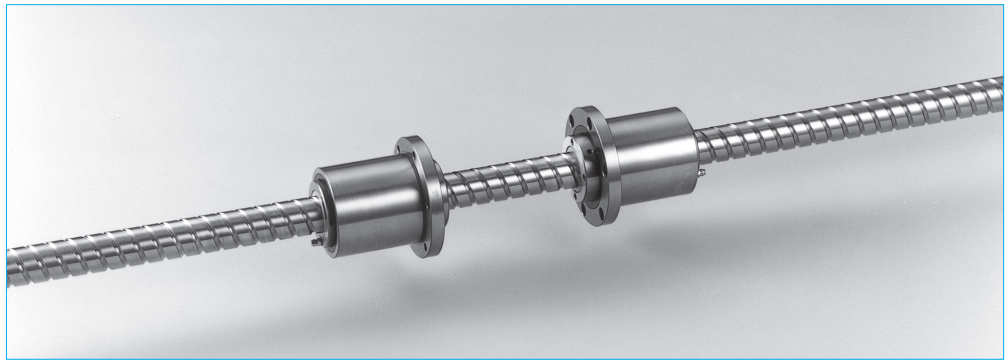


Fig. 3.26 ND series for nut-rotatable drives Page B555

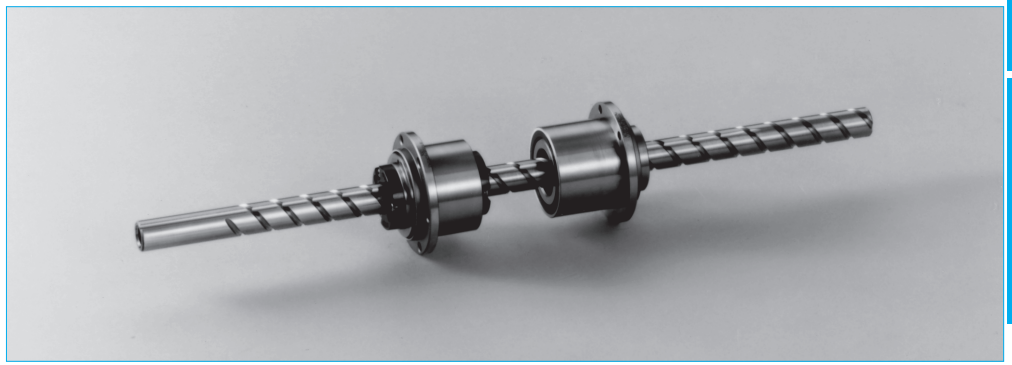


Fig. 3.27 $\sum$ series for robots Page B563

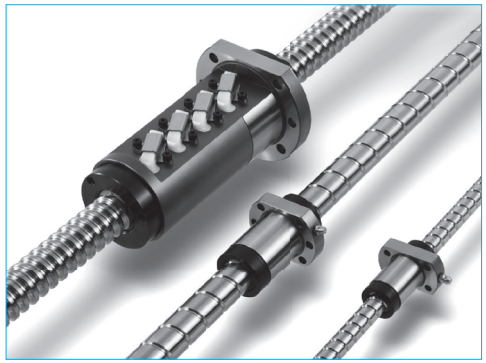


Fig. 3.28 Ball Screw with L1 Seal designed for Minimal Grease Splatter Page B575

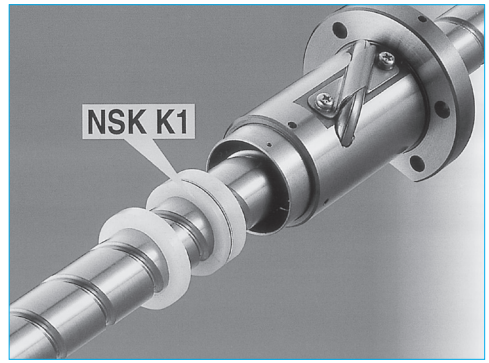


Fig. 3.29 Ball screws equipped with NSK K1™ lubrication units Page B579

(2) Standard accessories

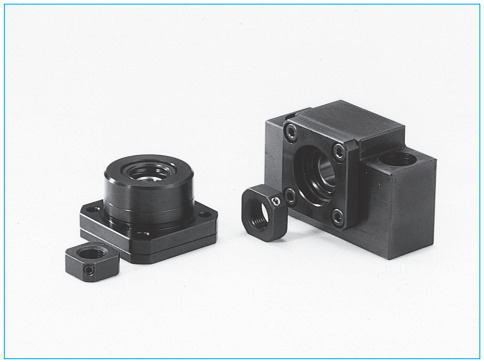


Fig. 3.29 Support units **Page B392**
(for small equipment, light load)



Fig. 3.30 Support units **Page B392**
(for small equipment, light load, low-profile)



Fig. 3.31 Support kits for RMA and RMS types **Page B401**

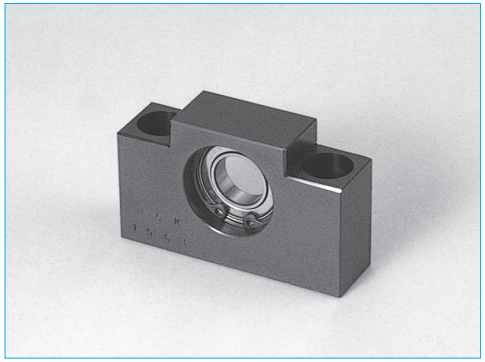


Fig. 3.32 Support unit for VFA type **Page B402**
(simple support side)



Fig. 3.33 Support units **Page B407**
(for machine tools, high speed, heavy load)

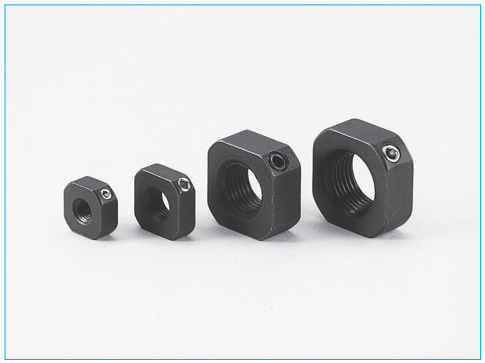


Fig. 3.34 Lock nuts for light load **Page B409**



Fig. 3.35 Lock nuts for high load **Page B410**

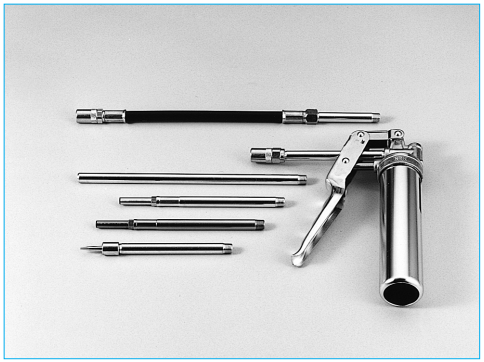


Fig. 3.36 NSK hand grease pump unit **Page D19**

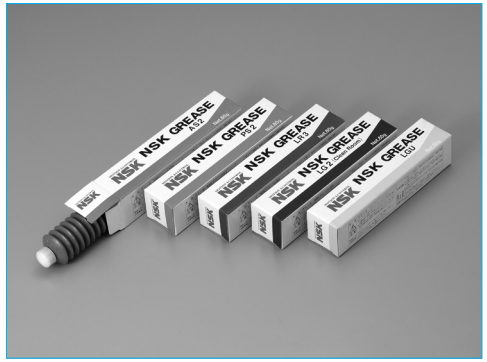


Fig. 3.37 NSK grease **Page B413, D19**

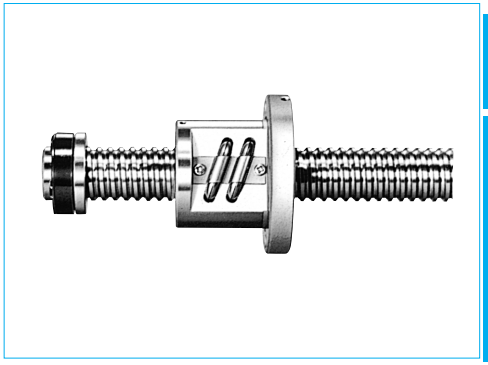


Fig. 3.38 Travel stoppers **Page B414**
(by order)



Fig. 3.39 Ball screw support bearings **Page B419**
NSKTAC C Series, NSKTAC 03 Series

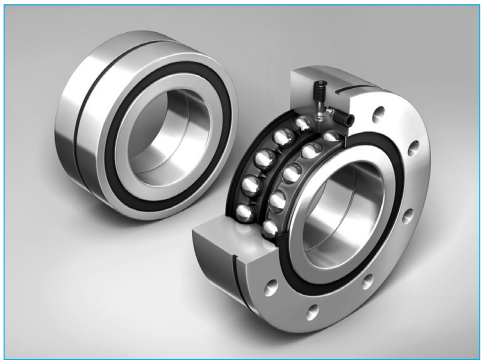


Fig. 3.40 Ball screw support bearings **Page B425**
BSBD series


B-1-4 Procedures to Select Ball Screw

B-1-4.1 Flow Chart for Selection

When selecting a ball screw, you have to review a variety of use conditions and requirements such as applied loads, speeds, motion strokes, positioning accuracy, required life and operating environment.
You require a multiple inspection because some of these conditions force a ball screw to have conflicting characteristics.


(1) Standard ball screw

The chart below is one of the selection procedures. To take advantage of prompt delivery and reasonable prices, this procedure focuses on the standardized ball screws.
NSK offers a ball screw selection program, and also has a service to select appropriate items using data file compiled by our knowledge and experience.

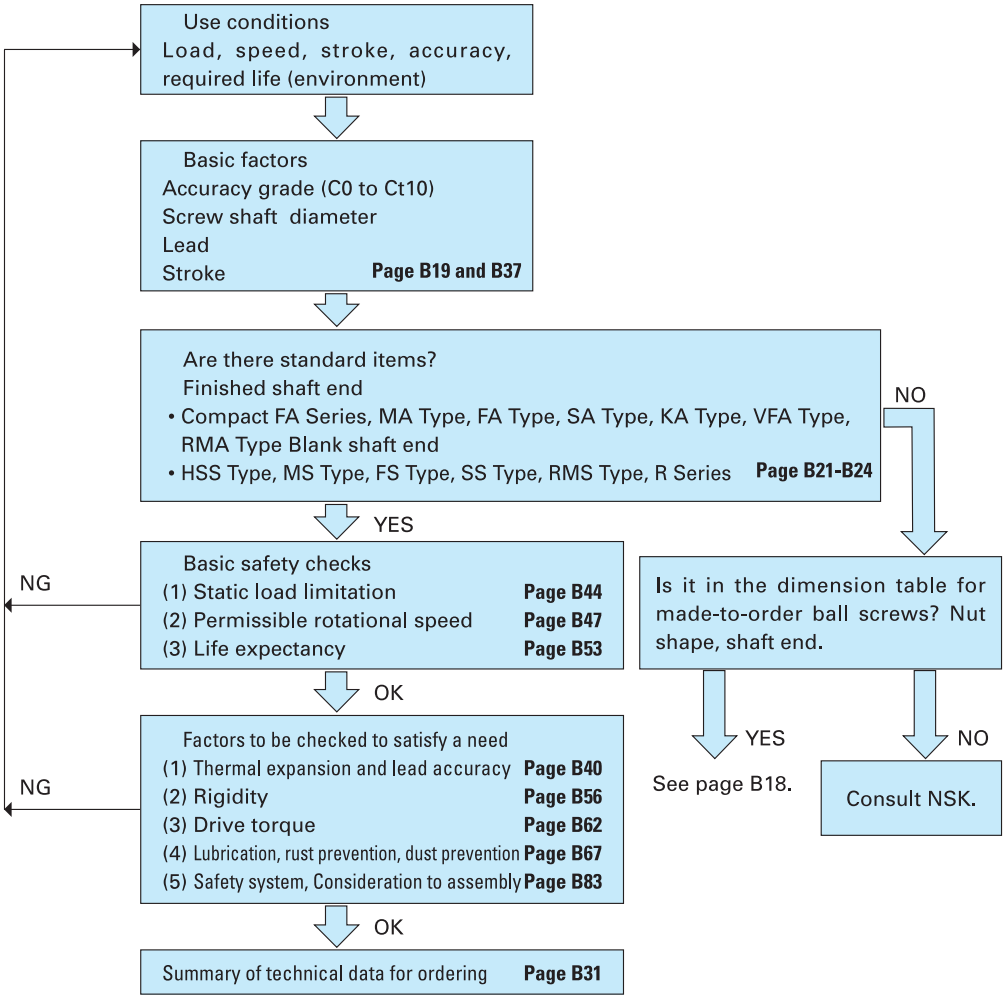

(2) Made-to-order ball screws

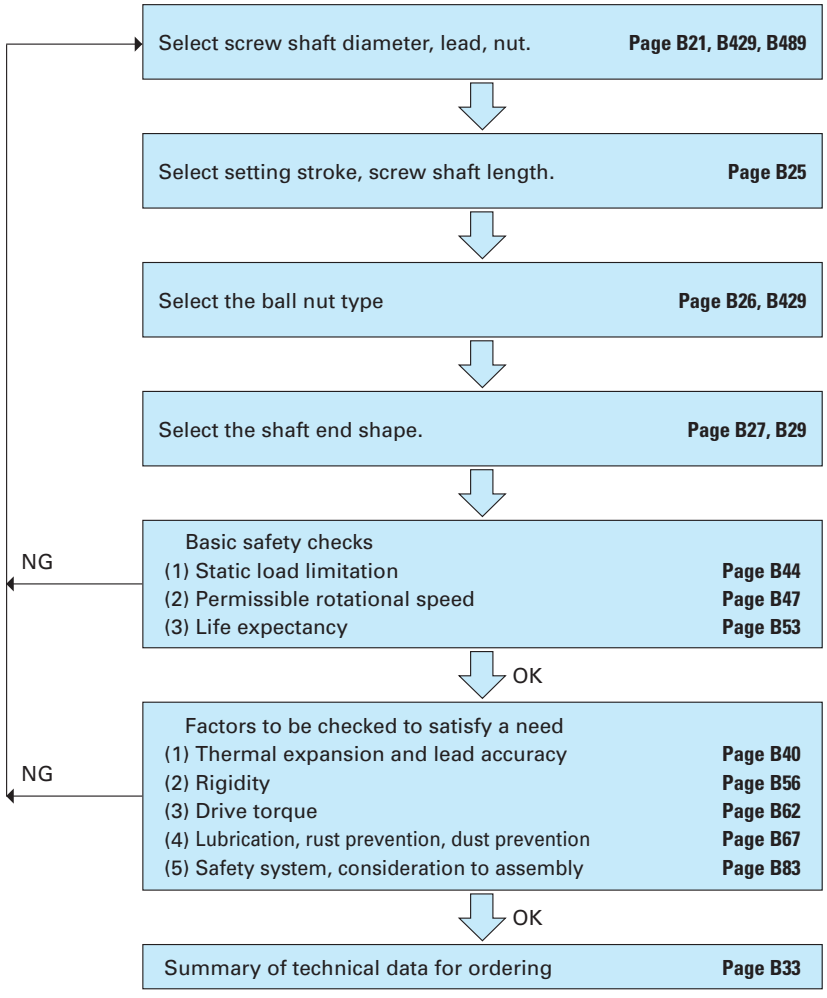Dimensions and specifications can be decided individually for the application-oriented ball screws and standard nut ball screws. Procedures are as follows. Refer to the selection exercises on page B87.
Table 4.4 is "Combinations of screw shaft diameter and leads for basic type ball screw." Please consult NSK if you require the types that are not listed in the table.



B-1-4.2 Accuracy Grades

Table 4.1 shows examples of how to select accuracy grade for a specific use. These practical cases are based on NSK's experience. The circles indicate the range of the accuracy grade in actual use. The double circles indicate accuracy grades most frequently used among the cases marked with the single circle. These symbols help to select the accuracy grade of ball screws temporarily. To confirm whether a specific ball screw accuracy grade satisfies requirements in positioning accuracy in actual use, refer to "Technical Description" and "Mean travel deviation and travel variation." (page B38)

Table 4.1 Accuracy grades of ball screw and their application

Application	NC machine tools																		
	Lathes		Milling machines Boring machines		Machining centers		Drilling machines		Jig boring machines		Grinders		Electric discharge machines		Wire cuttings Electric discharge machines		Punch presss	Laser cutting machines		Woodworking machines
Axis	X	Z	XY	Z	XY	Z	XY	Z	XY	Z	XY	Z	XY	Z	XY	Z	XY	XY	Z	
Accuracy grade C0	○								○	○	○									
C1	○		○		○				◎	◎	○	○	○		○	○				
C2	○		○	○	○	○					◎	○	○	○	◎	○				
C3	◎	○	◎	○	○	○	○					◎	◎	◎	◎	◎	○	○	○	
C5	◎	◎	◎	◎	◎	◎	◎	◎						◎		○	◎	◎	◎	◎
Ct7								○												◎
Ct10																				○

Application	General industrial machines, Machines for specific use	Semiconductor/associated industry						Industrial robots						Steel mills equipment	Plastic injection molding machines	Three-dimensional coordinate measuring machines	Office machines	Image processing equipment	Nuclear power		Aircrafts
		Lithographic machines	Chemical processing equipment	Wire bonders	Probers	Electric component mounted devices	Printed circuit board drilling machines	Cartesian type		Articulate type		SCARA type							Fuel rod controls	Mechanical snubbers	
								Assembly	other purposes	Assembly	other purposes										
Accuracy grade C0		○			○											○		○			
C1		◎		◎	◎		○									◎		◎			
C2				○	◎	○	○	○								○					
C3	○		○			○	◎	○		○		○							○		○
C5	◎		○			◎	○	◎	○	◎	○	○			○		○		◎		◎
C7	◎		◎					○	◎	○	◎	◎	○	◎			◎		○	◎	
Ct10	○		○						○				◎	○		○				○	

B-1-4.3 Axial Play

Table 4.2 indicates the combinations of NSK ball screw accuracy grades and axial play. Select an axial play which satisfies the required accuracy in backlash, positioning and repeatability. Ranges of available ball thread effective length in relation to accuracy grade and axial play are shown in **Table 4.3**. Please note that if the effective length exceeds the range, the axial play may become partially negative (preloaded condition).

For the axial play of Ct10 grade (ball screws for transfer equipment), refer to the R series dimension tables.

Table 4.2 Combinations of accuracy grades and axial play

Axial play / Accuracy grade	*Z* 0 mm (Preload)	*T* 0.005 mm or less	*S* 0.020 mm or less	*N* 0.050 mm or less	*L* 0.3 mm or less
C0	C0Z	C0T	—	—	—
C1	C1Z	C1T	—	—	—
C2	C2Z	C2T	—	—	—
C3	C3Z	C3T	C3S	—	—
C5	C5Z	C5T	C5S	C5N	—
Ct7	—	—	C7S	C7N	—

The combination codes shown in the table are NSK reference number.

Table 4.3 Maximum effective thread length in combination of accuracy grade and axial play

Unit: mm

Screw shaft diameter	Effective length of the screw thread (maximum)				
	Axial play *T* (0.005 mm or under)		Axial play *S* (0.020 mm or under)		
	C0 – C3	**C5**	**C3**	**C5**	**Ct7**
4 – 6	100	80	100	80	—
8 – 10	250	200	300	250	—
12 – 16	500	400	700	600	500
20 – 25	800	700	1 000	1 000	1 000
28 – 40	1 000	800	2 000	1 500	1 500
45 – 63	1 200	1 000	2 500	2 000	2 000
80 – 125	—	—	4 000	3 000	3 000

Note: Refer to **Table 4.8** (page B25) for the available length of screw shaft (maximum length). Also, axial play of code N does not become partial negative play if it is within the available range of effective ball thread length.

B-1-4.4 Screw Shaft Diameter, Lead, and Stroke

Choose a screw shaft diameter and stroke based on the allowable space for ball screw installation. A lead should be set based on the required running speed, and should give some allowance to the maximum rotational speed of the motor.

(1) Standard ball screw

Tables 4.4 and **4.5** show the combinations of ball screw shaft diameter and leads, and range of stroke. From these tables, select the closest values to the shaft diameter, lead, and stroke which had been selected previously. Also, confirm detailed specifications and sizes in "Dimensional table of standard ball screw" (page B105).

Table 4.4 Screw shaft diameter, lead and stroke of standard ball screw

Shaft dia.	Lead	Stroke												
		– 50	– 100	– 150	– 200	– 250	– 300	– 350	– 400	– 450	– 500	– 550	– 600	– 650
4	1	○	○△											
6	1	○	○	○△■	○△	■□								
	8		●											
	12		●											
8	1		○△	○■	○△	■□								
	1.5		○△	○■	○△	■□								
	2		○△	○■	○△	■□								
	10		●											
	15		●											
10	2		○	○△	○■	○△	■□							
	2.5		○	○△	○	○△								
	4		○	○△	○	○△	○	○△						
	5		●	●		●		●		●				
	10			●		●		●		●				
12	2		○	○	○△■	○	○△■□							
	2.5		○	○	○△	○	○△							
	5	●○	●	●○△	○	●○△	○	●	○	●△	○	●		
	10			●○	○△	●	○✓	●	○△	●	○✓	●		
	20				●		●		●		●		●	
	30			●		●		●		●		●		
14	5			○	○		○	△	○		○		△	○
	8			○	○	○	○	○	○	○	○△	○	○	○
15	5			●	●		●		●		●		●	
	10			●○	○	●○	○	●○△✓	○	●○	○	●○△✓	○	●○
	20			●○	○	●○	○	●○✓	○△	●○	○	●○✓	○△	●○
	30				●		●		●		●		●	
16	2		○	○	○	○△		○	△					
	2.5		○	○	○	○△		○	△					
	5			○	○	○		○		○	△			○
	16			○	○	○	○	○	○	○	○	○△	○	○
	32							○				○		
20	4				○	○	△	○		○	△	○		○
	5				●○	●○△		●○		●○△		●○		●△
	10					●○		●○		●○		●○		●○
	20					○		○	●	○	●	○	●	○
	30					●		●		●		●		●
	40										●○		●	
	60										●		●	
25	4				○	○	△	○		○		○	△	
	5				●○△	●○△		●○△		●○△		●○△		○
	6							○△				○		
	10						○	△	●		●○	△	●	△
	20											●		●
	25												●	
	30												●	
	50												●	
28	5				○	○	○	○△	○	○	○	○△		
	6						○	○△			○	○△		
32	5				○	○	○	○▲△	○	○	○	○▲△	○	○
	6						○	○			○	○△		
	8						○				○	△		
	10				○		○	▲△	○△		○	▲△	○△	
	25													
	32													
36	10						○		○		○	△	○△	
	5						○				○	△		
	8					○				○			△	○
40	10						○		○	▲	○	△	○△	
	12										○		○	
	16													
	20													
45	10												○	
50	10									○	○		△	○
	12													

Note: See **Table 4.5** for KA Type in stainless steel product.

Table 4.5 Screw shaft diameter, lead and stroke of KA type in stainless steel product Unit: mm

Shaft dia.	Lead	Stroke								
		– 150	– 200	– 250	– 300	– 350	– 450	– 500	– 650	– 1 050
6	1	●								
8	1		●							
	2		●							
10	2			●						
	4	●				●				
12	2	●			●					
	5			●				●		
	10				●			●		
15	10						●		●	●
	20						●		●	●
16	2	●				●				
20	20						●		●	●

●mark; PSS type, USS type, FSS type: ○mark; MA type, FA type, SA type: ▲mark; HSS type
△mark; MS type, FS type, SS type: ✓mark; VFA type: ■mark; RMA type: □mark; RMS type

Unit: mm

Shaft dia.	Lead	Stroke												
		– 700	– 750	– 800	– 850	– 900	– 950	– 1 100	– 1 200	– 1 300	– 1 400	– 1 500	– 1 700	– 2 100	– 3 000
6	1	●	○	△											
8	1	●○	●○	●○	●○✓	△		●○△							
	1.5	●○	●○	●○	●○✓	△		●○△							
	2	●		●		●		●							
10	2				○	○									
	2.5		○		○	○									
	4		○		○	○	△			○△					
	5				●		●								
	10					●○		●○△							
12	2		○	△	○	●	○	●○△	○	●○△	○	△	●		
	2.5		○		○	○									
	5		●		●	○	○△	●	○	●		○	●	●	
	10					●		●○△		●			●○△	●	
	20							●					●		
14	5														
	8														
15	5	●													
	10	●○			●○△✓			●○△							
	20	●○		●○	●○✓	△		●○△							
	30	●		●		●		●							
16	2														
	2.5														
	5				○	△									
	16		○		○			○△							
	32				○	△				○△					
20	4		△												
	5		●○		●○△		●								
	10		●○		●○		○	●○	○	●○△					
	20	●	○	●	○	●	○△	●○	○	●		△	●		
	30		●		●			●		●					
	40	●○		●		●○		●○△		●			●○△	●	
	60	●		●		●		●		●			●		
25	4		○					△							
	5		●○△		●△		○	●	○△						
	6		○△						○△						
	10	●○	△	●		●○	△	●○△			○	△	●○		
	20	○	●		●	○		●○		●○△		○	●○	●○△	
	25	●○		●		●○		●○		●○△		○	●○	●○△	
	30	●		●		●		●		●			●	●	
	50	●		●		●		●		●		△	●○	●○△	
28	5	○	○△			○	○	○	○△						
	6	○	△			○		○	△						
32	5	○	△		▲△	○	○	○▲	△		○▲	○△	△		
	6	○	○			○	○△	○	○		○	○△			
	8	○				○	△				○	△			
	10	○		○	△	○▲△		○		○▲△	○		○△		
	25							○					○△	○	○△
	32							○					○△	○	○△
36	10			○		○		△	○	○			○△	△	
	5	○				○	△	○				○	△		
	8				○			○△				○	△		
40	10	○		○	△	○▲△		○	○	○△	○	○▲	○△		○▲△
	12			○△	▲△	○△			○	○	▲△	△	○		○▲△
	16					▲					▲	▲			▲
	20				▲						▲				▲
45	10					○▲△				○		▲△	○		○▲△
50	10	○			○△	○▲△		○		▲	▲△		▲	○△	▲△
	12				▲										▲

Table 4.6 Screw shaft diameter, lead and standard screw shaft length of R Series Unit: mm

Screw shaft diameter	Lead	Standard screw shaft length									
		400	500	800	1 000	1 500	2 000	2 500	3 000	4 000	5 000
10	3	●		●							
	6	●		●							
12	8	●		●							
	12	●		●							
14	4		●		●						
	5		●		●						
15	20		●		●	●					
16	10		●		●	●					
	16		●		●	●					
	32		●		●	●					
18	8		●		●	●					
20	5		●		●		●				
	10		●		●		●				
	20		●		●		●				
	40		●		●	●	●				
25	5				●		●	●			
	10				●		●	●			
	25				●		●	●			
	50				●		●	●			
28	6				●		●	●			
32	10				●		●		●		
	32				●		●		●		
	64				●		●		●	●	
36	10				●		●		●		
40	10						●		●	●	
	40						●		●	●	
	80						●		●	●	●
45	12						●		●	●	
50	10						●		●	●	
	16						●		●	●	
	50						●		●	●	

(2) Made-to-order ball screws

Table 4.7 shows the combinations of screw shaft diameter and leads for made-to-order ball screws. For details, refer to the dimension tables from pages B429 and B489.

Table 4.7 Combinations of screw shaft diameter and leads for typical ball screw Unit: mm

Screw shaft diameter \ Lead	0.5	1	1.5	2	2.5	3	4	5	6	8	10	12	14	15	16	20	25	30	32	36	40	50	60	64	80	100
4	D	D																								
6	D	D		D						S		S														
8	D	D	D	D							S			S												
10		D		D	D		T	S			S															
12		D		D	D	D	T	S,T			S,T					S,C		S								
14				D		D		T		T																
15								S			S,T					S,C		S			C					
16				D	D		T	T	T						T,C				C			C				
20				D			T	S,T D,B	T,D B	T	S,T				T	S,T C		S			S,C		S,C			
25				D			T	S,T D,B	T,D B	T,B	S,T D,B				T	S,T	S,T C	S				S,C			C	
28								T	T		T															
32				D			T	S,T D	T,D	T,D	S,T D,B V,F	S,T B			S,V	S,T V,N	T,N		S,T C,V N					S,C		
36								S,T	T		S,T F	S,F			S,H	S,H										
40				D				T,D	T,D	T,D	S,T D,F	S,T F			S,T H	S,H	S,T H,N	S,H	T,H N	H	S,T C,V N				S	
45											S,T F	S,T F			S,H	S,H	S,H	S,H	H	H						
50								T,D	T,D	T,D	S,T D,F	S,T D,F	F		S,T F	S,T D,H	S,T H,N	S,H	T,H N		T,N F	S,T C,V N				S
55											T,F	F	F		F	H	H	H	H							
63									D	D	T,D	D,F	F		F	T,D F	F		F		T,F	T				
80											T,D	T,D	F		T,F	T,D F	F					F				
100											D	T,D			T,F	T,D F	F									
120															F	F	F									
125															T	T										
140																F	F	F	F							
160																	F	F	F							
200																		F	F							

T: Tube type
D: Deflector(bridge) type
C: End cap type
S: End deflector type
H: HMC type, HMD type
F: HTF-SRC, HTF-SRD, HTF type
N: ND Series
B: BSL type
V: VSS type

B-1-4.5 Manufacturing Capability for Screw Shaft

Table 4.8 shows the manufacturing capability for the screw shaft overall length for each accuracy grade. The capability of large ball screw whose shaft diameter exceeds 100 mm is limited due to the weight (indicated by * asterisk in the table). Please consult NSK in such a case.
Also consult NSK if the screw shaft size you desire exceeds the size listed in **Table 4.8.**

Table 4.8 Manufacturing capability of screw shaft

Unit: mm

Screw shaft diameter \ Accuracy grade	C0	C1	C2	C3	C5	Ct7	Ct10
4	90	110	120	140	140	140	—
6	150	180	200	250	250	250	—
8	240	280	340	340	340	340	—
10	350	400	500	500	500	550	800
12	450	500	650	700	750	800	800
14	600	650	750	800	1 000	1 000	1 000
15	600	700	800	900	1 250	1 250	1 500
16	600	750	900	1 000	1 500	1 500	1 500
18	—	—	—	—	—	—	1 500
20	850	1 000	1 200	1 400	1 900	1 900	2 000
25	1 100	1 400	1 600	1 900	2 500	2 500	2 500
28	1 100	1 400	1 600	1 900	2 500	2 500	2 500
32	1 500	1 750	2 250	2 500	3 200	3 200	3 000 (4 000)
36	1 500	1 750	2 250	2 500	3 200	3 500	3 000
40	2 000	2 400	3 000	3 400	3 800	4 300	4 000 (5 000)
45	2 000	2 400	3 000	3 400	4 000	4 500	4 000
50	2 000	3 200	4 000	4 500	5 000	5 750	4 000
55	2 000	4 000	5 000	5 800	6 000	6 000	—
63	2 000	4 000	5 000	6 000	6 800	7 700	—
80	—	4 000	6 300	8 200	9 200	10 000	—
100	—	4 000	6 300	10 000	12 500	13 500	—
*120	—	—	—	—	—	13 500	—
*125	—	—	—	10 000	13 500	13 500	—
*140	—	—	—	—	—	10 000	—
*160	—	—	—	—	—	8 000	—
*200	—	—	—	—	—	5 000	—

Notes: 1. Values in parentheses of Ct10 are applicable to the ultra high helix lead (l/d≥2). Refer to dimension tables on B385 and following pages for details.
2. Please note that the range for small leads (3 mm or under) are also limited by the screw length.

B-1-4.6 Outside Shapes of Ball Nut

(1) Flange shape

Fig. 4.1 shows the available flange shape. Select the appropriate shape according to the nut installation condition. (**Fig. 4.2**)

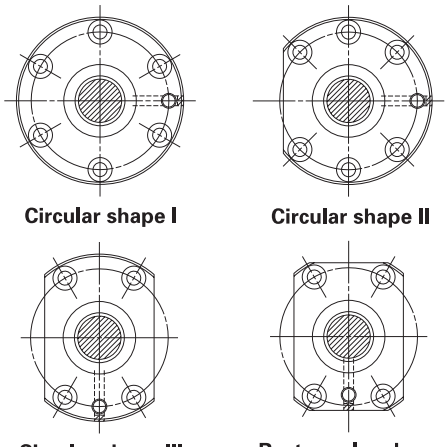


Fig. 4.1 Flange shape

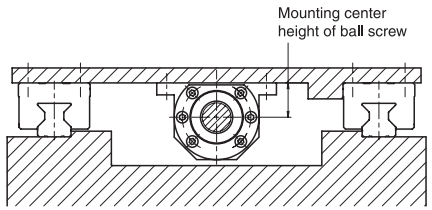


Fig. 4.2 Installation example

(2) Shapes of nut cross section

Cross-section of nuts are shown in **Fig. 4.3.** For detailed dimensions, refer to dimension table of nut.

① **Circular (round)**
The ball recirculation components are contained inside the circumference of the nut. It can be inserted in a round hole.

② **Tube-projecting type**
This shape is unique to the tube recirculation type. The nut outside diameter is small. However some recess must be given for housing because the ball recirculation tube protrudes from the circumference of the nut.

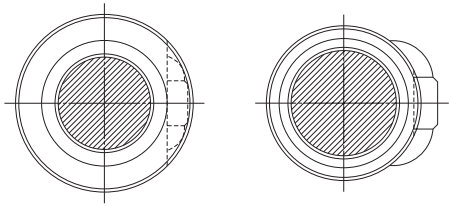


Fig. 4.3 Shape of the cross section of nut

B-1-4.7 Shaft End Configuration

(1) Standard shaft end dimensions

Tables 4.9 and **4.10** show shaft end types for NSK standard support units.
Refer to the dimension tables below when designing shaft ends of standard ball screw.

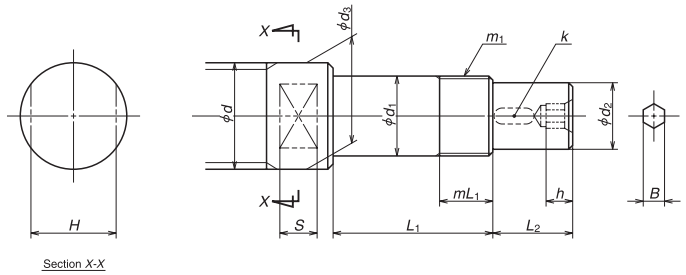


Fig. 4.4 Configuration of standard shaft end (drive side)

Table 4.9 Dimensions of shaft ends (drive side)

Unit: mm

Screw shaft diameter	Bearing journal		Thread		Drive section			Seal section	Hexagon hole		Wrench flats		Support unit
	Outside diameter	Length	Nominal spec.	Length	Outside diameter	Length	Key width	Outside diameter	Width across flats	Depth	Width across flats	Length	
d	d_1	L_1	m_1	mL_1	d_2	L_2	k	d_3	B	h	H	S	Reference No.
4	6	22.5	M6×0.75	7	4.5	7.5	—	9.5	—	—	8	4.5	WBK06-01A / WBK06-11
6	6	22.5	M6×0.75	7	4.5	7.5	—	9.5	—	—	8	4.5	WBK06-01A / WBK06-11
8	8	27	M8×1	9	6	10	—	11.5	—	—	10	5.5	WBK08-01A / WBK08-11
10	8	27	M8×1	9	6	10	—	11.5	—	—	10	5.5	WBK08-01A / WBK08-11
12	10	30	M10×1	10	8	15	—	14	—	—	12	6.5	WBK10-01A / WBK10-11
14	12	30	M12×1	10	10	15	3	15	4	6	12	6.5	WBK12-01A / WBK12-11
15	12	30	M12×1	10	10	15	3	15	4	6	12	6.5	WBK12-01A / WBK12-11
16	12	30	M12×1	10	10	15	3	15	4	6	12	6.5	WBK12-01A / WBK12-11
20	15	40	M15×1	15	12	20	4	19.5	5	7	17	8.5	WBK15-01A / WBK15-11
	17	81	M17×1	23	12	29	4	20	5	7	22	10	WBK17DF-31H
25	20	53	M20×1	16	15	27	5	25	6	8	22	10	WBK20-01 / WBK20-11
	20	81	M20×1	23	15	39	5	25	6	8	22	10	WBK20DF-31H
28	20	53	M20×1	16	15	27	5	25	6	8	22	10	WBK20-01 / WBK20-11
	20	81	M20×1	23	15	39	5	28	6	8	24	12	WBK20DF-31H
32	25	62	M25×1.5	20	20	33	6	32	8	10	27	12	WBK25-01W / WBK25-11
	25	89	M25×1.5	26	20	51	6	32	8	10	27	12	WBK25DF-31H
	25	104	M25×1.5	26	20	51	6	32	8	10	27	12	WBK25DFD-31H
36	30	89	M30×1.5	26	25	61	8	36	10	12	30	13	WBK30DF-31H
	30	104	M30×1.5	26	25	61	8	36	10	12	30	13	WBK30DFD-31H
40	30	89	M30×1.5	26	25	61	8	40	10	12	—	—	WBK30DF-31H
	30	104	M30×1.5	26	25	61	8	40	10	12	—	—	WBK30DFD-31H
45	35	92	M35×1.5	30	30	63	8	45	12	14	—	—	WBK35DF-31H
	35	107	M35×1.5	30	30	63	8	45	12	14	—	—	WBK35DFD-31H
50	40	92	M40×1.5	30	35	78	10	50	14	18	—	—	WBK40DF-31H
	40	107	M40×1.5	30	35	78	10	50	14	18	—	—	WBK40DFD-31H

Note: Low-profile support unit is available for compact FA Series.

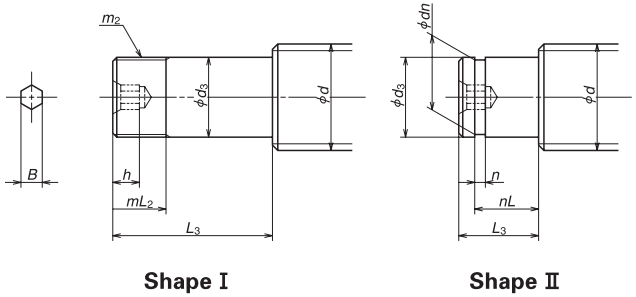


Fig. 4.5 Standard shaft end configuration (opposite to the drive side)

Table 4.10 Dimensions of shaft ends (opposite to the drive side)

Unit: mm

Screw shaft diameter	Shape	Bearing journal		Thread for lock nut		Retainer ring groove			Hexagonal hole		Support unit Reference No. Numbers in parentheses are bearing reference number.
		Outside diameter	Length	Nominal spec.	Length	Width	Groove diameter	Groove position	Width across flats	Depth	
d		d_3	L_3	m_2	mL_2	n	dn	nL	B	h	Reference No.
8	Ⅱ	6	9	—	—	0.8	5.7	6.8	—	—	WBK08S-01
10	Ⅱ	6	9	—	—	0.8	5.7	6.8	—	—	WBK08S-01
12	Ⅱ	8	10	—	—	0.9	7.6	7.9	—	—	WBK10S-01
14	Ⅱ	10	22(12)	—	—	1.15	9.6	9.15	4	6	WBK12S-01
15	Ⅱ	10	22(12)	—	—	1.15	9.6	9.15	4	6	WBK12S-01
16	Ⅱ	10	22(12)	—	—	1.15	9.6	9.15	4	6	WBK12S-01
20	Ⅱ	15	25(13)	—	—	1.15	14.3	10.15	5	7	WBK15S-01
25	Ⅱ	20	19	—	—	1.35	19	15.35	6	8	WBK20S-01
	Ⅰ	20	53	M20×1	16	—	—	—	6	8	WBK20-01 / WBK20-11
	Ⅰ	20	81	M20×1	23	—	—	—	6	8	WBK20DF-31H
28	Ⅱ	20	19	—	—	1.35	19	15.35	6	8	WBK20S-01
	Ⅰ	20	53	M20×1	16	—	—	—	6	8	WBK20-01 / WBK20-11
	Ⅰ	20	81	M20×1	23	—	—	—	6	8	WBK20DF-31H
32	Ⅱ	25	20	—	—	1.35	23.9	16.35	8	10	WBK25S-01W
	Ⅰ	25	62	M25×1.5	20	—	—	—	8	10	WBK25-01W / WBK25-11
	Ⅰ	25	89	M25×1.5	26	—	—	—	8	10	WBK25DF-31H
36	Ⅱ	25	20	—	—	1.35	23.9	16.35	10	12	(6205)
	Ⅰ	25	89	M25×1.5	26	—	—	—	10	12	WBK25DF-31H
40	Ⅱ	30	22	—	—	1.75	28.6	17.75	10	12	(6206)
	Ⅰ	30	89	M30×1.5	26	—	—	—	10	12	WBK30DF-31H
45	Ⅱ	35	25	—	—	1.75	33	18.75	12	14	(6207)
	Ⅰ	35	92	M35×1.5	30	—	—	—	12	14	WBK35DF-31H
50	Ⅱ	40	25	—	—	1.95	38	19.95	14	18	(6208)
	Ⅰ	40	92	M40×1.5	30	—	—	—	14	18	WBK40DF-31H

(2) Shaft end configuration of R series ball screws for transfer equipment

Tables 4.11 and **4.12** show shaft end types for R Series.

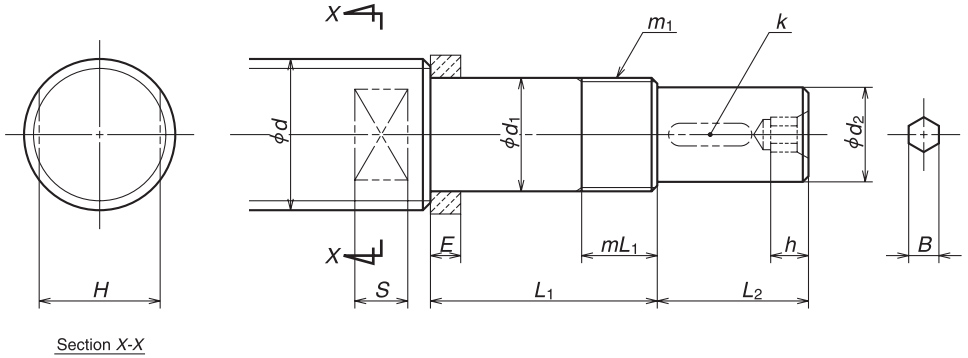


Fig. 4.6 R Series shaft end (drive side)

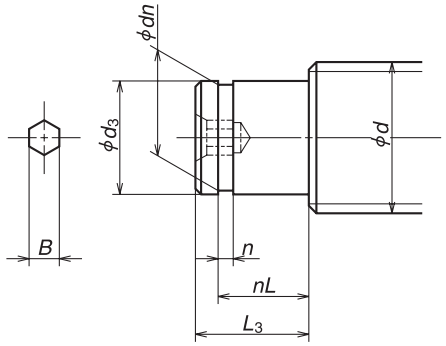


Fig. 4.7 Shaft end configuration of R Series (opposite to the drive side)

Table 4.11 Dimensions of R Series shaft ends (drive side)

Unit: mm

Screw shaft diameter	Bearing journal		Thread for lock nut		Spacer	Drive section			Hexagonal hole		Wrench flat		Support unit	
	Outside diameter	Length	Nominal spec	Length	Width	Outside diameter	Length	Key width	Width across flats	Depth	Width across flats	Length		
d	d_1	L_1	m_1	mL_1	*E*	d_2	L_2	*k*	*B*	*h*	*H*	*S*	Reference No.	
10	6	27	M6×0.75	7	5.0	4.5	7.5	—	—	—	8	4.5	WBK06-01A	WBK06-11
12	8	32	M8×1	9	5.5	6	10	—	—	—	10	5.5	WBK08-01A	WBK08-11
14	10	35	M10×1	10	5.5	8	15	—	—	—	12	6.5	WBK10-01A	WBK10-11
15	10	35	M10×1	10	5.5	8	15	—	—	—	12	6.5	WBK10-01A	WBK10-11
16	12	35	M12×1	10	5.6	10	15	3	4	6	12	6.5	WBK12-01A	WBK12-11
18	12	35	M12×1	10	5.6	10	15	3	4	6	12	6.5	WBK12-01A	WBK12-11
20	15	50	M15×1	15	10	12	20	4	5	7	17	8.5	WBK15-01A	WBK15-11
25	17	53	M17×1	17	7	15	27	5	6	8	22	10	WBK17-01A	—
	20	64	M20×1	16	11	15	27	5	6	8	22	10	WBK20-01	WBK20-11
28	20	64	M20×1	16	11	15	27	5	6	8	22	10	WBK20-01	WBK20-11
32	25	76	M25×1.5	20	14	20	33	6	8	10	27	12	WBK25-01W	WBK25-11
36	25	76	M25×1.5	20	14	20	33	6	8	10	27	12	WBK25-01W	WBK25-11
40	30	89	M30×1.5	26	—	25	61	8	10	12	—	—	WBK30DF-31H	
45	35	92	M35×1.5	30	—	30	63	8	12	14	—	—	WBK35DF-31H	
50	35	92	M35×1.5	30	—	30	63	8	12	14	—	—	WBK35DF-31H	

Note: The dimension d_1 shall be smaller enough than the minor diameter of the ball screw thread to provide sufficient shoulder surface for the spacer.
Refer to "Precautions for Designing Ball Screw (page B83)".

Table 4.12 Dimensions of R Series shaft ends (opposite to the drive side)

Unit: mm

Screw shaft diameter	Bearing journal		Retaining ring groove			Hexagonal hole		Support unit
	Outside diameter	Length	Width	Groove diameter	Groove position	Width across flats	Depth	Numbers in parentheses are bearing reference numbers.
d	d_3	L_3	*n*	*dn*	*nL*	*B*	*h*	
10	6	9	0.8	5.7	6.8	—	—	WBK08S-01(606)
12	8	10	0.9	7.6	7.9	—	—	WBK10S-01(608)
14	10	12	1.15	9.6	9.15	4	6	WBK12S-01(6000)
15	10	12	1.15	9.6	9.15	4	6	WBK12S-01(6000)
16	10	12	1.15	9.6	9.15	4	6	WBK12S-01(6000)
18	10	12	1.15	9.6	9.15	4	6	WBK12S-01(6000)
20	15	13	1.15	14.3	10.15	5	7	WBK15S-01(6002)
25	17	16	1.15	16.2	13.15	6	8	WBK17S-01(6203)
	20	19	1.35	19	15.35	6	8	WBK20S-01(6204)
28	20	19	1.35	19	15.35	6	8	WBK20S-01(6204)
32	25	20	1.35	23.9	16.35	8	10	WBK25S-01W(6205)
36	25	20	1.35	23.9	16.35	8	10	WBK25S-01W(6205)
40	30	22	1.75	28.6	17.75	10	12	(6206)
45	35	23	1.75	33	18.75	12	14	(6207)
50	35	23	1.75	33	18.75	12	14	(6207)

B-1-5 When Placing Orders

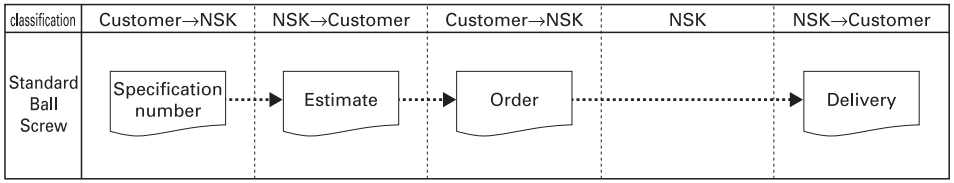
To avoid confusion, please use "reference number" or "specification number" when inquiring about desired ball screw specifications.

◇ **Reference number**:
Alpha-numeric codes are assigned to each ball screw. When placing order, please use this reference number.


◇ **Specification number**:
Specification factors are identified by alpha-numeric codes. Codes are for easy explanation of your requirements. (If you do not use these numbers, please itemize your requirements.)

B-1-5.1 When Ordering Standard Ball Screws


Find the reference number from the dimension table. Enter the reference number in the "Order Form by Fax" (page B34). Send the fax to your local NSK agency (branch office, sales office, or your local representative.).
The following is the flow chart for ordering standard ball screws.



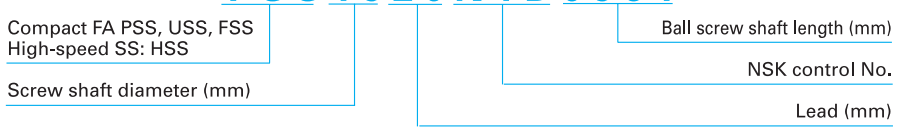
(1) Example of reference number for Standard ball screws Compact FA Series and high-speed SS Series



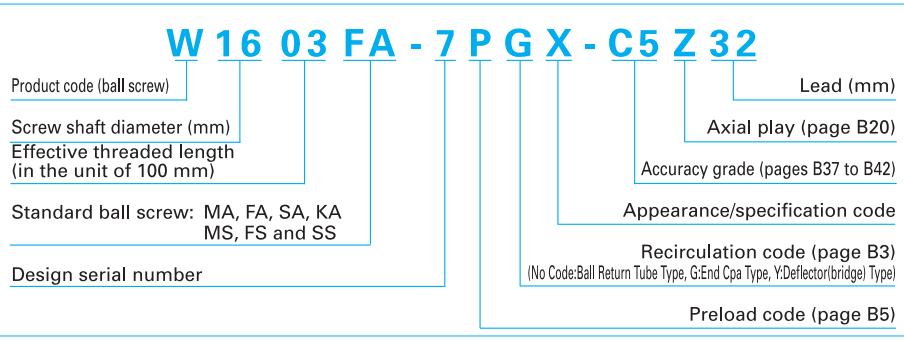
(2) Example of reference number of Standard ball screws



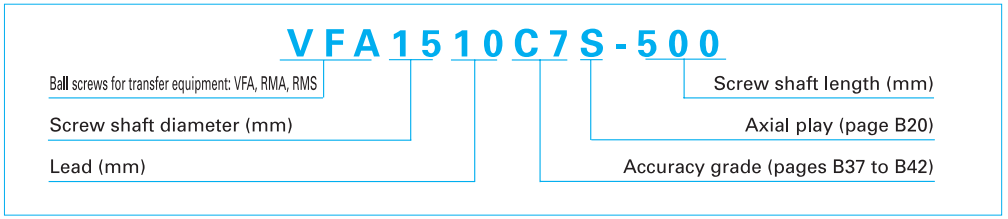(3) Example of reference number of ball screws for transfer equipment with finished shaft end and blank shaft end




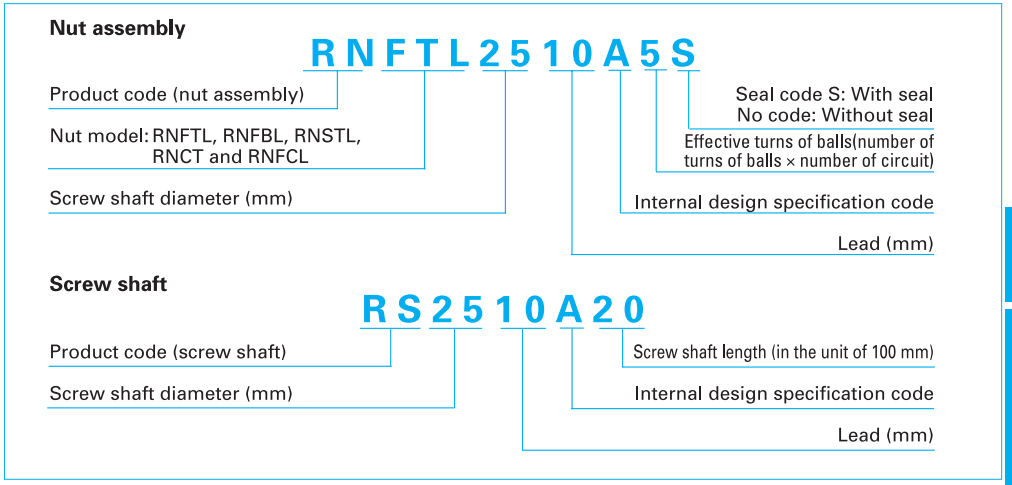(4) Example of reference number of R series ball screws for transfer equipment



B-1-5.2 When Ordering Made-to-Order Ball Screws

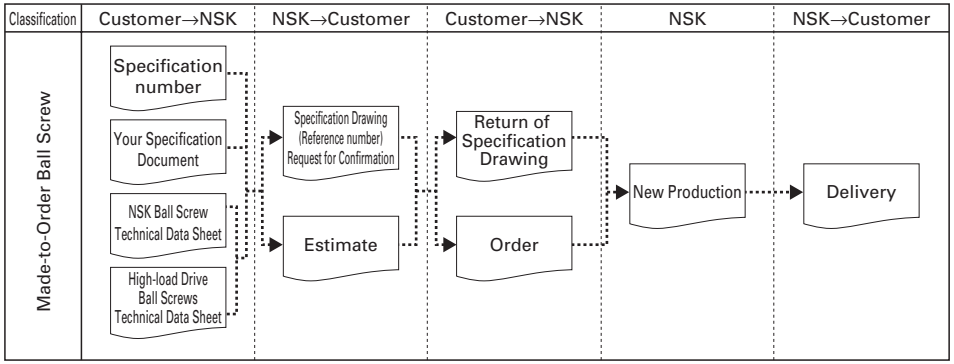If you would like to discuss technical points regarding specifications, use the NSK ball screw technical data sheet as an aid (page B36). For high-load drive ball screws, use the technical sheet on page B533 for NSK high-load drive ball screw.
The following is the flow chart for ordering made-to-order ball screws.



(1) Example of specification number of made-to-order ball screw

DFT 5010-5 L C3 Z-850/1230

- Nut model
- Screw shaft diameter (mm)
- Lead (mm)
- Effective turns of balls (number of turns of balls × number of circuit)
- Direction of turn: No code, right; L, left
- Accuracy grade (page B37 to B42)
- Axial play (page B20)
- Threaded length (mm)
- Screw shaft length (mm)

(2) Example of reference number of made-to-order ball screw

W 5012 - 26 L D - C1 Z10

- Product code (Ball Screw)
- Screw shaft diameter (mm)
- Effective threaded length (in the unit of 100 mm)
- Design serial number
- Direction of turn: No code, right; L, left
- Ball screw specification/appearance
- Accuracy grade (page B37 to B42)
- Axial play (page B20)
- Lead (mm)

Fax Order Form

(Make copies for future orders)

(1) Standard ball screw

Company name : Date: Day Month Year

Address : Telephone :

Name of person in charge : Section :

Product name	Specification number	Quantity	Desired delivery date
Precision ball screw			
R Series ball screw Nut			
R Series ball screw Screw shaft			
Support unit			
Lock nut			
Grease unit			

Describe the shaft end configuration if processing is required (blank shaft end ball screw). In this case, specify which ball screw in the above list the shaft end shall be processed.
Refer to pages B27 to B30 for shaft end configuration. These pages also show the reference number for support units.

Drive side

Opposite of drive side

NSK Ball Screw Technical Data Sheet (example)

(2) Made-to-order ball screw

Company name _____ Date: Day Month Year

Address _____ Telephone _____

Person in charge _____ Section _____

Machine which uses the ball screw *Machining center Model MC-* Application *Table left/right movement (X axis)*

Drawing/rough sketch attached? Yes (No)

Use conditions

	Axial load	Rotational speed	Operating hours		
Maximum load	*9 000* N	*20* min^{-1}	*15* %	Operating conditions	(Shaft rotation - Moving nut) (Normal operation) Shaft rotation - Moving shaft Back drive operation Nut rotation - Moving nut Nut rotation - Moving shaft Oscillation
Load in normal use	*4 000* N	*360* min^{-1}	*60* %		
Minimum load	*2 000* N	*1 000* min^{-1}	*25* %	Degree of vibration shock	*Normal*
Maximum rotational speed	*1 000* min^{-1}			Required life	*20 000 h*
Lubricant	Grease/oil (Brand name: *NSK GRS AS2* Maker:)			Motor in use	*Company A, Model 1*
Seal	Yes No			Control system	*Company B, Model 2* (resolution: *1 μm*)
Support bearing	Drive side *35TAC62DF*			Opposite to drive side *35TAC62DF*	
Guide way	(Rolling) Sliding (*RA45150GM2-P4Z3-Ⅱ*)				
Environment	Temperature (Normal temperature in degrees Celsius) Dust Humidity Gas Liquid (where?) Clean room In vacuum				
Schedule for prototype	Day Month Year (approx.)			Quantity used	Piece
Date, going in production/Quantity	/Month /Year /Lot			per machine	

Specification factors of the ball screw

Screw shaft diameter	*50 mm*	Direction of turn	*right*	Accuracy grade	*C2*	Screw shaft length	*880 mm*	Preload	*3000 N*
Lead	*10 mm*	Effective turns of balls		Axial play	*0 mm*	Overall shaft length	*1 335 mm*	Required torque	
Nut model	ZFT5010-10		Flange type	*Circular I*	Nut orientation	Same as shown in the dimension table			Opposite

Supplemental explanation/requests

NSK Ball Screw Technical Data Sheet (example)

(2) Made-to-order ball screw

Company name _____ Date: Day Month Year

Address _____ Telephone _____

Person in charge _____ Section _____

Machine which uses the ball screw _____ Application _____

Drawing/rough sketch attached? Yes No

Use conditions

	Axial load	Rotational speed	Operating hours		
Maximum load	N	min^{-1}	%	Operating conditions	Shaft rotation - Moving nut Normal operation Shaft rotation - Moving shaft Back drive operation Nut rotation - Moving nut Nut rotation - Moving shaft Oscillation
Load in normal use	N	min^{-1}	%		
Minimum load	N	min^{-1}	%	Degree of vibration shock	
Maximum rotational speed	min^{-1}			Required life	
Lubricant	Grease/oil (Brand name: Maker:)			Motor in use	
Seal	Yes No			Control system	(resolution:)
Support bearing	Drive side			Opposite to drive side	
Guide way	Rolling Sliding ( )				
Environment	Temperature (Normal temperature in degrees Celsius) Dust Humidity Gas Liquid (where?) Clean room In vacuum				
Schedule for prototype	Day Month Year (approx.)			Quantity used	Piece
Date, going in production/Quantity	/Month /Year /Lot			per machine	

Specification factors of the ball screw

Screw shaft diameter		Direction of turn		Accuracy grade		Screw shaft length		Preload	
Lead		Effective turns of balls		Axial play		Overall shaft length		Required torque	
Nut model		Flange type		Nut orientation	Same as shown in the dimension table				Opposite

Supplemental explanation/requests

B-2 Technical Description of Ball Screws

B-2-1 Accuracy

B-2-1.1 Lead Accuracy

The lead accuracy of NSK precision ball screws (C0 to C5 grades) conforms to the four characteristics specified in JIS Standards. These characteristics are expressed by codes *ep*, υ_u, υ_{300}, and $\upsilon_{2\pi}$.
Fig. 1.1 explains the definition of each characteristic, and shows allowable value of each. Leads are classified into two categories: C system for positioning; Ct system for transportation. **Tables 1.2**, **1.3** and **1.4** show tolerance of each characteristic.
JIS B1192 sets C type and Cp type standards for positioning ball screws. NSK uses the specification of C type only. JIS B1192 specifies Ct1, 3, and 5 grade. NSK standards are integrated by C type only. Refer to **Table 1.2** for C type standard tolerance.

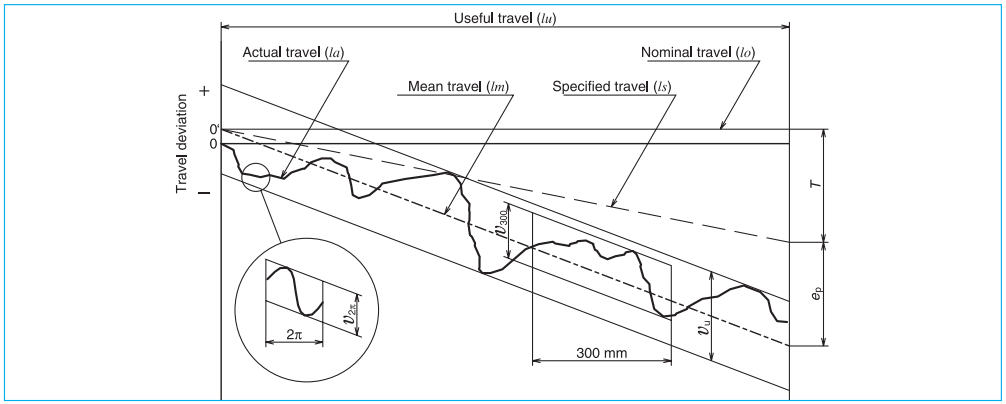


Fig. 1.1 Definition of lead accuracy

Table 1.1 Terminology in lead accuracy

Term	Code	Description	Tolerance
Specified travel	*ls*	The travel compensates the nominal travel for an elongation caused by an increase of temperature or load.	
Travel compensation	*T*	Value obtained by subtracting the specified travel from the nominal travel based on the useful travel. The value is to compensate for the errors caused by thermal deformation or deformation by load.This value is determined by tests and experience (see page B39).	
Actual travel	*la*	Actually measured travel	
Actual mean travel	*lm*	A straight line that demonstrates the direction of actual travel. This straight line is obtained from the curve that shows actual travel volume by least-squares method or by resembling approximation.	
Tolerance on specified travel	*ep*	Obtained by subtracting the specified travel from the actual mean travel.	**Table 1.2**
Travel variation	υ_u υ_{300} $\upsilon_{2\pi}$	Maximum range of the actual travel which is between the two straight lines drawn parallel to the actual mean travel. There are three categories as shown below. • Maximum range relative to the effective length of thread. • Maximum range relative to the length of 300 mm anywhere within the effective length of thread. • Maximum range which corresponds to any single rotation (2π *rad.*) within the effective length of thread.	**Table 1.2** **Table 1.3, 1.4** **Table 1.3**

Table 1.2 Tolerance on specified travel (±*ep*) and travel variation (υ_u) of the positioning (*C* type) ball screws

Unit: μm

Effective thread length, mm			C0		C1		C2		C3		C5	
	over	or less	±*ep*	υ_u	±*ep*	υ_u	±*ep*	υ_u	±*ep*	υ_u	±*ep*	υ_u
	–	100	3	3	3.5	5	5	7	8	8	18	18
	100	200	3.5	3	4.5	5	7	7	10	8	20	18
	200	315	4	3.5	6	5	8	7	12	8	23	18
	315	400	5	3.5	7	5	9	7	13	10	25	20
	400	500	6	4	8	5	10	7	15	10	27	20
	500	630	6	4	9	6	11	8	16	12	30	23
	630	800	7	5	10	7	13	9	18	13	35	25
	800	1 000	8	6	11	8	15	10	21	15	40	27
	1 000	1 250	9	6	13	9	18	11	24	16	46	30
	1 250	1 600	11	7	15	10	21	13	29	18	54	35
	1 600	2 000			18	11	25	15	35	21	65	40
	2 000	2 500			22	13	30	18	41	24	77	46
	2 500	3 150			26	15	36	21	50	29	93	54
	3 150	4 000			30	18	44	25	60	35	115	65
	4 000	5 000					52	30	72	41	140	77
	5 000	6 300					65	36	90	50	170	93
	6 300	8 000							110	60	210	115
	8 000	10 000									260	140
	10 000	12 500									320	170

Table 1.3 Tolerance of travel variation relative to 300 mm (υ_{300}) and one revolution ($\upsilon_{2\pi}$) of the positioning (*C* type) ball screws

Unit: μm

Accuracy grade	C0	C1	C2	C3	C5
υ_{300}	3.5	5	7	8	18
$\upsilon_{2\pi}$	2.5	4	5	6	8

Note: ▭ to JIS B1192 standards. Values in other areas are NSK standards.

Table 1.4 Travel variation (υ_{300}) relative to 300 mm of the transportation (*C*t type) ball screws

Unit: μm

Accuracy grade	Ct7	Ct10
υ_{300}	52	210

Note: Tolerance on specified travel (*ep*) of the transportation (*C*t type) ball screws is calculated as follows.

$$ep = \pm \frac{l_u}{300} \times \upsilon_{300}$$

l_u: Effective length of the screw thread

Example of specifying lead accuracy

<Use Conditions>

Nut model: DFT4010-5

Stroke: 1 000 mm

Positioning accuracy: ±0.035 mm/1 000 mm

<Calculation>

Obtain required lead accuracy of a ball screw under these conditions.

(1) Calculate the length of the thread

Stroke + nut length + margin =1 000 + 193 + 100

=1 293 (mm)···→1 300 mm

(2) Calculate lead accuracy

From **Table 1.2**, obtain the tolerance on specified travel relative to the length of thread (1 300 mm).

C5 ··· ±0.054/1 250 – 1 600

C3 ··· ±0.029/1 250 – 1 600

(3) Determine lead accuracy

Positioning accuracy is: ±ep ＜±0.035/1 000 mm

Accuracy grade: C3 grade $\pm ep = 0.029$/length of thread (1 300 mm)

$\upsilon_u = 0.018$

B-2-1.2 Thermal Expansion and Target Value of Specified Travel

(1) Thermal expansion

Thermal expansion of screw shaft induces the degradation of positioning accuracy of the ball screws. Thermal expansion of a screw shaft is calculated as follows.

$\Delta L_\theta = \rho \cdot \theta \cdot L$ (mm) ····· 1)

In this formula:

ΔL_θ : Thermal expansion (mm)

ρ : Thermal expansion coefficient (12.0×10^{-6} °C^{-1})

θ : Average temperature rise of screw shaft (Celsius)

L : Length of screw shaft (mm)

The above formula indicates that when the temperature rises one degree Celsius, the screw shaft stretches 12 μm per meter. Ball screw generates more heat when it is used at high speed. This causes elongation of the screw shaft. Although the ball screw lead is ground into high precision, an elongated screw shaft due to high temperature rise may not satisfy required highly accurate positioning.

(2) Countermeasures against temperature rise

Countermeasures against temperature rise of the ball screw are:

Hollow shaft cooling or nut cooling ball screws are recommended for operation under high-speed and high-precision conditions.

(a) Suppress heat generation.

- Do not apply excessive preload to the ball screw and support bearing.
- Select appropriate lubricant and use it properly.
- Use higher helix ball screw lead to lower rotational speed.

(b) Use forced cooling.

- Feed liquid coolant into the hollow shaft cooling or nut cooling ball screws. - Refer to the information on hollow shaft ball screw for high accuracy machine tools in the section for application-oriented ball screws (pages B546 to B554).
- Cool screw shaft surface with lubricant oil or air.

(c) Avoid effects of temperature rise on positioning.

- Warm up the machine by high speed until the temperature rise of ball screw shaft saturates, then maintain it properly.
- Set pre-tension. (**Fig. 1.2**)
- Set the negative (minus) target value of specified travel.
- Employ the closed loop control system.

(3) How to determine specified travel

In general, the specified travel of ball screw is the same as the nominal travel . However, the specified lead of ball screw is sometimes set to negative (minus) or positive (plus) to adjust expansion by temperature rise during operation, or the elongation/contraction of the screw shaft by external load. For such occasion, specify travel compensation (*T*) when ordering the ball screw.

As an example, **Table 1.5** shows the travel compensation (*T*) for typical NC machine tools.

Table 1.5 Travel compensation (*T*) of specified travel for typical NC machine tools

Unit: mm

Type of machine	Axis	Travel compensation (per 1 m)
NC lathes	X	– 0.02 — – 0.05
	Z	– 0.02 — – 0.03
Machining centers	X, Y	– 0.03 — – 0.04
	Z	Differs by structure

(4) How to determine pre-tension force

In order to absorb thermal expansion, pre-tension can be provided to the screw shaft at the time of installation. In this case, the pre-tension is usually equivalent to the expansion brought about by the temperature rise of 2 to 3°C.

Fig. 1.2 shows the bearing support structure in such occasion.

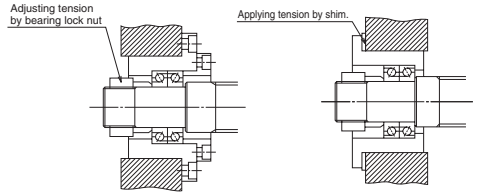


Fig. 1.2 Bearing structure to provide pre-tension

B-2-1.3 Mounting Accuracy and Tolerance of Ball Screws

The accuracy related to mount the ball screws is specified in the following seven characteristics (**Fig. 1.3**).
The tolerance is indicated in the specification drawing.

Detailed tolerances are specified by JIS B1192. For reference, **Table 1.6** shows standard values of "(7) Total run-out of the screw shaft axis (straightness of the screw shaft)". NSK sets stricter tolerance standards than JIS standards. For accuracy of the ball screw installation, refer to "Installation of Ball Screw (1) Centering of the units" (page B73).

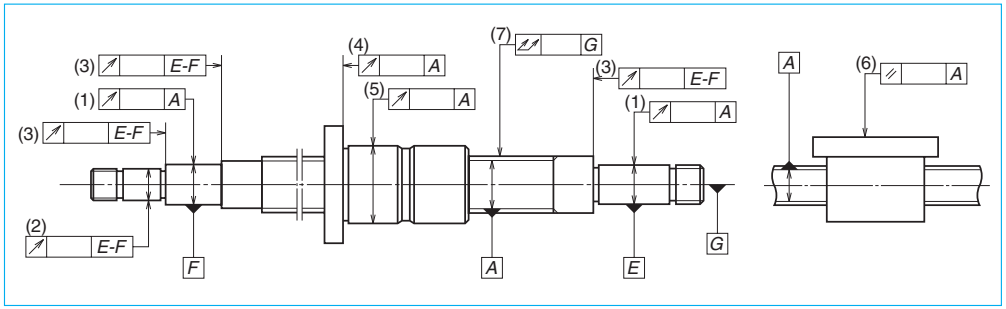


Fig. 1.3 Mounting accuracy of ball screw

(1) Radial run-out of the support bearing seat relative to the axis of the ball thread of screw shaft.
(2) Radial run-out of the other shaft ends section relative to the axis of the support bearing seat.
(3) Radial run-out of the shoulder of support bearing seat relative to the axis of support bearing seat.
(4) Radial run-out of the nut flange surface, or of the nut end datum surface, relative to the axis of screw shaft.
(5) Radial run-out of the nut outside surface (cylindrical shape) to the axis of screw shaft.
(6) Parallelism of the nut mounting surface to the screw shaft axis. (in case of flat mounting surface)
(7) Total run-out of the screw shaft axis.

Table 1.6 Total run-out of the screw shaft axis

Unit: μm

Accuracy grade			C0						C1						
Nominal diameter (mm)	over	–	8	12	20	32	50	–	8	12	20	32	50	80	
	over	or less	8	12	20	32	50	80	8	12	20	32	50	80	125
Overall length of screw shaft (mm)	–	125	15	15	15				20	20	15				
	125	200	25	20	20	15			30	25	20				
	200	315	35	25	20	20			40	30	25	20			
	315	400		35	25	20	15		45	40	30	25	20		
	400	500		45	35	25	20			50	40	30	25		
	500	630		50	40	30	20	15		60	45	35	25	20	
	630	800			50	35	25	20			60	40	30	25	
	800	1 000			65	45	30	25			75	55	40	30	25
	1 000	1 250			85	55	40	30			95	65	45	35	30
	1 250	1 600			110	70	50	40			130	85	60	45	35
	1 600	2 000				95	65	45				120	80	55	40
	2 000	2 500											100	70	50
	2 500	3 150												130	90
	3 150	4 000													120

Unit: μm

Accuracy grade			C3							C5						
Nominal diameter (mm)	over	–	8	12	20	32	50	80	–	8	12	20	32	50	80	
	over	or less	8	12	20	32	50	80	125	8	12	20	32	50	80	125
Overall length of screw shaft (mm)	–	125	25	25	20					35	35	35				
	125	200	35	35	25	20				50	40	40	35			
	200	315	50	40	30	30				65	55	45	40			
	315	400	60	50	40	35	25			75	65	55	45	35		
	400	500		65	50	40	30				80	60	50	45		
	500	630		70	55	45	35	30			90	75	60	50	40	
	630	800			70	55	40	35				90	70	55	45	
	800	1 000			95	65	50	40	30			120	85	65	50	45
	1 000	1 250			120	85	60	45	35			150	100	75	60	50
	1 250	1 600			160	110	75	55	40			190	130	95	70	55
	1 600	2 000				140	95	70	50				170	120	85	65
	2 000	2 500					120	85	60					150	110	80
	2 500	3 150					160	110	75					200	140	95
	3 150	4 000					220	150	100					260	180	120
	4 000	5 000						200	130						240	160
	5 000	6 300													310	210
	6 300	8 000														280
	8 000	10 000														370

B-2-1.4 Automatic Lead Accuracy Measuring System of NSK

In response to the demand for high precision in production technology, NSK is the first in the world that developed and uses "Lead Accuracy Measuring System (LAMS)." Lead accuracy is measured by the system that employs a laser interferometer measuring instrument and a personal computer.

Fig. 1.4 shows the lead accuracy measuring system. The inspection date of the ball screw is shown in **Fig. 1.5**. The laser interferometer measures either ball nut travel accuracy or lead accuracy of the ball thread. The data which are input into a computer are processed into four characteristics readings regarding lead accuracy. (See page B37.)

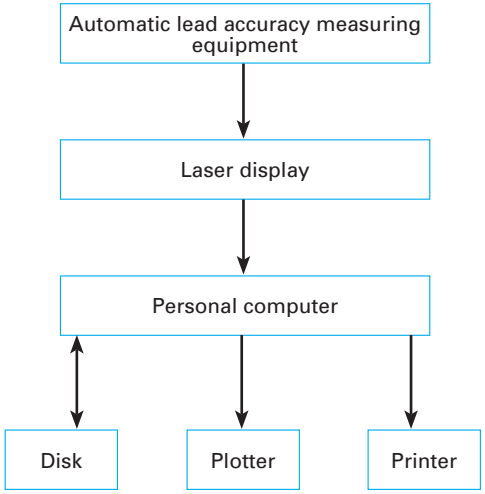


Fig. 1.4 Lead accuracy measuring system

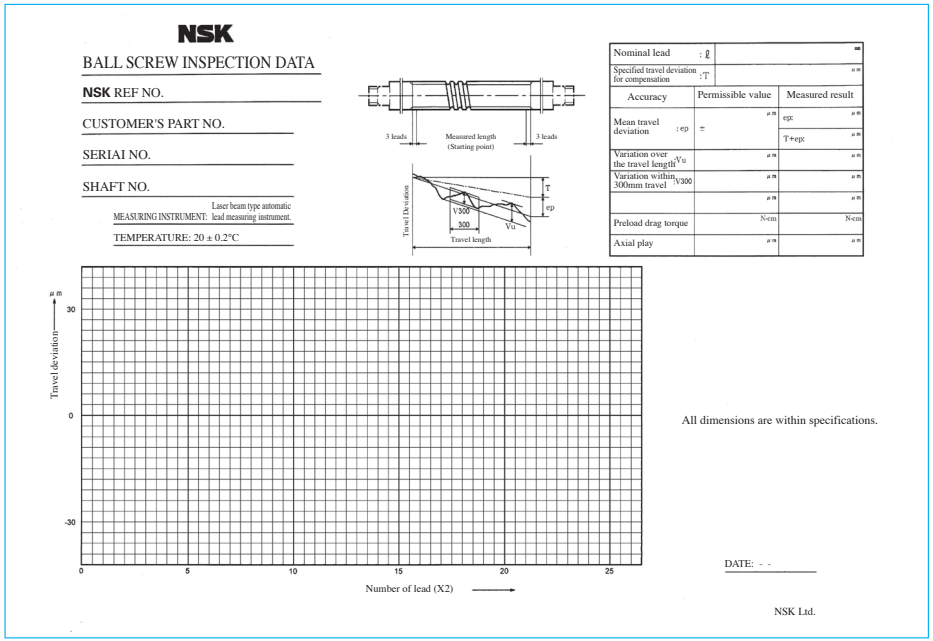


Fig. 1.5 Ball screw Inspection data

B-2-2 Static Load Limitation

Ball screws, based on their function, will generally receive axial load only. Ball screw shafts in general are long, so it is necessary to consider 3 items below:

- Buckling load of the screw shaft
- Yielding of the screw shaft by tensional or compressive stress
- Permanent deformation at the ball contact points

B-2-2.1 Buckling Load

It is necessary to calculate whether the ball screw shaft is safe against buckling.

Buckling load, i.e. permissible compressive load "P" to axial direction, is calculated as follows.

$$P = \alpha \times \frac{N \cdot \pi^2 \cdot E \cdot I}{L^2} = m \frac{d_r^4}{L^2} \times 10^4 \quad (\mathrm{N}) \cdots\cdots 2)$$

In this formula:

α : Safety factor (α = 0.5)

E : Elastic modulus ($E = 2.06 \times 10^5$ MPa)

I : Moment of inertia

$$I = \frac{\pi}{64} d_r^4 \quad (\mathrm{mm}^4) \cdots\cdots 3)$$

d_r : Screw shaft root diameter (mm) (See the dimension table.)

L : Unsupported length (mm) (See **Figs. 4.1** and **4.2** 'Supporting conditions of screw shaft and nut' on page B51.)

m, N : Factors determined by the supporting condition of the ball screw shaft

Table 2.1 Factors of bucking load

Supporting condition	*m*	*N*
Fixed - Fixed support	19.9	4
Fixed - Simple support	10.0	2
Fixed support - Free	1.2	0.25
Simple - Simple support	5.0	1

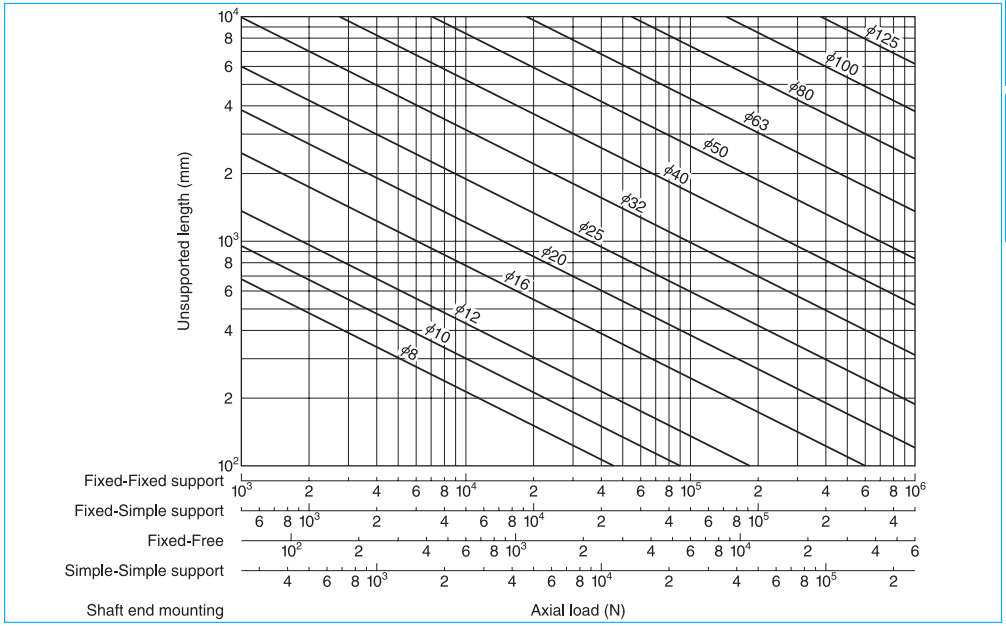


Fig. 2.1 Buckling load

<<Calculation example of buckling load>>

Calculate buckling load under the conditions in **Fig. 2.2.**

<Use conditions>

Nut model: DFT4010-5

Supporting condition is Fixed - Fixed support (From the supporting condition (ii) in **Fig. 4.1** 'Supporting conditions of screw shaft and nut' on page B51.)

Unsupported length $L = 2\,000$ mm

Screw shaft root diameter $d_r = 34.4$ mm (From the dimension table)

<Calculation>

Support condition is Fixed - Fixed support, from **Table 2.1** on page B44

$N = 4$

$m = 19.9$

By formula 2) on page B44

$$P = m\frac{d_r^4}{L^2} \cdot 10^4 = 19.9 \times \frac{34.4^4}{2\,000^2} \times 10^4 = 69\,667 \text{ (N)}$$

Therefore,

Permissible buckling load $P = 69\,600$ N

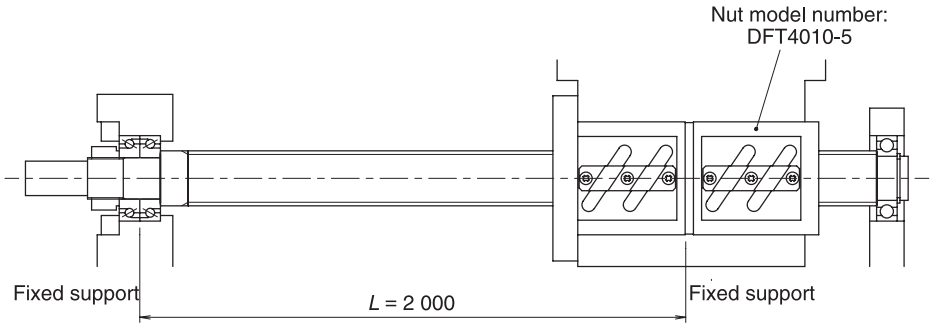


Fig. 2.2 Calculation example of buckling load

B-2-2.2 Yield by Tensional/Compressive Stress

It is necessary to consider permissible load in regards to the yield stress.

Permissible load "P" by tensional or compressive stress to screw shaft is

$$P = \sigma \cdot A = 1.15 d_r^2 \times 10^2 \text{ (N)} \quad \cdots 4)$$

In this formula:

σ : Allowable stress (= 147 MPa)

A : Cross section area of a screw shaft using root diameter (mm^2)

$$A = \frac{\pi}{4} \cdot d_r^2 \ (mm^2) \quad \cdots 5)$$

d_r : Screw shaft root diameter (mm)

<<Calculation example of yield load>>

Obtain load in respect to the allowable stress under the conditions in **Fig. 2.2.**

<Use conditions>

Nut model: DFT4010-5

Screw shaft root diameter $d_r = 34.4$ (mm) (From the dimension table)

<Calculation>

By formula 4)

$P = 1.15 d_r^2 \times 10^2 = 1.15 \times 34.4^2 \times 10^2$

$= 136\,086$ (N)

Therefore,

Permissible load $P = 136\,000$ N

B-2-2.3 Permanent Deformation at the Ball Contact Point

Exposed to an excessively heavy load in axial direction, the balls are squashed, and the ball rolling surface is dented. The deformations on these points do not perfectly restore to original shape after the load is removed. They are permanently disfigured. It is necessary to determine the limitation of this disfigurement to containing it within a certain range.

(1) Basic static load rating C_{0a}

Basic static load rating C_{0a} is a load to axial direction that results in the combined permanent deformation equal to 0.01% of the ball diameter at the contact points of ball and ball grooves of the screw shaft and nut.

(2) Calculation of permissible load by C_{0a}

P_0 (allowable axial direction load to limit the permanent deformation) is calculated using C_{0a}.

$$P_0 = \frac{C_{0a}}{f_s} \text{ (N)} \quad \cdots 6)$$

In this formula, f_s: Static permissible load factor

Table 2.2 Static permissible load factor

At time of normal operation	1 – 2
With vibration impact	1.5 – 3

<<Calculation example of the maximum allowable load>>

Obtain the maximum allowable load to the ball groove section under conditions in **Fig. 2.2.**

<Use conditions>

Nut model: DFT4010-5

Basic static load rating $C_{0a} = 137\,000$ (N) (From the dimension table)

Static permissible load factor $f_s = 2$ (normal operation, no vibration impact)

<Calculation>

By formula 6), the maximum allowable load of the ball groove section

$$P_0 = \frac{C_{0a}}{f_s} = \frac{137\,000}{2} = 68\,500 \text{ (N)}$$

B-2-3 Permissible Rotational Speed

Permissible rotational speed is determined by the feeding speed and ball screw lead. When selecting a ball screw, it is important to know the permissible rotational speed.

It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.

The lower of the following two factors, d·n and critical speed, will determine the overall permissible rotational speed of the ball screw.

- Critical speed which is the resonance vibration of the shaft.
- d·n value which is involved in damaging the ball recirculation components.

* Please consult NSK if the maximum rotational speed exceeds the criteria of maximum rotational speed on page B50, even both the critical speed of screw shaft rotation and the d·n value are in range of the allowable limit.

B-2-3.1 Critical Speed of the Screw Shaft

Calculate the critical speed which is the matching value of the ball screw rotational speed and the natural frequency of the screw shaft. The 80% of the critical speed is defined as the permissible rotational speed.

Calculate the critical speed of the screw shaft whether you use shaft rotation or nut rotation. Critical speed varies by the nut traveling position. Please consult NSK for detailed calculation.

If using a ball screw exceeding the critical speed, it is necessary to increase the natural frequency by using an intermediate support, etc. If using with nut rotation, it is possible to operate exceeding critical speed by installing a vibration energy absorbing system (optional, vibration control damper: patented by NSK) to the screw shaft. (Refer to "Nut rotatable drive ND Series" on page B555.)

Calculate the permissible rotational speed based on critical speed n_c as follows, taking in account "B-2-4 Supporting Conditions for Calculation of Buckling Load and Critical Speed" on page B51.

Fig. 3.1 shows the permissible rotational speeds against critical speed for each shaft diameter.

$$n_c = \alpha \times \frac{60\lambda^2}{2\pi L^2}\sqrt{\frac{E \cdot I \cdot g}{\gamma \cdot A}} = f\frac{d_r}{L^2} \times 10^7 \ (\text{min}^{-1}) \quad \cdots 7)$$

In this formula:

α : Safety factor ($\alpha = 0.8$)

E : Elastic modulus ($E = 2.06 \times 10^5$ MPa)

I : Moment of inertia of area of screw shaft

$$I = \frac{\pi}{64} d_r^4 \ (\text{mm}^4) \quad \cdots 3)$$

d_r : Screw shaft root diameter (mm) (See the dimension table.)

g : Acceleration of gravity ($= 9.8 \times 10^3$ mm/s^2)

γ : Specific weight ($\gamma = 7.65 \times 10^{-5}$ N/mm^3)

A : Cross section area of the screw shaft root diameter (mm^2)

$$A = \frac{\pi}{4} \times d_r^2 \ (\text{mm}^2) \quad \cdots 5)$$

L : Unsupported length (mm) (See **Figs. 4.1**, and **4.2** "Supporting conditions of screw shaft and ball nut" on page B51)

f, λ : Factors determined by the supporting condition

Table 3.1 Coefficients of critical speed

Supporting condition	f	λ
Fixed - Simple support	15.1	3.927
Fixed - Fixed support	21.9	4.730
Fixed support - Free	3.4	1.875
Simple - Simple support	9.7	π

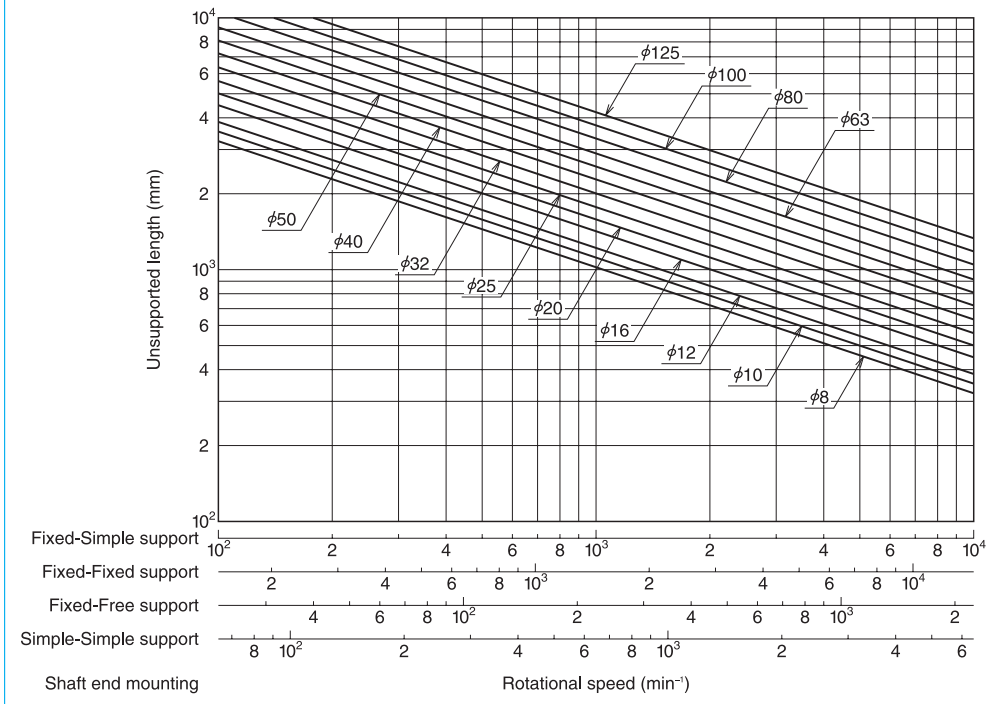


Fig. 3.1 Permissible rotational speeds vs. critical speeds

<<Calculation example of permissible rotational speed to the critical speed>>
Calculate the permissible rotational speed to the critical speed under conditions in **Fig. 3.2.**

<Use conditions>

Nut model: DFT4010-5

Supporting condition is Fixed - Simple support (From the supporting condition (ii) in **Fig. 4.1** "Supporting conditions of screw shaft and ball nut" on page B51.)

Unsupported length L = 2 000 mm

Screw shaft root diameter d_r = 34.4 mm (from the dimension table)

<Calculation>

Supporting condition is Fixed-Simple support, from **Table 3.1** on page B47

$\lambda = 3.927$

$f = 15.1$

By formula 7) on page B47, permissible rotational speed to critical speed is

$$n_c = f\frac{d_r}{L^2} \times 10^7 = 15.1 \times \frac{34.4}{2\,000^2} \times 10^7 = 1\,298.6 \ (\text{min}^{-1})$$

n_c = 1 290 min^{-1} or under

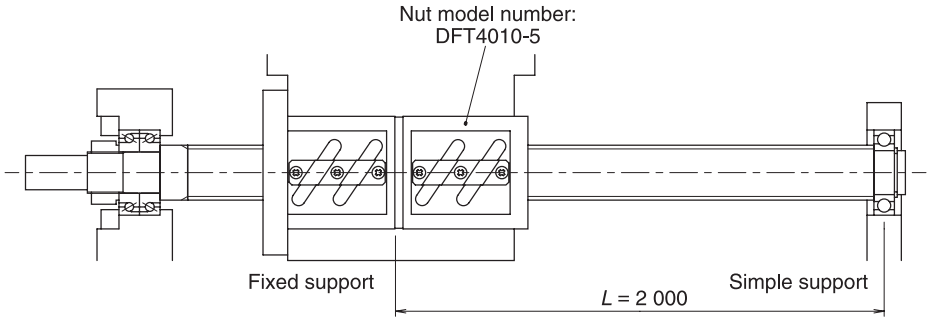


Fig. 3.2 Calculation example of permissible rotational speed to the critical speed

B-2-3.2 d·n Value

An increase of ball orbital speed increases the collision impact of balls to ball recirculation parts, and thus resulting in damage to them. For this reason, the permissible rotational speed is also limited by the d·n value (d, shaft diameter in millimeters; n, rotational speed per minutes). **Table 3.2** shows the allowable d·n value and the maximum rotational speed of ball screws.

Notes: 1. Special measure must be taken for high-speed specification products. Please consult NSK.

2. Please consult NSK if the maximum rotational speed or the d·n value exceed the values on the table below, even both the critical speed of screw shaft and the d·n value are in ranges of the allowable limit.

Table 3.2 Criteria of allowable d·n value and maximum rotational speed

Ball screw recirculation system, Series/Type		Allowable d·n value		Criterion of permissible rotational speed [min^{-1}]
		Standard	High-speed	
Standard ball screw	Ball screw for transfer equipment R series	50 000 or less	–	3 000
Standard nut ball screws	End-deflector type	180 000 or less	–	5 000
	Return tube type	70 000 or less	100 000 or less	3 000
	Deflector(bridge) type	84 000 or less	100 000 or less	3 000
	End cap type	80 000 or less	100 000 or less	3 000
Application-oriented ball screws	HMD type for high-speed machine tools	160 000 or less	–	4 000
	HMS type for high-speed machine tools	160 000 or less	–	5 000
	HMC type for high-speed machine tools	100 000 or less, 135 000 or less*1	–	3 750
	BSL type for miniature lathes	(180 000 or less)	–	4 000
	HTF-SRC type for high-load drives	140 000 or less, 160 000 or less*1	–	3 225
	HTF-SRD type for high-load drives	120 000 or less	–	2 400
	HTF type for high-load drives	50 000 or less, 70 000 or less*1	100 000 or less	3 125
	VSS type for contaminated environment	150 000 or less	–	3 000
	ND series nut-rotatable ball screws	70 000 or less	100 000 or less	3 000
	∑ series for robots	70 000 or less	–	3 000
	R series for transfer equipment	50 000 or less	–	3 000


*1) Please refer to the explanation of each ball screw for which two allowable d·n values are listed
- HMC type for high-speed machine tools: page B501
- HTF-SRC type for high-load drives: page B511
- HTF type for high-load drives: page B519

B-2-4 Supporting Conditions for Calculation of Buckling Load and Critical Speed


Figs. 4.1 and **4.2** are typical conditions in supporting ball screws. Use them as reference to calculate the buckling load and the critical speed.
Please consult NSK if it is necessary to scrutinize calculation due to use conditions, or if boundary conditions are not clear due to special installation.

[How to read the tables]
Example ii: A buckling load generates between the nut and the left bearings, indicating that the critical speed appears between the nut and the right bearing. Therefore, set *L* at the maximum stroke for each side. Calculate by applying support bearing conditions.

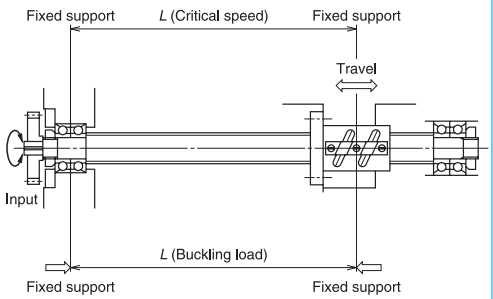
i
Buckling load: Fixed - Fixed support
Critical speed: Fixed - Fixed support



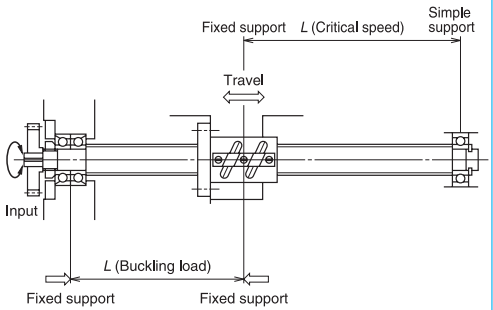
ii
Buckling load: Fixed - Fixed support
Critical speed: Fixed - Simple support



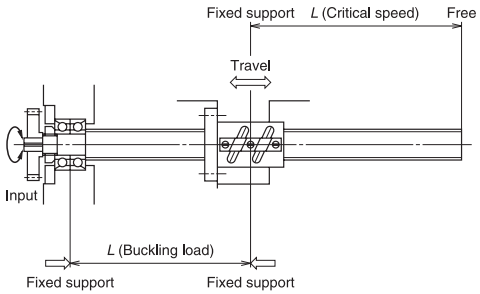iii
Buckling load: Fixed - Fixed support
Critical speed: Fixed - Free support



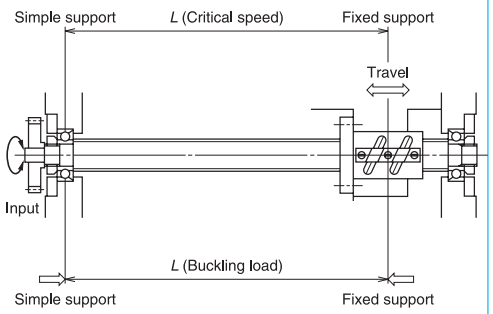iv
Buckling load: Fixed - Simple support
Critical speed: Fixed - Simple support



v
Buckling load: Fixed - Fixed support
Critical speed: Fixed - Fixed



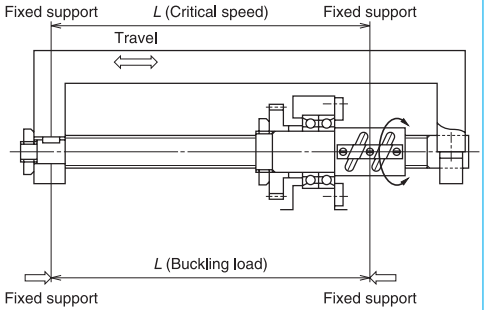


Fig. 4.1 Supporting conditions for screw shaft and ball nut

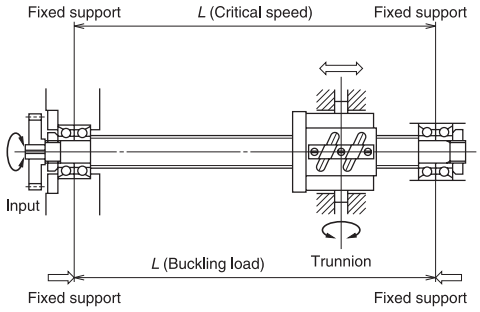
vi
Buckling load: Fixed - Fixed support
Critical speed: Fixed - Fixed support
} Minimum value (estimate) is obtained in the state as shown in the figure.



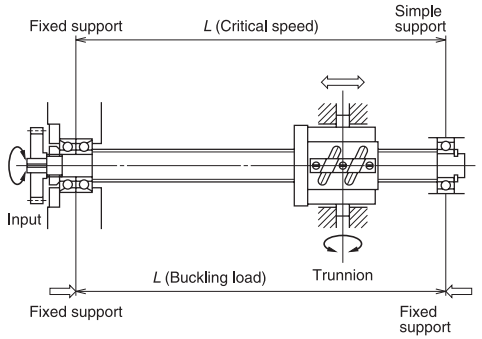
vii
Buckling load: Fixed - Fixed support
Critical speed: Fixed - Simple support
} Minimum value (estimate) is obtained in the state as shown in the figure.



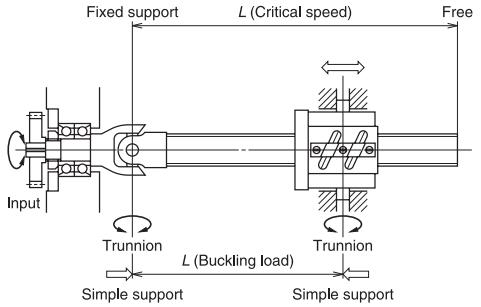
viii
Buckling load: Simple support - Simple support
Critical speed: Fixed - Free support→ Minimum value (estimate) is obtained in the state as shown in the figure.



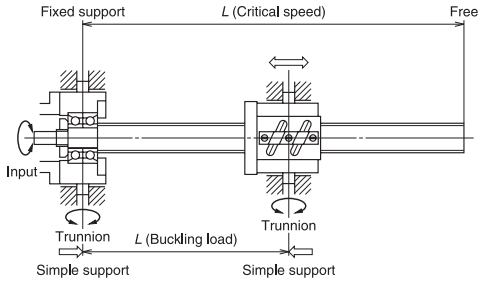ix
Buckling load: Simple support - Simple support
Critical speed: Fixed - Free support→ Minimum value (estimate) is obtained in the state as shown in the figure.



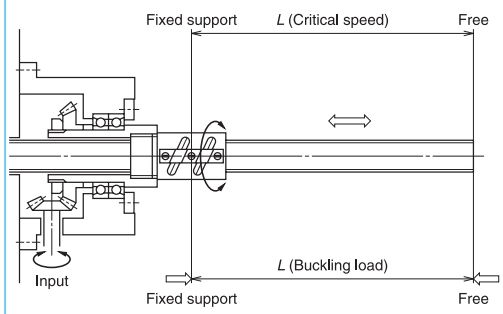x
Buckling load: Fixed - Free support
Critical speed: Fixed - Free support



xi
Buckling load: Fixed - Fixed support
Critical speed: Fixed - Free support

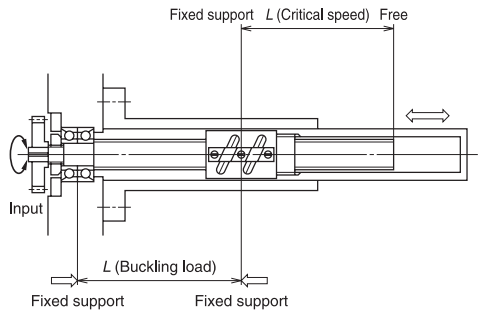


Fig. 4.2 Supporting conditions of screw shaft and ball nut

B-2-5 Life (Dynamic Load Limitation)

B-2-5.1 Life of Ball Screw

Although used in appropriate conditions and is ideally designed, the ball screw deteriorates after a certain operation period, and eventually becomes unusable. The period in this situation is the life of the ball screw. There are two life categories, "fatigue life" caused by flaking, and "life of accuracy" caused by deterioration in precision because of wear.

B-2-5.2 Fatigue Life

Fatigue life of a ball screw can be estimated by basic dynamic load rating (C_a) as is for the rolling bearings.

(1) Basic dynamic load rating C_a

Basic dynamic load rating is the axial load that allows a 90% of the group of the same ball screws to rotate 1 million times (10^6 rev) under the same condition without causing flaking by rolling contact fatigue.

(2) Fatigue life calculation

Fatigue life is defined as a total rotation number in general. It is sometimes indicated by total rolling hours or total running distance. Fatigue life is obtained by the following formula.

$$L = \left(\frac{C_a}{F_a \cdot f_w}\right)^3 \cdot 10^6 \quad \cdots 8)$$

$$L_t = \frac{L}{60n} \quad \cdots 9)$$

$$L_s = \frac{L \cdot l}{10^6} \quad \cdots 10)$$

In this formula:

L : Rating fatigue life (rev)
L_t : Life in hours (h)
L_s : Life by running distance (km)
C_a : Basic dynamic load rating (N)
F_a : Axial load (N)
n : Rotational speed (min^{-1})
l : Lead (mm)
f_w : Load factor (Coefficient by operating condition)

Load factor f_w for operating conditions is shown in **Table 5.1.**

Table 5.1 Load coefficient f_w

Smooth operation without impact	1.0 – 1.2
Normal operation	1.2 – 1.5
Operation associated with impact or vibration	1.5 – 3.0

Setting too long fatigue life requires larger ball screw, and is not economical. Below are the general target values of operating life for machines. (reference)

Table 5.2 General target values of fatigue life

Machine tools	20 000 hours
Industrial machines	10 000 hours
Automatic control system	15 000 hours
Measuring equipment	15 000 hours

(3) Mean load

If the axial load often varies, calculate life by obtaining the mean load, which gives the equivalent fatigue life under this varying load conditions.

(a) When the load and the rotational speed shift stepwise

Obtain the mean load F_m by the formula below. Obtain mean rotational speed N_m by the formula below as **Table 5.3** and **Fig. 5.1.**

$$F_m = \left(\frac{F_1^3 \cdot n_1 \cdot t_1 + F_2^3 \cdot n_2 \cdot t_2 + \cdots F_n^3 \cdot n_n \cdot t_n}{n_1 \cdot t_1 + n_2 \cdot t_2 + \cdots + n_n \cdot t_n}\right)^{\frac{1}{3}} \quad \cdots 11)$$

$$N_m = \frac{n_1 \cdot t_1 + n_2 \cdot t_2 + \cdots + n_n \cdot t_n}{t_1 + t_2 + \cdots + t_n} \quad \cdots 12)$$

Table 5.3 Stepwise operation condition

Axial load (N)	Rotational speed (min^{-1})	Hours of use, or ratio of hours of use
F_1	n_1	t_1
F_2	n_2	t_2
:	:	:
F_n	n_n	t_n




Fig. 5.1 Stepwise load variation

(b) When the rotational speed is constant, and the load changes linearly, obtain approximate value of the mean load F_m by the formula below.

$$F_m = \frac{1}{3}(F_{min} + 2F_{max}) \quad \cdots 13)$$




Fig. 5.2 Linear load change

(c) When the rotational speed is constant, and the load changes in a sinusoidal pattern, obtain approximate value of the mean load F_m by the formula below.

When the sine curve is Fig. (a)

$$F_m \fallingdotseq 0.65\ F_{max} \quad \cdots 14)$$

When the sine curve is Fig. (b)

$$F_m \fallingdotseq 0.75\ F_{max} \quad \cdots 15)$$

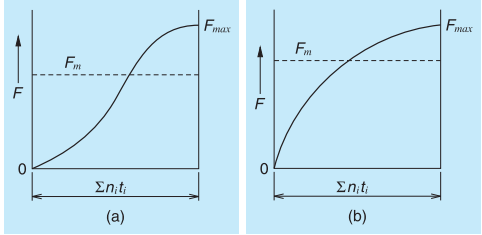


Fig. 5.3 Load changes in sinusoidal pattern

(4) Affect of mounting misalignment

If moment load or radial load is applied to the ball screw, it adversely affects ball screw function, and shortens life. Watch for eccentric load that induces moment or radial load.

Fig. 5.4 shows a calculation example of fatigue life when moment load is applied to the ball screw. In this figure, the value of the rigidity of mounting ball screw sections (screw shaft, support bearing, guide, etc.) is set at infinity. In actual use, deformation is absorbing the moment load in various areas, and the moment load that generates between the screw shaft and nut is abated.

In general, the following values are recommended as control values for precision grade.

Misalignment in inclination ··1/2 000 or less
Eccentricity·····20 μm or less

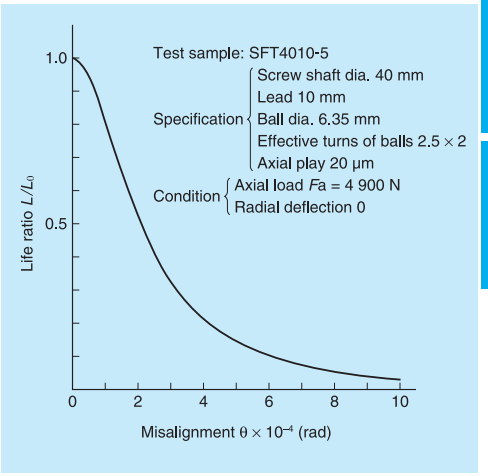


Fig. 5.4 Affects of misalignment

(5) Effects of heavy load and short stroke

If the ball screw is used under heavy load and short strokes, such as for the drive of plastic injection molding machine and of press machines, the fatigue life may become significantly shorter than the rated fatigue life which is calculated in B-2-5.2.

This decreased life occurs because the heavy load generates large stress (surface pressure) in the contact points of balls and ball grooves of the screw shaft and the nut, adversely affecting the life.

The axial load F_{amax} *1 during operation and the size of strokes, which affect fatigue life, can be obtained by the following formula.

In such case, the life calculation should take into account the size of the surface pressure as well as the size of the stroke. Please consult with NSK.

$$F_{amax} \geq 0.10 C_{0a} \quad \cdots 16)$$
$$S \leq 4$$

In this formula:

F_{amax} : Maximum load to axial direction during drive (N)

C_{0a} : Basic static load rating (N)

S : Stroke (rev)

$$S = \frac{L_s}{l}$$

L_s : Stroke distance (mm)

l : Lead (mm)

*1) Axial load : The load is applied to the axial direction when screw shaft and the nut of ball screw are rotating relatively each other. The rotational speed is irrelevant.

B-2-5.3 Ball Screw and Hardness

Table 5.4 indicates the hardness of NSK standard ball screw.

Table 5.4 Ball screw materials and their hardness

Component	Heat treatment method	Hardness (HRC)
Screw shaft	Carburizing	58 or over
	Induction hardening	58 or over
Nut	Carburizing	58 or over

Note: NSK manufactures special material ball screws for special environments (stainless steel: SUS440C, SUS630). NSK also furnishes protective surface treatment (refer to page D5). Please consult NSK for such request.

B-2-5.4 Wear Life

Wear of materials, as is the case for other mechanical components, is significantly affected by use conditions, lubrication conditions and other factors. It is difficult to estimate its volume, and measuring requires various tests and field data.

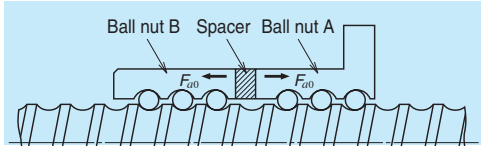
NSK has the data of wear accumulated through abundant experience. Please contact NSK for inquiry pertaining to the wear.

B-2-6 Preload and Rigidity

B-2-6.1 Elastic Deformation of Preloaded Ball Screw

(1) Position preload (D, Z, and P preload)

The concept of double nut preload ball screw is shown in **Fig. 6.1**.



(a) External load : 0

(b) External load : F_a

Fig. 6.1 Position preload (double-nut)

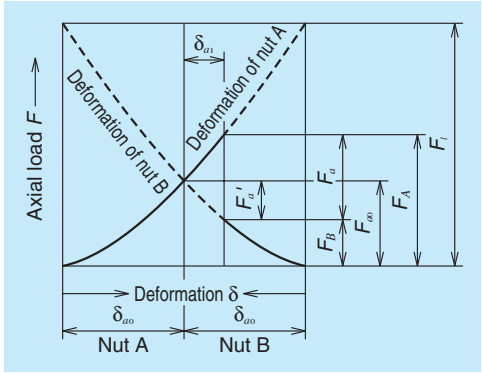


Fig. 6.2 Deformation of A and B nut (position preload)

Elastic deformation of Nut A and B is already given at time of assembly by the amount of $\delta a0$ by preload F_{a0}. When the external load F_a is added to Nut A, the elastic deformation δ_a and δ_b of each Nut A and B change as shown in **Fig. 6.2**,

$$\delta_a = \delta_{a0} + \delta_{a1} \qquad \delta_b = \delta_{a0} - \delta_{a1}$$

At this time, the load to each Nut A and B are:

$$F_A = F_{a0} + F_a - F_a'$$
$$F_B = F_{a0} - F_a'$$

It shows that the load applied to Nut A is affected by Nut B and reduced by the amount of F_a'. Thereby, the elastic deformation of Nut A becomes smaller. This effect continues until the elastic deformation by the external load becomes δ_{a0}, and the preload by Nut B disappears.

Assuming that the load when the preload is absorbed is F_l, the relationship between the axial load and the elastic deformation is as follows (refer to **Fig. 6.2**).

$$\delta_{a0} = K \cdot F_{a0}^{2/3} \qquad 2\delta_{a0} = K \cdot F_l^{2/3}$$

(K: Invariable number)

$$\left[\frac{F_l}{F_{a0}}\right]^{2/3} = \frac{2\delta_{a0}}{\delta_{a0}} = 2$$

$$F_l = 2^{3/2} \times F_{a0} \fallingdotseq 3F_{a0}$$

For this reason, the preload should be about 1/3 of the maximum axial load. However, please note that if the preload of about 1/3 of the maximum axial load exceeds 8% of C_a, which is the criterion of the maximum preload, the ball screw may adversely increases heat generation and / or may shortens its lifetime.

Fig. 6.3 shows two types of elastic deformation curves: one is by the ball screw with preload, the other without preload. When an axial load which is about three times as large as the preload is applied, the deformation of the preloaded ball screw is 1/2 of the deformation of the ball screw without preload.

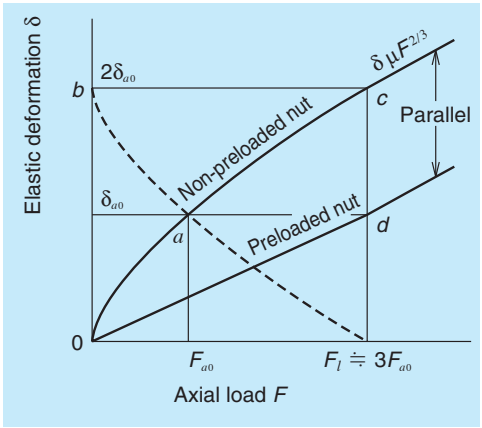


Fig. 6.3 Deformation of preloaded ball nut (position preload)

(2) Constant pressure preload (J preload: preloaded by spring)

Fig. 6.5 shows an elastic deformation of a ball screw which is preloaded with "constant pressure." The rigidity of the preload spring is sufficiently smaller than the nut rigidity. Therefore, the deformation of the spring becomes nearly parallel to the abscissa axis. For this reason, the elastic deformation by the preload with constant pressure changes along the deformation curve by Nut A.

In order to take advantage of the characteristics of the preload with constant pressure, the major external load should be applied in the directions shown by an arrow in **Fig. 6.4**.

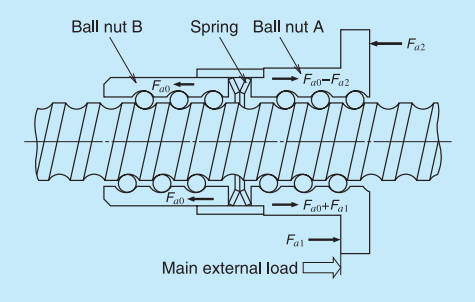


Fig. 6.4 Constant pressure preload (double nut)

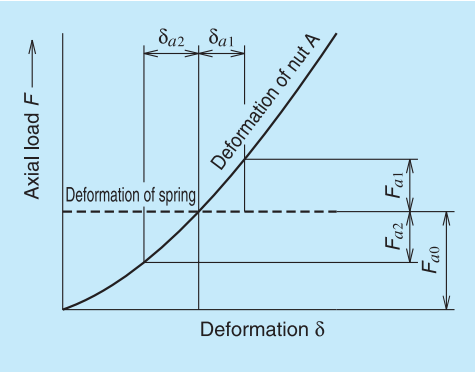


Fig. 6.5 Deformation curve of constant pressure preloaded nut

B-2-6.2 Rigidity of the Feed Screw System

A low rigidity around the feed screw mounting area causes lost motion. To improve the positioning accuracy of precision machines such as NC machine tools, it requires a good balance in axial rigidities of composing parts of the feed screw system.

Also should examine torsional rigidities of the feed screw system.

(1) Axial rigidity of the feed screw system K_T

Elastic deformation and rigidity of the feed screw system can be obtained by the following formula.

$$\delta = \frac{F_a}{K_T} \quad \cdots\cdots 17)$$

$$\frac{1}{K_T} = \frac{1}{K_S} + \frac{1}{K_N} + \frac{1}{K_B} + \frac{1}{K_H} \quad \cdots\cdots 18)$$

In this formula:

δ : Volume of axial elastic deformation of the feed screw system (μm)
F_a : Axial load to the feed screw system (N)
K_T : Axial rigidity of the feed system (N/μm)
K_S : Axial rigidity of the screw shaft (N/μm)
K_N : Axial rigidity of the nut (N/μm)
K_B : Axial rigidity of the support bearing (N/μm)
K_H : Axial rigidity of the nut and bearing mounting section (N/μm)

(2) Axial rigidity of the screw shaft: K_S

(a) In case of: Fixed support - Free (axial direction)

$$K_S = \frac{A \cdot E}{x} \times 10^{-3} \quad \cdots\cdots 19)$$

In this formula:

K_S : Axial rigidity of the screw shaft (N/μm)
A : Cross section area of the screw shaft (mm^2)

$$A = \frac{\pi}{4} dr^2$$

dr : Screw shaft root diameter (mm)
E : Elastic modulus ($E = 2.06 \times 10^5$ MPa)
x : Distance between points of load application (mm)

(b) In case of: Fixed – Fixed support (axial direction)

$$K_S = \frac{A \cdot E \cdot L}{x\,(L - x)} \times 10^{-3} \quad \cdots\cdots 20)$$

In this formula:

K_S : Axial rigidity of the screw shaft (N/μm)
L : Unsupported length (mm)
x : Axial deformation is maximum at position $x = L/2$.

Axial rigidity of the screw shaft can be obtained by the following formula.

$$K_S = \frac{4A \cdot E}{L} \times 10^{-3} \quad \cdots\cdots 21)$$

<<Calculation example of axial rigidity (1)>>

Obtain axial rigidity of the screw shaft under the condition in **Fig. 6.6.**

<Use conditions>

Nut model: DFT 4010-5
From **Fig. 6.6**: Supporting condition ;
Fixed support --Free (axial direction)
Distance between points of load application
x = 1 200 mm
Screw shaft root diameter (from the dimension table)
d_r = 34.4 mm

<Calculation>

By formula 19), axial rigidity K_S is :

$$A = \frac{\pi}{4} d_r^2 = \frac{3.14}{4} \times 34.4^2 = 929.4 \ (mm^2)$$

$$K_S = \frac{A \cdot E}{x} \times 10^{-3} = \frac{929.4 \times 2.06 \times 10^5}{1\,200} \times 10^{-3} = 159 \ (N/\mu m)$$

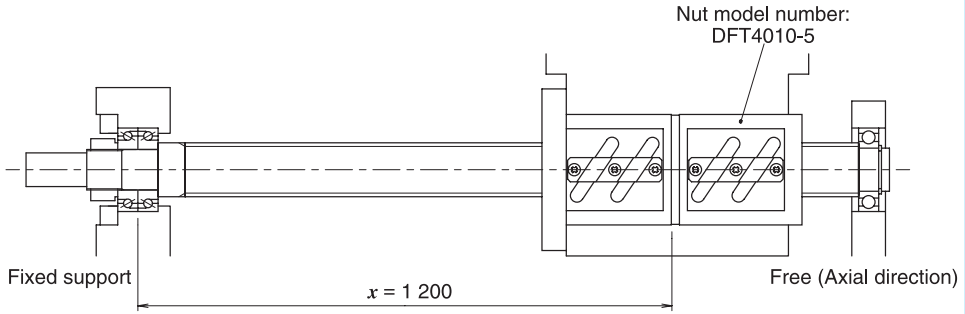


Fig. 6.6 Calculation example of axial rigidity of the screw shaft (1)

<<Calculation example of axial rigidity (2)>>

Obtain axial rigidity of the screw shaft under the conditions in **Fig. 6.7.**

<Use conditions>

Nut model: DFT 4010-5

From **Fig. 6.7**: Supporting condition:

Fixed - Fixed support (axial direction)

L = 1 200 mm

Distance between points of load application:

Screw shaft root diameter (from the dimension table)

dr = 34.4 mm

<Calculation>

By formula 21), axial rigidity K_S is :

$$A = \frac{\pi}{4} dr^2 = \frac{3.14}{4} \times 34.4^2 = 929.4 \ (mm^2)$$

$$K_S = \frac{4A \cdot E}{L} \times 10^{-3} = \frac{4 \times 929.4 \times 2.06 \times 10^5}{1\,200} \times 10^{-3} = 638 \ (N/\mu m)$$

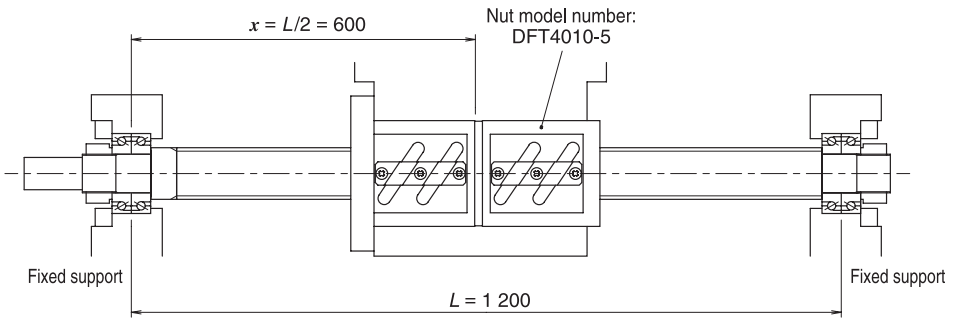


Fig. 6.7 Calculation example of axial rigidity of the screw shaft (2)

(3) Axial rigidity of the ball nut : K_N

(a) Rigidity of the nut with axial play

Theoretical rigidity value K is shown in the dimension table. The value K is obtained from the elastic deformation between screw grooves and balls when an axial load equivalent to 30% of the basic dynamic load rating C_a is applied. The criterion for the ball nut rigidity is 80% of the value listed in the table taking into consideration of deformation of the ball nut, etc. The rigidity value K_N is obtained by the following formula when the axial load "F_a" is not 30% of "C_a."

$$K_N = 0.8 \times K \left(\frac{F_a}{0.3\ C_a} \right)^{1/3} \ (N/\mu m) \qquad \cdots 22)$$

In this formula:

K : Rigidity value in dimension tables (N/μm)

F_a : Axial load (N)

C_a : Basic dynamic load rating (N)

<<Calculation example of axial rigidity (3)>>

Obtain axial rigidity of the nut under the following conditions.

<Use conditions>

Nut model: SFT 4010-5

Axial load: F_a = 6 000 N

F_a = Rigidity at 0.3 C_a K = 741 N/μm (from the dimension table)

<Calculation>

By formula 22), axial rigidity K_N is :

$$K_N = 0.8 \times K \left(\frac{F_a}{0.3 \cdot C_a} \right)^{1/3}$$

$$= 0.8 \times 741 \times \left(\frac{6\,000}{0.3 \times 61\,200} \right)^{1/3}$$

$$= 408 \ (N/\mu m)$$

(b) Rigidity of preloaded ball nut

Theoretical rigidity K of preloaded ball nut under an axial load is shown in each dimension table. The K is obtained from the elastic deformation of the ball rolling surface and the balls when: a preload which is equivalent to 10% of the basic dynamic load rating C_a (5% in case of the P-preload [single-nut oversize ball preload system]) is applied. The criterion for calculation of nut rigidity is 80% of the value listed in the table taking into consideration of deformation of the ball nut, etc. Rigidity K_N is obtained by the following formula when preload "F_{a0}" is not 10% (or 5%) of "C_a".

$$K_N = 0.8 \times K \left(\frac{F_{a0}}{\varepsilon \cdot C_a} \right)^{1/3} \ (N/\mu m) \qquad \cdots 23)$$

In this formula:

K : Rigidity in the dimension tables (N/μm)

F_{a0} : Preload (N)

ε : Basic factor to calculate rigidity (ε = 0.1. For P-preload use percentage of the preload to basic dynamic load rating. e.g. 0.03 for BSS and 0.015 for VSS.)

<<Calculation example of axial rigidity of the screw shaft (4)>>

Obtain axial rigidity of the nut under the following conditions.

<Use conditions>

Nut model : DFT 4010-5

Preload : F_{a0} = 4 000 N

Rigidity K when $F_{a0} = \varepsilon\ C_a$: K = 1 454 N/μm (from the dimension table on page B457)

Basic factor to calculate rigidity when D Preload: ε = 0.1

<Calculation>

By formula 23)

$$K_N = 0.8 \times K \left(\frac{F_{a0}}{\varepsilon \cdot C_a} \right)^{1/3}$$

$$= 0.8 \times 1\,454 \times \left(\frac{4\,000}{0.1 \times 61\,200} \right)^{1/3}$$

$$= 1\,009 \ (N/\mu m)$$

The criterion of the preload to ball screw

Nut rigidity increases by a larger preload volume. But an excessive preload shortens life, and generates heat. Set the maximum preload about at 0.08 C_a (0.03 for *P*-Preload). **Table 6.1** shows the criteria for preload for different applications.

Table 6.1 Criteria of preload

Ball screw application	Preload (relative to dynamic load rating C_a)
Robots, material handling systems, etc.	Axial play or under 0.01 C_a
Semiconductor manufacturing systems, etc. That require highly accurate positioning	0.01 C_a – 0.03 C_a
Medium- high-speed machine tools for cutting	0.03 C_a – 0.05 C_a
Low to medium-speed systems that require especially high rigidity	0.05 C_a – 0.07 C_a

(4) Axial rigidity of support bearing: K_B

The rigidity (K_B) of the bearing used for ball screw support is shown in the dimension table of bearing. See page B415 for ball screw support bearings, NSKTAC C series and B425 for BSBD series.

(5) Axial rigidity of the ball nut and bearing mounting section: K_H

As the rigidity of mounting section has a profound effect on positioning accuracy, we recommend incorporating high rigidity of the mounting sections of ball nut and support bearings into the design at the early stage of designing the machine.

(a) Torsional rigidity of the feed screw system

Major torsion factors in the rotating system that bring about error in positioning accuracy are given three points below.

- Torsional deformation of the screw shaft
- Torsional deformation of the joint section
- Torsional deformation of the motor

The value of the effect of torsional strain to positioning accuracy is smaller than axial deformation. However, check the effect when designing equipment that requires high positioning accuracy.

(b) Suppress thermal error

It is necessary to minimize the thermal error for ever increasing demand for positioning accuracy give three points below.

- Suppress heat
- Forced cooling
- Avoid effect of temperature rise

Refer to "Measures against thermal expansion" on page B40.

B-2-7 Friction Torque and Drive Torque

Operations that use ball screw drives require a motor torque which is equivalent to the total of following two:

- Friction torque, i.e. the friction of the ball screw itself
- Drive torque which is required for operation

B-2-7.1 Friction Torque

(1) Starting friction torque (breakaway torque)

A high torque is necessary to start a ball screw. This is called "starting friction torque" or "breakaway torque." This torque is 2 to 2.5 times larger than the dynamic (friction) torque due to preload which is described below. The starting friction torque quickly diminishes once the ball screw begins to move.

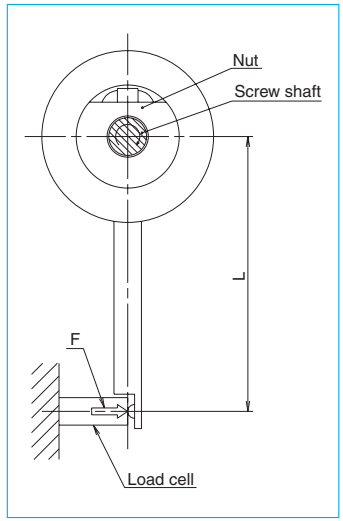


Fig. 7.1 Preload dynamic torque measuring method

(2) Dynamic friction torque (dynamic friction torque due to preload)

When a ball screw is moving, two types of torque generate: the dynamic friction torque due to preload and the friction torque associated with ball recirculation. JIS B1192 sets the standard of dynamic friction torque due to preload, which is the total of these two torque types. They are defined in **Fig. 7.2**.

The dynamic friction torque due to preload is calculated by the following formula. When the screw shaft is rotated as **Fig. 7.1** in the following measuring conditions, measure the nut holding power *F* and then multiple the distance of action line *L* which is perpendicular to the direction of the power *F*.

$$T_p = F \cdot L \quad \cdots 24)$$

- Measuring rotational speed 100 min^{-1}
- Viscosity of lubrication is ISO VG 68 as prescribed in JIS K 2009.
- Remove Seals.

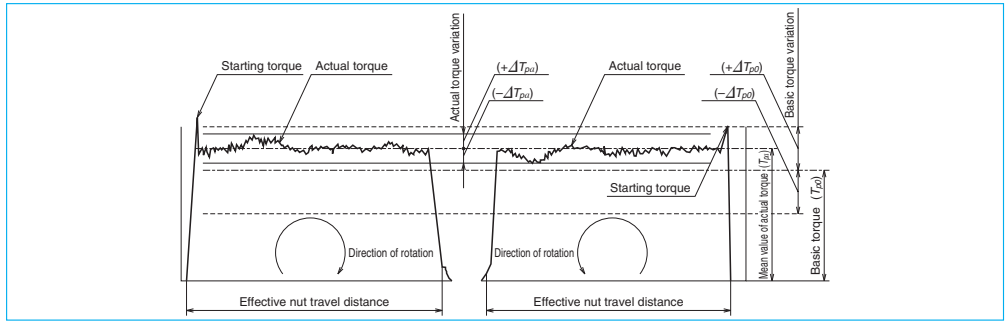


Fig. 7.2 Definitions of dynamic preloaded drag torque

(3) Calculation of basic torque

The basic torque of preloaded ball screw T_{p0} can be obtained by the following formula.

$$T_{p0} = K\frac{F_{a0} \cdot l}{2\pi} \fallingdotseq 0.014F_{a0}\sqrt{d_m \cdot l} \quad (N \cdot cm) \qquad \cdots 25)$$

In this formula:

F_{a0} : Preload (N)

l : Lead (cm)

K : Torque coefficient of ball screw

$$K = \frac{0.05}{\sqrt{tan\beta}}$$

β : Lead angle (deg.)

d_m : Ball pitch circle diameter (cm)

Allowable values of torque variation rate relative to basic torque are regulated as shown in **Table 7.1.**

B-2-7.2 Drive Torque

(1) Operating torque of a ball screw

(a) Normal drive

The torque when converting rotational motion to linear motion (normal operation) is obtained by the following formula.

$$T_a = \frac{F_a \cdot l}{2\pi \cdot \eta_1} \quad (N \cdot cm) \qquad \cdots 26)$$

In this formula:

T_a : Normal operation torque (N · cm)

F_a : Axial load (N)

l : Lead (cm)

η_1 : Normal efficiency (η_1 = 0.9 to 0.95)

(b) Back-drive operation

The torque when converting linear motion to rotational motion (back-drive operation) is obtained by the following formula.

$$T_b = \frac{F_a \cdot l \cdot \eta_2}{2\pi} \quad (N \cdot cm) \qquad \cdots 27)$$

In this formula:

T_b : Reverse operation torque (N · cm)

η_2 : Reverse efficiency (η_2 = 0.9 to 0.95)

(c) Dynamic drag torque of the preloaded ball screw

the operation torque of preloaded ball screw can be obtained by Formula 25).

Table 7.1 Range of allowable values of torque variation rates (Source: JIS B 1192)

Basic torque (N · cm)		Effective length of the screw thread (mm)										
		4 000 or under								Over 4 000 and 10 000 or under		
		Slenderness ratio[1]: 40 or less				Slenderness ratio[1]: More than 40 and 60 or less				—		
		Accuracy grade				Accuracy grade				Accuracy grade		
Over	Incl.	C0	C1	C2, 3	C5	C0	C1	C2, 3	C5	C1	C2, 3	C5
20	40	±30%	±35%	±40%	±50%	±40%	±40%	±50%	±60%	—	—	—
40	60	±25%	±30%	±35%	±40%	±35%	±35%	±40%	±45%	—	—	—
60	100	±20%	±25%	±30%	±35%	±30%	±30%	±35%	±40%	—	±40%	±45%
100	250	±15%	±20%	±25%	±30%	±25%	±25%	±30%	±35%	—	±35%	±40%
250	630	±10%	±15%	±20%	±25%	±20%	±20%	±25%	±30%	—	±30%	±35%
630	1 000	—	±15%	±15%	±20%	—	—	±20%	±25%	—	±25%	±30%

Notes: 1. Slenderness ratio: The value obtained by dividing the length of the screw thread section of screw shaft (mm) by diameter of the screw shaft (mm).
2. NSK independently sets torque standards which are under 20 N · cm.

(2) Drive torque of the motor

(a) Drive torque at constant speed

The torque which is necessary to drive a ball screw at constant speed resisting to external loads can be obtained by the following formula.

$$T_1 = (T_a + T_{pmax} + T_u) \times \frac{N_1}{N_2} \qquad \cdots 28)$$

In this formula:

T_a : Drive torque at constant speed

$$T_a = \frac{F_a \cdot l}{2\pi \cdot \eta_1} \qquad \cdots 26)$$

F_a : Axial load (N)

The value of F_a in **Fig. 7.3** is:

$F_a = F + \mu \cdot m \cdot g$

F : Such as cutting force to axial direction (N)

μ : Friction coefficient of the guide way

m : Volume of the traveling section (table mass plus work mass kg)

g : Gravitational acceleration (9.80665 m/s^2)

T_{pmax} : Upper limit of the dynamic friction torque of ball screw (N · cm)

T_u : Friction torque of the support bearing (N · cm)

N_1 : Number of teeth in Gear 1

N_2 : Number of teeth in Gear 2

Generally, though it depends on the type of motor, T_1 shall be kept under 30% of the motor rating torque.

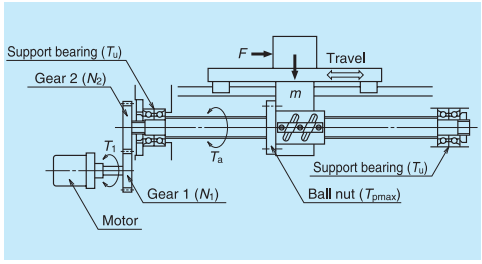


Fig. 7.3 Driving mechanism of ball screw

(b) Drive torque at acceleration

Accelerating the ball screw resisting axial load requires the maximum torque in an operation. Drive torque necessary for this occasion can be obtained by the following formula.

$$T_2 = T_1 + J \cdot \dot{\omega} \qquad \cdots 29)$$

$$J = J_M + J_{G1}\left(\frac{N_1}{N_2}\right)^2\left[J_{G2} + J_S + m\left(\frac{l}{2\pi}\right)^2\right] \quad (kg \cdot m^2) \qquad \cdots 30)$$

In this formula:

T_2 : Maximum drive torque at time of acceleration (N · m)

$\dot{\omega}$: Motor's angular acceleration (rad/s^2)

J : Moment of inertia applied to the motor (kg · m^2)

J_M : Moment of inertia of the motor (kg · m^2)

J_{G1} : Moment of inertia of Gear 1 (kg · m^2)

J_{G2} : Moment of inertia of Gear 2 (kg · m^2)

J_S : Moment of inertia of the screw shaft (kg · m^2)

When selecting a motor, it is necessary to examine the maximum torque of the motor relative to the drive torque T_2 at the time of acceleration of ball screw.

For the calculation of the moment of inertia of a cylindrical object (ball screw, gear, etc.), please refer to the formula below.

Formula for the moment of inertia of a cylindrical object

$$J = \frac{\pi \cdot \gamma}{32} D^4 \cdot L \quad (kg \cdot cm^2) \qquad \cdots 31)$$

In this formula:

γ : Material density (kg/cm^3)

D : Diameter of the cylindrical object (cm)



L : Length of the cylindrical object (cm)

B-2-8 Even Load Distribution in Ball Nut (In Case of Ball Screws for High-Load Drive)

Generally, the distribution of loaded balls in a ball nut is three-dimensionally asymmetric, thus resulting in uneven load distribution to the balls and ball nut. NSK has taken the measures for even load distribution to the balls by an optimal arrangement of the position of ball recirculation circuits.

Additionally, a heavier load results in a measurable axial deformation of the screw shaft and the ball nut, thus further increasing the unevenness of load distribution. We have lessened the unevenness of load distribution to the balls by arranging the load acting point of the ball nut and the screw shaft opposite to each other. The relation between loading points and load distribution is shown in **Fig. 8.1**, while **Table. 8.1** shows the result of load distribution analysis.

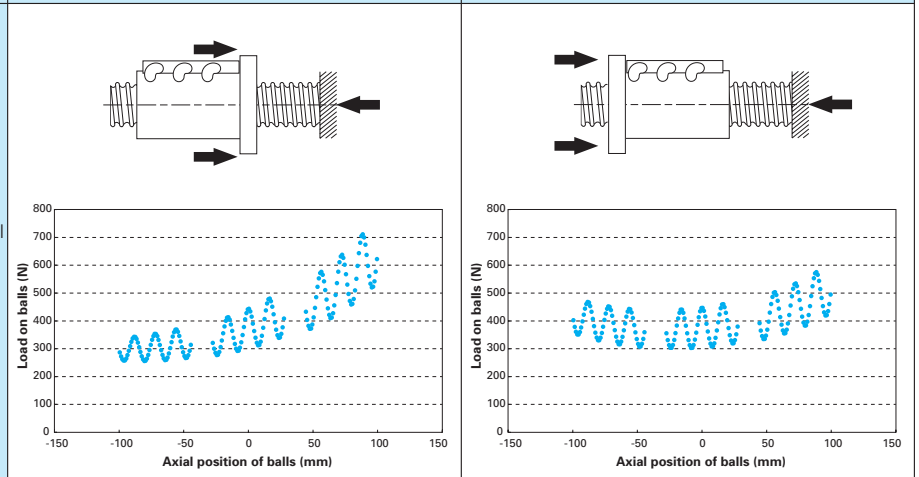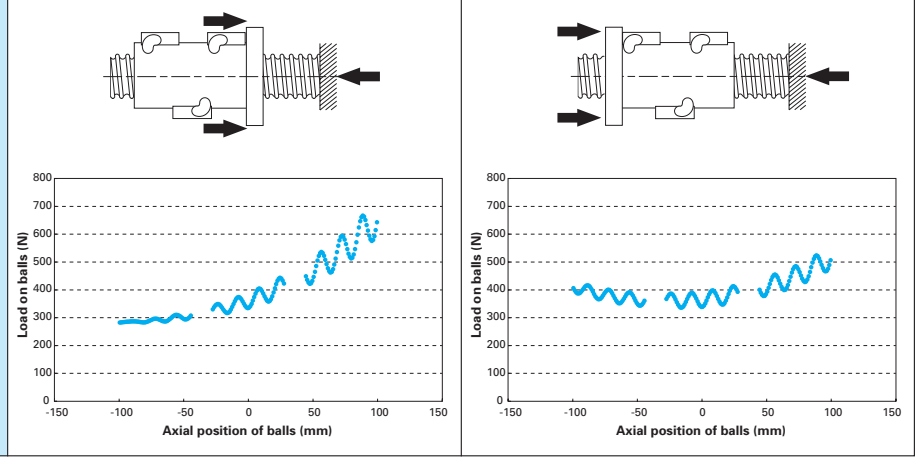Table. 8.1 The result of equalization of load distribution

	Conventional mounting direction	NSK recommended mounting direction
Conventional design		
HTF design		

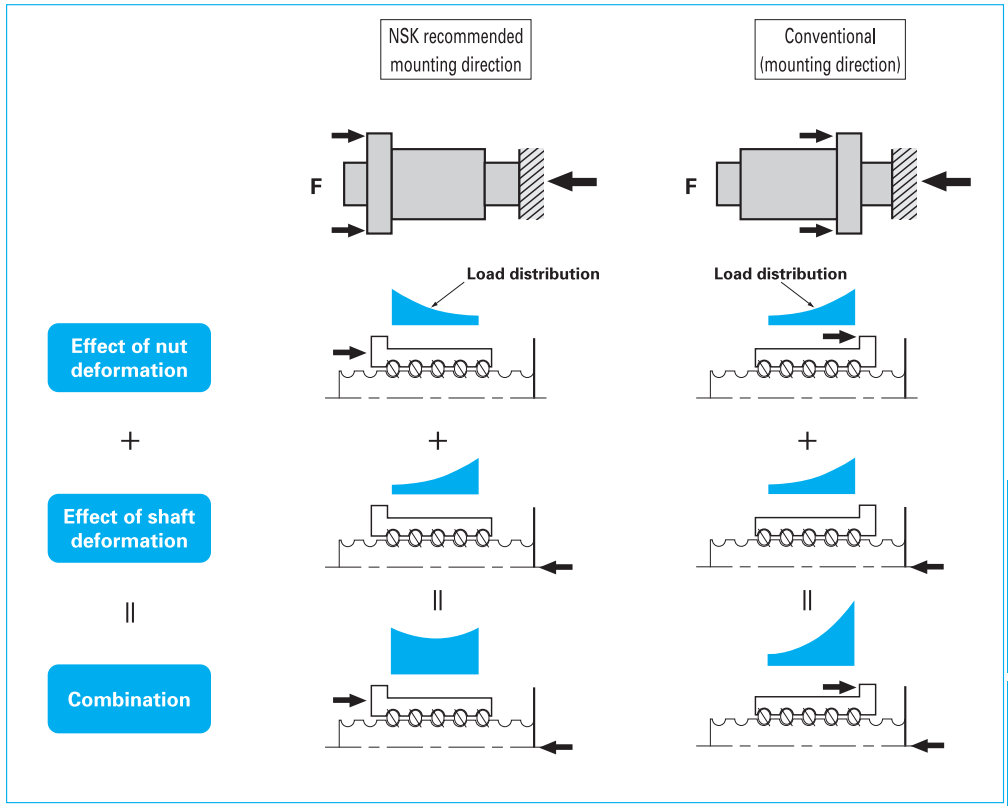


Fig. 8.1 The relationship between acting point of load and load distribution

B-2-9 Lubrication of Ball Screw

Lithium soap-based grease with base oil viscosity of 30 to 140 mm^2/s (40°C) is recommended for grease lubrication and oil of ISO VG 32 to 100 for oil lubrication.

In general, a lubricant with low base oil viscosity is recommended where a ball screw is used for high-speed operation, and thus requires reducing thermal elongation of the screw shaft. On the other hand, a lubricant with high base oil viscosity is recommended for a low-speed, high-temperature operation, or a high-load and oscillating operation.

Please consult NSK about greases for high-load drives and high-temperature applications.

NSK markets "NSK Grease Unit" as the standard series products for a variety of applications. NSK Grease Unit for ball screw lubrication includes:

1) Various types of grease in the bellows-tube which can be instantly attached to the grease pump
2) Hand grease pump which is compact and easy to use
3) Nozzles

Table 9.1 shows NSK greases, and names of other ball screw greases.

Table 9.2 explains checking points in lubrication and standard intervals between replenishments.

It is important to wipe off old grease from the screw shaft prior to applying new grease. Page D16 also explains in detail concerning the replenishing methods.

Table 9.1 Grease for ball screw

Product name	Thickener	Base oil	Base oil viscosity mm^2/s (40°C)	Range of temperature for use (°C)	Application
NSK Grease AS2	Lithium type	Mineral oil	130	–10 – 110	For general use at high load
NSK Grease PS2	Lithium type	Synthetic oil combined with Synthetic hydrocarbon oil	15.9	–50 – 110	For light load
NSK Grease LR3	Lithium type	Synthetic oil	30	–30 – 130	For high-speed medium load
NSK Grease LG2	Lithium type	Mineral oil combined with Synthetic hydrocarbon oil	32	–20 – 70	For clean environment
NSK Grease NF2	Urea composite type	Synthetic hydrocarbon oil	26	–40 – 100	For fretting resistant

*Refer to page D13 for the nature of NSK greases.

Table 9.2 Checking lubricant and intervals of replenishment

Lubricating method	Checking intervals	Check points	Replenish/replacing interval
Intermittent automatic oil supply	Once a week	Remaining volume, contamination	Supply oil when checking (depending on the tank volume)
Grease	2 – 3 months after start of use	Clean, foreign matters	Generally once a year (replenish when necessary)
Oil bath	Every day, when start to work	Oil level	Specify according to oil consumption

B-2-10 Dust Prevention for Ball Screw

If foreign matters enter inside the ball nut, all screw grooves and balls wear rapidly, or the ball screw may malfunction due to the damage of groove and/or ball recirculation system. Use bellows or telescopic pipes (**Fig. 10.1**) to keep foreign matters from entering into the feed screw system. Install these items so as to shut foreign matters completely from the ball screw. Also it is even more effective to add seals on the ball nut as shown in **Figs. 10.2** to **10.7.** We provide seals in **Table 10.1.**

Table 10.1 Seal

	Sealing capability	Torque	Heat	grease retention	Application
Thin plastic seal	○	○	○	○	End deflector type, HMD type, BSL type
Plastic seal	×	◎	◎	×	Tube type, Deflector(bridge) type (Seal is not put on the lead of 1mm or smaller.)
Wiper seal	○	×	×	○	
X1 seal	◎	○	○	◎	HMS type, HMD type
High performance seal	◎	○	○	○	VSS type
Brush-seal	△	○	○	△	For R Series (Seal for those with the shaft diameter of 14 mm or less is plastic seal.)

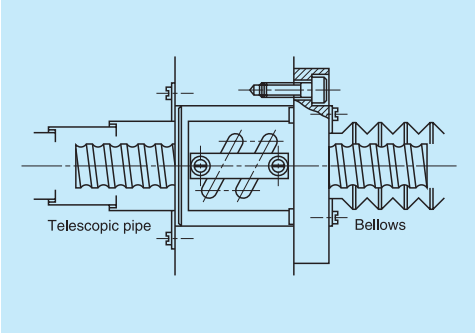


Fig. 10.1 Dust prevention by telescopic pipe and bellows

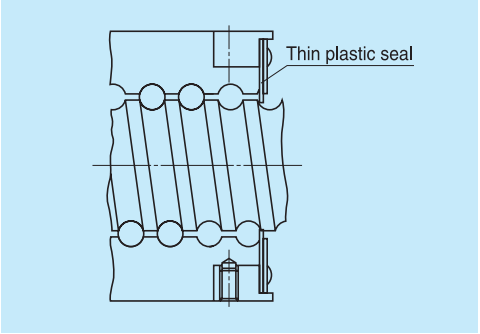


Fig. 10.2 Thin plastic seal

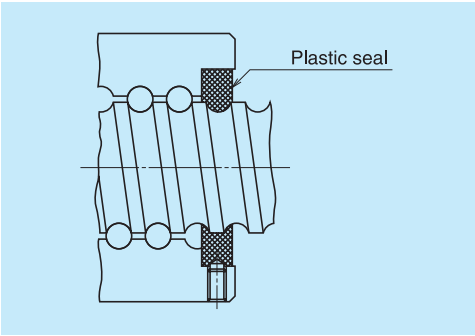


Fig. 10.3 Plastic seal

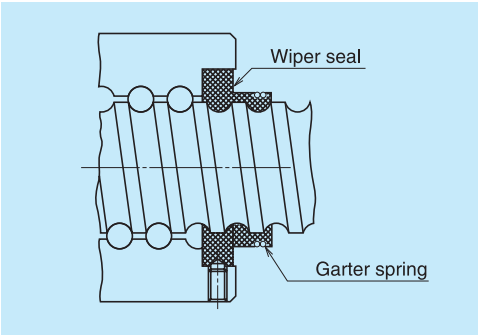


Fig. 10.4 Wiper seal




Fig. 10.5 X1 seal

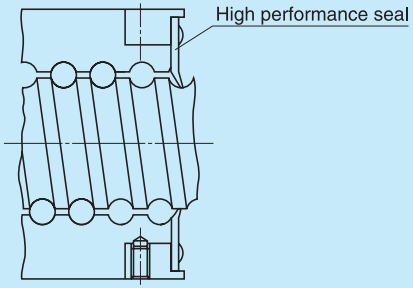


Fig. 10.6 High performance seal




Fig. 10.7 Brush-seal for R Series

B-2-11 Rust Prevention and Surface Treatment of Ball Screws

(1) Stainless steel ball screw

KA type ball screws made of stainless steel are available. Please consult NSK for a custom made stainless steel ball screw.

(2) Types of surface treatment

The following are common types of treatment.

○Low temperature chrome plating
- Used to prevent corrosion and light reflection, and for cosmetic purpose.

○Fluoride low temperature chrome plating
- Fluoroplastic coating is provided following the low temperature chrome plating.
- Resistance to corrosion is higher than low temperature chrome plating.

○Hard chrome plating
- Very hard coating provides high resistance to both wear and corrosion.

○Electroless nickel plating
- Creates a film of consistent thickness on complex shaped items.
- For corrosion prevention.

(3) Recommended surface treatment

Among the surface treatments mentioned above, we recommend "Low temperature chrome plating" and "fluoride low temperature chrome plating" for rust prevention because of the result of humidity chamber test for antirust characteristics.

However, never apply any organic solvent for degreasing because it has adverse effect on antirust characteristics.

Table 11.1 Surface treatment length

	Applicable length
Low temperature chrome plating	5 m or less
Fluoride low temperature chrome plating	4 m or less

Refer to "1.3 Rust Prevention and Surface Treatment" (page D5) for the results of humidity chamber test.

B-2-12 Ball Screw Specifications for Special Environments

B-2-12.1 Clean Environments

NSK manufactures NSK Clean Grease "LG2" and "LGU" for NSK linear guides, ball screws, and Monocarriers which are used under normal temperature and pressure in a clean room.

The LG2 and LGU grease are far more superior in stable torque characteristics than the vacuum grease which has been used as a countermeasure against dust generation. The LG2 and LGU also have a sufficient durability and dust prevention capability.

Features of "LG2" and "LGU"

(a) Generates less dust than prevailing vacuum greases and general greases. Cleanliness is enhanced by simply switching the grease to the LG2 or the LGU.

(b) Has extremely low and stable torque characteristics. It is ideal for high-speeds operation.

(c) Unlike prevailing vacuum greases, the LG2 and LGU have a nature similar to general grease. Its effect is long-lasting, and sufficiently durable. They greatly contribute to minimize the frequency of maintenance.

(d) They have an equal capability in rust prevention as general grease, and also are reliable.

When using NSK linear guides, ball screws, or Monocarriers in a clean environment, request the LG2 or LGU as a packed lubricant prior to delivery. NSK also makes bellows-tubes which contain 80 grams of the LG2 or LGU. The tube is easy to use, and is ideal for maintenance (refer to pages B413 and D19). Wash to remove adipose substances prior to use.

Refer to page D8 for their detailed nature, functions and characteristics of LG2 and LGU.

B-2-12.2 Measures for Use Under Vacuum

NSK developed MoS_2 / WS_2 spattering and dry-filmed ball screws for equipment to be used in space. NSK also makes soft-metal film (gold and silver) ball screws to be used in a vacuum environment for semiconductor and flat panel display processing equipment.

Lubricants widely used for ball screws in a high vacuum are:
- Vacuum grease which uses base oil of low vapor pressure.
- Solid lubricants such as MoS_2, WS_2 used mainly for equipment in space.
- Solid lubricants by soft-metal such as gold, silver, or lead film.

When used for semiconductor and flat panel display manufacturing equipment, the oil of the vacuum grease evaporates and causes environmental contamination. Also, it hinders creation of a super high vacuum. MoS_2 in the state of solid lubricant generates a large volume of dust, and Mo is unsuitable for semiconductors and reformed surface. Therefore, it is not suitable for the processing machines for semiconductor and flat panel display .

NSK recommends solid lubricant ball screws with a long life. These ball screws are treated with special silver film by NSK's unique processing technology, and can be used in a super-high vacuum. However, because of a solid lubricant, the film may peel off and stick to surface of ball grooves repeatedly, causing the torque to rise momentarily on some occasions. The drive motor should be of large capacity to handle this drastic variation of torque.

Refer to page D7 for the test data of ball screws for vacuum.

For ball screw specifications for special environments, refer to page D2.

B-2-13 Noise and Vibration

B-2-13.1 Consideration to Lowering Noise

As the machine operates at higher speeds, noise levels tend to increase. Covering the nut section is insufficient to lower noise. NSK has abundant data (NSK Motion & Control Technical Journal No.4, etc.), and offers advice to users regarding selecting ball screw.

To lower noise level in general, the following points should be taken into consideration.

(a) Use as a large lead as possible to reduce rotational speed.

(b) Use a ball screw with smaller outer diameter as possible.

(It often requires designing for critical dimensions, mandating special specification. Please consult NSK.)

For reference, noise levels by ball screws alone are plotted below. The formula for calculation is also shown below.

(a) Average value at measuring distance of 400 mm

$$dB\ (A) = 25.2\ \{\log_{10}\ (D_w \cdot d_m \cdot n \times 10^{-5})\} + 63.9 \quad \cdots 32)$$

(b) Upper limit at measuring distance of 400 mm

Average value + 6 dB (A)

D_w : Ball diameter (mm)

d_m : Ball pitch circle dia. (mm)

n : Rotational speed (min^{-1})

If measuring distance is 1 m, the average noise level is: Various noise levels minus 8 dB (A).

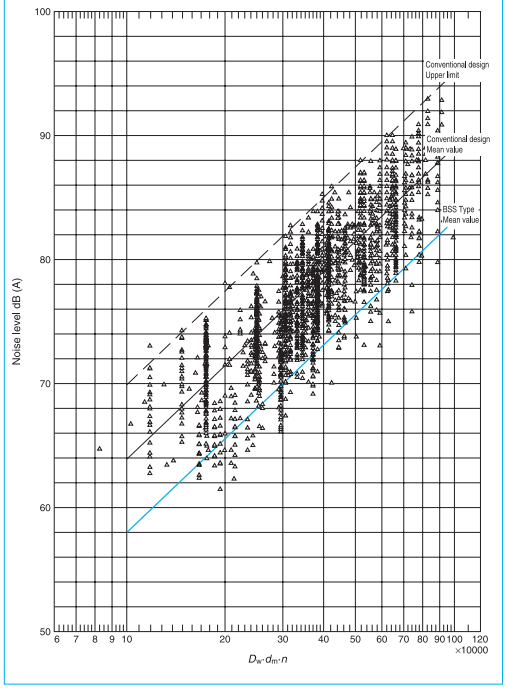


Fig. 13.1 Noise levels of ball screws

<<Example of calculation of noise levels>>

<Use conditions>

Nut model: DFT4010-5

From the dimension table: $D_w = 6.350$

$d_m = 41$

Maximum rotational speed: 2 000 min^{-1}

<Calculation>

By formula 34):

$$dB\ (A) = 25.2\ \{\log_{10}\ (D_w \cdot d_m \cdot n \times 10^{-5})\ \} + 63.9$$
$$= 25.2\ \{\log_{10}\ (6.350 \times 41 \times 2\,000 \times 10^{-5})\ \} + 63.9$$
$$= 82\ dB\ (A)$$

The average value of noise level by ball screws alone at maximum rotational speed (measuring distance 400 mm) is 82 dB (A).

Upper limit is: 82 dB (A) + 6 dB (A) = 88 dB (A)

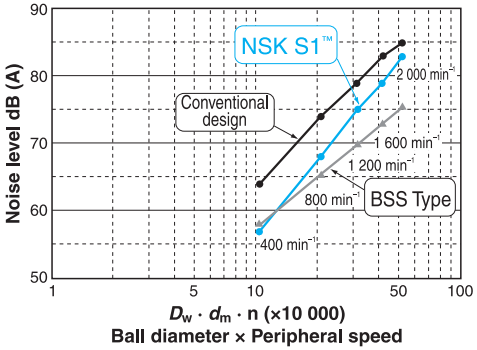
If the measuring distance is 1 m, the average value of noise level is 74 dB (A), and upper limit is 80 dB (A).

When installed, the noise of ball screw becomes higher by the noise of the machine and characteristics of machine vibration.

B-2-13.2 Consideration to Operational Characteristics

Smooth motion is achieved by using spacer balls on conventional ball return tube type ball screws. By using NSK S1 the smoothness is further improved. The BSS type will achieve the smoothness equivalent to ball screws with NSK S1.

By using NSK S1, the noise is reduced and softened compared to conventional ball screws. The BSS type will furthermore reduce and soften the noise.



B-2-13.3 Consideration to Ball Screw Support System

A ball screw has low radial rigidity because its support span is longer compare to its shaft diameter. It has only small damping capacity, requiring as much support rigidity as possible through design.

A simplified support bearing system to cut costs invites noise and vibration problems. Therefore, the necessity of consideration to the ball screw support system of both shaft ends is increasingly becoming important as the speed of machines is ever-increasing.

If one shaft end must be left unfixed without support bearing due to structural reasons, noise and vibration problems may occur. These problems are related to the natural vibration frequency of the screw shaft on the unsecured end. This problem can be averted by installing an impact damper to the shaft end (**Fig. 13.2**). Please consult NSK for details.



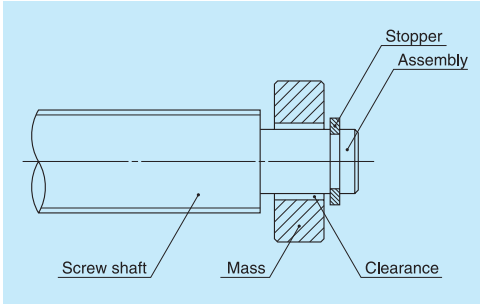



Fig. 13.2 Impact damper (Applied for patent)



Spacer balls




NSK S1 Inserting type



BSS Type, PSS Type

B-2-14 Installation of Ball Screw

The following simplified component drawing shows a representative example of a single-axis table.

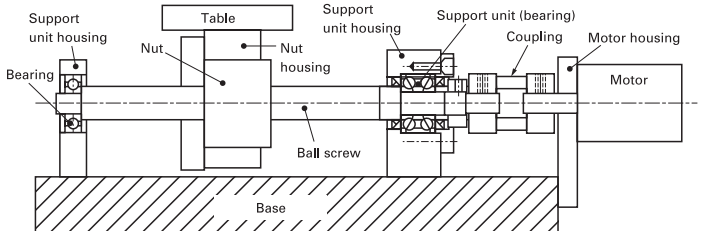


The screw shaft of the ball screw is supported by a nut and bearings, and it is driven by a motor.
It is critically important to complete the centering work to ensure the predetermined operation life, functionality and accuracy of the ball screw. In general, the following accuracy is recommended for precision-class applications.

Inclination of center line: 1/2000 or less (Target: 1/5000 or less)
Eccentricity: 0.020 mm or less


The following problems could occur if an installation error negatively affected the ball screw:

(1) Effects on durability:
→ Lowered flaking life or wearing life.
(2) Effects on torque characteristics:
→ Increased friction torque or torque variations.
(3) Effects on feed rate:
→ Decreased accuracy in motion.

<Inclination of center line>




<Eccentricity>



Overall View of Assembled Body

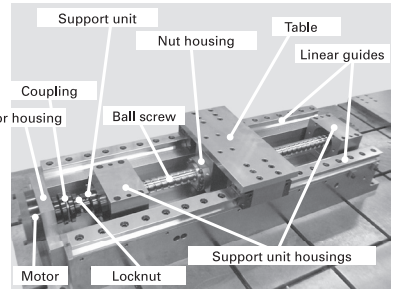Explanations of the assembling procedure are given below, using the single-axis table as an example: In this explanation, two different installation procedures are provided: one for machine tools, where high installation accuracy is required, and another for general industrial machinery.




B-2-14.1 Installation Procedure for Machine Tools, Where High Installation Accuracy Is Required

The single-axis table shall be installed according to the following procedure:

1. Centering of nut housing
2. Centering of support unit housing
3. Installation of ball screw
4. Installation of support unit
5. Adjusting axial runout of screw shaft end and fastening lock nut of support unit
6. Replenishing lubrication grease
7. Verification of functionality
8. Centering of motor housing
9. Installation of coupling and motor
10. Trial operation

I. Jigs required for installation

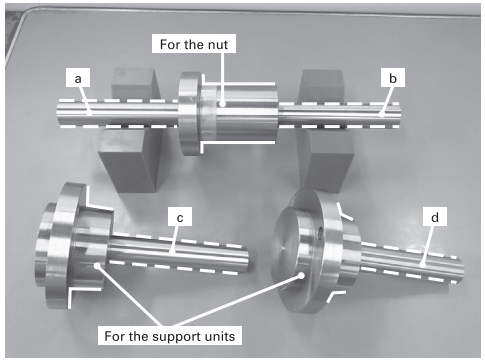Test bars:
(For the nut: one piece; for the support units: two pieces)
⇒ For centering and measurement of axial runout. The portions onto which the housing is installed (marked with the solid line) and the portions subject to measurement (a, b, c and d, marked with the broken line) shall be finished to high precision.





II. Installation of assembled body

1. Centering of nut housing


1-1


Turn the table over and mount the nut housing and test bar for the nut onto it.
Set up a magnet stand with a dial gauge attached, taking the rear side of the table as reference. Measure two spots at the top of the test bar for the nut by moving the magnetic stand around to check the inclination in the vertical direction.
If inclination of center line is observed, adjust the surfaces on which the nut housing is installed.





1-2
Fix the magnetic stand, with the dial gauge attached, onto a block. While pressing the block toward the reference surface of the table, move the magnet stand around. Measure the side surface of the test bar for the nut, check the inclination in the horizontal direction. If inclination of center line is observed, adjust the portion where the nut housing is installed onto the table.







2. Centering of support unit housing


Install the linear guides onto a machine base, and then install the table, which has already been centered. (For installation of linear guides, please refer to A67 of CAT. No. 9008.)

2-1
Install the test bar for the support unit onto the support unit housing.





2-2
Install the magnet stand, with the dial gauge attached, using the table as reference. While moving the table, measure the two spots at the top of the test bar for the motor-side support unit to check the inclination in the vertical direction. If inclination of center line is observed, adjust the mounting surfaces of the support unit housing.
Follow the same procedure for the opposite side of the motor.







2-3
Fix the magnet stand, with the dial gauge attached, onto a block, and install the block onto the top surface of the linear guide rail. Measure the top points of the test bar for the nut and the support unit to check for eccentricity in the vertical direction.
If eccentricity is observed, adjust the mounting surface of the support unit housing.
Follow the same procedure for the opposite side of the motor.






2-4
Fix the magnet stand, with the dial gauge attached, onto a block. While pressing the block toward the top surface of the linear guide rail as reference and moving it, take measurements of the side surfaces of the test bars for the nut and support unit to check for eccentricity in the horizontal direction. If eccentricity is observed, adjust the mounting surface of the support unit housing.
Follow the same procedure for the opposite side of the motor.






3. Installation of ball screw

Remove all test bars from the housing.
Clean the outside diameter surface of the nut and the inside diameter surface of the housing using a cloth, and install the ball screw.
Apply grease to spots with metal-to-metal contact to avoid any scratches or dents. While doing this, be careful not to drop the ball screw or hit it with anything, which might cause malfunction. If the housing must be removed in order to mount the ball screw, use a positioning pin so that the housing can be mounted back in its original position.




4. Installation of support unit

Insert the screw shaft into the support unit housing and mount the support units on both shaft ends. Fix the motor-side support unit to the housing. Fasten the locknut temporarily.
Follow the same procedure for the opposite side of the motor.




5. Adjusting axial runout of screw shaft end and fastening lock nut of support unit

Bring the dial gauge into contact with the top of the shaft end. Then, while rotating the screw shaft, measure the runout of the shaft end. While adjusting the shaft end runout, fasten the locknut to attain the required fastening torque.
Follow the same procedure for the opposite side of the motor.




6. Replenishing lubrication grease

Wipe away the antirust oil from the empty ball screw, to which grease has not been applied, and supply grease through the grease hole to fill the inside. (Supply the grease while rotating the ball screw in the direction that moves grease toward the inside of the nut. This will lubricate the ball screw evenly.)
If you use a ball screw already filled with grease, it is not necessary to add more.



7. Verification of functionality


To check whether the ball screw has been installed accurately, verify its functionality. Measure the driving torque with a torque meter over the entire movable range of the screw.
Confirm (including by touch) that there are no abnormalities.




8. Centering of motor housing

8-1


Install the motor housing, and mount the dial gauge onto the shaft end of the ball screw. Rotate the screw shaft to check the inclination of the motor housing, with the stylus of the dial gauge in contact with the end face of the motor housing. If inclination of the end surface of the motor housing is observed, adjust the mounting surface of the motor housing.






8-2


Set up the dial gauge onto the end face of the ball screw. Rotate the screw shaft to check eccentricity, with the stylus touching the inside diameter surface of the motor housing. If eccentricity is observed, adjust it by installing the motor housing appropriately.





9. Installation of coupling and motor

Mount the coupling onto the shaft end of screw, and install motor.
Fasten the bolts of the coupling to connect the shaft end with motor shaft.



10. Trial operation

At the beginning, run the assembly at low speed to check for vibrations and noise. Then, run it at moderate speed, and finally at high speed and check for abnormalities. Then run it continuously for approximately two hours, carry out a running-in operation and at the same time check for any abnormalities. During this running-in operation, the excessive grease inside of the nut is pushed out of the nut. Wipe it away.

B-2-14.2 Installation Procedure for General Industrial Machinery

In this procedure, the ball screw is installed with the accuracy required for the linear guide. The centering of nut and table are adjusted by installing the nut housing appropriately. Since no test bars are required and the inside diameter of the nut housing does not need to be fit with the nut, the ball screw can be installed relatively easily and cheaply.


The installation procedure used for the single-axis table is shown below:

1. Installation of support unit housing
2. Installation of ball screw
3. Installation of support unit
4. Adjusting runout of screw shaft end and fastening support unit lock nut
5. Centering of ball screw
6. Installation of nut housing
7. Replenishing lubrication grease
8. Verification of functionality
9. Centering of the motor housing
10. Installation of coupling and motor
11. Trial operation

I. Installation of assembled body


1. Installation of support unit housing

Install the linear guide onto the machine base.
(For installation procedure for linear guide, please refer to A67, CAT. No. 9908.)
Place the support unit housing at the predetermined position and fasten it temporarily.




2. Installation of ball screw

Clean the outside diameter surface of the nut and the inside diameter surface of the housing using a cloth, and install the ball screw.
Apply grease to spots with metal-to-metal contact to avoid scratches and dents. While doing this, be careful not to drop the ball screw or hit it with anything, which might cause malfunction.
Conduct this task using a V-block to prevent scratches and dents.




3. Installation of support unit

Insert the screw shaft into support unit housing and mount support units on both shaft ends. Fix the motor-side support unit to the housing. Fasten the locknut temporarily.
Follow the same procedure for the opposite side of the motor.



4. Adjusting runout of screw shaft end and fastening support unit locknut


Bring the dial gauge into contact with the top of the shaft end. Then, while rotating the screw shaft, measure the runout of the shaft end. While adjusting the shaft end runout, fasten the locknut to attain the required fastening torque.
Follow the same procedure for the opposite side of the motor.




5. Centering of ball screw

5-1


Set up a magnet stand with a dial gauge attached, using the ball slide of the linear guide as reference. Measure the top of the screw shaft in the vicinity of the support unit housing both on the motor and opposite sides to check the inclination in the vertical direction. If inclination of center line is observed, adjust the mounting surface of the support unit housing.






5-2

Fix the magnet stand, with the dial gauge attached, onto a block. While pressing the block toward the ball slide of the linear guide, move the block. Measure the side surface of the screw shaft in the vicinity of the support unit housing both on the motor and opposite sides to check the inclination in the horizontal direction. If inclination of center line is observed, adjust by installing support unit housing appropriately. After the adjustment, fix the support unit housings of the motor side and the opposite side.






6. Installation of nut housing


6-1

Temporarily fasten the nut housing onto the table, and fasten the table, using the ball slide of the linear guide as reference surface.
To minimize the bending of the screw shaft caused by the self-weight of the nut, move the nut toward the support unit housing at the shaft end.




6-2

Move the table toward the nut, and fasten the nut to the nut housing.
Loosen the bolts that fasten the table to the nut housing, and re-fasten them.
Loosen the bolts that fasten the nut housing and the nut, and re-fasten them.




7. Replenishing lubrication grease

Wipe away the antirust oil from the empty ball screw, to which grease has not been applied, and supply grease through the grease hole to fill the inside. (Supply grease while rotating the ball screw in the direction that moves grease toward the inside of the nut. This will lubricate the ball screw evenly.)
If you use a ball screw already filled with grease, it is not necessary to add more.



8. Verification of functionality


To check whether the ball screw has been installed accurately, verify its functionality. Measure the driving torque with a torque meter over the entire movable range of the screw.
Confirm (including by touch) that there are no abnormalities.




9. Centering of motor housing

9-1


Install the motor housing, and mount the dial gauge onto the end face of the ball screw. Rotate the screw shaft to check the inclination of the motor housing, with the stylus of the dial gauge in contact with the end face of the motor housing. If inclination of center line is observed, adjust the mounting surface of the motor housing.






9-2


Set up the dial gauge onto the end face of the screw shaft. Rotate the screw shaft to check eccentricity, with the stylus touching the inside-diameter surface of the motor housing. If eccentricity is observed, adjust it by installing the motor housing appropriately.





10. Installation of coupling and motor

Mount the coupling onto the shaft end, and install the motor.
Fasten the bolts of the coupling to connect the shaft end with the motor shaft.



11. Trial operation

At the beginning, run the assembly at low speed to check for vibrations and noise. Then, run it at moderate speed, and finally at high speed and check for abnormalities. Then run it continuously for approximately two hours, carry out a running-in operation and at the same time check for any abnormalities. During this running-in operation, the excessive grease inside of the nut is pushed out of the nut. Wipe it away.

B-2-15 Precautions for Designing Ball Screw

B-2-15.1 Safety System

As shown in the illustration on page B352, a stopper is installed in some cases to prevent the nut from overrunning due to malfunction of the safety system of the machine itself, or human error during operation.
The travel stopper should be installed at a place where it will not come into contact with the nut when the nut reaches the designed stroke end.
An impact absorbing travel stopper (NSK patent, refer to page B414) is available at NSK.

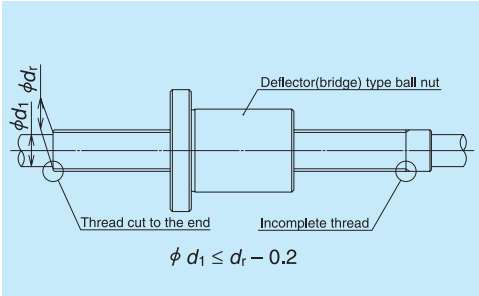


Fig. 15.1 Shaft end of a deflector (bridge) recirculation system ball screw

B-2-15.2 Design Cautions to Assembling Ball Screw

(1) Cutting through the thread screw to the end

For some recirculation system, such as the deflector(bridge) type, end cap type, S1 speficication (High-Load drive ball screws etc.) and a part of end deflector type, one end of the thread screw should be cut through to the end of the major diameter. This is necessary to assemble the ball nut to the screw shaft (**Fig. 15.1**).
In this case, the shaft end diameter, to where this "cut-through thread" is made, should be 0.2 mm or smaller than the ball groove root diameter "d_r". (See the dimension table.) A similar precaution is required when it is absolutely necessary to remove the nut from the screw shaft in order to install the ball screw to the machine. Also, in case using the cut-through end as the shoulder of the support bearing, make certain that a sufficient amount of the effective flat surface is left from the root diameter. If it is insufficient, the bearing cannot be installed perpendicularly to the bearing seat. (**Fig. 15.2**)

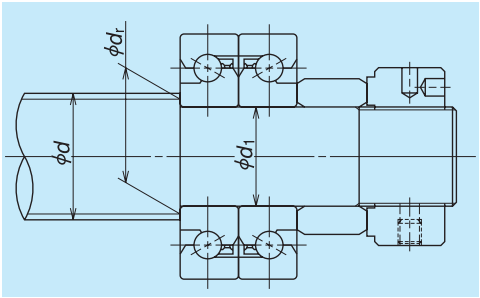


Fig. 15.2 Support bearing and end face (shoulder) for installation

(2) Designing the screw shaft end and the nut mounting area

When installing a ball screw to the machine, avoid a design which makes it necessary to separate the nut from the screw shaft as shown in **Fig. 15.3**. If separated, the balls may fall out. The separation may also deteriorate the ball screw accuracy, or may damage the ball screw. If separating them is unavoidable, please furnish NSK with the component which is to be installed between the nut and screw shaft. NSK will install the component prior to delivery.

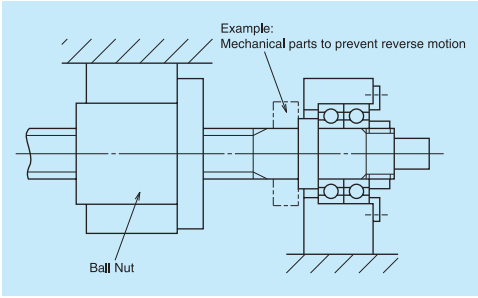


Fig. 15.3 Nut and ball screw are required to be separated when installing in this structure.

(3) Removing the nut from the screw shaft at the time of assembly

If it is unavoidable, use an arbor (**Fig. 15.4**), keeping the balls in the nut. In this case, the outside diameter of the arbor should be approximately 0.2 mm to 0.4 mm smaller than the ball groove root diameter "d_r."

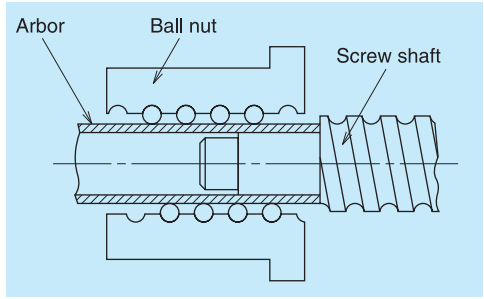


Fig. 15.4 Arbor to install and remove nut

(4) Centering of the ball nut when installing

When installing the nut as shown in **Fig. 15.5**, provide a space between the housing and the nut body diameter, allowing the centering to be performed.

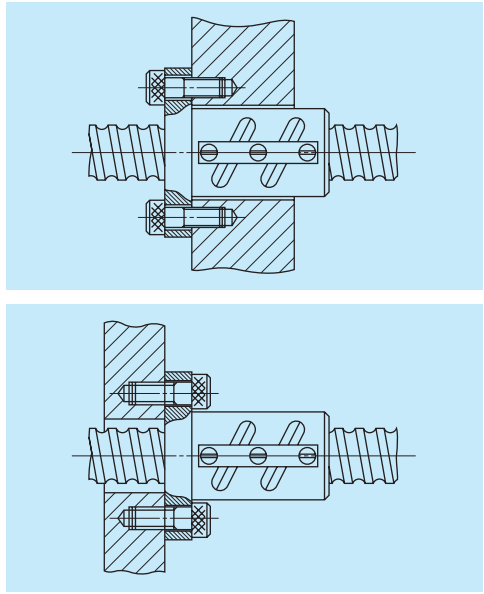


Fig. 15.5 Fixing a ball nut by flange

(5) Preventing the thread screw of nut from loosening

When installing and securing the nut to the housing at the thread screw section, as in the case for RNCT type of R Series ball screws, apply an agent which prevents the nut from loosening.

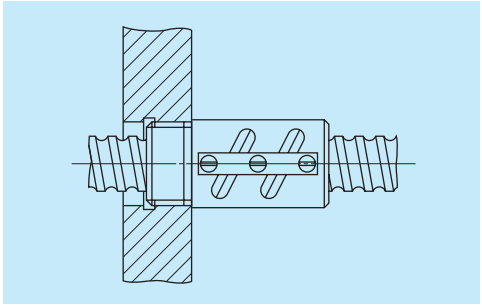


Fig. 15.6 Fixing a ball nut with thread screw

(6) Installation of brush-seal to the nut

If a brush-seal is installed at the thread screw side of the nut similar to the RNCT type which comes with a thread screw, the brush-seal should be secured as shown in **Fig. 15.7**.

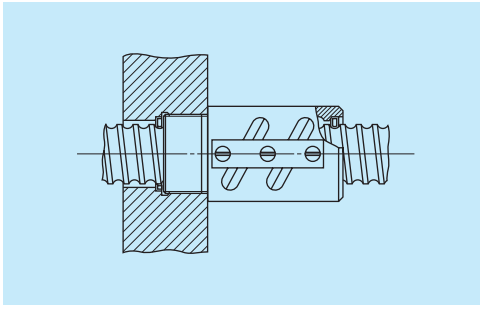


Fig. 15.7 Installation of brush-seal to a ball nut with thread screw

B-2-15.3 Effective Stroke of Ball Screw

When hardened by the induction hardening, the hardness of a ball screw may be slightly low at both ends of the screw section. Consider this low hardness prior to determining the length of effective stroke. Please consult NSK for details.

B-2-15.4 Matching after Delivery

When, after the delivery of a ball screw, you require drill knock pin hole on the screw shaft end, or at the nut mounting area, please inform NSK on the position and size of the hole.
NSK will take a measure and protect designated spots from heat treatment prior to delivery to make subsequent machining easy.

B-2-15.5 "NSK K1™" Lubrication Unit

When using the NSK K1 lubrication unit, be aware of the operating temperature and chemicals that come to contact the unit for keeping the K1's best performance.

Temperature range for use:

Maximum temperature; 50°C

Momentary maximum temperature; 80°C

Chemicals that should not come to contact:

Do not leave the K1 unit in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust preventive oil which contains white kerosene.

Water-type cutting oil, oil-type cutting oil, grease such as mineral-type AS2 and ester-type PS2 do not damage the K1 unit.

B-2-15.6 Intermediate support

The deflection of a long screw shaft due to its own weight may cause a radial load on the nut. There is also a risk that excessively large repeated load (rotational bending stress) will be applied to the shaft end during rotation. We therefore recommend intermediate support of the screw shaft at multiple points to minimize deflection.

B-2-16 Shaft End Machining

You require to machine shaft ends in the following three occasions.

* Precision ball screws with blank shaft end.
* Ball screws in R Series with blank shaft end (see page B349).
* Additional machining of a completed ball screw

The following are the summaries of machining of these shaft ends. For details, please contact NSK.

(1) Machining of blank shaft ends of precision ball screws

(a) Cutting screw shaft

Use a cutting whetstone or the like to cut the shaft, leaving stock for turning. Keep the nut in the assembled state to the screw shaft, and open only one side of the plastic wrapping bag, expose only the shaft end section to be machined, and then cut the screw shaft. This prevents foreign matters from entering to the ball screw section. Do the same for other machining.

(b) Precautions in cutting shaft end

Outside of the screw shaft is ground with precision (excluding R Series). There is a center hole in the ends. Use them for centering. Do not rotate the shaft quickly or stop it suddenly, or the nut might move along the shaft. We recommend securing the nut with tape. To machine a very long shaft, apply work rests to the screw shaft surface to suppress vibration (especially caused by critical speed).

(c) Turning by lathe

Cut to the length, turn shaft end steps, turn thread screw, and provide the center hole. Refer to JIS B1192 which sets standards for the shaft end accuracy.

(d) Processing by grinding

Apply the same precautions as for cutting for centering, securing nut, and work rest. Grind sections where the bearings and a "Spann ring" are installed.

e) Milling processing

Process keyways and tooth seats for lock washers.

(f) Deburring, washing, and rust prevention

Wash with clean white kerosene after processing. Apply lubricant for immediate use. For later use, apply rust preventive agent.

Note: Contact NSK if nut is accidentally removed.

B-2-17 Ball Screw Selection Exercise

Drill 1: High-speed transporting system

1. Design conditions

Table mass : $m_1 = 40$ kg
Mass of the transporting item : $m_2 = 20$ kg
Maximum stroke : $S_{max} = 700$ mm
Rapid traverse speed : $V_{max} = 1\,000$ mm/sec (60 m/min)
Positioning accuracy : ±0.05/700 mm (0.005 mm/pulse)
Repeatability : ±0.005 mm
Required life : $L_t = 25\,000$ h (5 years)
Guide way (rolling) : $\mu = 0.01$ (friction coefficient)
Drive motor : AC servo motor
($N_{max} = 3\,000$ min^{-1})

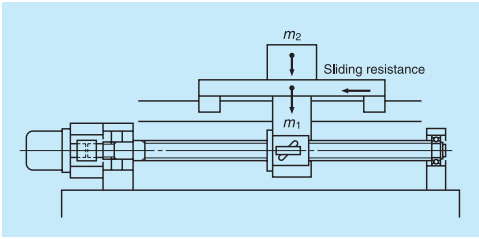


Fig. 16.1 System appearance

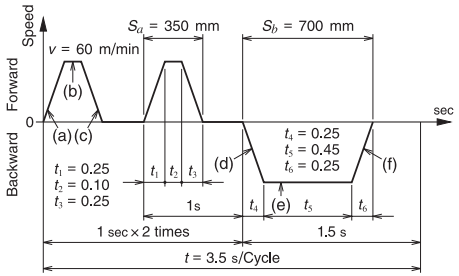


Fig. 16.2 Operating condition

2. Selection of basic factors

(1) Selection of accuracy grade and axial play

According to **Table 4.1** "Accuracy grades of ball screw and their application" on page B19, the accuracy grade of ball screws for Cartesian type industrial robots is C5 to Ct10.
From the following conditions in design, the axial play should be 0.005 mm or less.
Repeatability : ±0.005 (mm)
Resolution : 0.005 mm/pulse
According to **Table 4.2** "Combinations of accuracy grades and axial play" on page B20, you will require the accuracy grade C5 to satisfy the axial play of 0.005 mm or less. Therefore select the accuracy grade C5, and the axial play of 0 mm (Z-preload).

(2) Selection of lead

Calculate the lead l based on maximum speed of AC servo motor and the rapid traverse speed V_{max}.

$$l \geq \frac{V_{max}}{N_{max}} = \frac{1\,000 \times 60}{3\,000} = 20 \text{ (mm)}$$

Select a lead l of 20 mm or larger.

(3) Selection of screw shaft diameter

According to the **Table 4.4** "Shaft diameter, lead and stroke of standard ball screw" on page B21, the screw shaft diameter d which has a lead l larger than 20 mm should be in the range of 15 mm to 32 mm. Select the smallest 15 mm.

(4) Selection of stroke

From the **Table 4.4** "Screw shaft diameter, lead, and stroke of standard ball screw" on page B21, a ball screw with shaft diameter (d) of 15 mm and lead (l) of 20 mm meets maximum stroke of 700 mm, therefore it is possible to select from the standard ball screws. The primary selection is as follows:

Primary selection:
Shaft diameter : 15 (mm)
Lead : 20 (mm)
Stroke : 700 (mm)
Accuracy grade : C5
Axial play : Z

3. Confirmation of standard ball screw

In consideration of delivery time and price, select from the standard ball screws with finished shaft ends.

Primary candidate: W1507FA-3PG-C5Z20

4. Basic safety check

Let's examine the primary candidate.

(1) Allowable axial load

[1] Calculation of allowable axial load
From **Fig. 16.2**: Acceleration α_1 at accelerating / decelerating is:

$$\alpha_1 = \frac{V_{max}}{t_1} = \frac{1\,000}{0.25} = 4\,000 \text{ (mm/s}^2\text{)} = 4 \text{ (m/s}^2\text{)}$$

Axial load F_i is:
(At the time of acceleration (a)(d))

$$F_1 = \mu (m_1 + m_2) \times g + (m_1 + m_2) \times \alpha_1$$
$$= 0.01 \times (40 + 20) \times 9.80665 + (40 + 20) \times 4$$
$$= 246 \text{ (N)}$$

(At the time of constant speed (b)(e))

$$F_2 = \mu (m_1 + m_2) \times g = 0.01 \times (40 + 20) \times 9.80665$$
$$= 6 \text{ (N)}$$

(At the time of deceleration (c)(f))

$$F_3 = -\mu (m_1 + m_2) \times g + (m_1 + m_2) \times \alpha_1$$
$$= -0.01 \times (40 + 20) \times 9.80665 + (40 + 20) \times 4$$
$$= 234 \text{ (N)}$$

Thus, the maximum axial load P is 246 N.
[2] Buckling load
W1507FA-3PG-C5Z20 has the support length of 804 mm ("La" as per the dimension table on page B193), and must support maximum axial load (P) of 246 (N). The supporting condition of screw shaft is "Fixed – Simple", and the supporting condition of ball nut is "Fixed". Due to the direction of the load, the whole ball screw supporting condition is "Fixed – Fixed" support (Factor m = 19.9).
From fomula 2) on page B44:

$$d_r \geq \left(\frac{P \cdot L_a^2}{m} \times 10^{-4} \right)^{1/4} = \left(\frac{246 \times 804^2}{19.9} \times 10^{-4} \right)^{1/4}$$
$$= 5.3 \text{ (mm)}$$

W1507FA-3PG-C5Z20 has the dimension (dr) of 12.2 mm as per the dimension chart (page B193) and therefore meets the condition.

Result: Acceptable

(2) Allowable rotational speed

The permissible rotational speed listed in the dimension table is 3 000 min^{-1}. Since the motor maximum rotational speed is 3 000 min^{-1}, the operation is in the range of permissible rotational speed.

Result: Acceptable

(3) Checking life expectation

[1] Mean load F_m and mean rotational speed N_m
From the calculation of axial load, rotational speed N_i and the operating time t_i is:
(At the time of acceleration (a)(d))

$F_1 = 246$ (N)

$$N_1 = \frac{n}{2} = \frac{3\,000}{2} = 1\,500 \text{ (min}^{-1}\text{)}$$

$t_a = 2 \times t_1 + t_4 = 0.75$ (s)

(At the time of constant speed (b)(e))

$F_2 = 6$ (N)
$N_2 = 3\,000$ (min^{-1})
$t_b = 2 \times t_2 + t_5 = 0.65$ (s)

(At the time of deceleration (c)(f))

$F_3 = 234$ (N)
$N_3 = 1\,500$ (min^{-1})
$t_c = 2 \times t_3 + t_6 = 0.75$ (s)

Calculation result is shown in **Table 16.1**

Table 16.1 Axial load and rotational speed

Operating condition	Axial load (N)	Rotational speed (mean) (min^{-1})	Operating time (s)
(a) (d)	$F_1 = 246$	$N_1 = 1\,500$	$t_a = 0.75$
(b) (e)	$F_2 = 6$	$N_2 = 3\,000$	$t_b = 0.65$
(c) (f)	$F_3 = 234$	$N_3 = 1\,500$	$t_c = 0.75$

From the formulas 11) and 12) on page B53:

$$F_m = \left(\frac{F_1^3 \cdot N_1 \cdot t_a + F_2^3 \cdot N_2 \cdot t_b + F_3^3 \cdot N_3 \cdot t_c}{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c} \right)^{1/3}$$
$$= 195 \text{ (N)}$$

$$N_m = \frac{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c}{t}$$
$$= 1\,200 \text{ (min}^{-1}\text{)}$$

[2] Calculation of life expectancy

At the basic dynamic load rating C_a of W1507FA-3PG-C5Z20 (Clearance Z) is 5 660 N (as per the dimension table on page B193), from the formulas 8) and 9) on page B53:

$$L_t = \left(\frac{C_a}{F_m \cdot f_w}\right)^3 \times \frac{1}{60N_m} \times 10^6$$

$$= \left(\frac{5\,660}{195 \times 1.2}\right)^3 \times \frac{1}{60 \times 1\,200} \times 10^6$$

$$\fallingdotseq 196\,500$$

The ball screw satisfies the required life.

Result: Acceptable

5. Check for other requirements

(1) Accuracy and axial play

As per the dimension table on page B180 and **Table 1.2** for the permissible value of lead accuracy on page B38:

According to **Table 1.2**:

Accuracy grade: C5

$e_p = \pm 0.035/800$ (mm)

$\upsilon_u = 0.025$ (mm)

This grade satisfies the required positioning accuracy of ±0.05/700 mm.

The checking of axial play is omitted here since it is explained in "2. Selection of basic factors."

(2) Drive torque

Required specifications are as follows.

Motor rotational speed: 3 000 min^{-1}

Time to reach maximum speed: Less than 0.25 sec

[1] Load (converted to the motor axis)

Using the formula 30) and 31) on page B64, calculate the moment of inertia whereas γ is the material density of the ball screw.

(Screw shaft)

$$J_B = \frac{\pi \cdot \gamma}{32} D^4 \cdot L = \frac{\pi \times 7.8 \times 10^{-3}}{32} \times 1.5^4 \times 80$$

$$= 0.31 \text{ (kg} \cdot \text{cm}^2\text{)}$$

(Moving part)

$$J_w = m \times \left(\frac{l}{2\pi}\right)^2 = 60 \times \left(\frac{2}{2\pi}\right)^2$$

$$= 6.1 \text{ (kg} \cdot \text{cm}^2\text{)}$$

(Coupling)

$J_c = 0.25$ (kg · cm^2)···Temporary

(As a whole)

Moment of inertia of the ball screw J_L is:

$$J_L = J_B + J_W + J_C$$

$$= 0.31 + 6.1 + 0.25$$

$$= 6.7 \times 10^{-4} \text{ (kg} \cdot \text{m}^2\text{)}$$

[2] Driving torque

We assume that WBK12-01 compact light load type is used as recommended for W1507FA-3PG-C5Z20, and the moment of inertia of motor (J_M) is 3.1 (kg · cm^2) (3.1 × 10^{-4} kg · m^2).

(At the time of constant speed)

The torque which is necessary to drive the ball screw at a constant speed resisting to external loads is: per formula 28) on page B64

$$T_1 = T_a + T_{pmax} + T_u$$

In this formula, T_a is the drive torque at constant speed, T_{pmax} is the upper limit of the dynamic friction torque of ball screw, and T_u is the friction torque of the support bearings.

From the chart on pages B193 and B400, (T_{pmax}) is 7.8 (N · cm) and (T_u) is 2.1 (N · cm) respectively.

$$T_a = \frac{F_a \cdot l}{2\pi\eta_1}$$

Using formula 26) on page B63, the drive torque at a constant speed T_1 is:

$$T_1 = \frac{F_a \cdot l}{2\pi \cdot \eta_1} + T_{pmax} + T_u$$

$$= \frac{6 \times 2}{2\pi \times 0.9} + 7.8 + 2.1$$

$$= 12 \text{ (N} \cdot \text{cm)} = 0.12 \text{ (N} \cdot \text{m)}$$

(At the time of acceleration)

The drive torque necessary for accelerating the ball screw resisting axial load can be calculated by the formula 29) on page 64.

$$T_2 = T_1 + J \cdot \frac{2\pi \cdot n}{60t_1}$$

$$= T_1 + (J_L + J_M) \cdot \frac{2\pi \cdot n}{60t_1}$$

$$= 0.12 + (6.7 \times 10^{-4} + 3.1 \times 10^{-4}) \frac{2\pi \times 3\,000}{60 \times 0.25}$$

$$= 1.35 \text{ (N} \cdot \text{m)}$$

(At the time of deceleration)

Similarly at the time of acceleration.

$$T_3 = T_1 - J \cdot \frac{2\pi \cdot n}{60t_3}$$

$$= T_1 - (J_L + J_M) \cdot \frac{2\pi \cdot n}{60t_3}$$

$$= 0.12 - (6.7 \times 10^{-4} + 3.1 \times 10^{-4}) \frac{2\pi \times 3\,000}{60 \times 0.25}$$

$$= -1.11 \text{ (N} \cdot \text{m)}$$

[3] Selection of motor

Selection conditions are as follows.

Maximum rotational speed: $N_M \geq 3\,000$ (min^{-1})

Motor rating torque: $T_M \geq T_{rms}$ (N · m)

(T_{rms}: Effective torque)

Moment of inertia of the motor: $J_M > J_L/3$ or more

Form above: select an AC servo motor with the following specifications.

Motor specifications:
Rating power output: $W_M = 300$ (W)
Maximum rotational speed:
$N_M = 3\,000$ (min^{-1})
Rating torque: $T_M = 1$ (N · m) = 1×10^2 (N · cm)
Moment of inertia: $J_M = 3.1 \times 10^{-4}$ (kg · m^2)
= 3.1 (kg · cm^2)

[4] Check on effective torque

Effective torque T_{rms} can be calculated as follows:

$$T_{rms} = \sqrt{\frac{T_2^2 \times t_a + T_1^2 \times t_b + T_3^2 \times t_c}{t}}$$

$$= \sqrt{\frac{1.35^2 \times 0.75 + 0.12^2 \times 0.55 + 1.11^2 \times 0.75}{3.5}}$$

$$= 0.81$$

Thus the condition of "$T_M \geq T_{rms}$" is cleared.

[5] Check on time to reach maximum speed

The time required to reach the rapid traverse speed can be calculated as follows. Whereas $T_M' = 2 \times T_M$:

$$t_a = \frac{(J_L + J_M) \times 2\pi \times n}{(T_M' - T_1)} \times 1.4$$

$$= \frac{(6.7 \times 10^{-4} + 3.1 \times 10^{-4}) \times 2\pi \times 3\,000}{(2 \times 1 - 0.12) \times 60} \times 1.4$$

$$= 0.23$$

Thus the ball screw meets the requirement of "0.25 sec or less".

From the above, use W1507FA-3PG-C5Z20

Drill 2: Processing table for special machines

1. Design conditions

Table mass: m_1 = 1 000 kg
Mass of the work: m_2 = 600 kg
Maximum stroke: S_{max} = 1 000 mm
Maximum speed: V_{max} = 15 000 mm/min
Positioning accuracy: ±0.035/1 000 mm (no load)
* Attitude accuracy of the table and thermal displacement are not included in the accuracy requirement of the ball screw.
Repeatability: ±0.005 mm (no load)
Lost motion: 0.020 mm (no load)
Required life expectancy: L_t = 20 000 h
($16^{h} \times 250^{days} \times 10^{years} \times 0.5^{rate\ of\ operation}$)
Guide way (sliding): μ = 0.15
(friction coefficient)
Processing: Milling and drilling
Drive motor: AC servo motor
(N_{max} = 2 000 min^{-1})

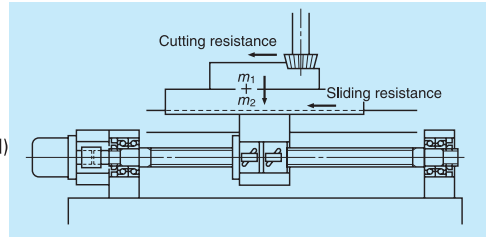


Fig. 16.3 System appearance

Table 16.2 Operating conditions

Operation	Axial load (N)		Feed speed (mm/min)	Use time ratio (%)
	Cutting resistance	Sliding resistance		
Rapid traverse	0	2 354	15 000	30
Light/medium cutting	4 000	2 354	500	50
Heavy cutting	8 000	2 354	100	20

* Sliding resistance: $F_r = \mu (m_1 + m_2)\, g = 0.15 \times (1\,000 + 600) \times 9.80665 = 2\,354$ (N)
* Ignore the inertia force at the time of acceleration/deceleration because their time rate is negligibly short.

2. Selection of basic factors

(1) Selection of accuracy grade and axial play

The proper accuracy grade for machining centers should be in the range from C1 to C5 according to "**Table 4.1** Accuracy grades of ball screws and their applications" on page B19. Assuming the nut length is 200 mm and margin stroke is 100 mm, the shaft length L_0 is obtained as follows:

L_0 = Maximum stroke + nut length + margin
= 1 000 = (200) + (100) = 1 300

From "**Table 1.2** Tolerance on specified travel and travel variation of the positioning ball screws" on page B38, the accuracy factors which satisfy the required function are:

Accuracy C3 grade
e_p = ±0.029/1 600 (mm)
υ_u = 0.018 (mm)

Considering the importance of lost motion, select the Z code (axial play 0 mm and less) for the axial play.

(2) Selection of lead

From the maximum rotational speed of AC servo motor N_{max} and rapid traverse speed of table V_{max}, lead l is :

$$l \geq \frac{V_{max}}{N_{max}} = \frac{15\,000}{2\,000} = 7.5 \text{ (mm)}$$

A larger lead l would be beneficial for a higher feed speed. But from the view of the control system (resolution), the lead l is limited to 8 mm or 10 mm.

(3) Selection of screw shaft diameter

According to **Table 4.4** "Screw shaft diameter, lead and stroke of standard ball screw" on page B21, the screw shaft diameter with the lead of 8 mm or 10 mm are in the range of 10 mm to 50 mm. Placing more importance on rigidity than to the volume of lost motion, select a relatively large size in the range of 32 mm to 50 mm.

(4) Selection of stroke

Select 1 000 mm, the maximum stroke as specified in the design condition.

Primary selection:
Standard ball screw
Shaft diameter: 32, 36, 40, 45, 50 mm
Lead: 8, 10 mm
Stroke: 1 000 mm
grade: C3
Axial play code: Z

3. Confirmation of standard ball screw

Giving consideration to delivery time and price, select a standard ball screw.
At the primary selection of C3 grade is not found in the standard ball screws. Let us check for application-oriented ball screws whether there is a C3 grade among ball screw.

4. Confirmation of made-to-order ball screw

Because standard ball screws do not meet the accuracy grade requirement, we will consider made-to-order ball screws which are based on standard ball screws but with accuracy grade of C3.

Second selection:
Made-to-order ball screw
Shaft diameter : 32, 36, 40, 45, 50 mm
Lead : 8, 10 mm
Stroke : 1 000 mm
Accuracy grade : C3
Axial play : Z

5. Selection of screw shaft diameter, lead, and nut

(1) Dynamic load rating

Obtain required load carrying capacity for each lead through load conditions. From **Table 16.2** "Operating conditions" on page B91, calculate the rotation speed N_i as shown in **Table 16.3.**

$$N_i \geq \frac{V_i}{l}$$

Table 16.3 Load conditions

Operating condition	Axial load (N)	Rotations per minute (min^{-1})		Use time ratio (%)
		l = 8	l = 10	
Rapid traverse	F_1 = 2 354	N_1 = 1 875	N_1 = 1 500	t_1 = 30
Light/medium cutting	F_2 = 6 354	N_2 = 62.5	N_2 = 50	t_2 = 50
Heavy cutting	F_3 = 10 354	N_3 = 12.5	N_3 = 10	t_3 = 20

By using the formulas 11) and 12) on page B53, calculate the mean load F_m and the mean rotational speed N_m as shown below.

$$F_m = \left(\frac{F_1^3 \cdot N_1 \cdot t_1 + F_2^3 \cdot N_2 \cdot t_2 + F_3^3 \cdot N_3 \cdot t_3}{N_1 \cdot t_1 + N_2 \cdot t_2 + N_3 \cdot t_3} \right)^{1/3}$$

$$N_m = \frac{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c}{t}$$

Table 16.4 Mean load and mean rotational speed

Lead (mm)	8	10
Mean load F_m (N)	3 122	3 122
Mean rotational speed N_m (min^{-1})	596	477

Required dynamic load rating C_a is:

Using the formulas 8) and 9) on page B53, calculate the required dynamic load rating.

$$C_a \geq (60 N_m \cdot L_t)^{1/3} \cdot F_m \cdot f_w \times 10^{-2} \ (N)$$

Whereas required life expectancy L_t = 20 000 (h), load coefficient f_w = 1.2 (refer to page B53),

l = 8 (mm) ····· $C_a \geq$ 33 500 (N)

l = 10 (mm) ····· $C_a \geq$ 31 100 (N)

(2) Selection of the nut

Due to the requirement on the lost motion, the nut will be selected as follows emphasizing the importance of system rigidity.

Table 16.5 shows the dynamic load rating of each specification.

- Standard nut ball screw, tube type
- Model: ZFT or DFT (pages B439 to B468)
- Number of turns of balls: Select from 2.5 turns 2 circuits or 2.5 turns 3 circuits

From **Table 16.5** select item that meets required dynamic load rating C_a as follows:

Third selection: In the range surrounded by the dotted lines ▭ in **Table 16.5**

Table 16.5 Dynamic load rating of each specification

Screw shaft diameter (mm)	Dynamic load rating *Ca*: (N)			
	Lead 8 mm		Lead 10 mm	
	2.5 turns 2 circuits	2.5 turns 3 circuits	2.5 turns 2 circuits	2.5 turns 3 circuits
32	37 300	–	54 500	–
36	–	–	58 000	–
40	41 100	–	61 200	–
45	–	–	65 800	93 300
50	45 700	64 800	68 100	96 500

(3) Permissible rotational speed

[1] Critical speed

Check if the rapid traverse speed of 15 000 mm/min (V_{max}) clears the critical speed. Ball screw rotational speed at each lead N is:

l = 8 (mm) ····· N = 1 875 (min^{-1})

l = 10 (mm) ····· N = 1 500 (min^{-1})

From the formula 7) on page B47, screw shaft root diameter to meet critical speed requirement is:

$$d_r \geqq \frac{N \cdot L_a^2}{f} \times 10^{-7} \ (mm)$$

In this formula, unsupported length L_a is:

L_a = Maximum stroke + nut length/2 + shaft end extra length

= 1 000 + 100 + 200 = 1 300 (mm)

Supporting condition of the screw shaft is Fixed - Fixed support, and that of the ball nut is Fixed. Therefore, supporting condition is Fixed - Fixed support (Factor f = 21.9)

l = 8 (mm) ····· $d_r \geq$ 14.5 (mm)

l = 10 (mm) ···· $d_r \geq$ 11.6 (mm)

[2] $d \cdot n$ value

From **Table 3.2** on page B50, as the d·n is 70 000 or less, screw shaft diameters to meet the d·n are:

$$d \leq \frac{70\,000}{N} \ (mm)$$

l = 8 (mm) ····· $d \leq$ 37.3 (mm)

l = 10 (mm) ····· $d \leq$ 46.7 (mm)

Based on nut specifications (pages B439 to B468) select an item that meets screw shaft root diameter (d_r) and screw shaft diameter (d).

∗ Please consult NSK if the d • n value is necessary to exceed 70 000.

Fourth selection: In the range surrounded by the solid-lines in **Table 16.5**

(4) Rigidity of the ball screw system

Set the lost motion of the ball screw system (screw shaft, nut and support bearings) at 80% of the specified value. Then calculate the system rigidity. The criterion lost motion is:

20 (μm) × 0.8 = 16 (μm)

At this time, the one-way elastic deformation ΔL of the major factors of ball screw system shall be less than the half of above criterion.

$\Delta L \leq$ 8 (μm)

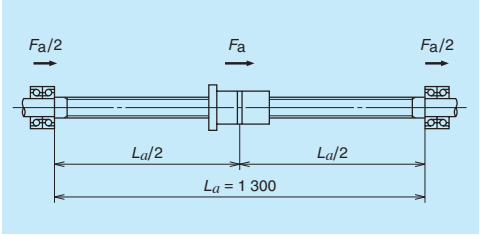


Fig. 16.3 Unsupported length

[1] Rigidity of the screw shaft K_S

Calculate the rigidity at the center of screw shaft where the axial deformation becomes the largest. Because the supporting condition of screw shaft is Fixed - Fixed support, the rigidity as per the formula 21) on page B58:

$$K_s = \frac{\pi \cdot d_r^2 \cdot E}{L_a} \times 10^{-3} \ (N/mm)$$

At here E is the elastic modulus. From the formula 17) on page B57, the elastic deformation of the screw shaft ΔL_S is:

$$\Delta L_s = \frac{F_a}{K_s} = \frac{F_a \cdot L_a}{\pi \cdot d_r^2 \cdot E} \times 10^3 \ (\mu m)$$

The sliding resistance F_a is:

$$F_a = \mu \ (m_1 + m_2) = 0.15 \times (1\,000 + 600)$$

= 2 354 (N)

Table 16.7 shows the rigidity of screw shaft K_S and the elastic deformation ΔL_S.

[2] Rigidity of the ball nut K_N

Set about 1/3 of the maximum axial load as the preload value F_{a0}.

$$F_{a0} = \frac{F_{max}}{3} = \frac{10\,354}{3} = 3\,452 \rightarrow 3\,500 \ (N)$$

From the formula 23) on page B60, the rigidity of the ball nut K_N is:

$$K_N = 0.8 \times K \left(\frac{F_{a0}}{\varepsilon \cdot C_a} \right)^{1/3} = 0.8 \times K \left(\frac{3\,500}{0.1 \cdot C_a} \right)^{1/3} \ (N/\mu m)$$

K : Theoretical rigidity

From the formula 17) on page B58, elastic deformation of the ball nut ΔL_N is:

$$\Delta L_N = \frac{F_a}{K_N} = \frac{2\,354}{K_N}$$

Table 16.7 shows the rigidity of ball nut K_N and the elastic deformation ΔL_N.

[3] Rigidity of the support bearing K_B

The bearings are Ball screw support bearings NSKTAC C series. We specify the model number of support bearing unit for each shaft diameter as shown in **Table 16.6** (refer to page B415).

Table 16.6 Bearing code

Screw shaft diameter (mm)	Bearing code
32	25TAC62CDF
36	25TAC62CDF
40	30TAC62CDF
45	35TAC72CDF

Refer to page B422 for the rigidity K_B of each bearing unit (axial spring modulus). Elastic deformation of bearing ΔL_B is:

$$\Delta L_B = \frac{F_a}{2K_B}$$

Table 16.7 shows the rigidity of support bearing K_B and the elastic deformation ΔL_B.

Table 16.7 Rigidity and elestic deformation

Nut model number	Screw shaft		Nut		Support bearing		Total
	K_S	ΔL_S	K_N	ΔL_N	K_B	ΔL_B	ΔL
DFT3210-5	347	6.8	843	2.8	850	1.4	11.0
DFT3610-5	460	5.1	898	2.6			9.1
DFT4010-5	589	4.0	966	2.4	890	1.3	7.7
DFT4510-5	772	3.0	1 054	2.2	1 030	1.1	6.3
DFT4510-7.5			1 381	1.7			5.8

Choose the most economical ball screw system which meets the requirement of one-way deformation (ΔL) of 8 μm or less.

The selected ball screw:

Nut model number: DFT4010-5

Shaft diameter: 40 (mm)

Lead: 10 (mm)

Dynamic load rating: 61 200 (N)

6. Decision of screw shaft length

DFT4010-5 ball nut has the length of 193 mm, and thus the unsupported length of screw shaft L_a should be:

L_a = Maximum stroke + nut length + margin

= 1 000 + 193 + 100 = 1 293 → 1 300 mm

7. Checking basic safety

(1) Permissible axial load

Calculate the buckling load for conditions shown in **Fig. 16.4** with P of 10 354 (N) and L_1 of 1 210 (mm).

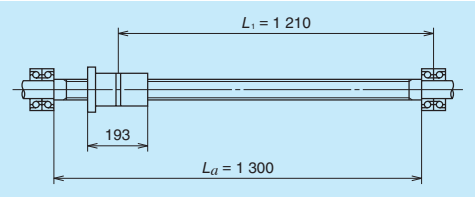


Fig. 16.4 Examination of bucking load

Supporting condition is Fixed - Fixed support, and from the calculation formula 2) on page B44, the screw shaft diameter d_r to prevent buckling is

$$d_r \geq \left(\frac{P \cdot L_1^2}{m} \times 10^{-4}\right)^{1/4}$$

$$= \left(\frac{10\,354 \times 1210^2}{19.9} \times 10^{-4}\right)^{1/4} = 16.6 \text{ (mm)}$$

From the specification of DFT4010-5 ball nut (page B457), the root diameter of screw shaft d_r is 34.4 mm and thus meets the above condition.

Result: Acceptable

(2) Permissible rotational speed

[1] Critical speed n

From the critical speed calculation formula 7) on page B47:

$$n = f \cdot \frac{d_r}{L_1^2} \times 10^7 = 21.9 \times \frac{34.4}{1\,210^2} \times 10^7$$

$$\fallingdotseq 5\,140$$

The maximum rotational speed (N_{max}) of 1 500 min^{-1} is less than the critical speed, and thus meets the requirement.

Result: Acceptable

[2] $d \cdot n$ value

The $d \cdot n$ value is:

$$d \cdot n = 40 \times 1\,500 = 60\,000$$

From **Table 3.2** on page B50, the d·n of tube type ball nut is 70 000 or less, and meets the requirement.

Result: Acceptable

(3) Life L_t

The dynamic load rating C_a is 61 200 N (see dimension table on page B457), and from the formulas 8) and 9) on page B53 the life expectancy is:

$$L_t = \left(\frac{C_a}{f_w \cdot F_m}\right)^3 \times 10^6 \times \frac{1}{60 \cdot N_m}$$

$$\fallingdotseq 152\,000$$

The above result satisfies the required life of 20 000 (h).

Result: Acceptable

8. Check whether the following factors satisfy requirements

(1) Checking accuracy

[1] Positioning accuracy

The positioning accuracy of ±0.035/1 000 mm, and therefore, from **Table 1.2** "Tolerance of specified travel and travel variation" on page B38 the positioning accuracy is:

Accuracy grade : C3

e_p = ±0.029/1 600 (mm)

υ_u = 0.018 (mm)

and thus meets the required positioning accuracy.

[2] Measures against thermal expansion

Provide pre-tension force equivalent to the elongation of 3°C temperature rise, taking in consideration of the load carrying capacity of bearings. Also, adjust the travel compensation for the specified travel equivalent to 3°C temperature rise (refer to page B40).

(a) Thermal elongation : ΔL_θ

From the formula 1) on page B40:

$$\Delta L_\theta = \rho \cdot \theta \cdot L_a = 12.0 \times 10^{-6} \times 3 \times 1\,300$$

$$= 0.047 \text{ (mm)}$$

(b) Pre-tension force : F_θ

$$F_\theta = \Delta L_\theta \cdot Ks = \frac{\Delta L_\theta \cdot E \cdot \pi \cdot d_r^2}{4 L_a}$$

$$= \frac{0.047 \times 2.06 \times 10^5 \times \pi \times 34.4^2}{4 \times 1\,300}$$

$$\fallingdotseq 6\,922 \rightarrow 6\,900 \text{ (N)}$$

Travel compensation :	–0.047/1 300 (mm)
Pre-tension force :	6 900 (N)
Tension (elongation) volume :	0.047 (mm)

[3] Selection of support bearing

Assuming that the ratio of basic dynamic load rating of support bearing (C_a) and pre-tension force (F_θ) is ε, select a bearing which generally satisfies the following:

$$\varepsilon = F_\theta / C_a < 0.20$$

Design the bearing supporting configuration to which pre-tension force is applied in such way that the axial load is supported by the duplex combination or a more multiple condition. Please consult NSK when one bearing must sustain the pre-tension load.

Table 16.8 Comparison of dynamic load rating and pre-tension force

Bearing reference number	C_a (N)	ε
30TAC62CDF	29 200	0.23
30TAC62CDFD	47 500	0.14

Selected support bearing: 30TAC62CDFD

(2) Checking drive torque of motor

〈Required specifications〉

- Motor rotational speed: 1 500 min^{-1}
- Time to reach maximum speed: 0.16 sec or less (At the time of rapid traverse)

[1] Load (converted to the motor load)

Calculate the moment of inertia of ball screw.

From the formulas 30) and 31) on page B64, moment of inertia of ball screw parts J are calculated the load as follows, whereas γ is material density and ball screw shaft length L_o is 1 550 mm.

(Screw shaft)

$$J_B = \frac{\pi \cdot \gamma}{32} D^4 \cdot L_o = \frac{\pi \times 7.8 \times 10^{-3}}{32} \times 4^4 \times 155$$

$$= 30 \text{ (kg} \cdot \text{cm}^2\text{)}$$

(Moving part)

$$J_w = m \times \left(\frac{l}{2\pi}\right)^2 = 1\,600 \times \left(\frac{1}{2\pi}\right)^2$$

$$= 40 \text{ (kg} \cdot \text{cm}^2\text{)}$$

(Coupling)

$$J_c = 10 \text{ (kg} \cdot \text{cm}^2\text{)} \cdots \text{assumed}$$

(Total)

$$J_L = J_B + J_w + J_c = 30 + 40 + 10$$

$$= 80 \text{ (kg} \cdot \text{cm}^2\text{)} \rightarrow 80 \times 10^{-4} \text{ (kg} \cdot \text{m}^2\text{)}$$

[2] Driving torque

The required torque to drive a ball screw resisting to external loads T_1 can be obtained by the formula 28) on page B64:

$$T_1 = T_A + T_P + T_U$$

In this formula, T_A is drive torque at constant speed, T_P is dynamic friction torque, and, T_U is friction torque of the support bearings. From the formula 26) and 25) on page B63, T_A and T_P are:

$$T_A = \frac{Fa \cdot l}{2\pi \eta_1}$$

$$T_P = 0.014 F_{a0} \sqrt{d_m \cdot l}$$

$$\eta_1 = 0.9$$

Refer to the starting torque value in **Table** on page B422:

T_U is:

$$T_U = (16 \times 1.35) + (16 \times 1.35) = 43.2 \text{ (N} \cdot \text{cm)}$$

So, the required drive torque during rapid traverse T_{11} and heavy cutting T_{13} are:

(At the time of rapid traverse)

$$T_{11} = T_{A1} + T_{P1} + T_{U1}$$

$$= \frac{2\,354 \times 1}{2\pi \times 0.9} + 0.014 \times 3\,500 \sqrt{4.1 \times 1} + 43.2$$

$$= 559 \text{ (N} \cdot \text{cm)} \rightarrow 559 \times 10^{-2} \text{ (N} \cdot \text{m)}$$

(At the time of heavy cutting)

$$T_{12} = T_{A2} + T_{P2} + T_{U2}$$

$$= \frac{10\,354 \times 1}{2\pi \times 0.9} + 0.014 \times 3\,500 \sqrt{4.1 \times 1} + 43.2$$

$$= 1\,973 \text{ (N} \cdot \text{cm)} \rightarrow 1\,973 \times 10^{-2} \text{ (N} \cdot \text{m)}$$

[3] Selection of the motor

〈Selection conditions〉

Maximum rotational speed: $N_M \geq 1\,500$ (min^{-1})

Motor rating torque: $T_M > T_1$ (N · m)

Moment of inertia of the motor: $J_M > J_L / 3$ (kg · m^2)

Based on the above, select AC servo motor as follows.

Motor specifications

Rating power output: $W_M = 1.8$ (kW)

Maximum rotational speed:

$N_M = 1\,500$ (min^{-1})

Rating torque: $T_M = 22.5$ (N · m)

$= 22.5 \times 10^2$ (N · cm)

Moment of inertia: $J_M = 190 \times 10^{-4}$ (kg · m^2)

$= 190$ (kg · cm^2)

[4] Checking the time to reach maximum speed:
Required time to reach rapid traverse speed can be calculated as follows (whereas $T_M' = 2 \times T_M$):

$$t_a = \frac{(J_L + J_M) \times 2\pi \times N}{(T_M' - T_1) \times 60} \times 1.4$$

$$= \frac{(80 \times 10^{-4} + 190 \times 10^{-4}) \times 2\pi \times 1\,500}{(2 \times 22.5 - 559 \times 10^{-2}) \times 60} \times 1.4$$

$= 0.15$ (sec)

Thus the time meets the requirement 0.16 sec or less.

Drill 3: Cartesian type robot Z axis (vertical axis)

1. Design conditions

Mass of the traveling item : $m = 300$ kg
Maximum travel : $S_{max} = 1\,500$ mm
Rapid traverse speed : $V_{max} = 10\,000$ mm/min
Repeatability : 0.3 mm
Required life : $L_t = 24\,000$ h
($16^{hours} \times 300^{days} \times 5^{years}$)
Screw shaft supporting condition :
Fixed -- Simple support
Nut: Flanged single nut
Guide way (rolling) : $\mu = 0.01$ (friction coefficient)
Drive motor : AC servo motor ($N_{max} = 1\,000$ min^{-1})
Environment : Slightly dusty

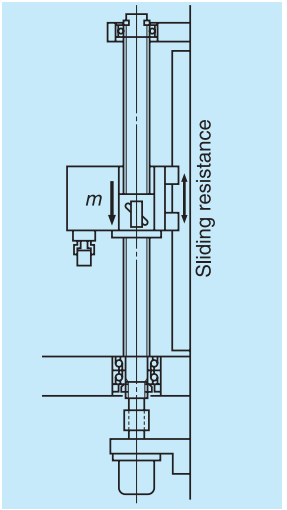


Fig. 16.5 System appearance

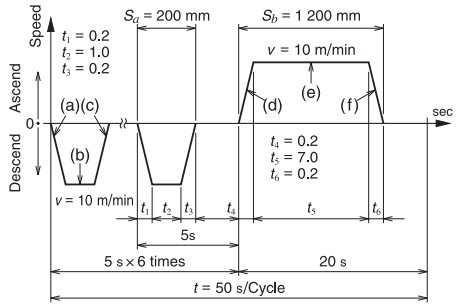


Fig. 16.6 Operating condition

2. Selection of basic factors

(1) Selection of accuracy grade

Although this application is not listed in **Table 4.1** "Accuracy grades of ball screw and their application" on page B19, the possibility is to use a ball screw for transfer equipment R series, because the required repeatability is 0.3 mm that is not very high.

(2) Selection of lead

From the maximum rotational speed of AC motor:

$$l \geq \frac{V_{max}}{N_{max}} = \frac{10\,000}{1\,000} = 10 \text{ (mm)}$$

Select a lead 10 mm or over.

(3) Selection of screw shaft diameter

According to the **Table 4.6** "Shaft diameter, lead and standard screw length of R Series" on page B23, the shaft diameters whose lead is 10 mm or over are in the range of 12 mm to 50 mm.

(4) Selection of stroke

From the **Table 4.6** "Screw shaft diameter, lead and standard screw shaft length of R series" on page B23, it is possible to select from R series because the diameter d of 15 mm to 50 mm and lead l of 10 mm will meet the required maximum stroke of 1500 mm.

Primary selection : R Series ball screw for transfer equipment
Screw shaft diameter : 15 – 50 (mm)
Lead : 10 (mm)
Stroke : 1 500 (mm)

3. Confirmation of standard ball screw

Select from a flanged single nuts of R Series ball screws for transfer equipment.

Second selection : R Series ball screw for transfer equipment
Screw shaft diameter : 16, 20, 25, 32, 36 40, 50 (mm)
Lead : 10 (mm)
Stroke : 1 500 (mm)

4. Decision of screw length

Screw length L_o is:

L_o = Stroke + nut length + margin + shaft end length

= 1 500 + 100 + 100 + 200 = 1 900 (mm)

Normally, the overall screw shaft length L_o less than or equal to 70 times of screw shaft diameter d is recommended.

Therefore, screw shaft diameter d is:

$$d \geq \frac{L_s}{70} = \frac{1\,900}{70} = 27.1 \text{ (mm)}$$

Third selection : R Series ball screw for transfer equipment
Shaft diameter: 32, 36, 40, 45, 50 (mm)
Lead: 10 (mm)
Stroke: 1 500 (mm)

5. Checking basic safety

(1) Allowable axial load

[1] Calculation of allowable axial load

Accelerating/decelerating time is:

$$\alpha = \frac{V}{60\,t} = \frac{10 \times 10^3}{60 \times 0.2} = 833 \text{ (mm/s}^2\text{)}$$

$$= 0.833 \text{ (m/s}^2\text{)}$$

$t = t_1 = t_3 = t_4 = t_6$

(a), (f) $\cdots\cdots F_1 = mg - m\alpha$

$= 300 \times 9.80665 - 300 \times 0.833$

$= 2\,690$ (N)

(b), (e) $\cdots\cdots F_2 = mg = 2\,940$ (N)

(c), (d) $\cdots\cdots F_3 = mg + m\alpha = 3\,190$ (N)

[2] Buckling load

For condition in **Fig. 16.7**, use values below.

P = 3 190 N, L_1 = 1 600 mm

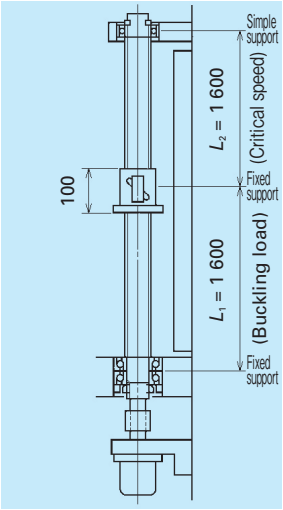


Fig. 16.7 Inspecting for buckling load and critical speed

From the formula 2) on page B44:

$$d_r \geq \left(\frac{P \cdot L_1^2}{m} \times 10^{-4} \right)^{1/4}$$

$$= \left(\frac{3\,190 \times 1\,600^2}{19.9} \times 10^{-4} \right)^{1/4} = 14.2 \text{ (mm)}$$

(2) Checking permissible rotational speed

[1] Critical speed

Use values below.

n = 1 000 (min^{-1}), L_2 = 1 600 (mm)

From the formula 7) on page B47:

$$d_r \geq \frac{n \cdot L_2^2}{f} \times 10^{-7} = \frac{1\,000 \times 1\,600^2}{15.1} \times 10^{-7}$$

$$= 17 \text{ (mm)}$$

[2] $d \cdot n$ value

From **Table 3.2** on page B50:

$$d \leq \frac{50\,000}{n} = \frac{50\,000}{1\,000}$$

$$= 50 \text{ (mm)}$$

* Please consult NSK when the d • n value exceeds 50 000.

(3) Checking life (dynamic load rating)

Determine the required load carrying capacity from load conditions of **Table 16.9**.

Table 16.9 Load conditions

Operating condition	Axial load (N)	Rotational speed (mean) (min^{-1})	Use time (s)
(a)$_{\times 6}$(f)	F_1 = 2 690	N_1 = 500	t_a = 1.4
(b)$_{\times 6}$(e)	F_2 = 2 940	N_2 = 1 000	t_b = 13.0
(c)$_{\times 6}$(d)	F_3 = 3 190	N_3 = 500	t_c = 1.4

Calculate mean load F_m and mean rotational speed N_m from the formulas 11) and 12) on page B53:

Required load carrying capacity is:

$$F_m = \left(\frac{F_1^3 \cdot N_1 \cdot t_a + F_2^3 \cdot N_2 \cdot t_b + F_3^3 \cdot N_3 \cdot t_c}{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c} \right)^{1/3}$$

$$= 2\,940 \text{ (N)}$$

$$N_m = \frac{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c}{t}$$

$$= 288 \text{ (min}^{-1}\text{)}$$

From the formulas 8) and 9) on page B53:

$$C_a \geq (60 N_m \cdot L_t)^{1/3} \cdot F_m \cdot f_w \times 10^{-2} \text{ (N)}$$

$$= (60 \times 288 \times 24\,000)^{1/3} \times 2\,940 \times 1.2 \times 10^{-2}$$

$$= 26\,300 \text{ (N)}$$

(4) Checking static load rating

$$C_{0a} = F_{max} \times f_s = 3\,190 \times 2$$

$$= 6\,380 \text{ (N)}$$

In consideration of expense, select a ball screw shaft as follows.

Fourth selection : R Series ball screw for transfer equipment
Shaft diameter : 32 (mm)
Lead : 10 (mm)
Stroke :
Turns of balls and circuit number : 2.5 × 2
Screw length : 2 000 (mm)
Basic dynamic load rating : 35 700 (N)

6. Selection of nut

Select a "standard nut with a flange and a built-in brush seals" based on the environmental conditions.

Selected ball screw:
Nut assembly RNFTL3210A5S
Screw shaft RS3210A20

B-2-18 Reference

"NSK Motion & Control (technical journal)" was compiled to introduce NSK products and its technologies. You will find data summaries which are imperative in selecting ball screws in this catalog. If you need detailed technical data, other than described in this catalog, please refer to "NSK Motion & Control" technical journal. For inquiries and orders, please contact NSK branch offices, sales offices, and representatives assigned at various locations.

Table 17.1 NSK Motion & Control (technical journal) : Issues relating to ball screws (1980-)

Issue No.	Date of Publication	Articles related to Ball Screws
No.4	Jun. 1998	Recent Technical Trends in Ball Screws
No.8	May. 2000	Ball Screw with Rotating Nut and Vibration Damper
No.9	Oct. 2000	WFA Standard-Stock Ball Screws
No.10	Apr. 2001	High Performance Seals for Ball Screws
No.11	Oct. 2001	Development of NSK S1 Series Ball Screws and Linear Guides
No.11	Oct. 2001	Low Inertia Series of Nut Rotatable Ball Screws
No.13	Oct. 2002	Development of HTF Series Ball Screws for High Load Drive Application
No.13	Oct. 2002	High Lead Precision Rolled Ball Screws
No.14	May. 2003	High Speed and Low Noise Ball Screws HMC-B02 Series
No.15	Dec. 2003	Clean Support Units for Ball Screws
No.16	Aug. 2004	Development of High Speed and Low Noise Ball Screws
No.18	Aug. 2005	S3 Ball Screws: Super Low Noise Ball Screws for Automation Equipment
No.19	Sep. 2006	High-Speed and Low-Noise Ball Screw for Standard Stock - Compact FA Series
No.21	Dec. 2007	V1 Series of Ball Screws for Contaminated Environments HTF-SRC Series of Ball Screws for High-Speed and High-Load Applications
No.22	Mar. 2011	Technological Trends of Ball Screws for Industrial Machinery BSL Series of Ball Screws for Small Lathes HTF-SRD Series of Long-Lead Ball Screws for High-Speed and Heavy-Load Applications
No.23	Jun. 2013	TW Series of Ball Screws for Twin-Drive Systems HMD Series of Ball Screws for High-Speed Machine Tools
No.24	Dec. 2014	Ball Screw for Motorcycle Brake Systems
No.25	Sep. 2015	HMS Series of Ball Screws for High-Speed Machine Tools Miniature Large-Lead Series of High-Speed, Low-Noise Ball Screws
No.26	Apr. 2016	Development of a Nut Cooling Ball Screw Ball Screws with X1 Seals for Machine-Tool Applications HTF-SRE Large, High-Speed, High-Load Capacity Ball Screws
No.27	Nov. 2016	Strategy for Frictional Behavior Control in Ball Screws Ball Screws with Minimal Grease-Splatter L1 Seals
No.28	Jun. 2017	Ultra-Large Ball Screws

B-2-19 Guide to Technical Services

(1) CAD data

■Web page

http://www.jp.nsk.com/app01/en/ctrg/

■CD-ROM

CAT. No. 7110

(3D data: Intermediate format or native,
2D date: DXF)

Catalog No.7110 (CD-ROM) contains precision machine components and rolling bearings.

Standard Ball Screws
- •Finished shaft end (Compact FA series, MA type, FA type, SA type, KA type, and RMA type)
- •Blank shaft end (MS type, FS type, and SS type)

Standard nut ball screws
- • End deflector type

Standard support units

(2) Telephone consultation with NSK engineers

This catalog contains technical explanation for each section. However, some descriptions and explanations may be insufficient due to page limitation, etc. To amend this shortcoming, NSK offers telephone assistance. NSK engineers are pleased to help you. Our local offices are listed in the last part of this catalog. Call local NSK office or representative in your area.

(3) Additional machining (processing) some part of standard ball screws in stock

NSK processes standard ball screw blank shaft end. NSK also cuts linear guide rails to required length for you. Service is available at NSK processing factories throughout the world. Requests are taken by branch offices and agencies.

B-2-20 Precautions When Handling Ball Screws

Ball screws are precision products. They require careful handling as described below.



Confirm lubrication

Lubrication

(1) Confirm the state of lubrication before use. Insufficient lubrication causes loss of ball screw functions in a short period.

(2) Do not apply any lubrication if grease is already applied to the ball screws. Remove dust or swarf if they stuck to the greased surface during handling. Wipe the surface with clean white kerosene, and then apply the same type of new lubricant before use. Avoid using different types of grease at the same time.

Consult NSK for special oil lubricant if it is required to your application.

(3) Check the grease after two to three months of operation. Wipe off the old grease if it is excessively contaminated, and apply sufficient volume of a fresh coat of grease. After the initial check, check and replenish the grease approximately every year. Check more often if environment requires.

Note: Refer to pages B67 and D13 for lubrication.



Do not disassemble



Do not reassemble



Watch out for falling objects



Handle with care



Do not apply shock

Handling

(1) Never disassemble the ball screw. It invites dust to enter, and lowers precision, or may cause an accident.

(2) Once the ball screw is disassembled for some reason, the user should never reassemble the ball screw by himself. Loss of ball screw function is apt to occur if a mistake is made. Please send the ball screw to NSK for repair or re-assembly. It will be reworked at the minimum service charge.

(3) The ball screw shaft or nut may fall off due to its own weight. Watch out for such falling object. If it falls, the ball groove or ball recirculation component may be damaged and their function might be lost. Make certain to return such item to NSK for check. There will be the minimum charge for this service.

(4) If the recirculation component, the shaft outside, or the ball groove is scratched or damaged by impact, recirculation operation becomes deficient, and may cause a loss of function.

Note: Refer to page B73 for assembling components.



Prevent dust



Rotational speed limitation



Do not overrun



Temperature limitation

Precautions in use

(1) Ball screws should be used in a clean environment. Use a dust cover to keep dust and swarf from entering into the system. Insufficient dust protection causes not only the ball screw function to deteriorate but also brings about damage to the recirculation components if dust plugs the system. This may result in more serious accident such as a fall of the table.

(2) For rotational speed in operation, refer to the applicable section in this catalog which describes permissible rotational speeds, or to specification drawing furnished by NSK. Exceeding permissible rotational speed damages recirculation components, and may cause the table to fall. A precaution system such as a safety nut is recommended in vertical use of ball screw. Please consult NSK for safety system.

(3) Overrunning ball nut (removed from the ball thread) causes the balls to fall out, damages recirculation components, and dent ball groove, resulting in insufficient operation. Continued use under such conditions may cause premature wear, and damages recirculation components. For these reasons, avoid overrun by all means. If overrun occurs, please request NSK to check. There will be a minimum charge for this service.

(4) Ball screws are designed to be used at a temperature of less than 80°C. Do not operate at temperatures higher than this limit. Use at a higher temperature may damage recirculation and seal components. Please consult NSK if it is necessary to use at a temperature higher than the limit.

When using NSK K1 lubrication unit, the operating temperature should be 50°C or less. (Momentary maximum temperature in use: 80°C)

Note: Please read page B83 before designing.



Store in the correct position

Storage

(1) Store in the original NSK packaging. Do not unpack or tear the inner wrapping unnecessarily. This allows dust and moisture to enter, potentially causing rusting and/or deterioration of product performance.

(2) Store indoors in a cool, dry environment with little temperature variation. High temperature and high humidity environments significantly decrease the effectiveness of rust-inhibiting compounds.

(3) The following position is recommended when storing ball screws.

① Keep in the NSK original package, and place it flat.

② Place flatly on supports; store in a clean area.

③ Hang vertically in a clean place.

B-3 Ball Screw Dimension Table

1. Compact FA Series B107
2. High-Speed SS Series B147
3. Finished Shaft End B157
   - MA Type, Miniature, Fine Lead B159
   - FA Type for Small Equipment B181
   - SA Type for Machine Tools B217
4. Finished Shaft End
   - KA Type Stainless Steel Product B273
5. Blank Shaft End B299
   - MS Type, Miniature, Fine Lead B301
   - FS Type for Small Equipment B309
   - SS Type for Machine Tools B321
6. Ball Screws for Transfer Equipment B349
7. Accessories B389

B-3-1 Dimension Table and Reference Number of Standard Ball Screws

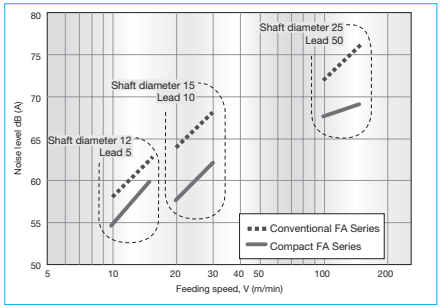
B-3-1.1 Compact FA Series PSS Type, USS Type, and FSS Type

1. Features

In order to respond quickly to a wide range of needs, NSK keeps end-deflector recirculation system ball screws, which offer high-speed and low-noise operation and compact design, in standard inventories as the Compact FA Series. The exceptionally high performance ball screws are ready for use in a variety of fields such as semiconductor manufacturing equipment, flat panel display manufacturing equipment, chip mounting equipment, measuring apparatus, food and medical equipment, and automotive manufacturing equipment.

●Quieter sound

The operating noise level of ball screws has been reduced by 6 dB(A), about half of what is sensed by the ear.



(Microphone was positioned at a distance of 400 mm for all noise levels)

Fig. 1 Comparison of noise level

●Compact

The outside diameter of the ball nut is as much as 30% smaller than those of existing NSK products. This contributes to more compact design of all sorts of equipment and devices such as low-profile positioning stages.

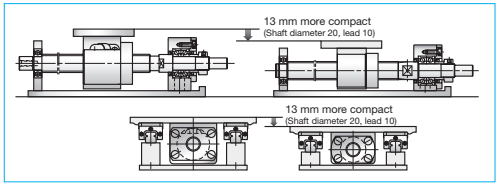


Fig. 2 Comparison of FA Type and Compact FA Series PSS Type

●High speed

The permissible rotational speed up to 5 000 min^{-1}. This capability dramatically expands the range of service conditions.

Please refer to the dimension tables for details of the permissible rotational speed.

●A grease fitting is provided as a standard equipment

The new ball screw type is equipped with a grease fitting (M5 × 0.8) as a standard equipment. Two lubrication ports are provided to facilitate easy maintenance.

●Storage seal

Compact, thin plastic seal is available. Nut outside diameter is compact compare with the return tube recirculation system.

●Low-profile design

The low-profile support units especially compatible with the compact FA Series are available for a superb space-saving design.

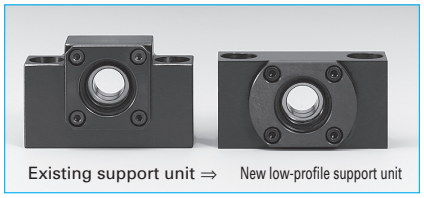


Fig. 3 Comparison of support units

●Low dust generation LG2 grease (USS Type)

The dust count is approximately 1/100 that of the existing FA series. It is suitable for applications in clean environments.

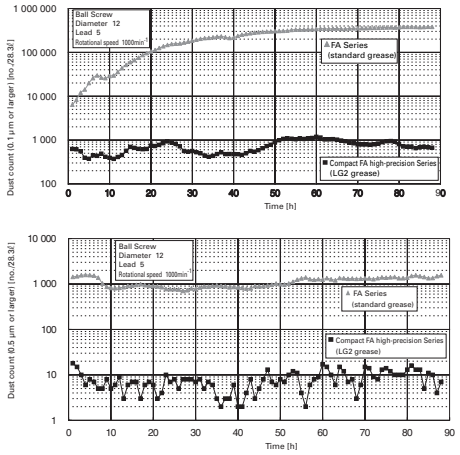


Fig.4 Comparison of dust count

●Easy stroke setting (FSS Type)

Flexible stroke setting with fixed-simple support by means of mounting support unit (simple support side) directly onto ball screw thread outside diameter. Proprietary support unit (simple support side) is available from NSK.

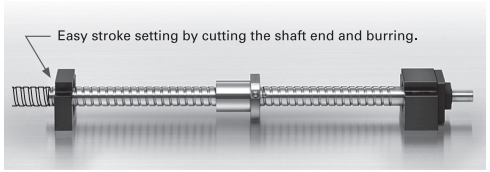


Fig.5 Flexible stroke setting

2. Order of the dimension table

For each type, it is arranged in order from small diameter to large.

3. Dimension tables

Dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

●Stroke

Nominal stroke: A reference for your use.

Maximum stroke: The limit stroke that the nut can move. The figure is obtained by subtracting the nut length from the effective threaded length (L_1).

●Lead accuracy

PSS Type, C5 grade; USS Type, C3 grade; FSS Type, Ct7 grade

T: Travel compensation

e_p: Tolerance on specified travel

υ_u: Travel variation

See "Technical Description: Lead Accuracy" (page B37) for the details of the codes.

●Permissible rotational speed

d • n: Limited by the relative peripheral speed between the screw shaft and the nut.

Critical speed: Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.

The lower of the two criteria, the d·n and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).

4. Other

The seal of the ball screw and end deflector are made of synthetic resin. Consult NSK when using our ball screws under extreme environments or in special environments, or if using special lubricant or oil.

The NSK K1 cannot be mounted to the compact FA Series.

For special environments, see pages B70 and D2. For lubrications, see pages B67 and D13.

Note: For details of standard stock products, contact NSK.


Table 1 Combinations of screw shaft diameter and lead


Screw shaft diameter \ Lead	5	8	10	12	15	20	25	30	40	50	60
6		B109		B109							
8			B111		B111						
10	B113 B133		B113								
12	B115 B135		B115 B139			B115		B115			
15	B117 B137		B117 B141			B119 B141		B119			
20	B121		B121 B143			B123 B143		B123	B125		B125
25	B127		B127 B145			B129 B145	B129 B145	B131		B131	

Screw shaft ø6

Lead 8, 12

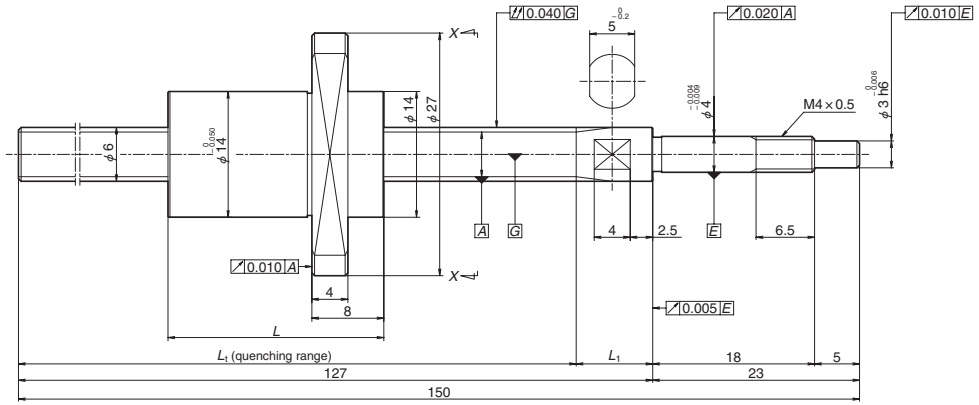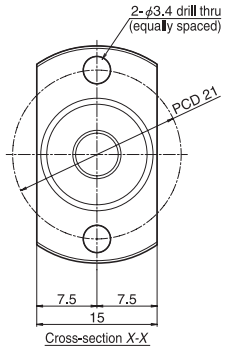Unit: mm





Ball screw specification	
Ball diameter/screw shaft root diameter	1.2 / 4.9
Ball circle dia.	6.2
Accuracy grade/axial play	C5 / 0.005 or less
Factory-packed grease	NSK grease PS2

Recommended

For drive side (Fixed)
WBK04-01M (square)
WBK04-11M (round)

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Effective turns of balls	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Maximum stroke	Nut length L	Screw shaft dimensions L_t	Screw shaft dimensions L_1
PSS0608NAD0150	6	8	2	690	805	102.5	16	118.5	8.5
PSS0608NBD0150			4	1 480	1 940	94.5	24	118.5	8.5
PSS0612NAD0150		12	2	665	800	97.0	20	117	10
PSS0612NBD0150			4	1 430	1 970	85.0	32	117	10

Lead accuracy Target value T	Lead accuracy Error e_p	Lead accuracy Variation v_u	Dynamic preload torque (N·cm)	Mass (kg)	Permissible rotational speed (min^{-1}) *1	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
0	0.020	0.018	~0.5	0.06	5 000	0.2	0.1
				0.06		0.3	0.2
				0.06		0.2	0.1
				0.07		0.3	0.2

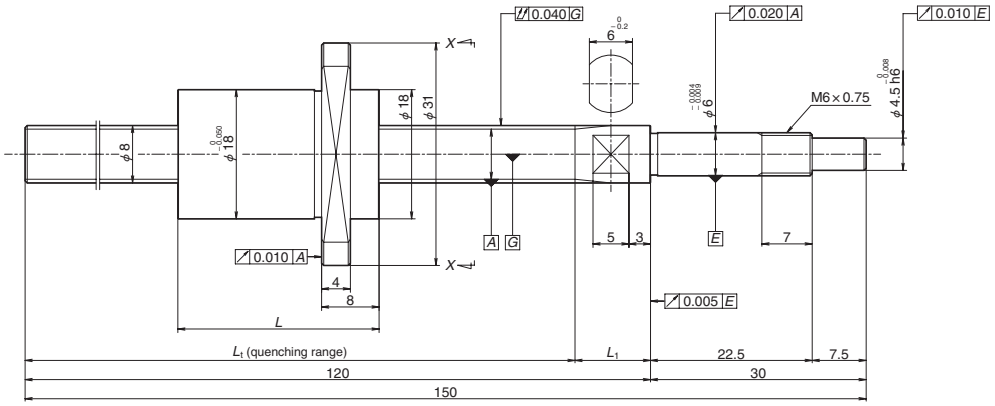
Notes: 1. Contact NSK if permissible rotational speed is to be exceeded.


2. Service temperature range is 0 to 80°C.
3. Use of NSK support unit is recommended. Refer to page B389 for details.

Screw shaft ø8

Lead 10, 15

Unit: mm





Ball screw specification	
Ball diameter/screw shaft root diameter	1.588 / 6.6
Ball circle dia.	8.3
Accuracy grade/axial play	C5 / 0.005 or less
Factory-packed grease	NSK grease PS2

Recommended

For drive side (Fixed)
WBK06-01M (square)
WBK06-11M (round)


Unit: mm


Ball screw No.	Screw shaft diameter d	Lead l	Effective turns of balls	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Maximum stroke	Nut length L	Screw shaft dimensions L_t	Screw shaft dimensions L_1
PSS0810NAD0150	8	10	2	1 150	1 420	91.5	18	109.5	10.5
PSS0810NBD0150			4	2 470	3 430	81.5	28	109.5	10.5
PSS0815NAD0150		15	2	1 130	1 430	85.0	22	107	13
PSS0815NBD0150			4	2 410	3 520	70.0	37	107	13

Lead accuracy Target value T	Lead accuracy Error e_p	Lead accuracy Variation v_u	Dynamic preload torque (N·cm)	Mass (kg)	Permissible rotational speed (min^{-1}) *1	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
0	0.020	0.018	~0.5	0.09	5 000	0.4	0.2
				0.11		0.5	0.3
				0.1		0.4	0.2
				0.12		0.6	0.3

Notes: 1. Contact NSK if permissible rotational speed is to be exceeded.

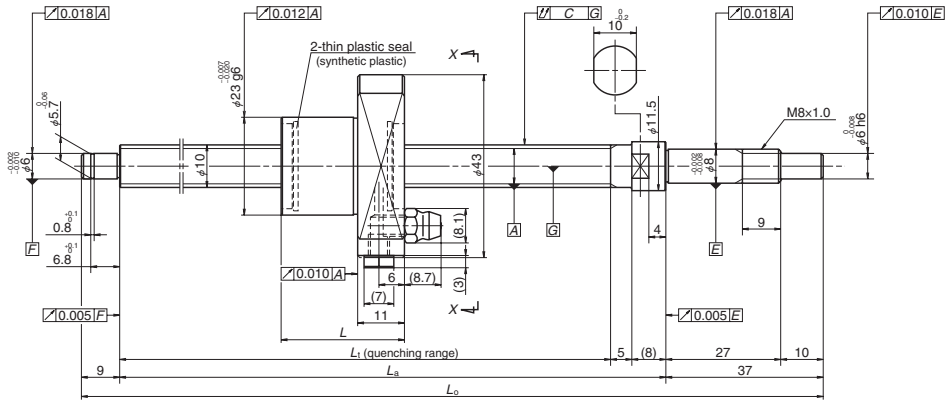2. Service temperature range is 0 to 80°C.
3. Use of NSK support unit is recommended. Refer to page B389 for details.





NSK

Screw shaft ø10

Lead 5, 10

Unit: mm

Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.000 / 8.2
Ball circle dia.	10.3
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease PS2

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01B (low-profile, square)	WBK08S-01B (low-profile, square)
WBK08-11 (round)	
WBK08-11B (round, high load)	

Unit: mm

Ball screw No.	Screw shaft diameter *d*	Lead *l*	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Nut length *L*	Screw shaft dimensions L_t	Screw shaft dimensions L_a	Screw shaft dimensions L_o
PSS1005N1D0171	10	5	3 420	4 840	50	78	29	112	125	171
PSS1005N1D0221					100	128		162	175	221
PSS1005N1D0321					200	228		262	275	321
PSS1005N1D0421					300	328		362	375	421
PSS1005N1D0521					400	428		462	475	521
PSS1010N1D0221		10	2 290	2 980	100	125	32	162	175	221
PSS1010N1D0321					200	225		262	275	321
PSS1010N1D0421					300	325		362	375	421
PSS1010N1D0521					400	425		462	475	521

Lead accuracy Target value *T*	Lead accuracy Error e_p	Lead accuracy Variation v_u	Shaft run-out *C*	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min^{-1}) *2 Fixed-Simple	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
0	0.020	0.018	0.030	0.7 – 3.3	0.3	5 000	0.8	0.4
	0.020	0.018	0.045	0.7 – 3.3	0.3			
	0.023	0.018	0.060	0.6 – 4.3	0.3			
	0.025	0.020	0.070	0.6 – 4.3	0.4			
	0.027	0.020	0.085	0.4 – 4.9	0.5			
	0.020	0.018	0.045	0.7 – 3.3	0.3	5 000	0.7	0.4
	0.023	0.018	0.060	0.6 – 4.3	0.4			
	0.025	0.020	0.070	0.6 – 4.3	0.4			
	0.027	0.020	0.085	0.4 – 4.9	0.5			

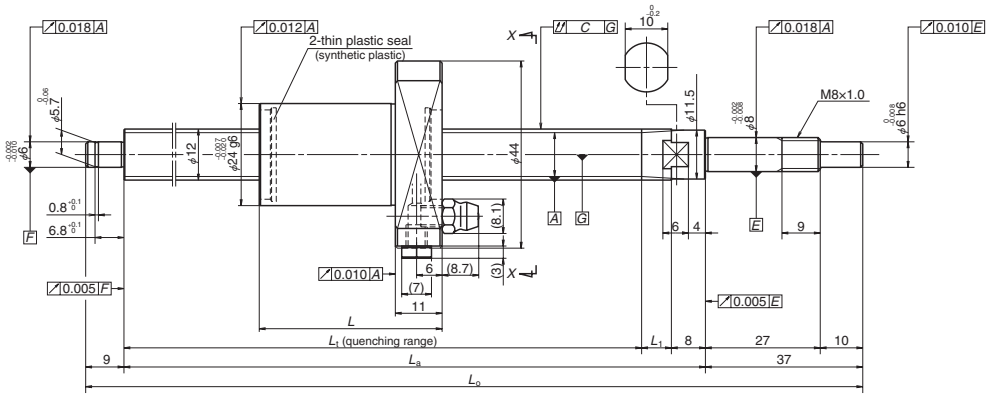Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 80°C.
4. Use of NSK support unit is recommended. Refer to page B389 for details.
5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.




NSK

Screw shaft ø12

Lead 5, 10, 20, 30

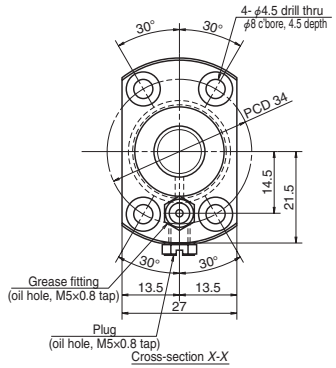Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.000 / 10.2
Ball circle dia.	12.3
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease PS2

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01B (low-profile, square)	WBK08S-01B (low-profile, square)
WBK08-11 (round)	
WBK08-11B (round, high load)	

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Nut length L	Screw shaft dimensions L_t	L_a	L_o	L_1
PSS1205N1D0171	12	5	3 750	5 810	50	75	30	110	125	171	7
PSS1205N1D0221					100	125		160	175	221	
PSS1205N1D0321					200	225		260	275	321	
PSS1205N1D0421					300	325		360	375	421	
PSS1205N1D0521					400	425		460	475	521	
PSS1205N1D0621					500	525		560	575	621	
PSS1210N1D0221		10	3 760	5 780	100	112	43	160	175	221	7
PSS1210N1D0321					200	212		260	275	321	
PSS1210N1D0421					300	312		360	375	421	
PSS1210N1D0521					400	412		460	475	521	
PSS1210N1D0621					500	512		560	575	621	
PSS1220N1D0271		20	2 330	3 600	100	153	50	208	225	271	9
PSS1220N1D0371					200	253		308	325	371	
PSS1220N1D0471					300	353		408	425	471	
PSS1220N1D0571					400	453		508	525	571	
PSS1220N1D0671					500	553		608	625	671	
PSS1230N1D0271		30	2 190	3 650	100	128	70	203	225	271	14
PSS1230N1D0371					200	228		303	325	371	
PSS1230N1D0471					300	328		403	425	471	
PSS1230N1D0571					400	428		503	525	571	
PSS1230N1D0671					500	528		603	625	671	

Lead accuracy Target value T	Error e_p	Variation v_u	Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min^{-1}) *2 Fixed-Simple	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
0	0.020	0.018	0.030	0.7 – 3.3	0.3	5 000	1.0	0.5
	0.020	0.018	0.045	0.7 – 3.3	0.3			
	0.023	0.018	0.060	0.6 – 4.3	0.4			
	0.025	0.020	0.070	0.6 – 4.3	0.5			
	0.027	0.020	0.085	0.6 – 4.3	0.6			
	0.030	0.023	0.085	0.4 – 4.9	0.7			
	0.020	0.018	0.045	0.7 – 3.3	0.4	5 000	1.0	0.5
	0.023	0.018	0.060	0.6 – 4.3	0.5			
	0.025	0.020	0.070	0.6 – 4.3	0.5			
	0.027	0.020	0.085	0.6 – 4.3	0.6			
	0.030	0.023	0.085	0.4 – 4.9	0.7			
	0.023	0.018	0.045	1.4 – 4.5	0.4	5 000	1.2	0.6
	0.023	0.018	0.060	0.9 – 4.9	0.5	5 000		
	0.027	0.020	0.070	0.9 – 4.9	0.6	5 000		
	0.030	0.023	0.085	0.6 – 5.9	0.7	5 000		
	0.030	0.023	0.110	0.6 – 5.9	0.8	4 480		
	0.023	0.018	0.045	1.4 – 4.5	0.5	5 000	1.5	0.8
	0.023	0.018	0.060	0.9 – 4.9	0.6	5 000		
	0.027	0.020	0.070	0.9 – 4.9	0.7	5 000		
	0.030	0.023	0.085	0.6 – 5.9	0.7	5 000		
	0.030	0.023	0.110	0.6 – 5.9	0.8	4 720		

Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 80°C.
4. Use of NSK support unit is recommended. Refer to page B389 for details.
5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

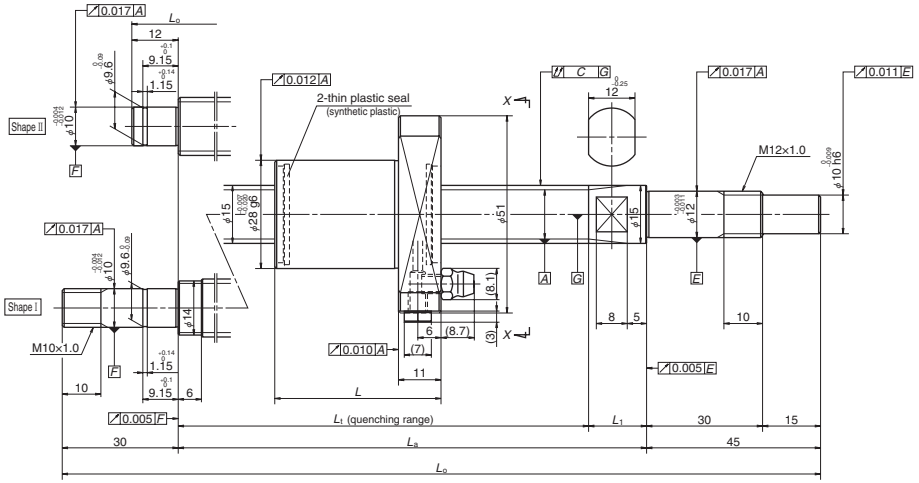
PSS


NSK

Screw shaft ø15

Lead 5, 10

Unit: mm





Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.778 / 12.6
Ball circle dia.	15.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01B (low-profile, square)	WBK10-01B (low-profile, square)	WBK12S-01B (low-profile, square)
WBK12-11 (round)	WBK10-11 (round)	


Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Nut length L	Screw shaft dimensions L_t	L_a	L_o	L_1
PSS1505N1D0211	15	5	6 410	10 100	50	103	30	139	154	211	15
PSS1505N1D0261					100	153		189	204	261	
PSS1505N1D0361					200	253		289	304	361	
PSS1505N1D0461					300	353		389	404	461	
PSS1505N1D0561					400	453		489	504	561	
PSS1505N1D0661					500	553		589	604	661	
PSS1505N1D0761					600	653		689	704	761	
PSS1510N1D0261		10	6 530	10 200	100	140	43	189	204	261	15
PSS1510N1D0361					200	240		289	304	361	
PSS1510N1D0461					300	340		389	404	461	
PSS1510N1D0561					400	440		489	504	561	
PSS1510N1D0661					500	540		589	604	661	
PSS1510N1D0761					600	640		689	704	761	
PSS1510N1D0879					700	740		789	804	879	
PSS1510N1D0979					800	840		889	904	979	
PSS1510N1D1179					1 000	1 040		1 089	1 104	1 179	

Left shaft end (opposite driven side)	Lead accuracy Target value T	Lead accuracy Error e_p	Lead accuracy Variation v_u	Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min^{-1}) *2 Fixed-Simple	Permissible rotational speed (min^{-1}) *2 Fixed-Fixed	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
II	0	0.020	0.018	0.035	0.2 – 6.9	0.5	5 000			
II		0.020	0.018	0.035	0.2 – 6.9	0.5	5 000			
II		0.023	0.018	0.045	0.2 – 6.9	0.6	5 000			
II		0.025	0.020	0.050	0.4 – 9.8	0.8	5 000	—	2.0	1.0
II		0.027	0.020	0.060	0.4 – 9.8	0.9	5 000			
II		0.030	0.023	0.075	0.4 – 9.8	1.0	5 000			
II		0.035	0.025	0.075	0.4 – 11.8	1.1	4 130			
II		0.020	0.018	0.035	0.6 – 7.4	0.6	5 000	—		
II		0.023	0.018	0.045	0.6 – 7.4	0.7	5 000	—		
II		0.025	0.020	0.050	0.4 – 9.8	0.8	5 000	—		
II		0.027	0.020	0.060	0.4 – 9.8	1.0	5 000	—		
II		0.030	0.023	0.075	0.4 – 9.8	1.1	5 000	—	2.0	1.0
II		0.035	0.025	0.075	0.4 – 11.8	1.2	4 210	—		
I		0.035	0.025	0.095	0.4 – 11.8	1.4	3 190	4 410		
I		0.040	0.027	0.095	0.4 – 11.8	1.5	2 500	3 470		
I		0.046	0.030	0.120	0.4 – 11.8	1.7	1 650	2 320		

Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 80°C.
4. Use of NSK support unit is recommended. Refer to page B389 for details.
5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

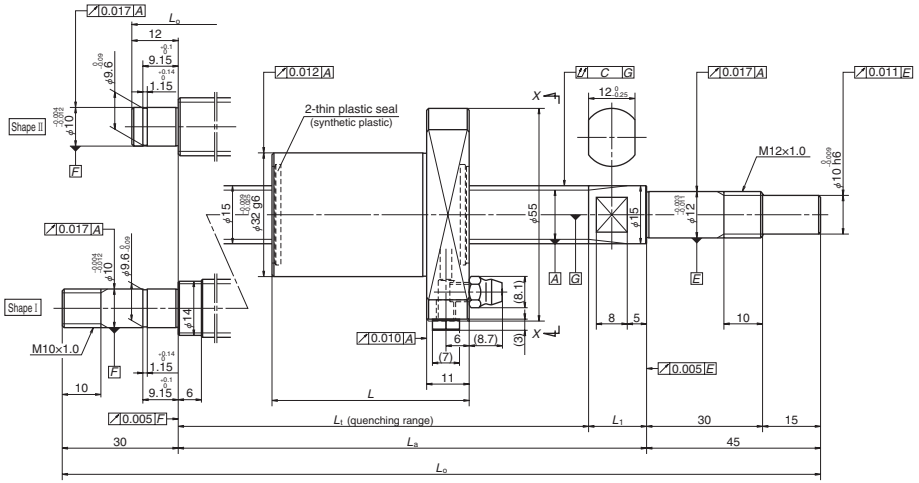PSS




NSK

Screw shaft ø15

Lead 20, 30

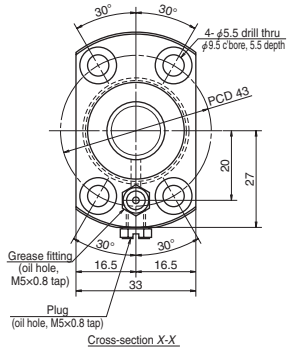Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 12.2
Ball circle dia.	15.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01B (low-profile, square)	WBK10-01B (low-profile, square)	WBK12S-01B (low-profile, square)
WBK12-11 (round)	WBK10-11 (round)	

Unit: mm

Ball screw No.	Screw shaft diameter *d*	Lead *l*	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Nut length *L*	Screw shaft dimensions L_t	L_a	L_o	L_1
PSS1520N1D0261	15	20	5 660	8 700	100	129	51	186	204	261	18
PSS1520N1D0361					200	229		286	304	361	
PSS1520N1D0461					300	329		386	404	461	
PSS1520N1D0561					400	429		486	504	561	
PSS1520N1D0661					500	529		586	604	661	
PSS1520N1D0761					600	629		686	704	761	
PSS1520N1D0879					700	729		786	804	879	
PSS1520N1D0979					800	829		886	904	979	
PSS1520N1D1179					1 000	1 029		1 086	1 104	1 179	
PSS1530N1D0311		30	5 500	8 580	100	153	71	230	254	311	24
PSS1530N1D0411					200	253		330	354	411	
PSS1530N1D0511					300	353		430	454	511	
PSS1530N1D0611					400	453		530	554	611	
PSS1530N1D0711					500	553		630	654	711	
PSS1530N1D0811					600	653		730	754	811	
PSS1530N1D0929					700	753		830	854	929	
PSS1530N1D1029					800	853		930	954	1 029	
PSS1530N1D1229					1 000	1 053		1 130	1 154	1 229	

Left shaft end (opposite driven side)	Lead accuracy Target value *T*	Lead accuracy Error e_p	Lead accuracy Variation v_u	Shaft run-out *C*	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min⁻¹) *2 Fixed-Simple	Permissible rotational speed (min⁻¹) *2 Fixed-Fixed	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
II	0	0.020	0.018	0.035	0.8 – 8.8	0.7	5 000	—	2.8	1.4
II		0.023	0.018	0.045	0.8 – 8.8	0.8	5 000	—		
II		0.025	0.020	0.050	0.8 – 10.8	0.9	5 000	—		
II		0.027	0.020	0.060	0.8 – 10.8	1.1	5 000	—		
II		0.030	0.023	0.075	0.8 – 10.8	1.2	5 000	—		
II		0.035	0.025	0.075	0.8 – 13.8	1.3	4 170	—		
I		0.035	0.025	0.095	0.8 – 13.8	1.5	3 150	4 310		
I		0.040	0.027	0.095	0.8 – 13.8	1.6	2 460	3 390		
I		0.046	0.030	0.120	0.8 – 13.8	1.9	1 620	2 260		
II		0.023	0.018	0.035	1.2 – 9.3	0.8	5 000	—	3.4	1.7
II		0.025	0.020	0.050	0.8 – 10.8	1.0	5 000	—		
II		0.027	0.020	0.060	0.8 – 10.8	1.1	5 000	—		
II		0.030	0.023	0.060	0.8 – 10.8	1.2	5 000	—		
II		0.030	0.023	0.075	0.8 – 13.8	1.4	5 000	—		
II		0.035	0.025	0.095	0.8 – 13.8	1.5	3 770	—		
I		0.040	0.027	0.095	0.8 – 13.8	1.6	2 880	3 910		
I		0.040	0.027	0.120	0.8 – 13.8	1.8	2 310	3 110		
I		0.046	0.030	0.120	0.8 – 13.8	2.0	1 540	2 100		

Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 80°C.
4. Use of NSK support unit is recommended. Refer to page B389 for details.
5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

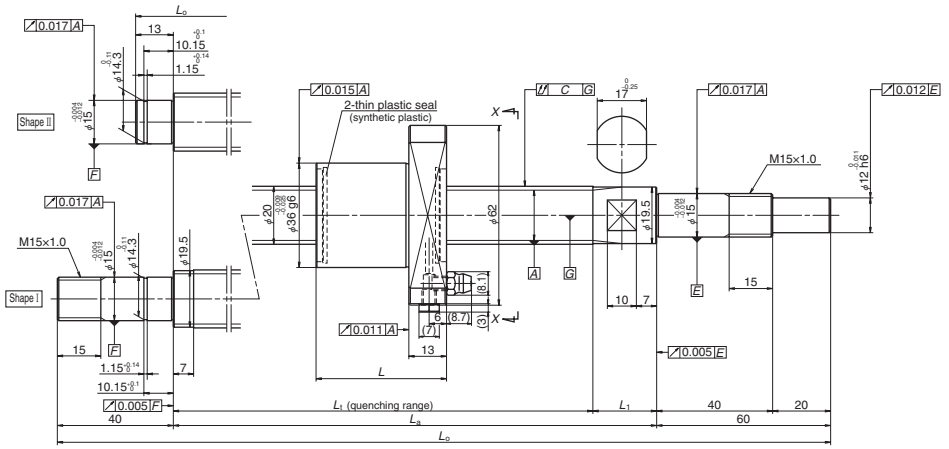
PSS


NSK

Screw shaft ø20

Lead 5, 10

Unit: mm





Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 17.2
Ball circle dia.	20.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01B (low-profile, square)	WBK15-01B (low-profile, square)	WBK15S-01B (low-profile, square)
WBK15-11 (round)	WBK15-11 (round)	

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Nut length L	Screw shaft dimensions L_t	L_a	L_o	L_1
PSS2005N1D0323	20	5	10 400	18 500	150	191	31	228	250	323	22
PSS2005N1D0373					200	241		278	300	373	
PSS2005N1D0473					300	341		378	400	473	
PSS2005N1D0573					400	441		478	500	573	
PSS2005N1D0673					500	541		578	600	673	
PSS2005N1D0773					600	641		678	700	773	
PSS2005N1D0873					700	741		778	800	873	
PSS2005N1D1000					800	839		878	900	1 000	
PSS2010N1D0387		10	10 200	18 600	200	241	45	292	314	387	22
PSS2010N1D0487					300	341		392	414	487	
PSS2010N1D0587					400	441		492	514	587	
PSS2010N1D0687					500	541		592	614	687	
PSS2010N1D0787					600	641		692	714	787	
PSS2010N1D0887					700	741		792	814	887	
PSS2010N1D1014					800	839		892	914	1 014	
PSS2010N1D1214					1 000	1 039		1 092	1 114	1 214	
PSS2010N1D1414					1 200	1 239		1 292	1 314	1 414	

Left shaft end (opposite driven side)	Lead accuracy Target value T	Lead accuracy Error e_p	Lead accuracy Variation v_u	Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min^{-1}) *2 Fixed-Simple	Permissible rotational speed (min^{-1}) *2 Fixed-Fixed	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
Ⅱ	0	0.023	0.018	0.045	0.6 – 7.4	1.0	5 000	—	3.4	1.7
Ⅱ		0.023	0.018	0.045	0.6 – 7.4	1.1	5 000	—		
Ⅱ		0.025	0.020	0.050	0.6 – 7.4	1.3	5 000	—		
Ⅱ		0.027	0.020	0.060	0.4 – 9.8	1.5	5 000	—		
Ⅱ		0.030	0.023	0.075	0.4 – 9.8	1.7	5 000	—		
Ⅱ		0.035	0.025	0.075	0.4 – 9.8	1.9	5 000	—		
Ⅱ		0.035	0.025	0.095	0.4 – 9.8	2.2	4 410	—		
Ⅰ		0.040	0.027	0.095	0.4 – 11.8	2.4	3 450	4 710		
Ⅱ		0.023	0.018	0.045	1.2 – 9.3	1.2	5 000	—	3.2	1.6
Ⅱ		0.025	0.020	0.050	1.2 – 9.3	1.4	5 000	—		
Ⅱ		0.027	0.020	0.060	0.8 – 10.8	1.7	5 000	—		
Ⅱ		0.030	0.023	0.075	0.8 – 10.8	1.9	5 000	—		
Ⅱ		0.035	0.025	0.075	0.8 – 10.8	2.1	5 000	—		
Ⅱ		0.035	0.025	0.095	0.8 – 10.8	2.4	4 330	—		
Ⅰ		0.040	0.027	0.120	0.8 – 13.8	2.6	3 400	4 640		
Ⅰ		0.046	0.030	0.120	0.8 – 13.8	3.1	2 250	3 110		
Ⅰ		0.054	0.035	0.160	0.8 – 13.8	3.6	1 600	2 220		

Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 80°C.
4. Use of NSK support unit is recommended. Refer to page B389 for details.
5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

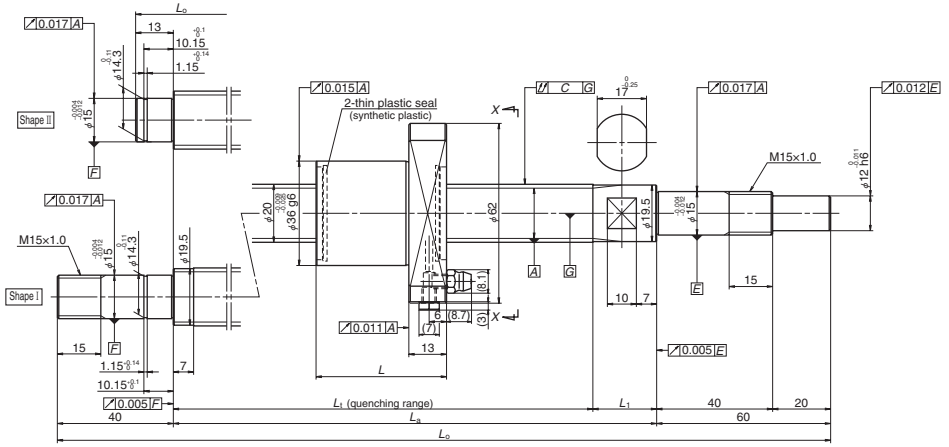
PSS


NSK

Screw shaft ø20

Lead 20, 30

Unit: mm





Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 17.2
Ball circle dia.	20.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01B (low-profile, square)	WBK15-01B (low-profile, square)	WBK15S-01B (low-profile, square)
WBK15-11 (round)	WBK15-11 (round)	

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Nut length L	Screw shaft dimensions L_t	L_a	L_o	L_1
PSS2020N1D0508	20	20	6 790	11 800	300	353	54	413	435	508	22
PSS2020N1D0608					400	453		513	535	608	
PSS2020N1D0708					500	553		613	635	708	
PSS2020N1D0808					600	653		713	735	808	
PSS2020N1D0908					700	753		813	835	908	
PSS2020N1D1035					800	851		913	935	1 035	
PSS2020N1D1235					1 000	1 051		1 113	1 135	1 235	
PSS2020N1D1435					1 200	1 251		1 313	1 335	1 435	
PSS2020N1D1835					1 600	1 651		1 713	1 735	1 835	
PSS2030N1D0408		30	6 550	11 800	200	228	74	308	335	408	27
PSS2030N1D0508					300	328		408	435	508	
PSS2030N1D0608					400	428		508	535	608	
PSS2030N1D0708					500	528		608	635	708	
PSS2030N1D0808					600	628		708	735	808	
PSS2030N1D0908					700	728		808	835	908	
PSS2030N1D1035					800	826		908	935	1 035	
PSS2030N1D1235					1 000	1 026		1 108	1 135	1 235	
PSS2030N1D1435					1 200	1 226		1 308	1 335	1 435	

Left shaft end (opposite driven side)	Lead accuracy Target value T	Lead accuracy Error e_p	Lead accuracy Variation v_u	Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min^{-1}) *2 Fixed-Simple	Permissible rotational speed (min^{-1}) *2 Fixed-Fixed	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
Ⅱ	0	0.027	0.020	0.060	1.4 – 11.8	1.6	5 000	—	3.2	1.6
Ⅱ		0.030	0.023	0.060	1.4 – 11.8	1.8	5 000	—		
Ⅱ		0.030	0.023	0.075	1.4 – 11.8	2.0	5 000	—		
Ⅱ		0.035	0.025	0.095	1.4 – 11.8	2.3	5 000	—		
Ⅱ		0.040	0.027	0.095	0.8 – 13.8	2.5	4 150	—		
Ⅰ		0.040	0.027	0.120	0.8 – 13.8	2.8	3 270	4 470		
Ⅰ		0.046	0.030	0.120	0.8 – 13.8	3.3	2 180	3 010		
Ⅰ		0.054	0.035	0.160	0.8 – 13.8	3.8	1 550	2 170		
Ⅰ		0.065	0.040	0.200	0.8 – 13.8	4.7	900	1 270		
Ⅱ		0.023	0.018	0.050	1.6 – 9.8	1.4	5 000	—	4.6	2.3
Ⅱ		0.027	0.020	0.060	1.4 – 11.8	1.7	5 000	—		
Ⅱ		0.030	0.023	0.060	1.4 – 11.8	1.9	5 000	—		
Ⅱ		0.030	0.023	0.075	1.4 – 11.8	2.1	5 000	—		
Ⅱ		0.035	0.025	0.095	1.4 – 11.8	2.4	5 000	—		
Ⅱ		0.040	0.027	0.095	0.8 – 13.8	2.6	4 310	—		
Ⅰ		0.040	0.027	0.120	0.8 – 13.8	2.9	3 380	4 570		
Ⅰ		0.046	0.030	0.120	0.8 – 13.8	3.4	2 240	3 070		
Ⅰ		0.054	0.035	0.160	0.8 – 13.8	3.9	1 590	2 200		

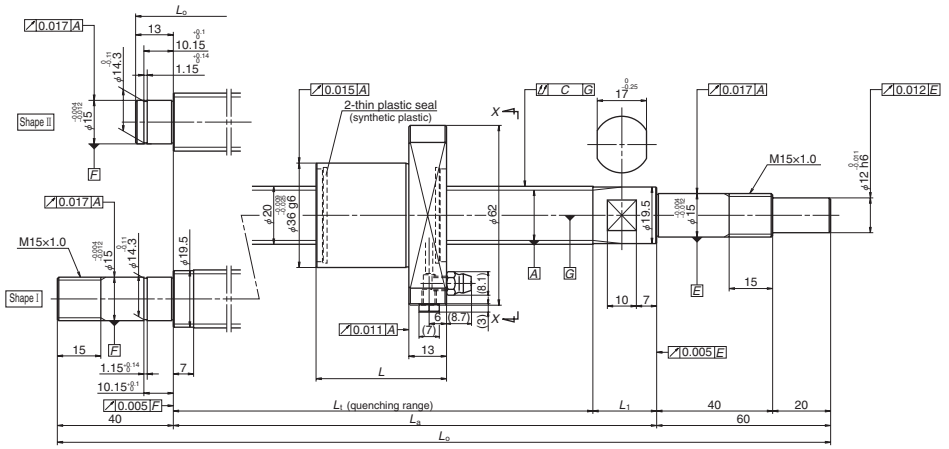
Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 80°C.
4. Use of NSK support unit is recommended. Refer to page B389 for details.
5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.


NSK

Screw shaft ø20

Lead 40, 60

Unit: mm





Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 17.2
Ball circle dia.	20.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01B (low-profile, square)	WBK15-01B (low-profile, square)	WBK15S-01B (low-profile, square)
WBK15-11 (round)	WBK15-11 (round)	

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Nut length L	Screw shaft dimensions L_t	L_a	L_o	L_1
PSS2040N1D0658	20	40	6 380	11 600	400	455	92	553	585	658	32
PSS2040N1D0758					500	555		653	685	758	
PSS2040N1D0858					600	655		753	785	858	
PSS2040N1D0958					700	755		853	885	958	
PSS2040N1D1085					800	853		953	985	1 085	
PSS2040N1D1285					1 000	1 053		1 153	1 185	1 285	
PSS2040N1D1485					1 200	1 253		1 353	1 385	1 485	
PSS2040N1D1885					1 600	1 653		1 753	1 785	1 885	
PSS2040N1D2285					2 000	2 053		2 153	2 185	2 285	
PSS2060N1D0708		60	5 680	11 800	400	458	129	593	635	708	42
PSS2060N1D0808					500	558		693	735	808	
PSS2060N1D0908					600	658		793	835	908	
PSS2060N1D1008					700	758		893	935	1 008	
PSS2060N1D1135					800	856		993	1 035	1 135	
PSS2060N1D1335					1 000	1 056		1 193	1 235	1 335	
PSS2060N1D1535					1 200	1 256		1 393	1 435	1 535	
PSS2060N1D1935					1 600	1 656		1 793	1 835	1 935	
PSS2060N1D2335					2 000	2 056		2 193	2 235	2 335	

Left shaft end (opposite driven side)	Lead accuracy Target value T	Lead accuracy Error e_p	Lead accuracy Variation v_u	Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min^{-1}) *2 Fixed-Simple	Permissible rotational speed (min^{-1}) *2 Fixed-Fixed	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
Ⅱ	0	0.030	0.023	0.075	2.2 – 12.8	2.1	5 000	—	5.3	2.7
Ⅱ		0.035	0.025	0.075	2.2 – 12.8	2.4	5 000	—		
Ⅱ		0.035	0.025	0.095	2.2 – 12.8	2.6	5 000	—		
Ⅱ		0.040	0.027	0.095	1.8 – 14.8	2.8	3 940	—		
Ⅰ		0.040	0.027	0.120	1.8 – 14.8	3.1	3 120	4 190		
Ⅰ		0.046	0.030	0.160	1.8 – 14.8	3.6	2 100	2 850		
Ⅰ		0.054	0.035	0.160	1.8 – 14.8	4.1	1 500	2 070		
Ⅰ		0.065	0.040	0.200	1.8 – 14.8	5.1	880	1 230		
Ⅰ		0.077	0.046	0.240	1.8 – 14.8	6.0	580	810		
Ⅱ		0.030	0.023	0.075	2.7 – 13.8	2.4	5 000	—	7.0	3.5
Ⅱ		0.035	0.025	0.095	2.7 – 13.8	2.6	5 000	—		
Ⅱ		0.035	0.025	0.095	2.7 – 13.8	2.9	4 830	—		
Ⅱ		0.040	0.027	0.120	1.8 – 14.8	3.1	3 740	—		
Ⅰ		0.040	0.027	0.120	1.8 – 14.8	3.4	2 980	3 920		
Ⅰ		0.046	0.030	0.160	1.8 – 14.8	3.9	2 020	2 700		
Ⅰ		0.054	0.035	0.160	1.8 – 14.8	4.4	1 460	1 970		
Ⅰ		0.065	0.040	0.200	1.8 – 14.8	5.4	860	1 180		
Ⅰ		0.077	0.046	0.240	1.8 – 14.8	6.3	570	790		

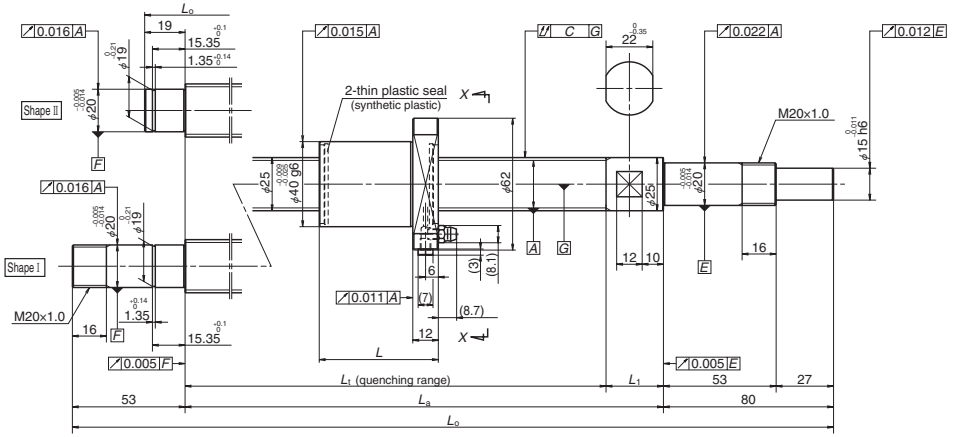
Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 80°C.
4. Use of NSK support unit is recommended. Refer to page B389 for details.
5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.


NSK

Screw shaft ø25

Lead 5, 10

Unit: mm





Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 22.2
Ball circle dia.	25.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic Ca	Basic load ratings (N) Static C0a	Stroke Nominal	Stroke Max.	Nut length L	Screw shaft dimensions Lt	Lsa	Lo	L1
PSS2505N1D0349	25	5	11 500	23 500	150	185	32	223	250	349	27
PSS2505N1D0399					200	235		273	300	399	
PSS2505N1D0499					300	335		373	400	499	
PSS2505N1D0599					400	435		473	500	599	
PSS2505N1D0699					500	535		573	600	699	
PSS2505N1D0899					700	735		773	800	899	
PSS2505N1D0999					800	835		873	900	999	
PSS2505N1D1233					1 000	1 027		1 073	1 100	1 233	
PSS2510N1D0549		10	15 000	32 400	300	361	56	423	450	549	27
PSS2510N1D0649					400	461		523	550	649	
PSS2510N1D0749					500	561		623	650	749	
PSS2510N1D0849					600	661		723	750	849	
PSS2510N1D0949					700	761		823	850	949	
PSS2510N1D1049					800	861		923	950	1 049	
PSS2510N1D1283					1 000	1 053		1 123	1 150	1 283	
PSS2510N1D1883					1 600	1 653		1 723	1 750	1 883	

Left shaft end (opposite driven side)	Lead accuracy Target value T	Lead accuracy Error ep	Lead accuracy Variation vu	Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min⁻¹) *2 Fixed-Simple	Permissible rotational speed (min⁻¹) *2 Fixed-Fixed	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
Ⅱ	0	0.023	0.018	0.035	1.2 – 9.3	1.5	5 000	—	4.4	2.2
Ⅱ		0.023	0.018	0.035	1.2 – 9.3	1.6	5 000	—		
Ⅱ		0.025	0.020	0.040	1.2 – 9.3	2.0	5 000	—		
Ⅱ		0.027	0.020	0.045	1.2 – 9.3	2.3	5 000	—		
Ⅱ		0.030	0.023	0.055	0.8 – 10.8	2.7	5 000	—		
Ⅱ		0.035	0.025	0.065	0.8 – 10.8	3.4	5 000	—		
Ⅱ		0.040	0.027	0.065	0.8 – 10.8	3.7	4 490	—		
Ⅰ		0.046	0.030	0.080	0.8 – 13.8	4.5	2 960	4 060		
Ⅱ		0.027	0.020	0.045	3.1 – 11.8	2.4	5 000	—	4.7	2.4
Ⅱ		0.030	0.023	0.055	2.2 – 12.8	2.7	5 000	—		
Ⅱ		0.030	0.023	0.055	2.2 – 12.8	3.1	5 000	—		
Ⅱ		0.035	0.025	0.065	2.2 – 12.8	3.5	5 000	—		
Ⅱ		0.040	0.027	0.065	2.2 – 12.8	3.8	5 000	—		
Ⅱ		0.040	0.027	0.080	2.2 – 12.8	4.2	4 120	—		
Ⅰ		0.046	0.030	0.100	1.8 – 14.8	5.0	2 760	3 790		
Ⅰ		0.065	0.040	0.130	1.8 – 14.8	7.2	1 150	1 620		

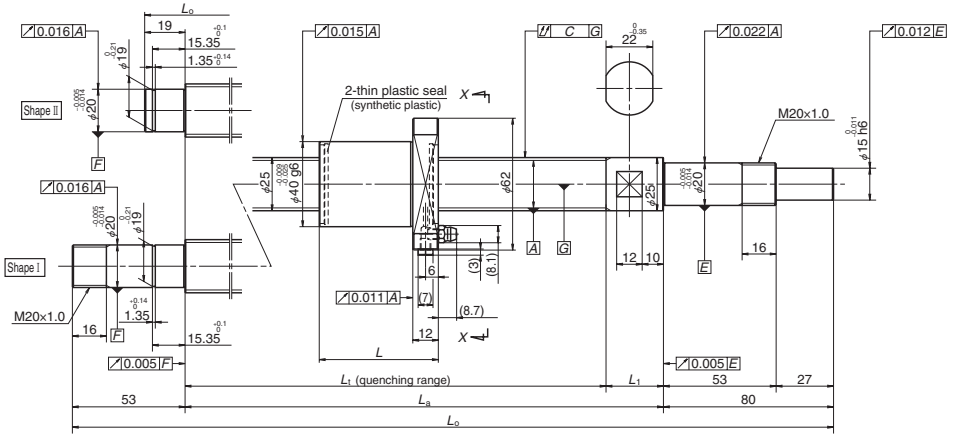
Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 80°C.
4. Use of NSK support unit is recommended. Refer to page B389 for details.
5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.


NSK

Screw shaft ø25

Lead 20, 25

Unit: mm





Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 22.2
Ball circle dia.	25.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Ball screw No.	Screw shaft diameter *d*	Lead *l*	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Nut length *L*	Screw shaft dimensions L_t	L_a	L_o	L_1
PSS2520N1D0729	25	20	7 650	14 800	500	544	54	604	630	729	26
PSS2520N1D0829					600	644		704	730	829	
PSS2520N1D0929					700	744		804	830	929	
PSS2520N1D1029					800	844		904	930	1 029	
PSS2520N1D1263					1 000	1 036		1 104	1 130	1 263	
PSS2520N1D1463					1 200	1 236		1 304	1 330	1 463	
PSS2520N1D1863					1 600	1 636		1 704	1 730	1 863	
PSS2520N1D2263					2 000	2 036		2 104	2 130	2 263	
PSS2525N1D0779		25	7 490	14 600	500	581	63	650	680	779	30
PSS2525N1D0879					600	681		750	780	879	
PSS2525N1D0979					700	781		850	880	979	
PSS2525N1D1079					800	881		950	980	1 079	
PSS2525N1D1313					1 000	1 073		1 150	1 180	1 313	
PSS2525N1D1513					1 200	1 273		1 350	1 380	1 513	
PSS2525N1D1913					1 600	1 673		1 750	1 780	1 913	
PSS2525N1D2313					2 000	2 073		2 150	2 180	2 313	

Left shaft end (opposite driven side)	Lead accuracy Target value *T*	Lead accuracy Error e_p	Lead accuracy Variation v_u	Shaft run-out *C*	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min⁻¹) *2 Fixed-Simple	Permissible rotational speed (min⁻¹) *2 Fixed-Fixed	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
II	0	0.030	0.023	0.055	2.2 – 12.8	3.1	5 000	—	3.9	2.0
II		0.035	0.025	0.065	2.2 – 12.8	3.4	5 000	—		
II		0.040	0.027	0.065	2.2 – 12.8	3.8	5 000	—		
II		0.040	0.027	0.080	2.2 – 12.8	4.2	4 280	—		
I		0.046	0.030	0.100	1.8 – 14.8	5.0	2 850	3 920		
I		0.054	0.035	0.100	1.8 – 14.8	5.8	2 030	2 820		
I		0.065	0.040	0.130	1.8 – 14.8	7.3	1 180	1 650		
I		0.077	0.046	0.170	1.8 – 14.8	8.8	770	1 080		
II		0.035	0.025	0.055	2.7 – 13.8	3.3	5 000	—	4.3	2.2
II		0.035	0.025	0.065	2.7 – 13.8	3.7	5 000	—		
II		0.040	0.027	0.065	2.7 – 13.8	4.1	4 910	—		
II		0.040	0.027	0.080	2.7 – 13.8	4.4	3 910	—		
I		0.046	0.030	0.100	1.8 – 14.8	5.3	2 640	3 620		
I		0.054	0.035	0.100	1.8 – 14.8	6.0	1 900	2 630		
I		0.065	0.040	0.130	1.8 – 14.8	7.5	1 120	1 570		
I		0.077	0.046	0.170	1.8 – 14.8	9.1	740	1 040		

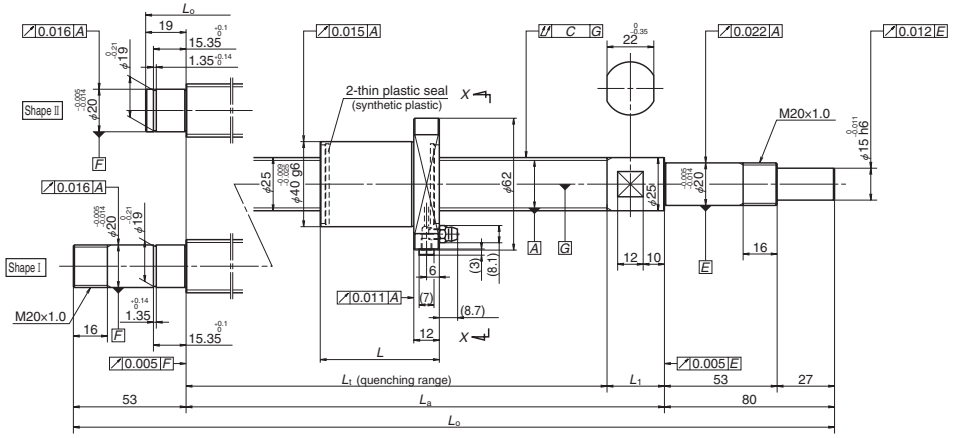
Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 80°C.
4. Use of NSK support unit is recommended. Refer to page B389 for details.
5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.


NSK

Screw shaft ø25

Lead 30, 50

Unit: mm





Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 22.2
Ball circle dia.	25.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic Ca	Basic load ratings (N) Static C0a	Stroke Nominal	Stroke Max.	Nut length L	Screw shaft dimensions Lt	Lsa	Lo	L1
PSS2530N1D0779	25	30	7 490	14 600	500	570	74	650	680	779	30
PSS2530N1D0879					600	670		750	780	879	
PSS2530N1D0979					700	770		850	880	979	
PSS2530N1D1079					800	870		950	980	1 079	
PSS2530N1D1313					1 000	1 062		1 150	1 180	1 313	
PSS2530N1D1513					1 200	1 262		1 350	1 380	1 513	
PSS2530N1D1913					1 600	1 662		1 750	1 780	1 913	
PSS2530N1D2313					2 000	2 062		2 150	2 180	2 313	
PSS2550N1D0829		50	6 910	14 700	500	570	114	690	730	829	40
PSS2550N1D0929					600	670		790	830	929	
PSS2550N1D1029					700	770		890	930	1 029	
PSS2550N1D1129					800	870		990	1 030	1 129	
PSS2550N1D1363					1 000	1 062		1 190	1 230	1 363	
PSS2550N1D1563					1 200	1 262		1 390	1 430	1 563	
PSS2550N1D1963					1 600	1 662		1 790	1 830	1 963	
PSS2550N1D2363					2 000	2 062		2 190	2 230	2 363	

Left shaft end (opposite driven side)	Lead accuracy Target value T	Lead accuracy Error ep	Lead accuracy Variation vu	Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min⁻¹) *2 Fixed-Simple	Permissible rotational speed (min⁻¹) *2 Fixed-Fixed	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
Ⅱ	0	0.035	0.025	0.055	2.7 – 13.8	3.4	5 000	—	5.5	2.8
Ⅱ		0.035	0.025	0.065	2.7 – 13.8	3.7	5 000	—		
Ⅱ		0.040	0.027	0.065	2.7 – 13.8	4.1	4 980	—		
Ⅱ		0.040	0.027	0.080	2.7 – 13.8	4.5	3 960	—		
Ⅰ		0.046	0.030	0.100	1.8 – 14.8	5.3	2 670	3 650		
Ⅰ		0.054	0.035	0.100	1.8 – 14.8	6.1	1 920	2 650		
Ⅰ		0.065	0.040	0.130	1.8 – 14.8	7.6	1 130	1 580		
Ⅰ		0.077	0.046	0.170	1.8 – 14.8	9.1	740	1 040		
Ⅱ		0.035	0.025	0.065	5.4 – 17.6	3.8	5 000	—	7.7	3.9
Ⅱ		0.035	0.025	0.065	5.4 – 17.6	4.1	5 000	—		
Ⅱ		0.040	0.027	0.080	5.4 – 17.6	4.5	4 750	—		
Ⅱ		0.040	0.027	0.080	5.4 – 17.6	4.9	3 790	—		
Ⅰ		0.046	0.030	0.100	4.1 – 19.6	5.8	2 570	3 470		
Ⅰ		0.054	0.035	0.100	4.1 – 19.6	6.5	1 860	2 540		
Ⅰ		0.065	0.040	0.130	4.1 – 19.6	8.0	1 100	1 520		
Ⅰ		0.077	0.046	0.170	4.1 – 19.6	9.6	730	1 020		


Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 80°C.
4. Use of NSK support unit is recommended. Refer to page B389 for details.
5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.


NSK

Screw shaft ø10

Lead 5

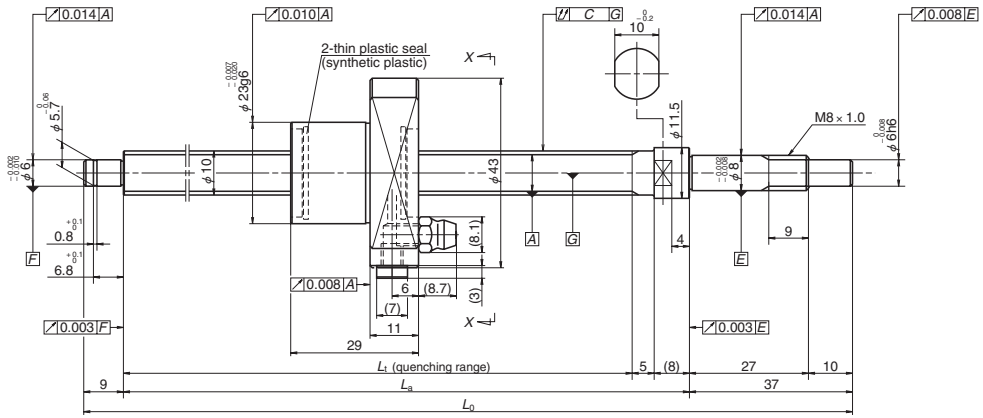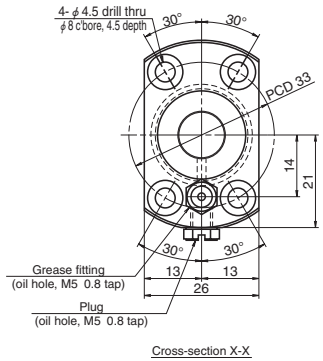Unit: mm





Cross-section X-X

Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.000 / 8.2
Ball circle dia.	10.3
Accuracy grade/axial play	C3 / 0
Factory-packed grease	NSK grease LG2

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01C (square, clean)	WBK08S-01C (square, clean)
WBK08-11C (round, clean)	WBK08S-01B (low-profile, square)
WBK08-01B (low-profile, square)	
WBK08-11 (round)	

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Screw shaft dimensions L_t	Screw shaft dimensions L_a	Screw shaft dimensions L_o
USS1005N1D0221	10	5	3 420	4 840	100	133	162	175	221
USS1005N1D0321					200	233	262	275	321
USS1005N1D0521					400	433	462	475	521

Lead accuracy Target value T	Lead accuracy Error e_p	Lead accuracy Variation V_u	Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min^{-1}) *2 Fixed-Simple	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
0	0.010	0.008	0.035	0.2–1.8	0.3	5 000	0.8	0.4
	0.012	0.008	0.045	0.2–2.0	0.3			
	0.015	0.010	0.070	0.2–3.0	0.5			


Notes: 1. Indicates ball screw preload control value. Approximately 0.5 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 70°C.
4. Use of NSK support unit is recommended. See page B389 for details.


NSK

Screw shaft ø12

Lead 5

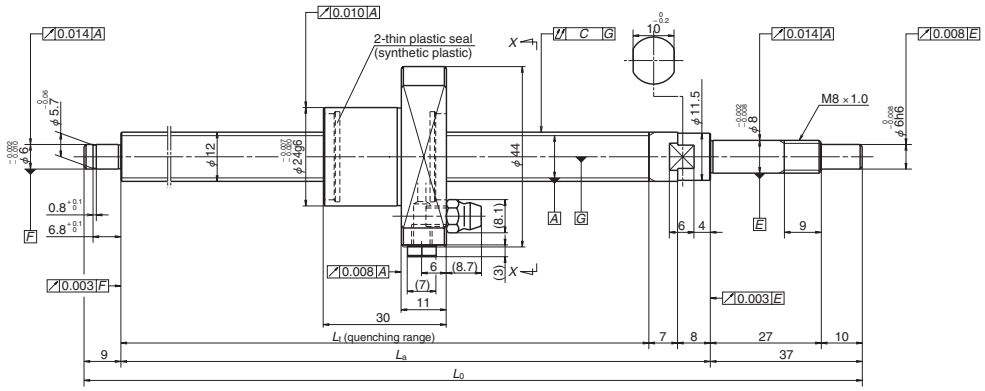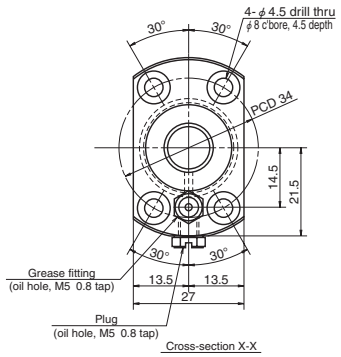Unit: mm





Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.000 / 10.2
Ball circle dia.	12.3
Accuracy grade/axial play	C3 / 0
Factory-packed grease	NSK grease LG2

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01C (square, clean)	WBK08S-01C (square, clean)
WBK08-11C (round, clean)	WBK08S-01B (low-profile, square)
WBK08-01B (low-profile, square)	
WBK08-11 (round)	

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Screw shaft dimensions L_t	L_a	L_0
USS1205N1D0221	12	5	3 750	5 810	100	130	160	175	221
USS1205N1D0321					200	230	260	275	321
USS1205N1D0621					500	530	560	575	621

Lead accuracy Target value T	Lead accuracy Error e_p	Lead accuracy Variation V_u	Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min^{-1}) *2 Fixed-Simple	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
0	0.010	0.008	0.035	0.2–1.8	0.3	5 000	1.0	0.5
	0.012	0.008	0.045	0.2–2.0	0.3			
	0.016	0.012	0.070	0.2–3.0	0.7			

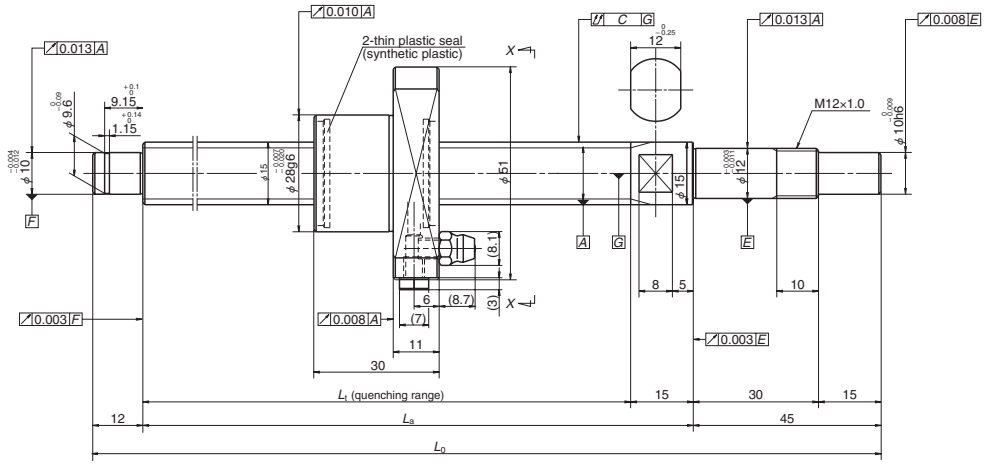Notes: 1. Indicates ball screw preload control value. Approximately 0.5 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 70°C.
4. Use of NSK support unit is recommended. See page B389 for details.




NSK

Screw shaft ø15

Lead 5

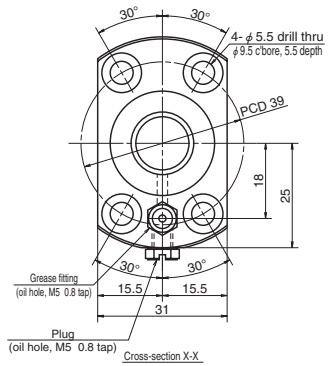Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.778 / 12.6
Ball circle dia.	15.5
Accuracy grade/axial play	C3 / 0
Factory-packed grease	NSK grease LG2

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01C (square, clean)	WBK12S-01C (square, clean)
WBK12-11C (round, clean)	WBK12-01B (low-profile, square)
WBK12S-01B (low-profile, square)	
WBK12-11 (round)	

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Screw shaft dimensions L_t	L_a	L_0
USS1505N1D0261	15	5	6 410	10 100	100	159	189	204	261
USS1505N1D0361					200	259	289	304	361
USS1505N1D0561					400	459	489	504	561
USS1505N1D0761					600	653	689	704	761

Lead accuracy Target value T	Error e_p	Variation V_u	Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min^{-1}) *2 Fixed-Simple	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
0	0.010	0.008	0.025	0.2–5.0	0.5	5 000	2.0	1.0
	0.012	0.008	0.035	0.2–5.0	0.6	5 000		
	0.015	0.010	0.045	0.2–6.0	0.9	5 000		
	0.018	0.013	0.060	0.2–8.0	1.1	4 130		


Notes: 1. Indicates ball screw preload control value. Approximately 0.5 N·cm of torque is added due to thin plastic seals.
2. Contact NSK if permissible rotational speed is to be exceeded.
3. Service temperature range is 0 to 70°C.
4. Use of NSK support unit is recommended. See page B389 for details.


NSK

Screw shaft ø12

Lead 10

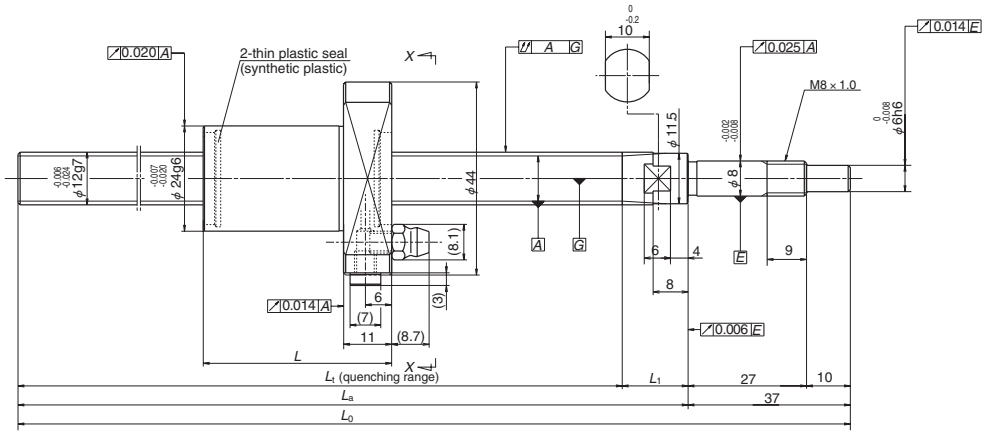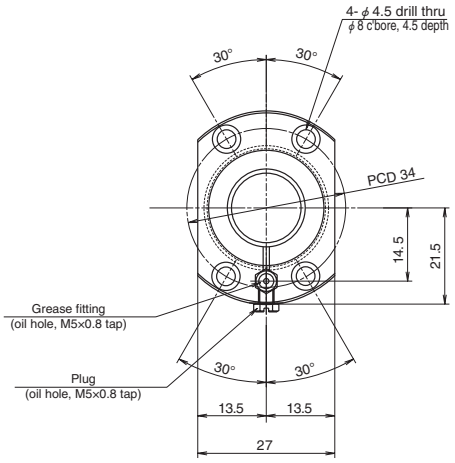Unit: mm





Ball screw specification	
Ball diameter/screw shaft root diameter	2.000 / 10.2
Accuracy grade/axial play	Ct7 / 0.010 or less
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01B (low-profile, square)	WBK12SF-01B (low-profile, square)

Unit: mm

Ball screw No.	Screw shaft diameter *d*	Lead *l*	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Nut length *L*	Screw shaft dimensions L_t	L_a	L_0	L_1
FSS1210N1D0400	12	10	3 760	5 780	250	287	43	348	363	400	15
FSS1210N1D0600					450	487		548	563	600	
FSS1210N1D0900					750	787		848	863	900	

Lead accuracy Target value *T*	Error e_p	Variation V_{300}	Shaft run-out *C*	Dynamic preload torque (N·cm)	Mass (kg)	Permissible rotational speed (min^{-1}) *5 Fixed-Simple	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
0	0.120	0.052	0.080	–	0.5	5 000	1.0	0.5
	0.195		0.120		0.7	5 000		
	0.310		0.180		1.0	2 300		

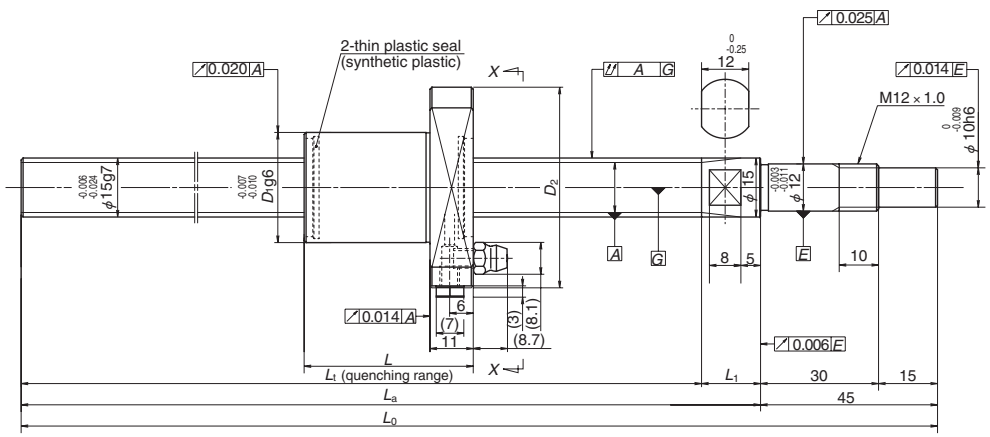
Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Service temperature range is 0 to 80°C.
3. Use of NSK support unit is recommended. See page B389 for details.
4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.
5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.
*Critical speed which is the resonance vibration of the shaft (page B47).
*Maximum rotational speed 5 000 min^{-1}

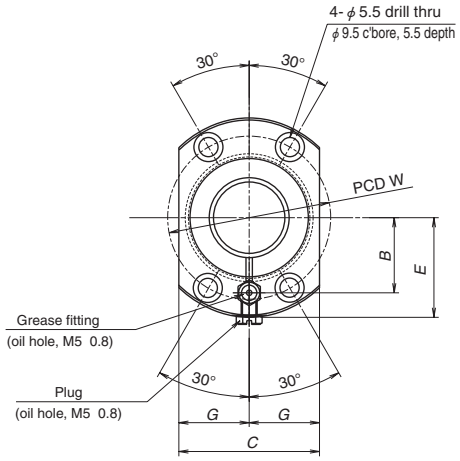
NSK

Screw shaft ø15

Lead 10, 20

Unit: mm





Ball screw specification		
Lead	10	20
Ball diameter/screw shaft root diameter	2.778 / 12.6	3.175 / 12.2
Accuracy grade/axial play	Ct7 / 0.010 or less	
Factory-packed grease	NSK grease LR3	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01B (low-profile, square)	WBK15SF-01B (low-profile, square)

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Screw shaft dimensions L_t	L_a	L_o	L_1	Lead accuracy Target value T	Error e_p	Variation V_{300}
FSS1510N1D0500	15	10	6 530	10 200	350	379	440	455	500	15	0	0.155	0.052
FSS1510N1D1000					850	879	940	955	1 000			0.310	
FSS1510N1D1450					1 300	1 329	1 390	1 405	1 450			0.490	
FSS1520N1D0500		20	5 660	8 700	350	368	437	455	500	18		0.155	
FSS1520N1D1000					850	868	937	955	1 000			0.310	
FSS1520N1D1450					1 300	1 318	1 387	1 405	1 450			0.490	

Nut dimensions L	D_1	D_2	W	B	C	E	G	Shaft run-out C	Dynamic preload torque (N·cm)	Mass (kg)	Permissible rotational speed (min⁻¹) *5 Fixed-Simple	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
43	28	51	39	18	31	25	15.5	0.070	–	0.9	5 000	2.0	1.0
								0.125		1.7	2 300		
								0.200		2.3	1 020		
51	32	55	43	20	33	27	16.5	0.070		1.0	5 000	2.8	1.4
								0.125		1.7	2 260		
								0.200		2.3	1 000		

Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Service temperature range is 0 to 80°C.
3. Use of NSK support unit is recommended. See page B389 for details.
4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.
5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.
*Critical speed which is the resonance vibration of the shaft (page B47).
*Maximum rotational speed 5 000 min^{-1}

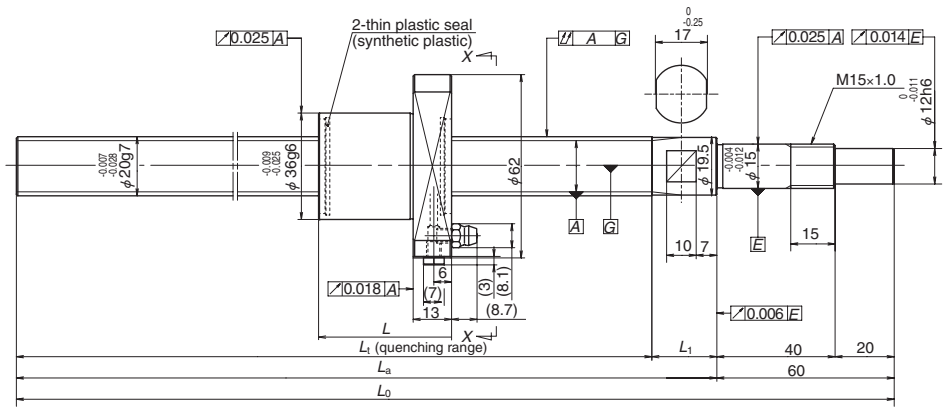
FSS

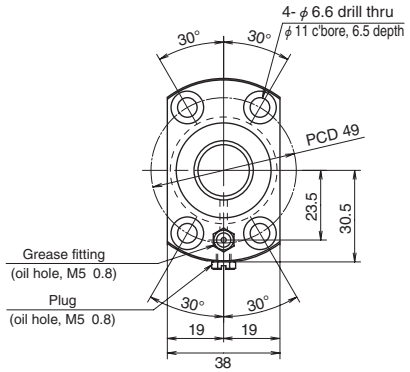
NSK

Screw shaft ø20

Lead 10, 20

Unit: mm





Ball screw specification	
Ball diameter/screw shaft root diameter	3.175 / 17.2
Accuracy grade/axial play	Ct7 / 0.010 or less
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01B (low-profile, square)	WBK20SF-01B (low-profile, square)

Unit: mm

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Nut length L	Screw shaft dimensions L_t	L_a	L_o	L_1
FSS2010N1D0600	20	10	10 200	18 600	400	451	45	518	540	600	22
FSS2010N1D1000					800	851		918	940	1 000	
FSS2010N1D1450					1 250	1 301		1 368	1 390	1 450	
FSS2020N1D0600		20	6 790	11 800	400	442	54	518	540	600	
FSS2020N1D1000					800	842		918	940	1 000	
FSS2020N1D1450					1 250	1 292		1 368	1 390	1 450	

Lead accuracy Target value T	Error e_p	Variation V_{300}	Shaft run-out C	Dynamic preload torque (N·cm)	Mass (kg)	Permissible rotational speed (min^{-1}) *5 Fixed-Simple	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
0	0.195	0.052	0.085	–	1.7	5 000	3.2	1.6
	0.310		0.125		2.6	3 310		
	0.490		0.200		3.6	1 450		
	0.195		0.085		1.8	5 000		
	0.310		0.125		2.7	3 350		
	0.490		0.200		3.8	1 460		

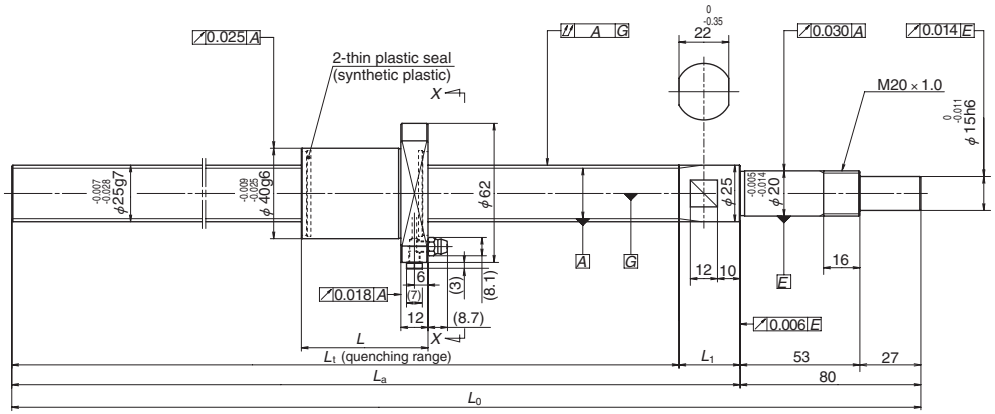
Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Service temperature range is 0 to 80°C.
3. Use of NSK support unit is recommended. See page B389 for details.
4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.
5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.
*Critical speed which is the resonance vibration of the shaft (page B47).
*Maximum rotational speed 5 000 min^{-1}

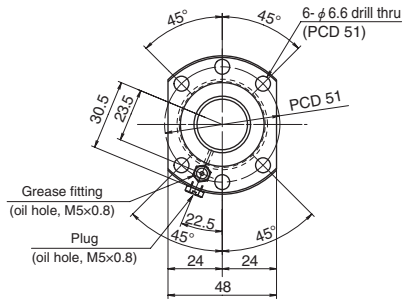
NSK

Screw shaft ø25

Lead 10, 20, 25

Unit: mm





Ball screw specification	
Ball diameter/screw shaft root diameter	3.175 / 22.2
Accuracy grade/axial play	Ct7 / 0.010 or less
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK25SF-01 (square)

Unit: mm

Ball screw No.	Screw shaft diameter *d*	Lead *l*	Basic load ratings (N) Dynamic C_a	Basic load ratings (N) Static C_{0a}	Stroke Nominal	Stroke Max.	Nut length *L*	Screw shaft dimensions L_t	L_a	L_o	L_1
FSS2510N1D0600	25	10	15 000	32 400	400	415	56	493	520	600	27
FSS2510N1D1000					800	815		893	920	1 000	
FSS2510N1D1450					1 250	1 265		1 343	1 370	1 450	
FSS2520N1D0600		20	7 650	14 800	400	418	54	494	520	600	26
FSS2520N1D1000					800	818		894	920	1 000	
FSS2520N1D1450					1 250	1 268		1 344	1 370	1 450	
FSS2525N1D0600		25	7 490	14 600	400	405	63	490	520	600	30
FSS2525N1D1000					800	805		890	920	1 000	
FSS2525N1D1450					1 250	1 255		1 340	1 370	1 450	

Notes: 1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
2. Service temperature range is 0 to 80°C.
3. Use of NSK support unit is recommended. See page B389 for details.

Lead accuracy Target value *T*	Lead accuracy Error e_p	Lead accuracy Variation V_{300}	Shaft run-out *C*	Dynamic preload torque (N·cm)	Mass (kg)	Permissible rotational speed (min^{-1}) *4 *5 Fixed-Simple	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
0	0.155	0.052	0.065	–	2.6	5 000	4.7	2.4
	0.310		0.090		4.0	4 590		
	0.490		0.130		5.8	1 970		
	0.155		0.065		2.6	5 000	3.9	2.0
	0.310		0.090		4.0	4 570		
	0.490		0.130		5.8	1 960		
	0.155		0.065		2.6	5 000	4.3	2.2
	0.310		0.090		4.1	4 660		
	0.490		0.130		5.8	1 990		

4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.
5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.
*Critical speed which is the resonance vibration of the shaft (page B47).
*Maximum rotational speed 5 000 min^{-1}

B-3-1.2 High Speed SS Series HSS Type

◇ Features

The HMS and HMD series, originally developed for machine tools, are an addition to NSK's lineup of standard ball screws. They have a wide range of applications, from general machines to high performance machines such as those requiring high speed and precision.

● High speed

The new recirculation system that utilizes NSK's high speed and low noise technology more than doubles the d • n value from 70 000 to 160 000.
To extend the range of the lead to 20mm, high speed operation of over 60m/min. is possible.

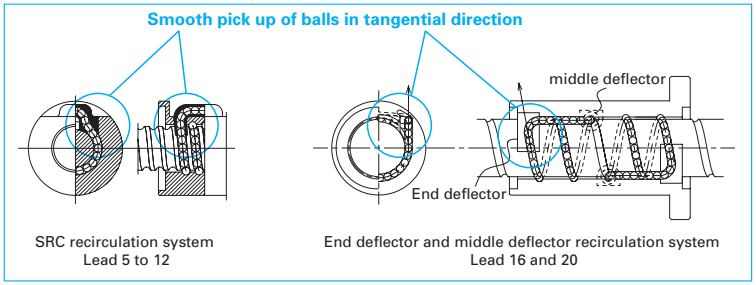


Fig 1 Ball recirculation system

Table 1 Allowable feed speed of combinations of shaft diameter and lead

shaft diameter [mm] \ Lead [mm]	5	10	12	16	20
32	25m/min	50m/min			
40		40m/min	48m/min	64m/min	80m/min
45		35m/min			
50		32m/min	38m/min		

* Allowable speed needs to be calculated. See the permissible rotational speed in the dimensions table.

● Low noise and vibrations

Compared to our conventional products, the average noise level has been reduced by more than 6dB(A), reducing the number of colliding balls and recirculation parts thanks to high speed, low noise technology.
The vibration level of the nut has also been reduced drastically.

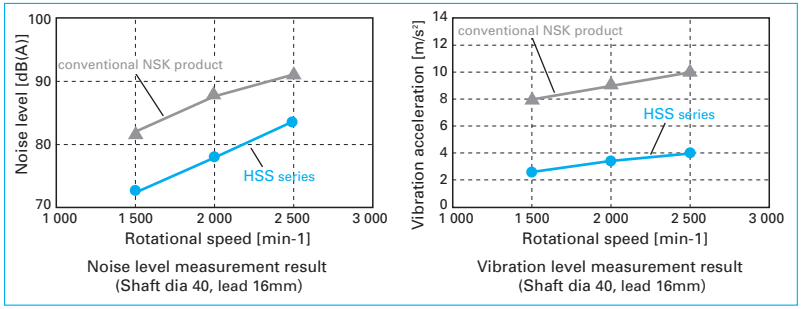


Table 2

● Installation

Installation dimension are the same as those of a conventional SS series.

● Compact

Achieved high-level stiffness and high load capacity equivalent to that of double nut preload by changing the double nut preload to the offset preload of a single nut, and compact sized nut. Adopted thin seals axially and shorten nut length.

● Blank shaft ends

The blank shaft ends can be customized according to customers' requests. See page B27 in NSK's recommended design when drawing up plans for a shaft end. The support units available on page B389 in the case of NSK's recommended design. See "Technical Description: Shaft End Processing" (page B86) for procedures of shaft end processing and precautions.

● Oil supply

2 oil holes, M6×1.0, are provided in the nut flange periphery are the end of the nut flange.
A plug is standardly screwed into the periphery of the nut flange.

◇ Specifications

● Accuracy grade and axial play

The available standard accuracy grade and axial play are show in Table 2.

Table 2 Accuracy grade and axial play

Accuracy grade	C5
Axial play	0 mm (preloaded)

● Dimension tables

Shape dimensions and specifications are listed for every shaft diameter and lead.
See Table 3, the "List of pages".

◇ Other


The seal of the ball screw and recirculation parts are made of synthetic resin. Consult NSK when using the ball screws under extreme environments or special environments, or using special lubrican or oil.
For special environments, see pages B70 and D2. See pages B67 and D13 for lubricants.


Table 3 Combinations of screw shaft diameter and lead

Screw shaft diameter [mm] \ Lead [mm]	5	10	12	16	20
32	B149	B149			
40		B151	B151	B153	B153
45		B155			
50		B155	B155		


NSK

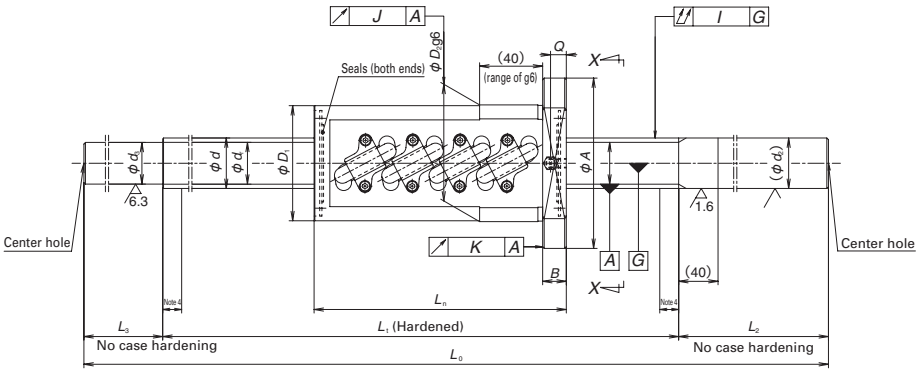Screw shaft ϕ 32
Lead 5,10





View X-X
(HSS3210)



View X-X
(HSS3205)


Unit : mm


Reference No.	Screw shaft dia.	Lead	Ball dia.	Ball circle dia.	Root dia.	Effective balls turns: Tune × Circuits	Basic load rating(N): Dynamic	Basic load rating(N): Static	Preload	Dynamic friction torque, median (N·cm)	Ball nut dimensions: Diameter		Flange				Overall length	
	d	l	D_w	d_m	d_r	Circuits	C_a	C_{oa}	(N)		D_1	D_2	A	G	H	B	L_n	W
HSS3205N1D0650	32	5	3.175	32.5	29.2	2.5X2	21 800	56 000	920	17.0	57	58	85	32	42	13	89	71
HSS3205N1D0950																		
HSS3205N1D1250																		
HSS3205N1D1550																		
HSS3205N1D1850																		
HSS3210N1D0850	32	10	6.350	33.0	26.4	2.5X2	54 500	110 000	2 310	59.5	73	74	108	41	53.5	15	160	90
HSS3210N1D1050																		
HSS3210N1D1450																		
HSS3210N1D1850																		
HSS3210N1D2250																		

Bolt hole: X	Y	Z	Oil hole: Q	Screw shaft dimension: Threaded length L_t	Shaft end, right d_2	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy: Travel compensation T	Deviation e_p	Variation V_u	Run-out: Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed (min^{-1}): Installation: Fixed-Free support	Fixed-Fixed support	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
6.6	11	6.5	8	400	32	200	29.2	50	650	-0.010	0.025	0.020	0.055	0.019	0.013	5.2	5 000	5 000	10	5
				600		250		100	950	-0.014	0.030	0.023	0.065			7.0	5 000	5 000		
				900		250		100	1 250	-0.022	0.040	0.027	0.080			8.7	5 000	5 000		
				1 150		300		100	1 550	-0.028	0.046	0.030	0.100			10.5	3 500	4 700		
				1 450		300		100	1 850	-0.035	0.054	0.035	0.130			12.2	2 200	2 900		
9	14	8.5	10	500	32	250	26.4	100	850	-0.012	0.027	0.020	0.065	0.019	0.013	8.9	5 000	5 000	43	22
				700		250		100	1 050	-0.017	0.035	0.025	0.080			10.0	5 000	5 000		
				1 050		300		100	1 450	-0.025	0.046	0.030	0.100			12.2	4 100	5 000		
				1 450		300		100	1 850	-0.035	0.054	0.035	0.130			14.3	2 100	2 800		
				1 850		300		100	2 250	-0.045	0.065	0.040	0.170			16.5	1 200	1 700		

Notes: 1. Service temperature range is 0 to 60°C.
2. Use of NSK support unit is recommended. See page B389 for details.
3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.

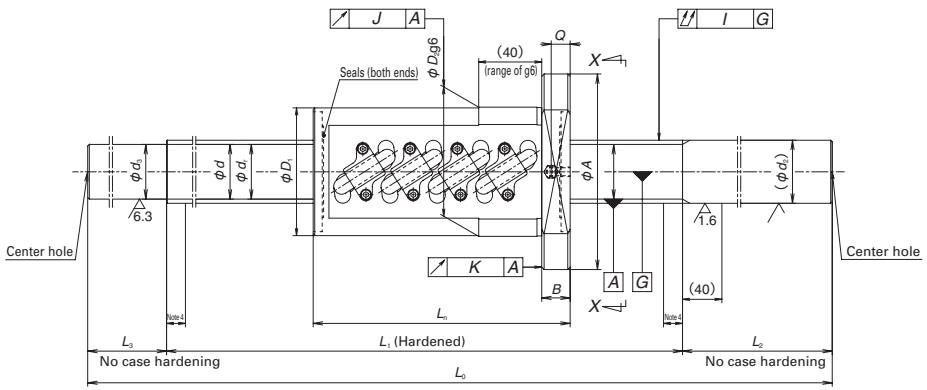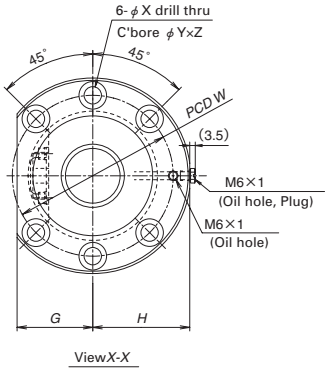Screw shaft ϕ 40
Lead 10, 12






Unit : mm


Reference No.	Screw shaft dia.	Lead	Ball dia.	Ball circle dia.	Root dia.	Effective balls turns	Basic load rating(N)		Preload	Dynamic friction torque, median (N·cm)	Ball nut dimensions							
						Tune × Circuits	Dynamic	Static			Diamete		Flange				Overall length	
	d	l	D_w	d_m	d_r		C_a	C_{oa}	(N)		D_1	D_2	A	G	H	B	L_n	W
HSS4010N1D0950	40	10	6.350	41.0	34.4	2.5X2	61 200	137 000	2 600	74.5	81	82	124	47	61.5	18	163	102
HSS4010N1D1450																		
HSS4010N1D2100																		
HSS4010N1D2900																		
HSS4012N1D1450	40	12	7.144	41.5	34.1	2.5X2	71 700	154 000	3 050	96.0	85	86	128	48	63.5	18	187	106
HSS4012N1D2100																		
HSS4012N1D2900																		

Bolt hole			Oil hole	Screw shaft dimension						Lead accuracy			Run-out			Mass	Permissible rotational speed (min^{-1})		Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
				Threaded length	Shaft end, right		Shaft end, left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out			Installation			
X	Y	Z	Q	L_t	d_2	L_2	d_3	L_3	L_0	T	e_p	V_u	l	J	K	(kg)	Fixed-Free support	Fixed-Fixed support		
11	17.5	11	12	600	40	250	34.4	100	950	-0.014	0.030	0.023	0.050	0.025	0.015	13.5	4 000	4 000	52	26
				1 050		300		100	1 450	-0.025	0.046	0.030	0.070			17.9	4 000	4 000		
				1 600		350		150	2 100	-0.039	0.054	0.035	0.110			23.5	2 200	3 000		
				2 400		350		150	2 900	-0.058	0.077	0.046	0.140			30.5	900	1 300		
11	17.5	11	12	1 050	40	300	34.1	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	19.1	4 000	4 000	67	34
				1 600		350		150	2 100	-0.039	0.054	0.035	0.110			24.8	2 200	3 000		
				2 400		350		150	2 900	-0.058	0.077	0.046	0.140			31.8	900	1 300		

Notes: 1. Service temperature range is 0 to 60°C.
2. Use of NSK support unit is recommended. See page B389 for details.
3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.

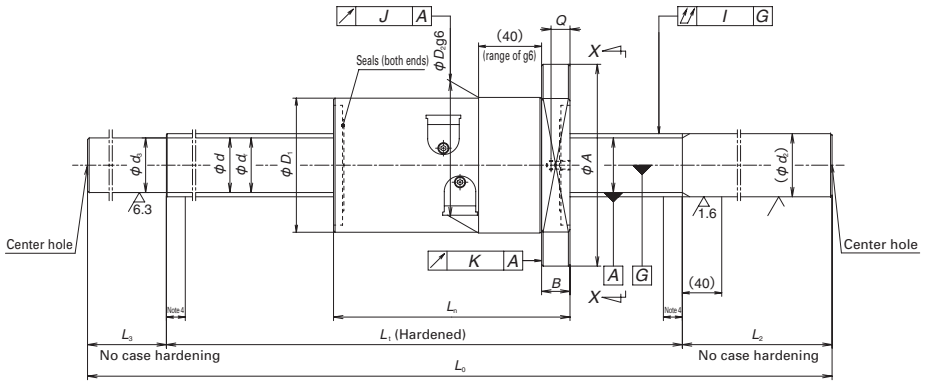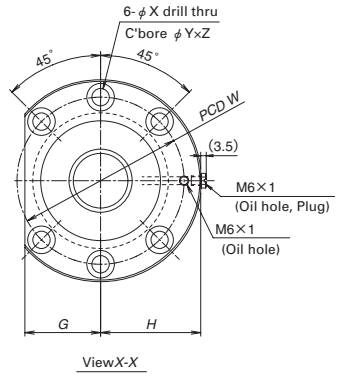Screw shaft ϕ40
Lead 16, 20






Unit : mm


Reference No.	Screw shaft dia.	Lead	Ball dia.	Ball circle dia.	Root dia.	Effective balls turns	Basic load rating(N)		Preload	Dynamic friction torque, median	Ball nut dimensions							
						Tune × Circuits	Dynamic	Static			Diamete		Flange				Overall length	
	d	l	D_w	d_m	d_r		C_a	C_{oa}	(N)	(N·cm)	D_1	D_2	A	G	H	B	L_n	W
HSS4016N1D1450	40	16	7.144	41.5	34.1	3.7X1	66 900	131 000	2 850	104.0	85	86	128	48	63.5	18	160	106
HSS4016N1D2100																		
HSS4016N1D2900																		
HSS4020N1D1450	40	20	7.144	41.5	34.1	3.7X1	66 500	131 000	2 850	116.5	85	86	128	48	63.5	18	192	106
HSS4020N1D2100																		
HSS4020N1D2900																		

Bolt hole			Oil hole	Screw shaft dimension						Lead accuracy			Run-out			Mass	Permissible rotational speed (min^{-1})		Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
				Threaded length	Shaft end, right		Shaft end, left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out			Installation			
X	Y	Z	Q	L_t	d_2	L_2	d_3	L_3	L_0	T	e_p	V_u	I	J	K	(kg)	Fixed-Free support	Fixed-Fixed support		
11	17.5	11	11	1 050	40	300	34.1	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	19.2	4 000	4 000	40	20
				1 600		350		150	2 100	-0.039	0.054	0.035	0.110			25.0	2 200	3 000		
				2 400		350		150	2 900	-0.058	0.077	0.046	0.140			32.2	900	1 300		
11	17.5	11	11	1 050	40	300	34.4	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	20.3	4 000	4 000	47	24
				1 600		350		150	2 100	-0.039	0.054	0.035	0.110			26.2	2 200	3 000		
				2 400		350		150	2 900	-0.058	0.077	0.046	0.140			33.5	900	1 300		

Notes: 1. Service temperature range is 0 to 60°C.
2. Use of NSK support unit is recommended. See page B389 for details.
3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.

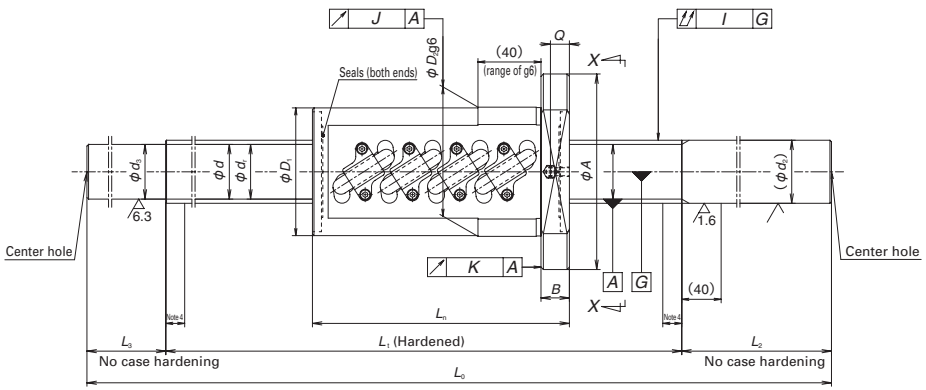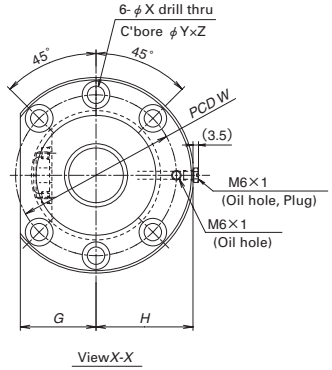Screw shaft ϕ 45, 50
Lead 10, 12





Unit : mm

Reference No.	Screw shaft dia.	Lead	Ball dia.	Ball circle dia.	Root dia.	Effective balls turns Tune × Circuits	Basic load rating(N) Dynamic	Static	Preload	Dynamic friction torque, median	Ball nut dimensions Diameter		Flange				Overall length	
	d	l	D_w	d_m	d_r		C_a	C_{oa}	(N)	(N·cm)	D_1	D_2	A	G	H	B	L_n	W
HSS4510N1D1450	45	10	6.350	46.0	39.4	2.5X2	65 800	157 000	2 710	82.0	87	88	132	50	65.5	18	163	110
HSS4510N1D2100																		
HSS4510N1D2900																		
HSS5010N1D1450	50	10	6.350	51.0	44.4	2.5X2	68 100	174 000	2 880	92.0	92	93	135	51	67	18	163	113
HSS5010N1D1850																		
HSS5010N1D2350																		
HSS5010N1D2900																		
HSS5012N1D1450	50	12	7.938	51.5	43.2	2.5X2	91 500	218 000	3 880	136.5	99	100	146	55	72.5	22	193	122
HSS5012N1D2100																		
HSS5012N1D2900																		

Bolt hole X	Y	Z	Oil hole Q	Screw shaft dimension Threaded length L_t	Shaft end, right d_2	L_2	Shaft end, left d_3	L_3	Overall length L_0	Lead accuracy Travel compensation T	Deviation e_p	Variation V_u	Run-out Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed (min^{-1}) Installation Fixed-Free support	Fixed-Fixed support	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
11	17.5	11	12	1 050	45	300	39.4	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	22.0	3 500	3 500	58	29
				1 600		350		150	2 100	-0.039	0.054	0.035	0.110			29.2	2 500	3 400		
				2 400		350		150	2 900	-0.058	0.077	0.046	0.140			38.2	1 100	1 500		
11	17.5	11	12	1 050	50	300	44.4	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	26.3	3 200	3 200	64	32
				1 450		300		100	1 850	-0.035	0.054	0.035	0.090			31.9	3 200	3 200		
				1 850		350		150	2 350	-0.045	0.065	0.040	0.110			38.8	2 100	2 900		
				2 400		350		150	2 900	-0.058	0.077	0.046	0.140			46.5	1 200	1 700		
14	20	13	12	1 050	50	300	43.2	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	28.5	3 200	3 200	99	50
				1 600		350		150	2 100	-0.039	0.054	0.035	0.110			37.3	2 800	3 200		
				2 400		350		150	2 900	-0.058	0.077	0.046	0.140			48.2	1 200	1 600		

Notes: 1. Service temperature range is 0 to 60°C.
2. Use of NSK support unit is recommended. See page B389 for details.
3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.

B-3-1.3 Finished Shaft End MA type, FA type, SA type

1. Order of the dimension tables

The tables begin with the smallest shaft diameter of each MA, FA, and SA type ball screws, and proceeds to the larger sizes. If ball screws have the same shaft diameter, those with smaller leads appear first. Page numbers of shaft diameter and lead combinations are shown in Table 1.

2. Dimension tables

Dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

●Stroke

Nominal stroke: A reference for your use.

Maximum stroke: The limit stroke that the nut can move. The figure is obtained by subtracting the nut length from the effective threaded length (L_1).

●Lead accuracy

Lead accuracy is either C3 or C5 grades

T : Travel compensation

e_p : Tolerance on specified travel

v_u : Travel variation

See "Technical Description: Lead Accuracy" (page B37) for the details of the codes.

●Permissible rotational speed

d • n: Limited by the relative peripheral speed between the screw shaft and the nut.

Critical speed: Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.

The lower of the two criteria, the d·n and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).


3. Other

The seal of the ball screw, ball recirculating deflector, and end cap are made of synthetic resin. Consult NSK when using our ball screws under extreme environments or in special environments, or if using special lubricant or oil. For special environments, see pages B70 and D2. For lubricants, see pages B67 and D13.

Note: For details of standard stock products, contact NSK.

Table 1 Combinations of screw shaft diameter and lead

Screw shaft diameter (mm) \ Lead (mm)	1	1.5	2	2.5	4	5	6	8	10	12	16	20	25	32	40	50
4	B159															
6	B161															
8	B163	B165	B167													
10			B169	B171	B181											
12			B173	B175		B183			B185							
14						B187		B189								
15									B191			B193				
16			B177	B179		B195					B197			B199		
20					B217	B219			B201			B203			B205	
25					B221	B223	B225		B227			B207	B209			B211
28						B229 B231	B233 B235									
32						B237 B239	B241 B243	B245	B247 B249				B213	B215		
36									B251 B253							
40						B255		B257	B259 B261	B263 B265						
45									B267							
50									B269 B271							

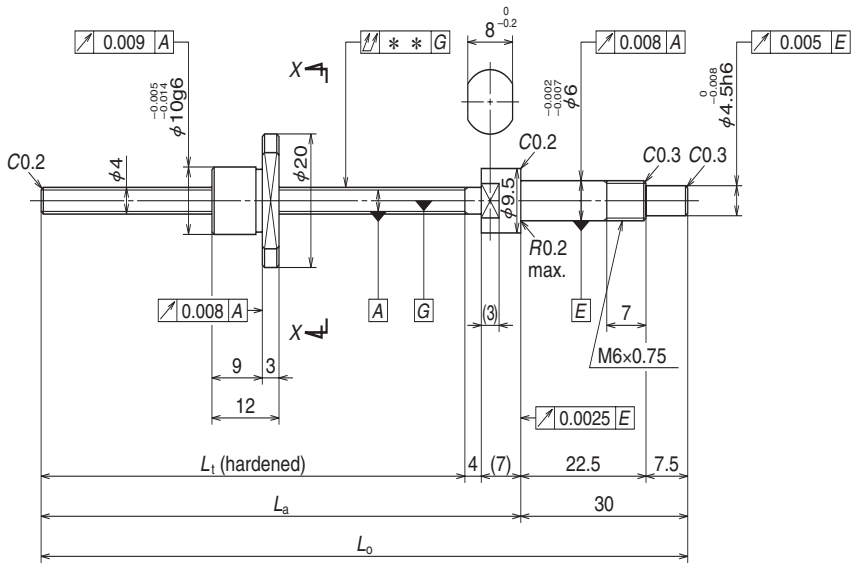


NSK

Screw shaft ø4

Lead 1

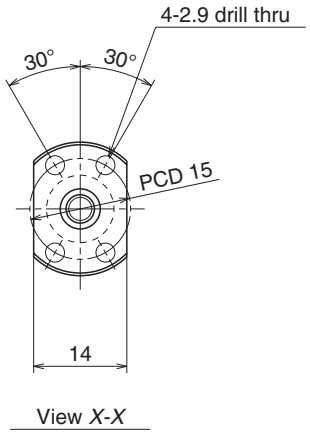Unit: mm



View *X-X*

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		4 × 1 / Right	
Preload / Ball recirculation		P-preload / Deflector (bridge type)	
Ball dia. / Ball circle dia.		0.800 / 4.2	
Screw shaft root diameter		3.2	
Effective turns of balls		1 × 2	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	370	
	Static C_{0a}	370	
Axial play		0	0.005 or less
Preload (N)		19.6	—
Dynamic friction torque, (N·cm)		1.0 or less	0.3 or less
Spacer ball		None	
Factory-packed grease		NSK grease PS2	

Recommended support unit


For drive side (Fixed)
WBK06-01A (square)
WBK06-11 (round)

MA

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
												Supporting condition
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Free
W0400MA-1PY-C3Z1	**W0400MA-2Y-C3T1**	20	32	44	55	85	0	0.008	0.008	0.015	0.024	3 000
W0400MA-3PY-C3Z1	**W0400MA-4Y-C3T1**	40	52	64	75	105	0	0.008	0.008	0.020	0.026	3 000
W0401MA-1PY-C3Z1	**W0401MA-2Y-C3T1**	70	82	94	105	135	0	0.008	0.008	0.025	0.028	3 000

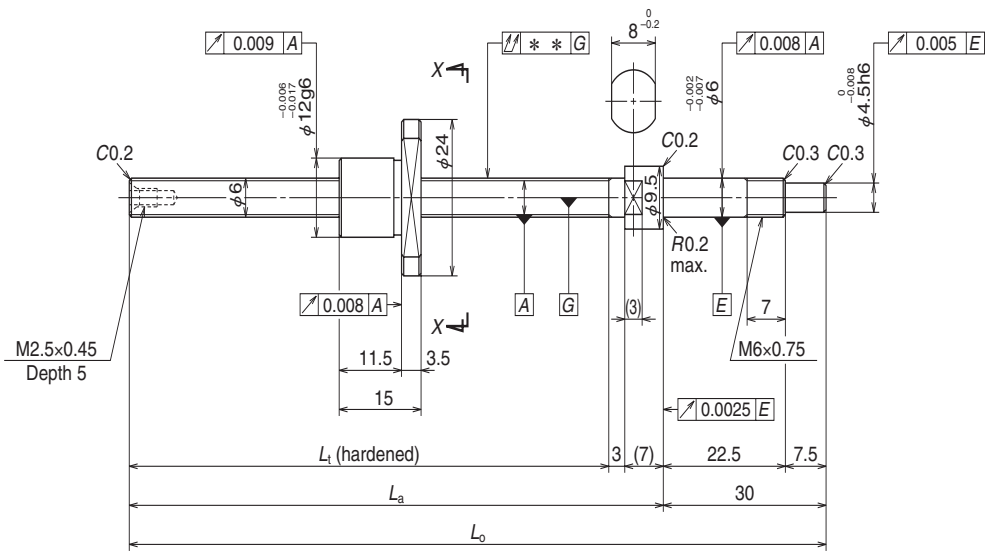Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.




NSK

Screw shaft ø6

Lead 1

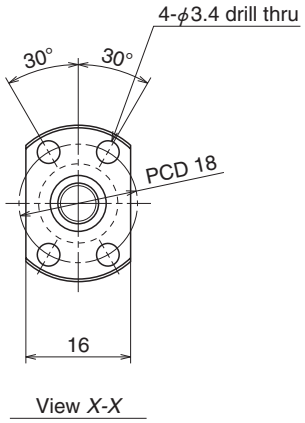Unit: mm



View *X-X*

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		6 × 1 / Right	
Preload / Ball recirculation		P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.		0.800 / 6.2	
Screw shaft root diameter		5.2	
Effective turns of balls		1 × 3	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	680	
	Static C_{0a}	920	
Axial play		0	0.005 or less
Preload (N)		24.5	—
Dynamic friction torque, (N·cm)		1.3 or less	0.3 or less
Spacer ball		None	
Factory-packed grease		NSK grease PS2	

Recommended support unit

For drive side (Fixed)
WBK06-01A (square)
WBK06-11 (round)


MA

Unit: mm

Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W0600MA-1PY-C3Z1	**W0600MA-2Y-C3T1**	40	50
W0601MA-1PY-C3Z1	**W0601MA-2Y-C3T1**	70	80
W0601MA-3PY-C3Z1	**W0601MA-4Y-C3T1**	100	110

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹) Supporting condition
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Free
65	75	105	0	0.008	0.008	0.015	0.039	3 000
95	105	135	0	0.008	0.008	0.020	0.045	3 000
125	135	165	0	0.010	0.008	0.025	0.051	3 000

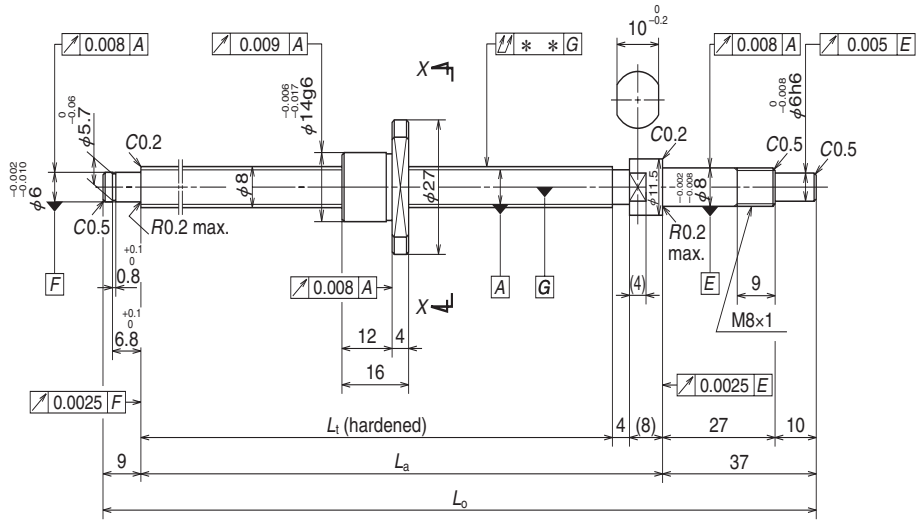
Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.



NSK

Screw shaft ø8

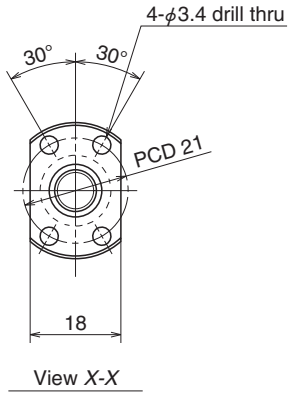Lead 1



Unit: mm

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		8 × 1 / Right	
Preload / Ball recirculation		P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.		0.800 / 8.2	
Screw shaft root diameter		7.2	
Effective turns of balls		1 × 3	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	790	
	Static C_{0a}	1 290	
Axial play		0	0.005 or less
Preload (N)		29.4	—
Dynamic friction torque, (N·cm)		1.8 or less	0.5 or less
Spacer ball		None	
Factory-packed grease		NSK grease PS2	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01A (square)	WBK08S-01 (square)
WBK08-11 (round)	


MA

Unit: mm

Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W0800MA-1PY-C3Z1	**W0800MA-2Y-C3T1**	40	59
W0801MA-1PY-C3Z1	**W0801MA-2Y-C3T1**	70	89
W0801MA-3PY-C3Z1	**W0801MA-4Y-C3T1**	100	119
W0802MA-1PY-C3Z1	**W0802MA-2Y-C3T1**	150	169

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
								Supporting condition
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support
80	92	138	0	0.008	0.008	0.025	0.073	3 000
110	122	168	0	0.010	0.008	0.030	0.084	3 000
140	152	198	0	0.010	0.008	0.030	0.095	3 000
190	202	248	0	0.010	0.008	0.035	0.11	3 000

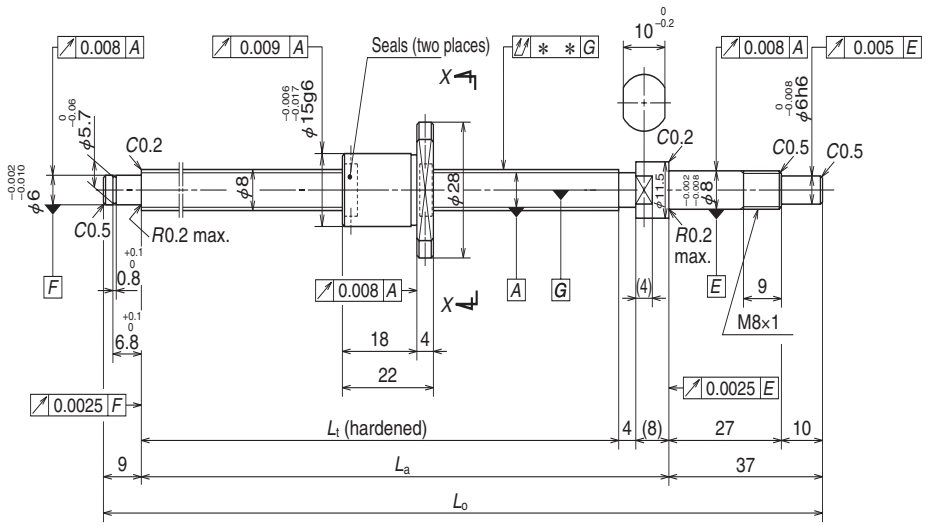Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.




NSK

Screw shaft ø8

Lead 1.5

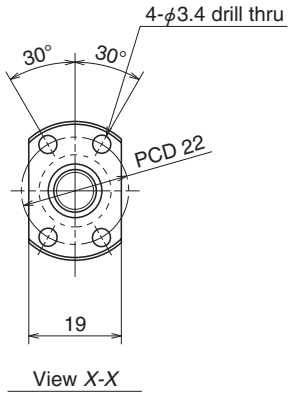Unit: mm



Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		8 × 1.5 / Right	
Preload / Ball recirculation		P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.		1.000 / 8.3	
Screw shaft root diameter		7.0	
Effective turns of balls		1 × 3	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	1 270	
	Static C_{0a}	1 970	
Axial play		0	0.005 or less
Preload (N)		49.0	—
Dynamic friction torque, (N·cm)		2.0 or less	0.5 or less
Spacer ball		None	
Factory-packed grease		NSK grease PS2	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01A (square)	WBK08S-01 (square)
WBK08-11 (round)	


Unit: mm

Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W0800MA-3PY-C3Z1.5	**W0800MA-4Y-C3T1.5**	40	53
W0801MA-5PY-C3Z1.5	**W0801MA-6Y-C3T1.5**	70	83
W0801MA-7PY-C3Z1.5	**W0801MA-8Y-C3T1.5**	100	113
W0802MA-3PY-C3Z1.5	**W0802MA-4Y-C3T1.5**	150	163

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
								Supporting condition
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support
80	92	138	0	0.008	0.008	0.025	0.082	3 000
110	122	168	0	0.010	0.008	0.030	0.093	3 000
140	152	198	0	0.010	0.008	0.030	0.10	3 000
190	202	248	0	0.010	0.008	0.035	0.12	3 000

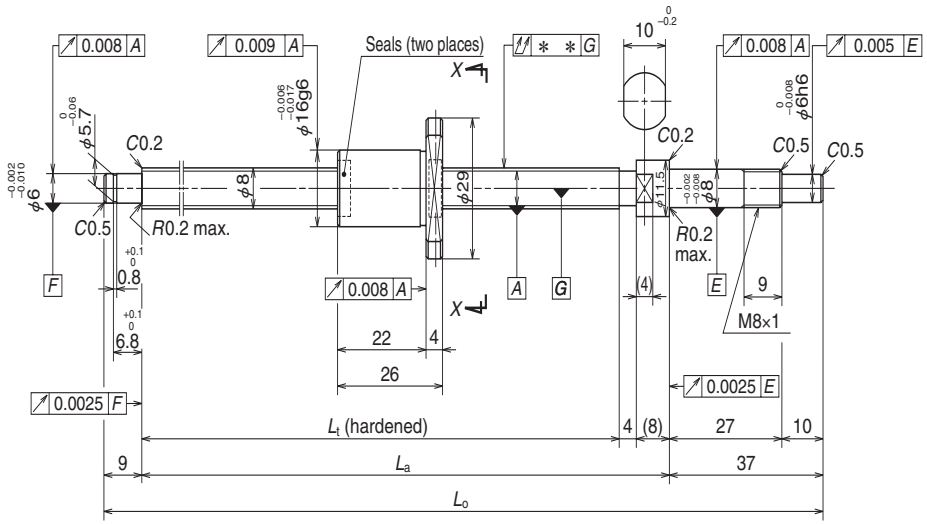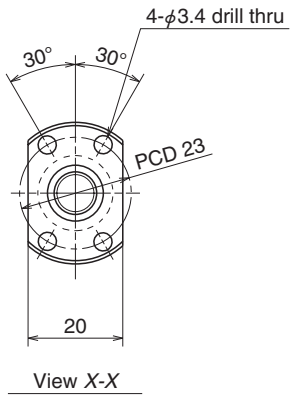Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.





NSK

Screw shaft ø8

Lead 2

Unit: mm

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		8 × 2 / Right	
Preload / Ball recirculation		P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.		1.200 / 8.3	
Screw shaft root diameter		6.9	
Effective turns of balls		1 × 3	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	1 560	
	Static C_{0a}	2 200	
Axial play		0	0.005 or less
Preload (N)		49.0	—
Dynamic friction torque, (N·cm)		2.0 or less	0.5 or less
Spacer ball		None	
Factory-packed grease		NSK grease PS2	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01A (square)	WBK08S-01 (square)
WBK08-11 (round)	

MA

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
												Supporting condition
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support
W0800MA-5PY-C3Z2	**W0800MA-6Y-C3T2**	40	49	80	92	138	0	0.008	0.008	0.025	0.09	3 000
W0801MA-9PY-C3Z2	**W0801MA-10Y-C3T2**	70	79	110	122	168	0	0.010	0.008	0.030	0.10	3 000
W0801MA-11PY-C3Z2	**W0801MA-12Y-C3T2**	100	109	140	152	198	0	0.010	0.008	0.030	0.11	3 000
W0802MA-5PY-C3Z2	**W0802MA-6Y-C3T2**	150	159	190	202	248	0	0.010	0.008	0.035	0.13	3 000

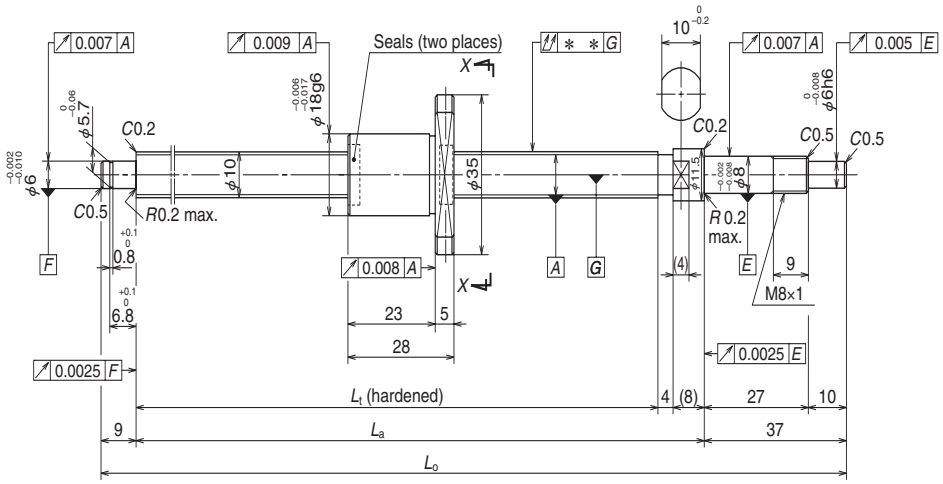Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.




NSK

Screw shaft ø10

Lead 2

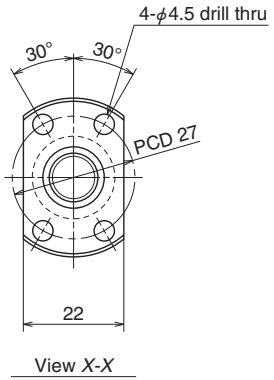Unit: mm



Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		10 × 2 / Right	
Preload / Ball recirculation		P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.		1.200 / 10.3	
Screw shaft root diameter		8.9	
Effective turns of balls		1 × 3	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	1 800	
	Static C_{0a}	2 970	
Axial play		0	0.005 or less
Preload (N)		58.8	—
Dynamic friction torque, (N·cm)		0.1 – 2.4	0.5 or less
Spacer ball		None	
Factory-packed grease		NSK grease PS2	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01A (square)	WBK08S-01 (square)
WBK08-11 (round)	


MA

Unit: mm

Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W1001MA-1PY-C3Z2	**W1001MA-2Y-C3T2**	50	67
W1001MA-3PY-C3Z2	**W1001MA-4Y-C3T2**	100	117
W1002MA-1PY-C3Z2	**W1002MA-2Y-C3T2**	150	167
W1002MA-3PY-C3Z2	**W1002MA-4Y-C3T2**	200	217

Screw shaft length			Lead accuracy			Shaft run-out ** ↗↗	Mass (kg)	Permissible rotational speed N (min⁻¹) Supporting condition
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support
100	112	158	0	0.008	0.008	0.020	0.13	3 000
150	162	208	0	0.010	0.008	0.030	0.16	3 000
200	212	258	0	0.010	0.008	0.030	0.19	3 000
250	262	308	0	0.012	0.008	0.030	0.22	3 000

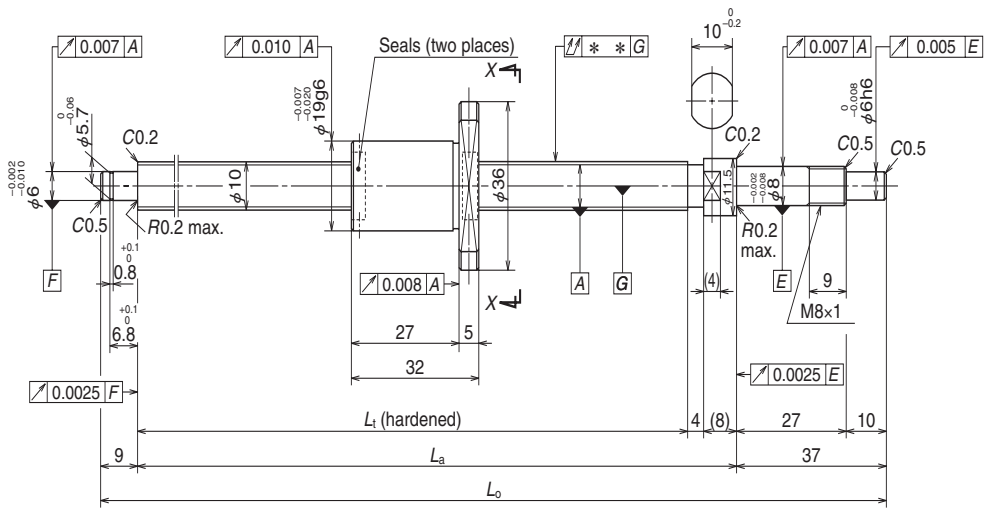Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.




NSK

Screw shaft ø10

Lead 2.5

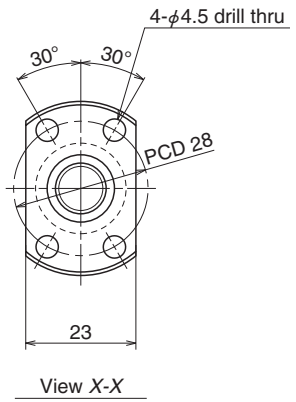Unit: mm



Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		10 × 2.5 / Right	
Preload / Ball recirculation		P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.		1.588 / 10.4	
Screw shaft root diameter		8.6	
Effective turns of balls		1 × 3	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	2 500	
	Static C_{0a}	3 630	
Axial play		0	0.005 or less
Preload (N)		98.1	—
Dynamic friction torque, (N·cm)		0.2 – 2.9	0.5 or less
Spacer ball		None	
Factory-packed grease		NSK grease PS2	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01A (square)	WBK08S-01 (square)
WBK08-11 (round)	


MA

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
												Supporting condition
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support
W1001MA-5PY-C3Z2.5	**W1001MA-6Y-C3T2.5**	50	63	100	112	158	0	0.008	0.008	0.020	0.14	3 000
W1001MA-7PY-C3Z2.5	**W1001MA-8Y-C3T2.5**	100	113	150	162	208	0	0.010	0.008	0.030	0.17	3 000
W1002MA-5PY-C3Z2.5	**W1002MA-6Y-C3T2.5**	150	163	200	212	258	0	0.010	0.008	0.030	0.20	3 000
W1002MA-7PY-C3Z2.5	**W1002MA-8Y-C3T2.5**	200	213	250	262	308	0	0.012	0.008	0.030	0.23	3 000

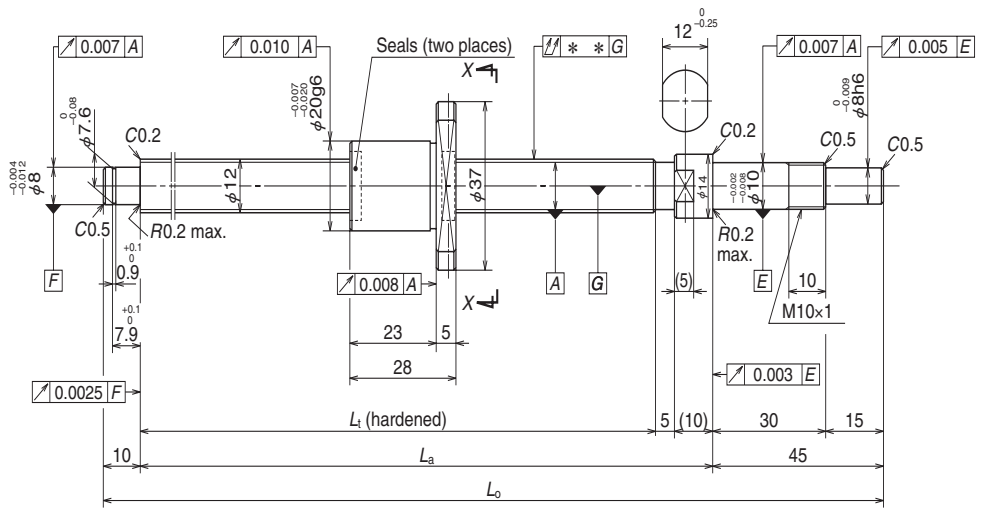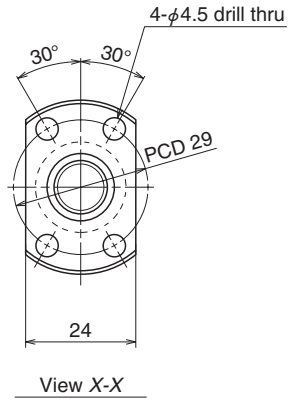Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.





Unit: mm

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		12 × 2 / Right	
Preload / Ball recirculation		P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.		1.200 / 12.3	
Screw shaft root diameter		10.9	
Effective turns of balls		1 × 3	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	1 960	
	Static C_{0a}	3 620	
Axial play		0	0.005 or less
Preload (N)		98.1	—
Dynamic friction torque, (N·cm)		0.4 – 3.4	1.0 or less
Spacer ball		None	
Factory-packed grease		NSK grease PS2	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK10-01A (square)	WBK10S-01 (square)
WBK10-11 (round)	


MA

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
												Supporting condition
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support
W1201MA-1PY-C3Z2	**W1201MA-2Y-C3T2**	50	75	110	125	180	0	0.010	0.008	0.020	0.20	3 000
W1201MA-3PY-C3Z2	**W1201MA-4Y-C3T2**	100	125	160	175	230	0	0.010	0.008	0.030	0.24	3 000
W1202MA-1PY-C3Z2	**W1202MA-2Y-C3T2**	150	175	210	225	280	0	0.012	0.008	0.030	0.28	3 000
W1202MA-3PY-C3Z2	**W1202MA-4Y-C3T2**	200	225	260	275	330	0	0.012	0.008	0.040	0.32	3 000
W1203MA-1PY-C3Z2	**W1203MA-2Y-C3T2**	250	275	310	325	380	0	0.012	0.008	0.040	0.36	3 000

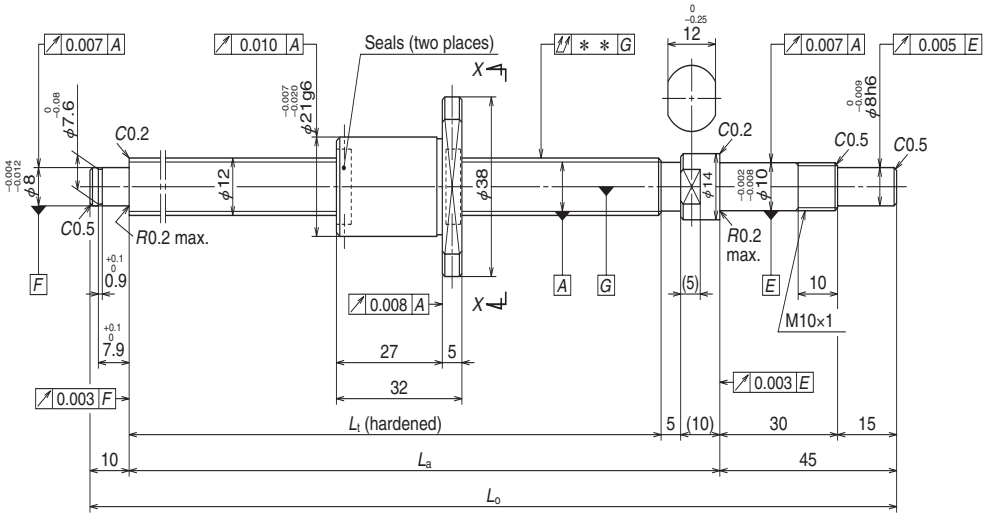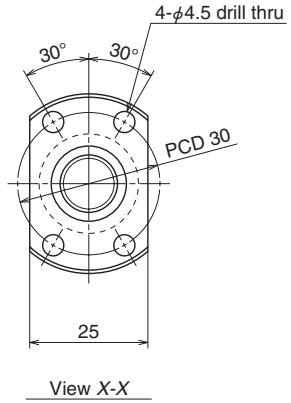Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.





View *X-X*

NSK

Screw shaft ø12

Lead 2.5

Unit: mm

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		12 × 2.5 / Right	
Preload / Ball recirculation		P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.		1.588 / 12.4	
Screw shaft root diameter		10.6	
Effective turns of balls		1 × 3	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	2 790	
	Static C_{0a}	4 530	
Axial play		0	0.005 or less
Preload (N)		98.1	—
Dynamic friction torque, (N·cm)		0.4 – 3.4	1.0 or less
Spacer ball		None	
Factory-packed grease		NSK grease PS2	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK10-01A (square)	WBK10S-01 (square)
WBK10-11 (round)	

MA

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
												Supporting condition
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support
W1201MA-5PY-C3Z2.5	**W1201MA-6Y-C3T2.5**	50	71	110	125	180	0	0.010	0.008	0.020	0.21	3 000
W1201MA-7PY-C3Z2.5	**W1201MA-8Y-C3T2.5**	100	121	160	175	230	0	0.010	0.008	0.030	0.25	3 000
W1202MA-5PY-C3Z2.5	**W1202MA-6Y-C3T2.5**	150	171	210	225	280	0	0.012	0.008	0.030	0.29	3 000
W1202MA-7PY-C3Z2.5	**W1202MA-8Y-C3T2.5**	200	221	260	275	330	0	0.012	0.008	0.040	0.33	3 000
W1203MA-3PY-C3Z2.5	**W1203MA-4Y-C3T2.5**	250	271	310	325	380	0	0.012	0.008	0.040	0.37	3 000

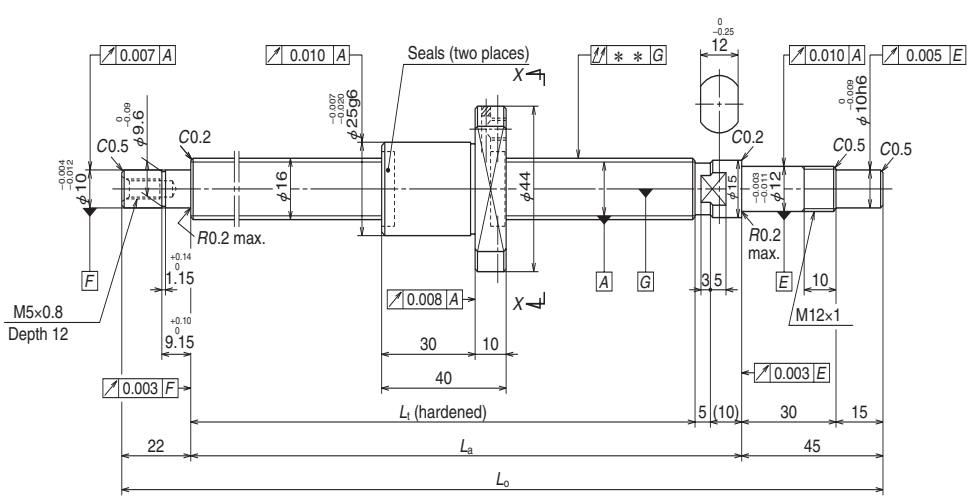
Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.



NSK

Screw shaft ø16

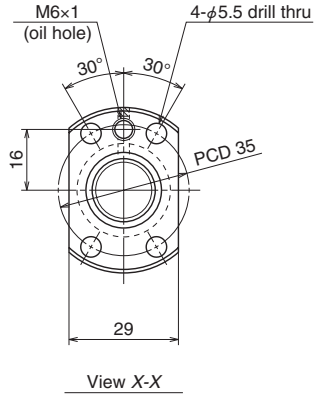Lead 2



Unit: mm

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		16 × 2 / Right	
Preload / Ball recirculation		P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.		1.588 / 16.4	
Screw shaft root diameter		14.6	
Effective turns of balls		1 × 4	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	4 150	
	Static C_{0a}	8 450	
Axial play		0	0.005 or less
Preload (N)		147	—
Dynamic friction torque, (N·cm)		0.5 – 4.9	1.5 or less
Spacer ball		None	
Factory-packed grease		NSK grease PS2	
Internal spatial volume of nut (cm^3)		1.6	
Standard volume of grease replenishing (cm^3)		0.8	


Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
												Supporting condition	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
W1601MA-1PY-C3Z2	**W1601MA-2Y-C3T2**	50	93	139	154	221	0	0.010	0.008	0.020	0.41	3 000	3 000
W1601MA-3PY-C3Z2	**W1601MA-4Y-C3T2**	100	143	189	204	271	0	0.010	0.008	0.020	0.48	3 000	3 000
W1602MA-1PY-C3Z2	**W1602MA-2Y-C3T2**	150	193	239	254	321	0	0.012	0.008	0.030	0.55	3 000	3 000
W1602MA-3PY-C3Z2	**W1602MA-4Y-C3T2**	200	243	289	304	371	0	0.012	0.008	0.030	0.62	3 000	3 000
W1603MA-1PY-C3Z2	**W1603MA-2Y-C3T2**	300	343	389	404	471	0	0.013	0.010	0.035	0.77	3 000	3 000

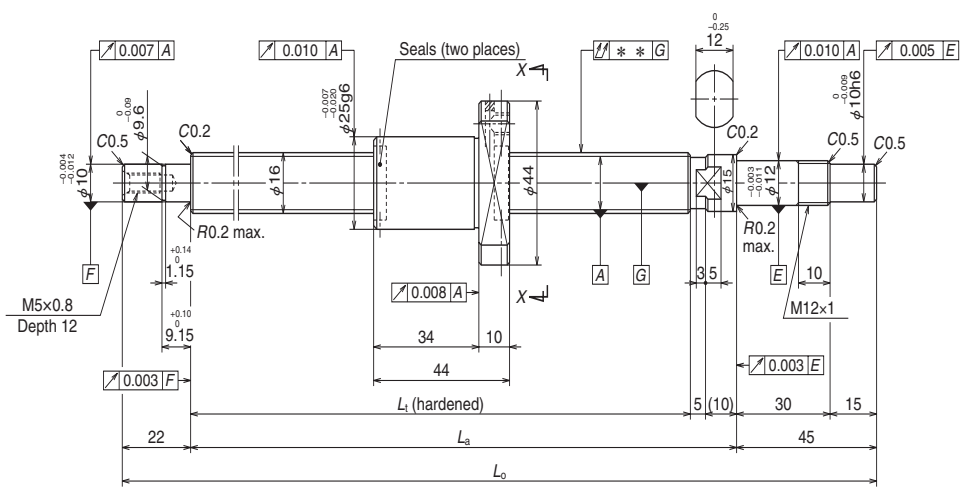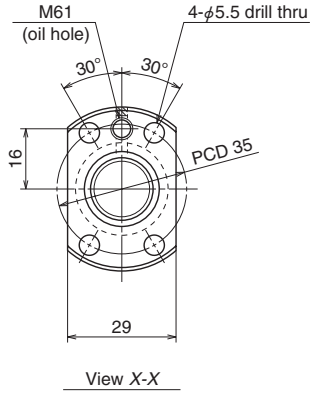Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).





Unit: mm

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn		16 × 2.5 / Right	
Preload / Ball recirculation		P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.		1.588 / 16.4	
Screw shaft root diameter		14.6	
Effective turns of balls		1 × 4	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	4 150	
	Static C_{0a}	8 440	
Axial play		0	0.005 or less
Preload (N)		147	—
Dynamic friction torque, (N·cm)		0.5 – 4.9	1.5 or less
Spacer ball		None	
Factory-packed grease		NSK grease PS2	
Internal spatial volume of nut (cm^3)		1.6	
Standard volume of grease replenishing (cm^3)		0.8	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
												Supporting condition	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u	↗↙		Fixed - Simple support	Fixed - Fixed
W1601MA-5PY-C3Z2.5	**W1601MA-6Y-C3T2.5**	50	89	139	154	221	0	0.010	0.008	0.020	0.42	3 000	3 000
W1601MA-7PY-C3Z2.5	**W1601MA-8Y-C3T2.5**	100	139	189	204	271	0	0.010	0.008	0.020	0.49	3 000	3 000
W1602MA-5PY-C3Z2.5	**W1602MA-6Y-C3T2.5**	150	189	239	254	321	0	0.012	0.008	0.030	0.57	3 000	3 000
W1602MA-7PY-C3Z2.5	**W1602MA-8Y-C3T2.5**	200	239	289	304	371	0	0.012	0.008	0.030	0.64	3 000	3 000
W1603MA-3PY-C3Z2.5	**W1603MA-4Y-C3T2.5**	300	339	389	404	471	0	0.013	0.010	0.035	0.79	3 000	3 000

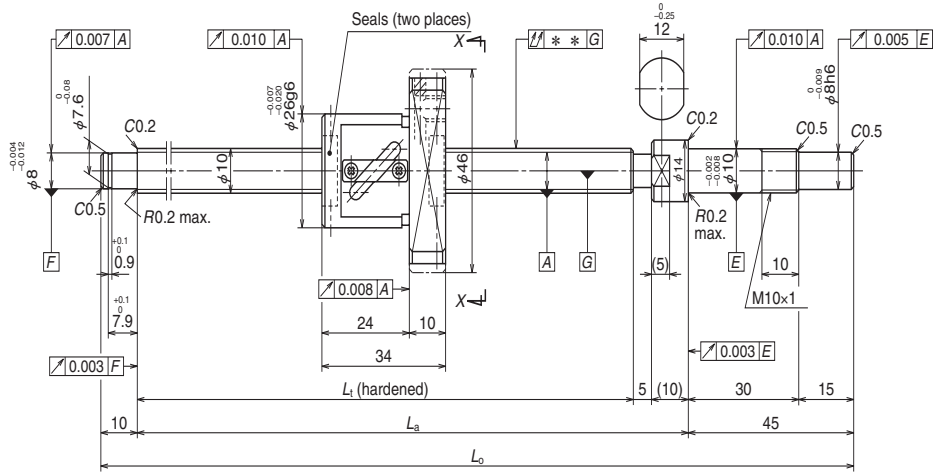Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if permissible rotational speed is to be exceeded.
4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).




NSK

Screw shaft ø10

Lead 4

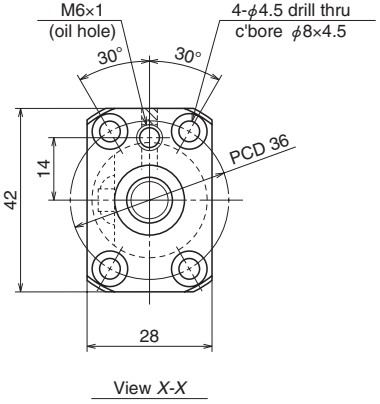Unit: mm



Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		10 × 4 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		2.000 / 10.3	
Screw shaft root diameter		8.2	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	2 020	3 210
	Static C_{0a}	2 210	4 420
Axial play		0	0.005 or less
Preload (N)		98.1	—
Dynamic friction torque, (N·cm)		0.5 – 3.9	1.0 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease PS2	
Internal spatial volume of nut (cm^3)		0.8	
Standard volume of grease replenishing (cm^3)		0.4	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK10-01A (square)	WBK10S-01 (square)
WBK10-11 (round)	

FA

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹) Supporting condition
Preloaded (PFT)	Precise clearance (SFT)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support
W1001FA-1P-C3Z4	**W1001FA-2-C3T4**	50	69	110	125	180	0	0.010	0.008	0.020	0.26	3 000
W1001FA-3P-C3Z4	**W1001FA-4-C3T4**	100	119	160	175	230	0	0.010	0.008	0.030	0.28	3 000
W1002FA-1P-C3Z4	**W1002FA-2-C3T4**	150	169	210	225	280	0	0.012	0.008	0.030	0.31	3 000
W1002FA-3P-C3Z4	**W1002FA-4-C3T4**	200	219	260	275	330	0	0.012	0.008	0.040	0.34	3 000
W1003FA-1P-C3Z4	**W1003FA-2-C3T4**	250	269	310	325	380	0	0.012	0.008	0.040	0.37	3 000
W1003FA-3P-C3Z4	**W1003FA-4-C3T4**	300	319	360	375	430	0	0.013	0.010	0.050	0.39	3 000

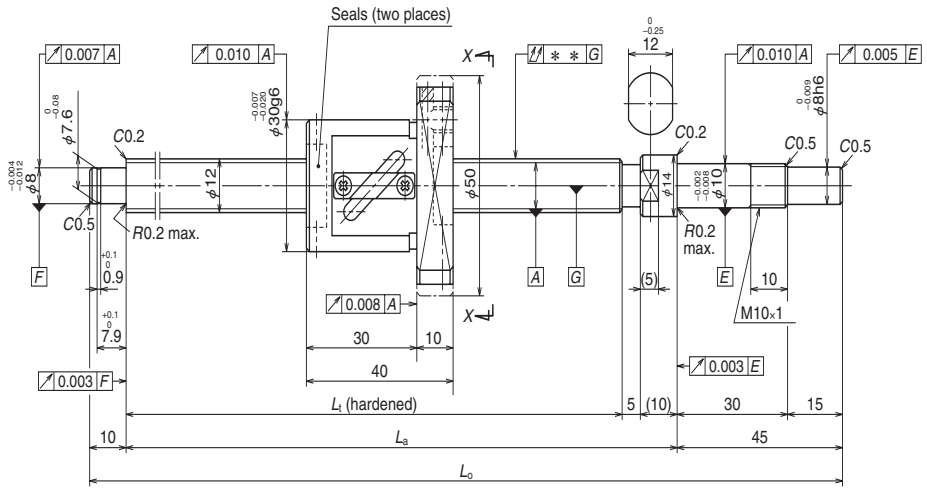Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if permissible rotational speed is to be exceeded.




NSK

Screw shaft ø12

Lead 5

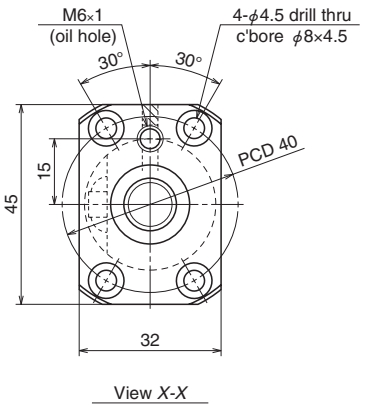Unit: mm



View *X-X*

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		12 × 5 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		2.381 / 12.3	
Screw shaft root diameter		9.8	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	2 770	4 390
	Static C_{0a}	3 130	6 260
Axial play		0	0.005 or less
Preload (N)		98.1	—
Dynamic friction torque, (N·cm)		1.0 – 4.4	1.0 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease PS2	
Internal spatial volume of nut (cm^3)		1.2	
Standard volume of grease replenishing (cm^3)		0.6	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK10-01A (square)	WBK10S-01 (square)
WBK10-11 (round)	


FA

Unit: mm

Ball screw No.		Stroke	
Preloaded (PFT)	Precise clearance (SFT)	Nominal	Maximum
W1201FA-1P-C3Z5	**W1201FA-2-C3T5**	50	63
W1201FA-3P-C3Z5	**W1201FA-4-C3T5**	100	113
W1202FA-1P-C3Z5	**W1202FA-2-C3T5**	150	163
W1202FA-3P-C3Z5	**W1202FA-4-C3T5**	200	213
W1203FA-1P-C3Z5	**W1203FA-2-C3T5**	250	263
W1204FA-1P-C3Z5	**W1204FA-2-C3T5**	350	363
W1205FA-1P-C3Z5	**W1205FA-2-C3T5**	450	463

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹) Supporting condition
L_t	L_a	L_o	T	e_p	v_u			Fixed - Simple support
110	125	180	0	0.010	0.008	0.020	0.35	3 000
160	175	230	0	0.010	0.008	0.030	0.38	3 000
210	225	280	0	0.012	0.008	0.030	0.42	3 000
260	275	330	0	0.012	0.008	0.040	0.46	3 000
310	325	380	0	0.012	0.008	0.040	0.50	3 000
410	425	480	0	0.015	0.010	0.050	0.58	3 000
510	525	580	0	0.016	0.012	0.065	0.66	3 000

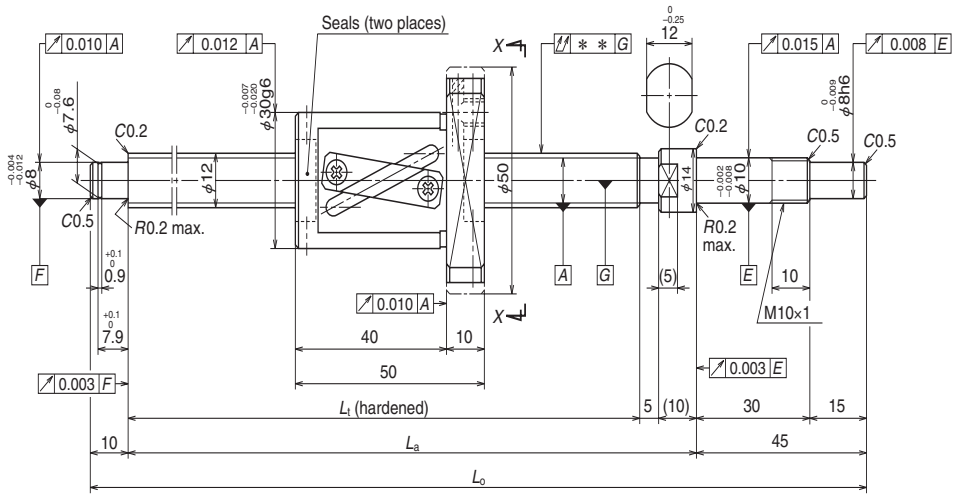
Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if permissible rotational speed is to be exceeded.



NSK

Screw shaft ø12

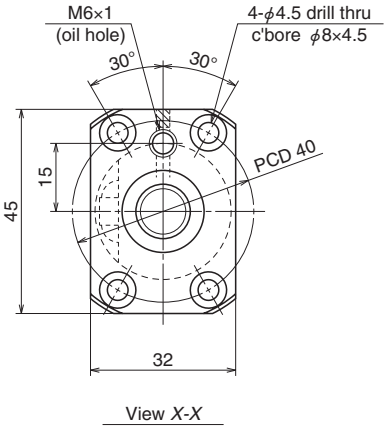Lead 10



Unit: mm

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		12 × 10 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		2.381 / 12.5	
Screw shaft root diameter		10.0	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	2 790	4 430
	Static C_{0a}	3 220	6 430
Axial play		0	0.005 or less
Preload (N)		98.1	—
Dynamic friction torque, (N·cm)		1.0 – 4.9	1.5 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		1.4	
Standard volume of grease replenishing (cm^3)		0.7	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK10-01A (square)	WBK10S-01 (square)
WBK10-11 (round)	


FA

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
												Supporting condition
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support
W1201FA-5P-C5Z10	**W1201FA-6-C5T10**	100	103	160	175	230	0	0.020	0.018	0.035	0.43	3 000
W1202FA-5P-C5Z10	**W1202FA-6-C5T10**	150	153	210	225	280	0	0.023	0.018	0.035	0.47	3 000
W1203FA-3P-C5Z10	**W1203FA-4-C5T10**	250	253	310	325	380	0	0.023	0.018	0.050	0.56	3 000
W1204FA-3P-C5Z10	**W1204FA-4-C5T10**	350	353	410	425	480	0	0.027	0.020	0.060	0.64	3 000
W1205FA-3P-C5Z10	**W1205FA-4-C5T10**	450	453	510	525	580	0	0.030	0.023	0.075	0.72	3 000

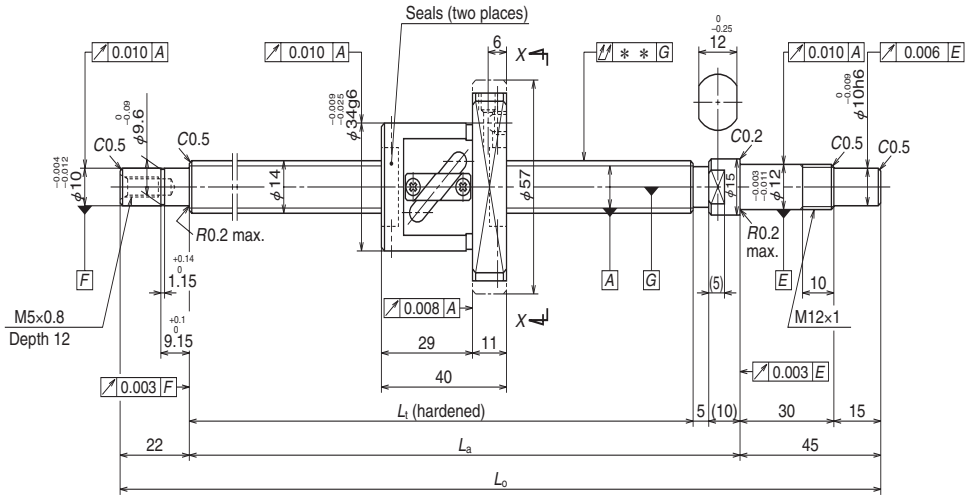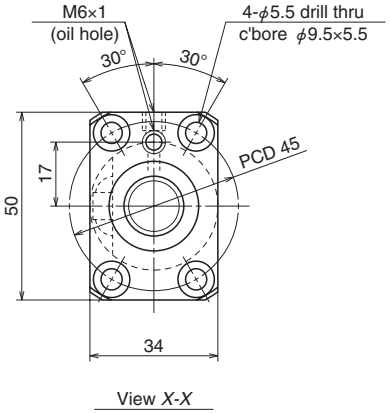Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.





NSK

Screw shaft ø14

Lead 5

Unit: mm

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		14 × 5 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		3.175 / 14.5	
Screw shaft root diameter		11.2	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	5 020	7 970
	Static C_{0a}	5 970	11 900
Axial play		0	0.005 or less
Preload (N)		147	—
Dynamic friction torque, (N·cm)		1.5 – 6.9	2.0 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		2.2	
Standard volume of grease replenishing (cm^3)		1.1	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	


FA

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
												Supporting condition	
Preloaded (PFT)	Precise clearance (SFT)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
W1401FA-1P-C3Z5	**W1401FA-2-C3T5**	100	143	189	204	271	0	0.010	0.008	0.020	0.52	3 000	3 000
W1402FA-1P-C3Z5	**W1402FA-2-C3T5**	150	193	239	254	321	0	0.012	0.008	0.030	0.57	3 000	3 000
W1403FA-1P-C3Z5	**W1403FA-2-C3T5**	250	293	339	354	421	0	0.013	0.010	0.035	0.67	3 000	3 000
W1404FA-1P-C3Z5	**W1404FA-2-C3T5**	350	393	439	454	521	0	0.015	0.010	0.045	0.77	3 000	3 000
W1405FA-1P-C3Z5	**W1405FA-2-C3T5**	450	493	539	554	621	0	0.016	0.012	0.045	0.87	3 000	3 000
W1406FA-1P-C3Z5	**W1406FA-2-C3T5**	600	643	689	704	771	0	0.018	0.013	0.055	1.0	3 000	3 000

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

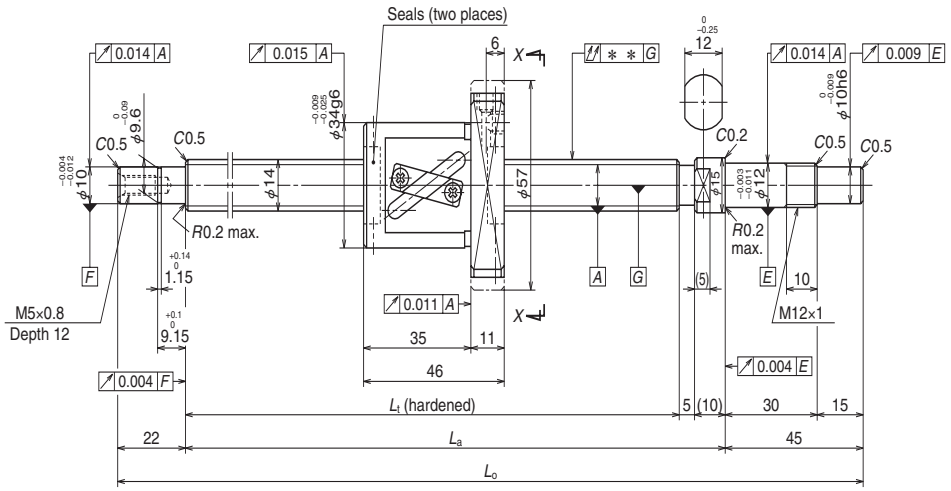
Notes: 4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).



Screw shaft ø14

Lead 8

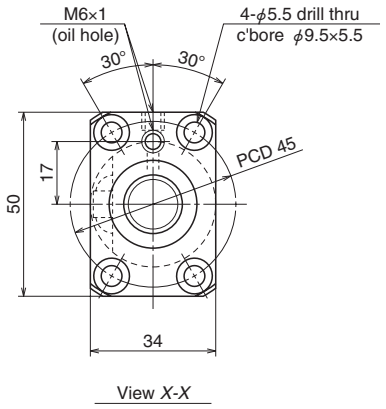Unit: mm



Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		14 × 8 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		3.175 / 14.5	
Screw shaft root diameter		11.2	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	4 960	7 880
	Static C_{0a}	5 920	11 800
Axial play		0	0.005 or less
Preload (N)		147	—
Dynamic friction torque, (N·cm)		1.5 – 7.8	2.4 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		2.1	
Standard volume of grease replenishing (cm^3)		1.1	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	


Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
												Supporting condition	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
W1401FA-3P-C5Z8	**W1401FA-4-C5T8**	100	137	189	204	271	0	0.020	0.018	0.025	0.56	3 000	3 000
W1402FA-3P-C5Z8	**W1402FA-4-C5T8**	150	187	239	254	321	0	0.023	0.018	0.035	0.61	3 000	3 000
W1402FA-5P-C5Z8	**W1402FA-6-C5T8**	200	237	289	304	371	0	0.023	0.018	0.035	0.67	3 000	3 000
W1403FA-3P-C5Z8	**W1403FA-4-C5T8**	250	287	339	354	421	0	0.025	0.020	0.040	0.72	3 000	3 000
W1403FA-5P-C5Z8	**W1403FA-6-C5T8**	300	337	389	404	471	0	0.025	0.020	0.040	0.78	3 000	3 000
W1404FA-3P-C5Z8	**W1404FA-4-C5T8**	350	387	439	454	521	0	0.027	0.020	0.050	0.83	3 000	3 000
W1404FA-5P-C5Z8	**W1404FA-6-C5T8**	400	437	489	504	571	0	0.027	0.020	0.050	0.88	3 000	3 000
W1405FA-3P-C5Z8	**W1405FA-4-C5T8**	450	487	539	554	621	0	0.030	0.023	0.050	0.94	3 000	3 000
W1405FA-5P-C5Z8	**W1405FA-6-C5T8**	500	537	589	604	671	0	0.030	0.023	0.065	0.99	3 000	3 000
W1406FA-3P-C5Z8	**W1406FA-4-C5T8**	550	587	639	654	721	0	0.035	0.025	0.065	1.0	3 000	3 000
W1406FA-5P-C5Z8	**W1406FA-6-C5T8**	600	637	689	704	771	0	0.035	0.025	0.065	1.1	3 000	3 000
W1407FA-1P-C5Z8	**W1407FA-2-C5T8**	700	737	789	804	871	0	0.035	0.025	0.085	1.2	2 830	3 000

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Notes: 4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

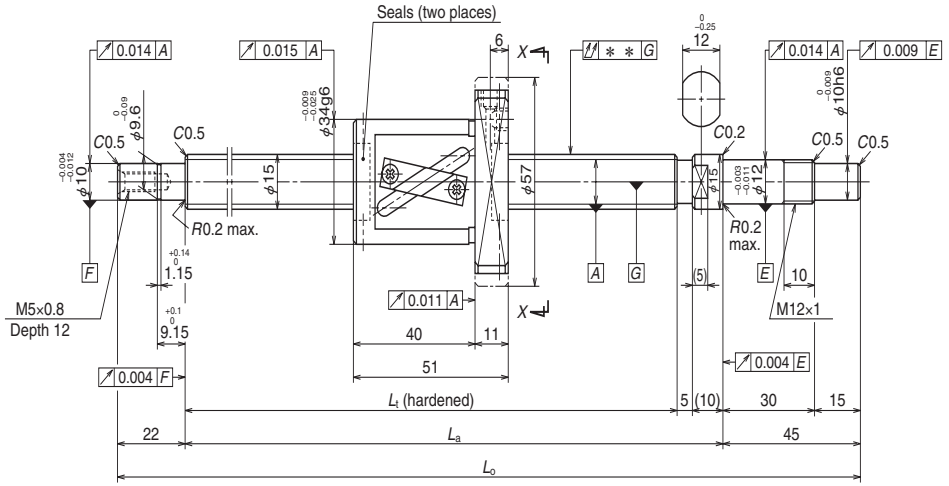FA




NSK

Screw shaft ø15

Lead 10

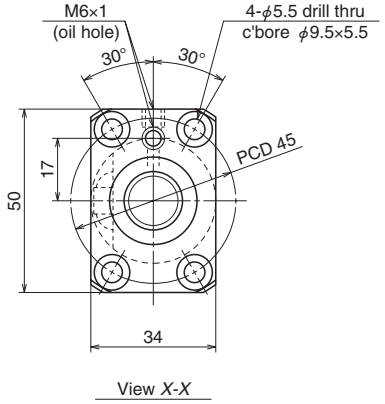Unit: mm



Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		15 × 10 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		3.175 / 15.5	
Screw shaft root diameter		12.2	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	5 130	8 140
	Static C_{0a}	6 420	12 800
Axial play		0	0.005 or less
Preload (N)		147	—
Dynamic friction torque, (N·cm)		1.5 – 7.8	2.4 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		2.3	
Standard volume of grease replenishing (cm^3)		1.2	

Unit: mm


Ball screw No.		Stroke	
		Nominal	Maximum
Preloaded (LPFT)	Precise clearance (LSFT)		
W1501FA-1P-C5Z10	**W1501FA-2-C5T10**	100	132
W1502FA-1P-C5Z10	**W1502FA-2-C5T10**	150	182
W1502FA-3P-C5Z10	**W1502FA-4-C5T10**	200	232
W1503FA-1P-C5Z10	**W1503FA-2-C5T10**	250	282
W1503FA-3P-C5Z10	**W1503FA-4-C5T10**	300	332
W1504FA-1P-C5Z10	**W1504FA-2-C5T10**	350	382
W1504FA-3P-C5Z10	**W1504FA-4-C5T10**	400	432
W1505FA-1P-C5Z10	**W1505FA-2-C5T10**	450	482
W1505FA-3P-C5Z10	**W1505FA-4-C5T10**	500	532
W1506FA-1P-C5Z10	**W1506FA-2-C5T10**	550	582
W1506FA-3P-C5Z10	**W1506FA-4-C5T10**	600	632
W1507FA-1P-C5Z10	**W1507FA-2-C5T10**	700	732
W1508FA-1P-C5Z10	**W1508FA-2-C5T10**	800	832
W1510FA-1P-C5Z10	**W1510FA-2-C5T10**	1 000	1 032

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
								Supporting condition	
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
189	204	271	0	0.020	0.018	0.025	0.61	3 000	3 000
239	254	321	0	0.023	0.018	0.035	0.67	3 000	3 000
289	304	371	0	0.023	0.018	0.035	0.74	3 000	3 000
339	354	421	0	0.025	0.020	0.040	0.80	3 000	3 000
389	404	471	0	0.025	0.020	0.040	0.86	3 000	3 000
439	454	521	0	0.027	0.020	0.050	0.93	3 000	3 000
489	504	571	0	0.027	0.020	0.050	1.0	3 000	3 000
539	554	621	0	0.030	0.023	0.050	1.1	3 000	3 000
589	604	671	0	0.030	0.023	0.065	1.1	3 000	3 000
639	654	721	0	0.035	0.025	0.065	1.2	3 000	3 000
689	704	771	0	0.035	0.025	0.065	1.2	3 000	3 000
789	804	871	0	0.035	0.025	0.085	1.4	3 000	3 000
889	904	971	0	0.040	0.027	0.085	1.5	2 430	3 000
1 089	1 104	1 171	0	0.046	0.030	0.110	1.8	1 600	2 250

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Notes: 4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

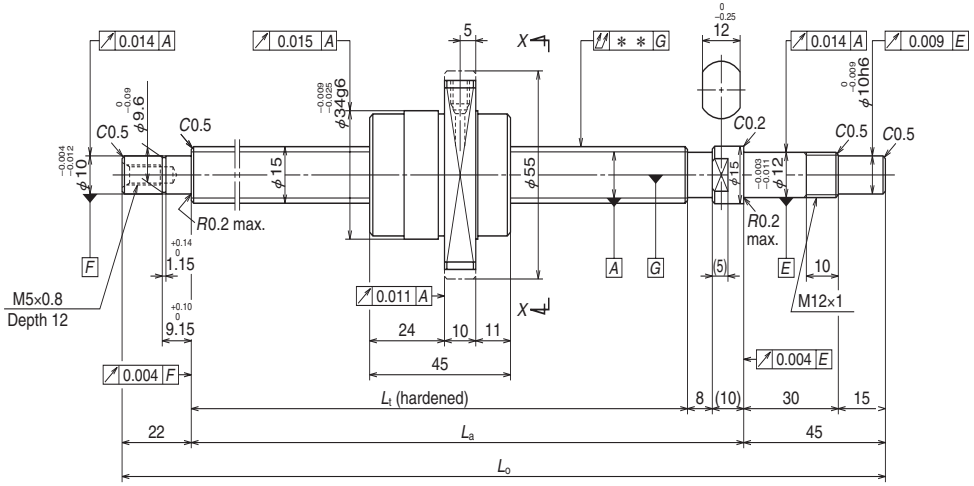FA




NSK

Screw shaft ø15

Lead 20

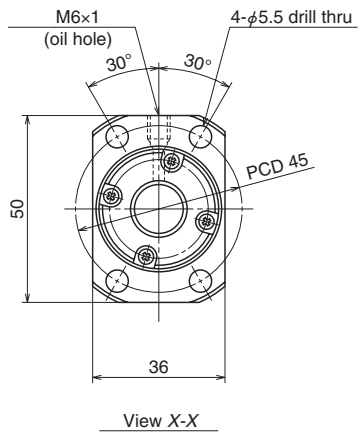Unit: mm



View *X-X*

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		15 × 20 / Right	
Preload / Ball recirculation		P-preload / End cap	
Ball dia. / Ball circle dia.		3.175 / 15.5	
Screw shaft root diameter		12.2	
Effective turns of balls		1.7 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	4 320	5 660
	Static C_{0a}	5 800	8 700
Axial play		0	0.005 or less
Preload (N)		147	—
Dynamic friction torque, (N·cm)		1.5 – 7.8	2.4 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		1.9	
Standard volume of grease replenishing (cm^3)		1.0	

Unit: mm


Ball screw No.		Stroke	
		Nominal	Maximum
Preloaded (UPFC)	Precise clearance (USFC)		
W1501FA-3PG-C5Z20	**W1501FA-4G-C5T20**	100	135
W1502FA-5PG-C5Z20	**W1502FA-6G-C5T20**	150	185
W1502FA-7PG-C5Z20	**W1502FA-8G-C5T20**	200	235
W1503FA-5PG-C5Z20	**W1503FA-6G-C5T20**	250	285
W1503FA-7PG-C5Z20	**W1503FA-8G-C5T20**	300	335
W1504FA-5PG-C5Z20	**W1504FA-6G-C5T20**	350	385
W1504FA-7PG-C5Z20	**W1504FA-8G-C5T20**	400	435
W1505FA-5PG-C5Z20	**W1505FA-6G-C5T20**	450	485
W1505FA-7PG-C5Z20	**W1505FA-8G-C5T20**	500	535
W1506FA-5PG-C5Z20	**W1506FA-6G-C5T20**	550	585
W1506FA-7PG-C5Z20	**W1506FA-8G-C5T20**	600	635
W1507FA-3PG-C5Z20	**W1507FA-4G-C5T20**	700	735
W1508FA-3PG-C5Z20	**W1508FA-4G-C5T20**	800	835
W1510FA-3PG-C5Z20	**W1510FA-4G-C5T20**	1 000	1 035

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
								Supporting condition	
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
186	204	271	0	0.020	0.018	0.025	0.61	3 000	3 000
236	254	321	0	0.023	0.018	0.035	0.68	3 000	3 000
286	304	371	0	0.023	0.018	0.035	0.75	3 000	3 000
336	354	421	0	0.025	0.020	0.040	0.81	3 000	3 000
386	404	471	0	0.025	0.020	0.040	0.88	3 000	3 000
436	454	521	0	0.027	0.020	0.050	0.95	3 000	3 000
486	504	571	0	0.027	0.020	0.050	1.0	3 000	3 000
536	554	621	0	0.030	0.023	0.050	1.1	3 000	3 000
586	604	671	0	0.030	0.023	0.065	1.1	3 000	3 000
636	654	721	0	0.035	0.025	0.065	1.2	3 000	3 000
686	704	771	0	0.035	0.025	0.065	1.3	3 000	3 000
786	804	871	0	0.035	0.025	0.085	1.4	3 000	3 000
886	904	971	0	0.040	0.027	0.085	1.5	2 440	3 000
1 086	1 104	1 171	0	0.046	0.030	0.110	1.8	1 610	2 240

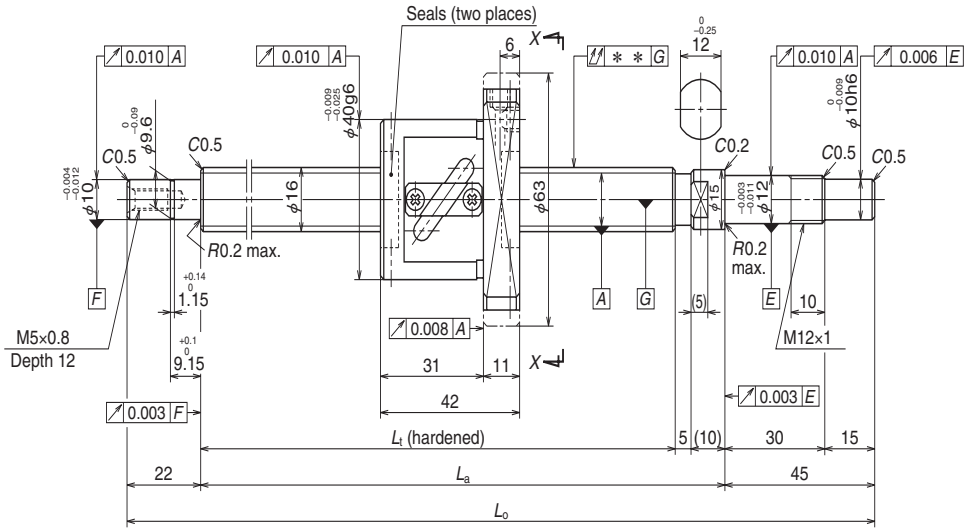Notes: 4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).




NSK

Screw shaft ø16

Lead 5

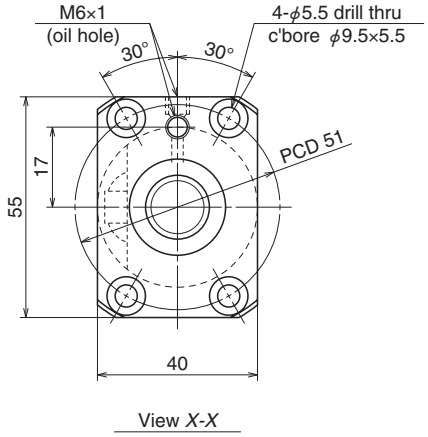Unit: mm



View *X-X*

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		16 × 5 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		3.175 / 16.5	
Screw shaft root diameter		13.2	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	5 430	8 620
	Static C_{0a}	6 890	13 800
Axial play		0	0.005 or less
Preload (N)		147	—
Dynamic friction torque, (N·cm)		1.5 – 7.8	2.0 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		2.6	
Standard volume of grease replenishing (cm^3)		1.3	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

FA


Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
												Supporting condition	
Preloaded (PFT)	Precise clearance (SFT)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
W1601FA-1P-C3Z5	**W1601FA-2-C3T5**	100	141	189	204	271	0	0.010	0.008	0.020	0.70	3 000	3 000
W1602FA-1P-C3Z5	**W1602FA-2-C3T5**	200	241	289	304	371	0	0.012	0.008	0.030	0.83	3 000	3 000
W1603FA-1P-C3Z5	**W1603FA-2-C3T5**	300	341	389	404	471	0	0.013	0.010	0.035	0.97	3 000	3 000
W1604FA-1P-C3Z5	**W1604FA-2-C3T5**	400	441	489	504	571	0	0.015	0.010	0.045	1.1	3 000	3 000
W1606FA-1P-C3Z5	**W1606FA-2-C3T5**	600	641	689	704	771	0	0.018	0.013	0.055	1.4	3 000	3 000
W1608FA-1P-C3Z5	**W1608FA-2-C3T5**	800	841	889	904	971	0	0.021	0.015	0.075	1.6	2 570	3 000

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Notes: 4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

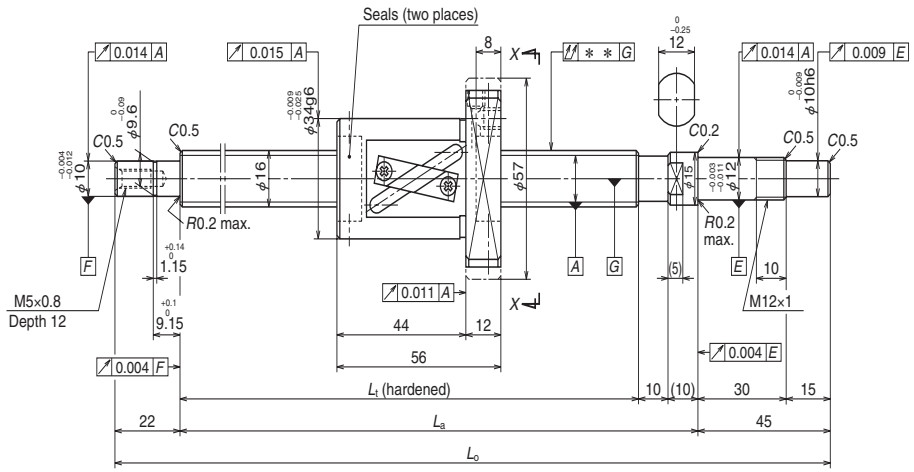Finished shaft end FA Type (High helix lead)




Nut models: LPFT, LSFT

NSK

Unit: mm

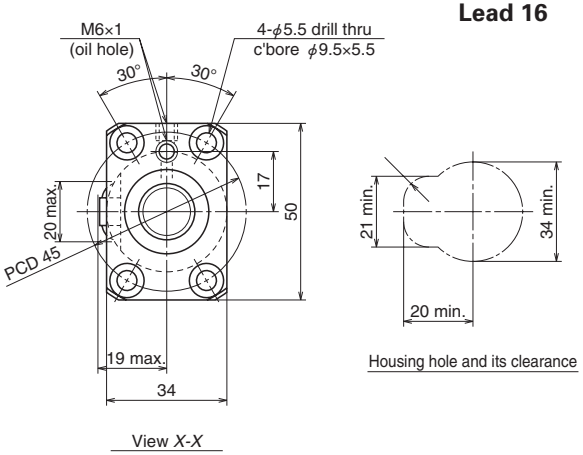Screw shaft ø16
Lead 16



Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn		16 × 16 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		3.175 / 16.75	
Screw shaft root diameter		13.4	
Effective turns of balls		1.5 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	4 180	5 480
	Static C_{0a}	5 390	8 080
Axial play		0	0.005 or less
Preload (N)		147	—
Dynamic friction torque, (N·cm)		1.5 – 7.8	2.4 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		2.1	
Standard volume of grease replenishing (cm^3)		1.1	

Unit: mm

Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W1601FA-3P-C5Z16	**W1601FA-4-C5T16**	100	122
W1602FA-3P-C5Z16	**W1602FA-4-C5T16**	150	172
W1602FA-5P-C5Z16	**W1602FA-6-C5T16**	200	222
W1603FA-3P-C5Z16	**W1603FA-4-C5T16**	250	272
W1603FA-5P-C5Z16	**W1603FA-6-C5T16**	300	322
W1604FA-3P-C5Z16	**W1604FA-4-C5T16**	350	372
W1604FA-5P-C5Z16	**W1604FA-6-C5T16**	400	422
W1605FA-1P-C5Z16	**W1605FA-2-C5T16**	450	472
W1605FA-3P-C5Z16	**W1605FA-4-C5T16**	500	522
W1606FA-3P-C5Z16	**W1606FA-4-C5T16**	550	572
W1606FA-5P-C5Z16	**W1606FA-6-C5T16**	600	622
W1607FA-1P-C5Z16	**W1607FA-2-C5T16**	700	722
W1608FA-3P-C5Z16	**W1608FA-4-C5T16**	800	822
W1610FA-1P-C5Z16	**W1610FA-2-C5T16**	1 000	1 022


Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if permissible rotational speed is to be exceeded.

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
								Supporting condition	
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
184	204	271	0	0.020	0.018	0.025	0.69	3 000	3 000
234	254	321	0	0.023	0.018	0.035	0.77	3 000	3 000
284	304	371	0	0.023	0.018	0.035	0.84	3 000	3 000
334	354	421	0	0.025	0.020	0.040	0.92	3 000	3 000
384	404	471	0	0.025	0.020	0.040	0.99	3 000	3 000
434	454	521	0	0.027	0.020	0.050	1.1	3 000	3 000
484	504	571	0	0.027	0.020	0.050	1.1	3 000	3 000
534	554	621	0	0.030	0.023	0.050	1.2	3 000	3 000
584	604	671	0	0.030	0.023	0.065	1.3	3 000	3 000
634	654	721	0	0.035	0.025	0.065	1.4	3 000	3 000
684	704	771	0	0.035	0.025	0.065	1.4	3 000	3 000
784	804	871	0	0.035	0.025	0.085	1.6	3 000	3 000
884	904	971	0	0.040	0.027	0.085	1.7	2 720	3 000
1 084	1 104	1 171	0	0.046	0.030	0.110	2.0	1 790	2 480

Notes: 4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

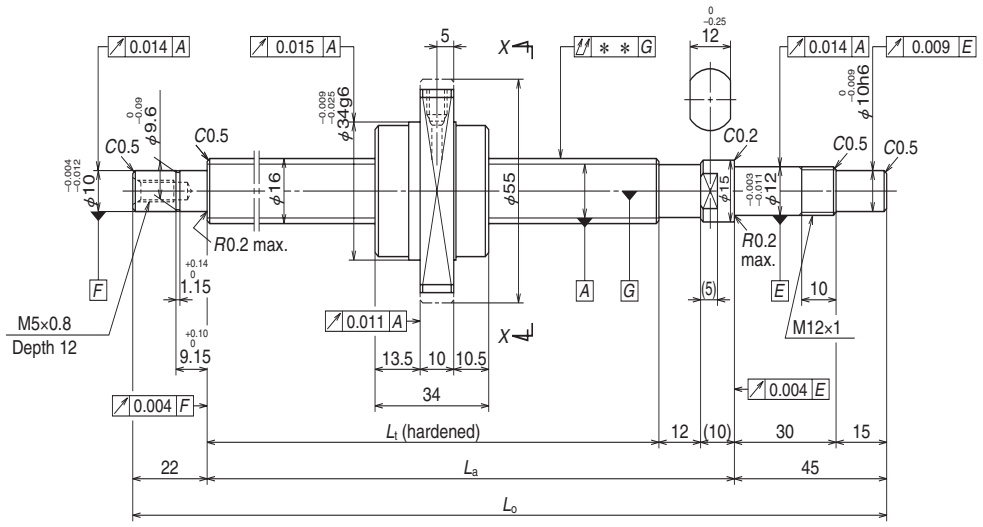
FA



NSK

Screw shaft ø16

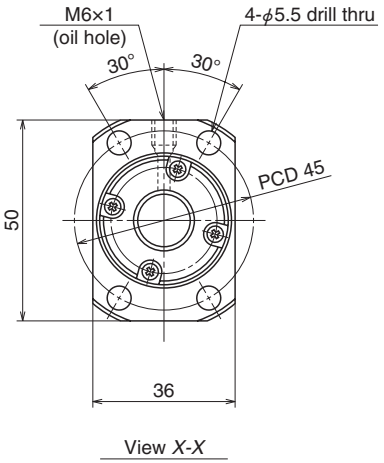Lead 32



Unit: mm

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		16 × 32 / Right	
Preload / Ball recirculation		P-preload / End cap	
Ball dia. / Ball circle dia.		3.175 / 16.75	
Screw shaft root diameter		13.4	
Effective turns of balls		0.7 × 2	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	4 800	
	Static C_{0a}	7 510	
Axial play		0	0.005 or less
Preload (N)		118	—
Dynamic friction torque, (N·cm)		1.5 – 9.8	2.4 or less
Spacer ball		None	
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		2.0	
Standard volume of grease replenishing (cm^3)		1.0	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

FA


Unit: mm

Ball screw No.		Stroke	
Preloaded (UPFC)	Precise clearance (USFC)	Nominal	Maximum
W1603FA-7PGX-C5Z32	**W1603FA-8GX-C5T32**	300	342
W1605FA-5PGX-C5Z32	**W1605FA-6GX-C5T32**	500	542
W1608FA-5PGX-C5Z32	**W1608FA-6GX-C5T32**	800	842
W1612FA-1PGX-C5Z32	**W1612FA-2GX-C5T32**	1 200	1 242

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
								Supporting condition	
L_t	L_a	L_o	T	e_p	υ_u	↗↗		Fixed - Simple support	Fixed - Fixed
382	404	471	0	0.025	0.020	0.040	0.90	3 000	3 000
582	604	671	0	0.030	0.023	0.065	1.2	3 000	3 000
882	904	971	0	0.040	0.027	0.085	1.7	2 670	3 000
1 282	1 304	1 371	0	0.054	0.035	0.150	2.3	1 250	1 740

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.

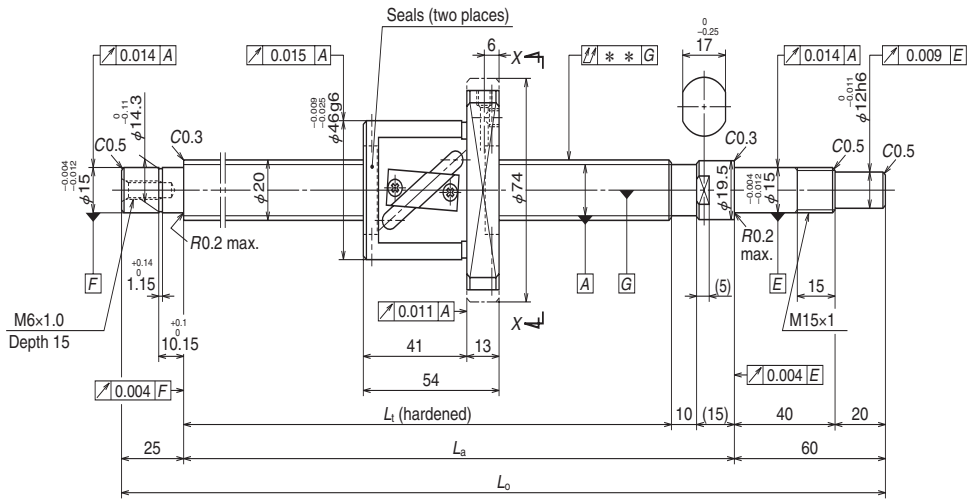Notes: 5. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
6. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).




NSK

Screw shaft ø20

Lead 10

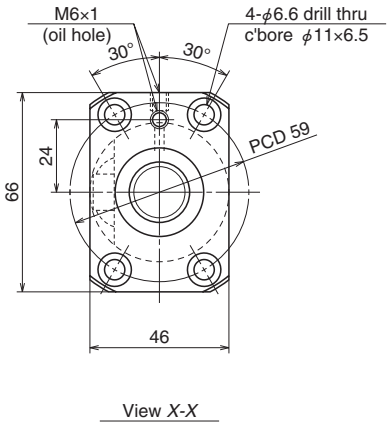Unit: mm



View *X-X*

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01A (square)	WBK15S-01 (square)
WBK15-11 (round)	

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		20 × 10 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		3.969 / 21	
Screw shaft root diameter		16.9	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	8 350	13 300
	Static C_{0a}	11 000	21 900
Axial play		0	0.005 or less
Preload (N)		196	—
Dynamic friction torque, (N·cm)		2.0 – 11.8	2.9 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		4.7	
Standard volume of grease replenishing (cm^3)		2.4	

Unit: mm


Ball screw No.		Stroke	
		Nominal	Maximum
Preloaded (LPFT)	Precise clearance (LSFT)		
W2002FA-1P-C5Z10	**W2002FA-2-C5T10**	200	229
W2003FA-1P-C5Z10	**W2003FA-2-C5T10**	300	329
W2004FA-1P-C5Z10	**W2004FA-2-C5T10**	400	429
W2005FA-1P-C5Z10	**W2005FA-2-C5T10**	500	529
W2006FA-1P-C5Z10	**W2006FA-2-C5T10**	600	629
W2007FA-1P-C5Z10	**W2007FA-2-C5T10**	700	729
W2008FA-1P-C5Z10	**W2008FA-2-C5T10**	800	829
W2009FA-1P-C5Z10	**W2009FA-2-C5T10**	900	929
W2010FA-1P-C5Z10	**W2010FA-2-C5T10**	1 000	1 029
W2011FA-1P-C5Z10	**W2011FA-2-C5T10**	1 100	1 129
W2012FA-1P-C5Z10	**W2012FA-2-C5T10**	1 200	1 229

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
								Supporting condition	
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
289	314	399	0	0.023	0.018	0.035	1.4	3 000	3 000
389	414	499	0	0.025	0.020	0.040	1.6	3 000	3 000
489	514	599	0	0.027	0.020	0.050	1.9	3 000	3 000
589	614	699	0	0.030	0.023	0.065	2.1	3 000	3 000
689	714	799	0	0.035	0.025	0.065	2.3	3 000	3 000
789	814	899	0	0.035	0.025	0.085	2.5	3 000	3 000
889	914	999	0	0.040	0.027	0.085	2.8	3 000	3 000
989	1 014	1 099	0	0.040	0.027	0.110	3.0	2 710	3 000
1 089	1 114	1 199	0	0.046	0.030	0.110	3.2	2 220	3 000
1 189	1 214	1 299	0	0.046	0.030	0.150	3.4	1 860	2 570
1 289	1 314	1 399	0	0.054	0.035	0.150	3.7	1 580	2 190

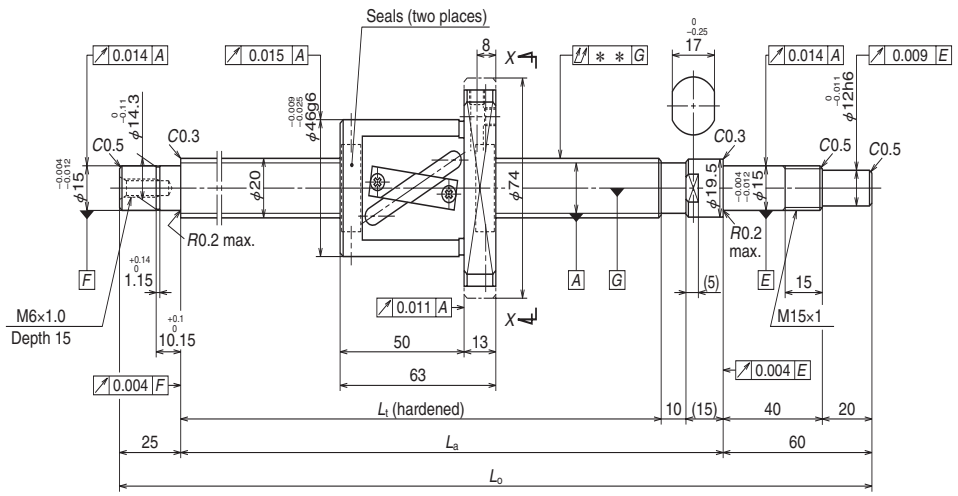Notes: 4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).




NSK

Screw shaft ø20

Lead 20

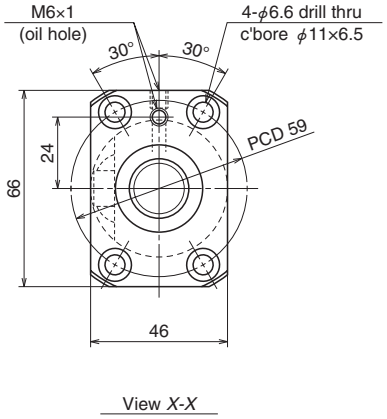Unit: mm



Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01A (square)	WBK15S-01 (square)
WBK15-11 (round)	

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		20 × 20 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		3.969 / 21	
Screw shaft root diameter		16.9	
Effective turns of balls		1.5 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	6 250	8 190
	Static C_{0a}	8 760	13 100
Axial play		0	0.005 or less
Preload (N)		196	—
Dynamic friction torque, (N·cm)		2.0 – 11.8	2.9 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		4.2	
Standard volume of grease replenishing (cm^3)		2.1	

Unit: mm


Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W2003FA-3P-C5Z20	**W2003FA-4-C5T20**	200	241
W2004FA-3P-C5Z20	**W2004FA-4-C5T20**	300	341
W2005FA-3P-C5Z20	**W2005FA-4-C5T20**	400	441
W2006FA-3P-C5Z20	**W2006FA-4-C5T20**	500	541
W2007FA-3P-C5Z20	**W2007FA-4-C5T20**	600	641
W2008FA-3P-C5Z20	**W2008FA-4-C5T20**	700	741
W2009FA-3P-C5Z20	**W2009FA-4-C5T20**	800	841
W2010FA-3P-C5Z20	**W2010FA-4-C5T20**	900	941
W2011FA-3P-C5Z20	**W2011FA-4-C5T20**	1 000	1 041
W2012FA-3P-C5Z20	**W2012FA-4-C5T20**	1 100	1 141
W2015FA-1P-C5Z20	**W2015FA-2-C5T20**	1 400	1 441

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
								Supporting condition	
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
310	335	420	0	0.023	0.018	0.040	1.6	3 000	3 000
410	435	520	0	0.027	0.020	0.050	1.8	3 000	3 000
510	535	620	0	0.030	0.023	0.050	2.0	3 000	3 000
610	635	720	0	0.030	0.023	0.065	2.3	3 000	3 000
710	735	820	0	0.035	0.025	0.085	2.5	3 000	3 000
810	835	920	0	0.040	0.027	0.085	2.7	3 000	3 000
910	935	1 020	0	0.040	0.027	0.110	3.0	3 000	3 000
1 010	1 035	1 120	0	0.046	0.030	0.110	3.2	2 630	3 000
1 110	1 135	1 220	0	0.046	0.030	0.110	3.4	2 160	2 970
1 210	1 235	1 320	0	0.046	0.030	0.150	3.7	1 810	2 500
1 510	1 535	1 620	0	0.054	0.035	0.180	4.4	1 150	1 610

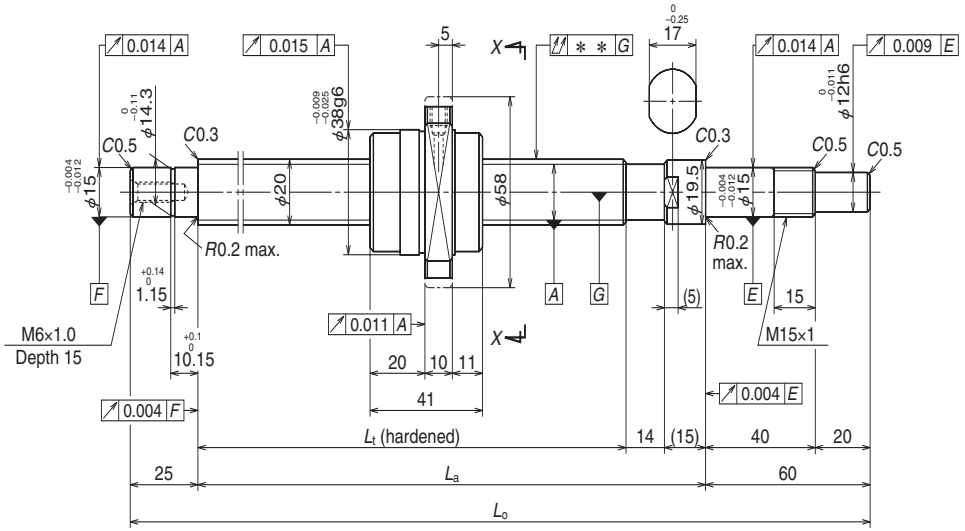Notes: 4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).




NSK

Screw shaft ø20

Lead 40

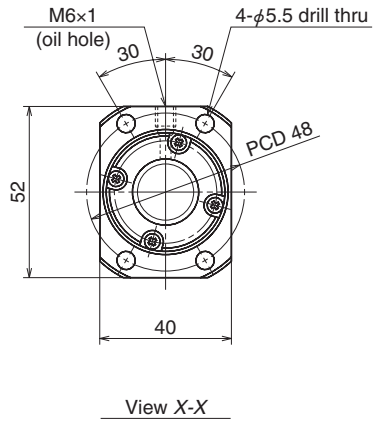Unit: mm



View *X-X*

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		20 × 40 / Right	
Preload / Ball recirculation		P-preload / End cap	
Ball dia. / Ball circle dia.		3.175 / 20.75	
Screw shaft root diameter		17.4	
Effective turns of balls		0.7 × 2	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	5 410	
	Static C_{0a}	9 360	
Axial play		0	0.005 or less
Preload (N)		148	—
Dynamic friction torque, (N·cm)		2.0 – 11.8	2.9 or less
Spacer ball		None	
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		2.8	
Standard volume of grease replenishing (cm^3)		1.4	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01A (square)	WBK15S-01 (square)
WBK15-11 (round)	


Unit: mm

Ball screw No.		Stroke	
Preloaded (UPFC)	Precise clearance (USFC)	Nominal	Maximum
W2005FA-5PGX-C5Z40	**W2005FA-6GX-C5T40**	400	459
W2007FA-5PGX-C5Z40	**W2007FA-6GX-C5T40**	600	659
W2009FA-5PGX-C5Z40	**W2009FA-6GX-C5T40**	800	859
W2011FA-5PGX-C5Z40	**W2011FA-6GX-C5T40**	1 000	1 059
W2013FA-1PGX-C5Z40	**W2013FA-2GX-C5T40**	1 200	1 259
W2017FA-1PGX-C5Z40	**W2017FA-2GX-C5T40**	1 600	1 659

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
								Supporting condition	
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
506	535	620	0	0.030	0.023	0.050	1.7	3 000	3 000
706	735	820	0	0.035	0.025	0.085	2.2	3 000	3 000
906	935	1 020	0	0.040	0.027	0.110	2.7	3 000	3 000
1 106	1 135	1 220	0	0.046	0.030	0.110	3.1	2 210	3 000
1 306	1 335	1 420	0	0.054	0.035	0.150	3.6	1 570	2 160
1 706	1 735	1 820	0	0.065	0.040	0.230	4.6	910	1 270

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.

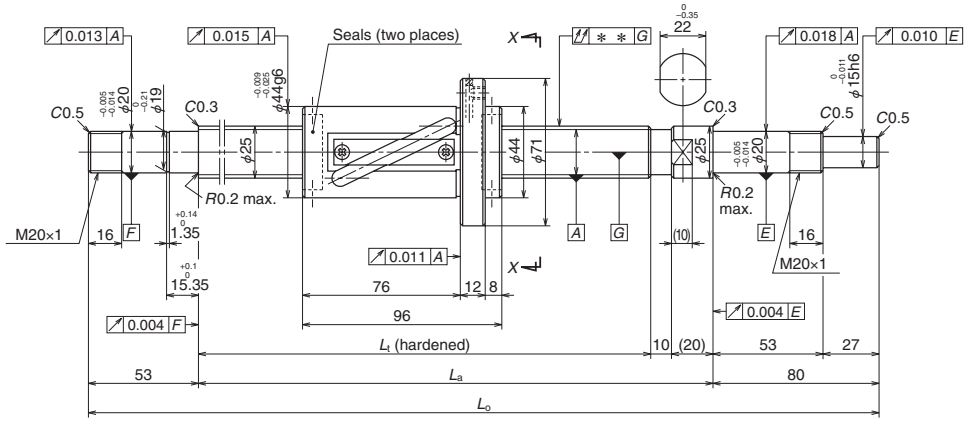Notes: 5. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
6. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).




NSK

Screw shaft ø25

Lead 20

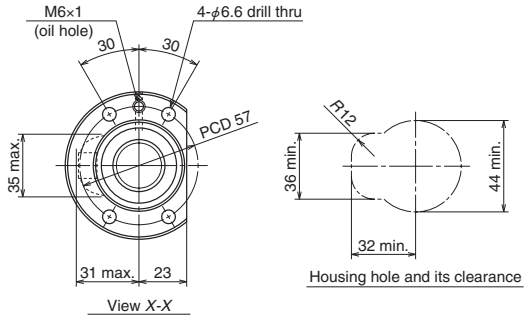Unit: mm



Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		25 × 20 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		4.762 / 26.25	
Screw shaft root diameter		21.3	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	11 700	18 600
	Static C_{0a}	16 300	32 600
Axial play		0	0.005 or less
Preload (N)		343	—
Dynamic friction torque, (N·cm)		3.9 – 24.5	4.9 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		12	
Standard volume of grease replenishing (cm^3)		6	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	


FA

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
												Supporting condition	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
W2507FA-1P-C5Z20	**W2507FA-2-C5T20**	600	640	750	780	913	0	0.035	0.025	0.055	4.0	2 800	2 800
W2509FA-1P-C5Z20	**W2509FA-2-C5T20**	800	840	950	980	1 113	0	0.040	0.027	0.070	4.7	2 800	2 800
W2511FA-1P-C5Z20	**W2511FA-2-C5T20**	1 000	1 040	1 150	1 180	1 313	0	0.046	0.030	0.090	5.4	2 590	2 800
W2513FA-1P-C5Z20	**W2513FA-2-C5T20**	1 200	1 240	1 350	1 380	1 513	0	0.054	0.035	0.090	6.2	1 860	2 550
W2515FA-1P-C5Z20	**W2515FA-2-C5T20**	1 400	1 440	1 550	1 580	1 713	0	0.054	0.035	0.120	6.9	1 400	1 940
W2517FA-1P-C5Z20	**W2517FA-2-C5T20**	1 600	1 640	1 750	1 780	1 913	0	0.065	0.040	0.120	7.6	1 090	1 520
W2521FA-1P-C5Z20	**W2521FA-2-C5T20**	2 000	2 040	2 150	2 180	2 313	0	0.077	0.046	0.160	9.1	720	1 000

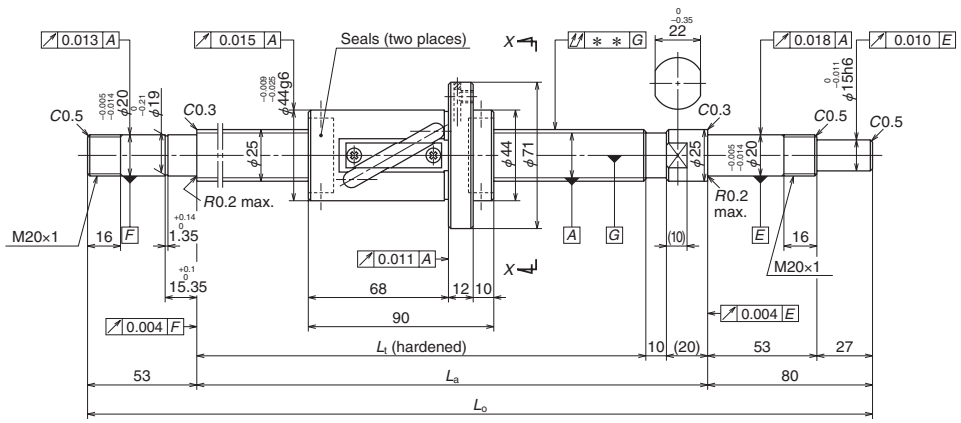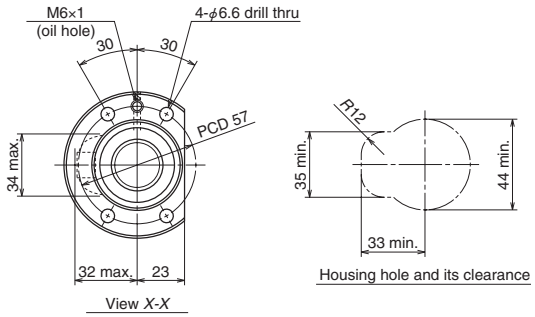Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.





Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W2507FA-3P-C5Z25	**W2507FA-4-C5T25**	600	646
W2509FA-3P-C5Z25	**W2509FA-4-C5T25**	800	846
W2511FA-3P-C5Z25	**W2511FA-4-C5T25**	1 000	1 046
W2513FA-3P-C5Z25	**W2513FA-4-C5T25**	1 200	1 246
W2515FA-3P-C5Z25	**W2515FA-4-C5T25**	1 400	1 446
W2517FA-3P-C5Z25	**W2517FA-4-C5T25**	1 600	1 646
W2521FA-3P-C5Z25	**W2521FA-4-C5T25**	2 000	2 046

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Screw shaft ø25

Lead 25

Unit: mm


Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		25 × 25 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		4.762 / 26.25	
Screw shaft root diameter		21.3	
Effective turns of balls		1.5 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	8 970	11 700
	Static C_{0a}	13 100	19 700
Axial play		0	0.005 or less
Preload (N)		294	—
Dynamic friction torque, (N·cm)		3.9 – 24.5	4.9
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		7.5	
Standard volume of grease replenishing (cm^3)		3.8	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
								Supporting condition	
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
750	780	913	0	0.035	0.025	0.055	4.0	2 800	2 800
950	980	1 113	0	0.040	0.027	0.070	4.7	2 800	2 800
1 150	1 180	1 313	0	0.046	0.030	0.090	5.4	2 580	2 800
1 350	1 380	1 513	0	0.054	0.035	0.090	6.2	1 850	2 550
1 550	1 580	1 713	0	0.054	0.035	0.120	7.0	1 400	1 930
1 750	1 780	1 913	0	0.065	0.040	0.120	7.7	1 090	1 510
2 150	2 180	2 313	0	0.077	0.046	0.160	9.1	710	1 000

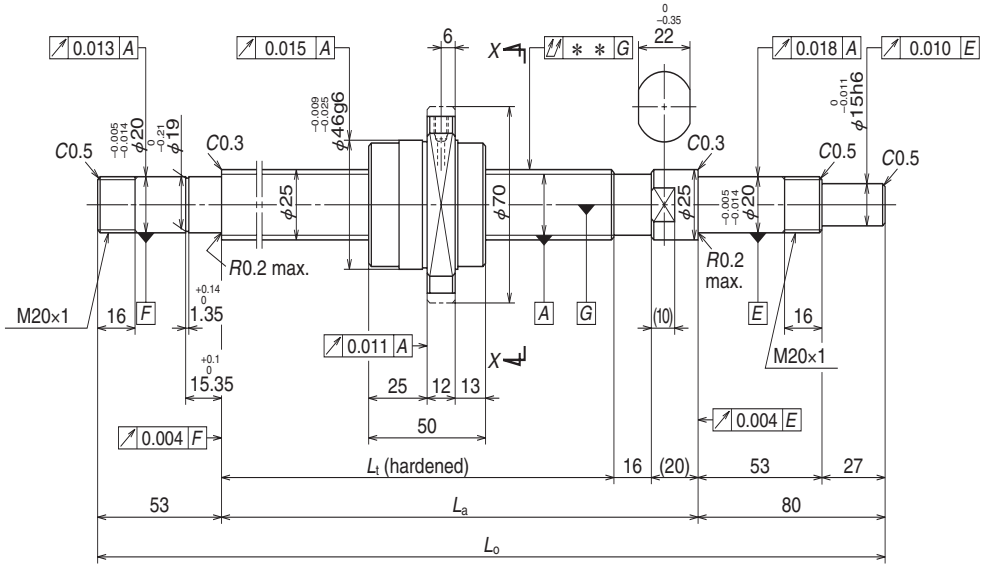


NSK

Screw shaft ø25

Lead 50

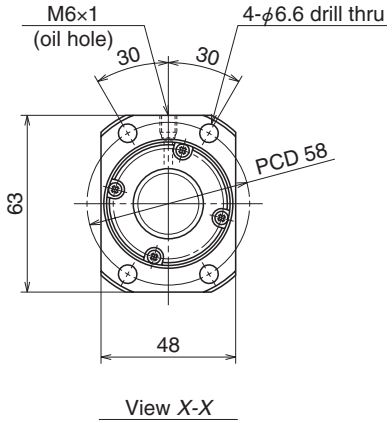Unit: mm



View *X-X*

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		25 × 50 / Right	
Preload / Ball recirculation		P-preload / End cap	
Ball dia. / Ball circle dia.		3.969 / 26	
Screw shaft root diameter		21.9	
Effective turns of balls		0.7 × 2	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	8 090	
	Static C_{0a}	14 600	
Axial play		0	0.005 or less
Preload (N)		196	—
Dynamic friction torque, (N·cm)		2.9 – 21.5	4.9 or less
Spacer ball		None	
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		4.2	
Standard volume of grease replenishing (cm^3)		2.1	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	


FA

Unit: mm

Ball screw No.		Stroke	
Preloaded (UPFC)	Precise clearance (USFC)	Nominal	Maximum
W2508FA-1PGX-C5Z50	**W2508FA-2GX-C5T50**	700	780
W2511FA-5PGX-C5Z50	**W2511FA-6GX-C5T50**	1 000	1 080
W2516FA-1PGX-C5Z50	**W2516FA-2GX-C5T50**	1 500	1 580
W2521FA-5PGX-C5Z50	**W2521FA-6GX-C5T50**	2 000	2 080

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
								Supporting condition	
L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
844	880	1 013	0	0.040	0.027	0.070	4.1	2 800	2 800
1 144	1 180	1 313	0	0.046	0.030	0.090	5.3	2 600	2 800
1 644	1 680	1 813	0	0.065	0.040	0.120	7.2	1 250	1 720
2 144	2 180	2 313	0	0.077	0.046	0.160	9.1	730	1 010

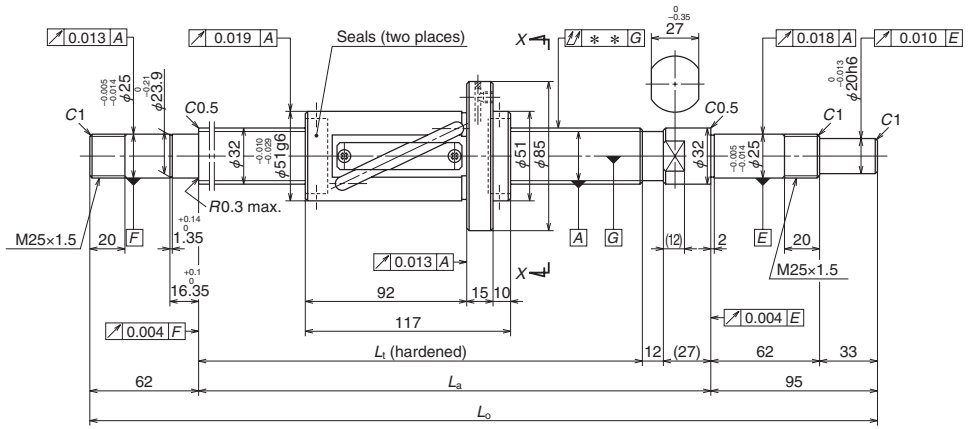Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.




NSK

Screw shaft ø32

Lead 25

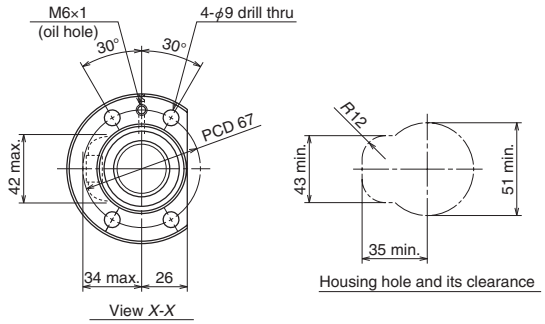Unit: mm



Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		32 × 25 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		4.762 / 33.25	
Screw shaft root diameter		28.3	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	12 900	20 400
	Static C_{0a}	21 100	42 200
Axial play		0	0.005 or less
Preload (N)		441	—
Dynamic friction torque, (N·cm)		6.8 – 31.5	7.8 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		17.5	
Standard volume of grease replenishing (cm^3)		8.8	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK25-01W (square)	WBK25-01W (square)	WBK25S-01W (square)
WBK25-11 (round)	WBK25-11 (round)	

FA

Unit: mm

Ball screw No.		Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
												Supporting condition	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
W3211FA-1P-C5Z25	**W3211FA-2-C5T25**	1 000	1 046	1 180	1 219	1 376	0	0.046	0.030	0.090	9.3	2 180	2 180
W3216FA-1P-C5Z25	**W3216FA-2-C5T25**	1 500	1 546	1 680	1 719	1 876	0	0.065	0.040	0.120	12.3	1 600	2 180
W3221FA-1P-C5Z25	**W3221FA-2-C5T25**	2 000	2 046	2 180	2 219	2 376	0	0.077	0.046	0.160	15.4	930	1 300
W3227FA-1P-C5Z25	**W3227FA-2-C5T25**	2 600	2 646	2 780	2 819	2 976	0	0.093	0.054	0.200	19.1	570	800

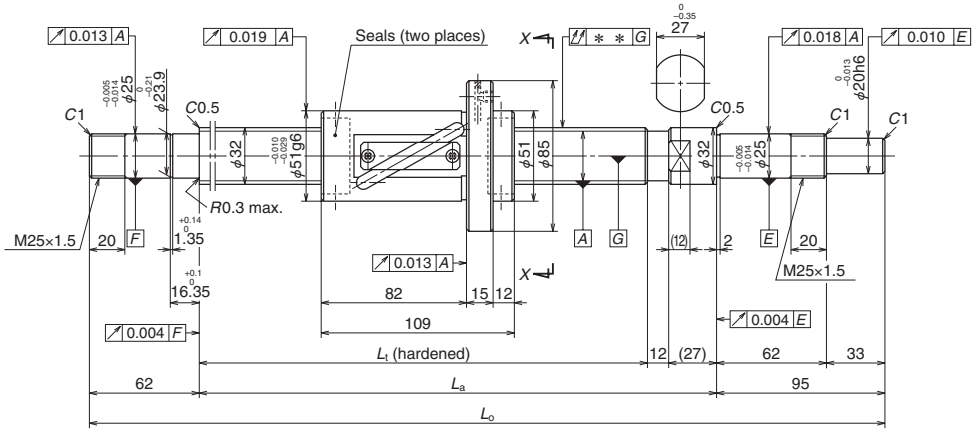Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.




NSK

Screw shaft ø32

Lead 32

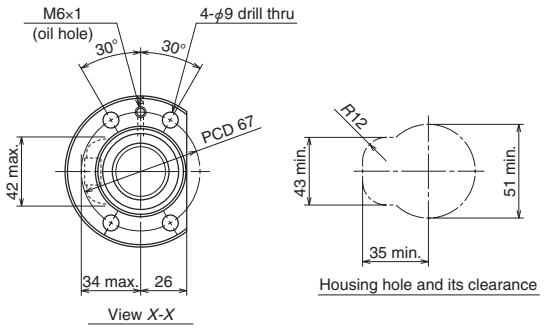Unit: mm



Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. x Lead / Direction of turn		32 × 32 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		4.762 / 33.25	
Screw shaft root diameter		28.3	
Effective turns of balls		1.5 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	10 100	13 300
	Static C_{0a}	16 800	25 200
Axial play		0	0.005 or less
Preload (N)		392	—
Dynamic friction torque, (N·cm)		6.9 – 31.5	7.8 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm^3)		14	
Standard volume of grease replenishing (cm^3)		7	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	(Simple)
WBK25-01W (square)	WBK25-01W (square)	WBK25S-01W (square)
WBK25-11 (round)	WBK25-11 (round)	


FA


Unit: mm

Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W3211FA-3P-C5Z32	**W3211FA-4-C5T32**	1 000	1 054
W3216FA-3P-C5Z32	**W3216FA-4-C5T32**	1 500	1 554
W3221FA-3P-C5Z32	**W3221FA-4-C5T32**	2 000	2 054
W3227FA-3P-C5Z32	**W3227FA-4-C5T32**	2 600	2 654

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
								Supporting condition	
L_t	L_a	L_o	T	e_p	υ_u	↗↗		Fixed - Simple support	Fixed - Fixed
1 180	1 219	1 376	0	0.046	0.030	0.090	9.3	2 180	2 180
1 680	1 719	1 876	0	0.065	0.040	0.120	12.3	1 590	2 180
2 180	2 219	2 376	0	0.077	0.046	0.160	15.4	930	1 290
2 780	2 819	2 976	0	0.093	0.054	0.200	19.1	570	790

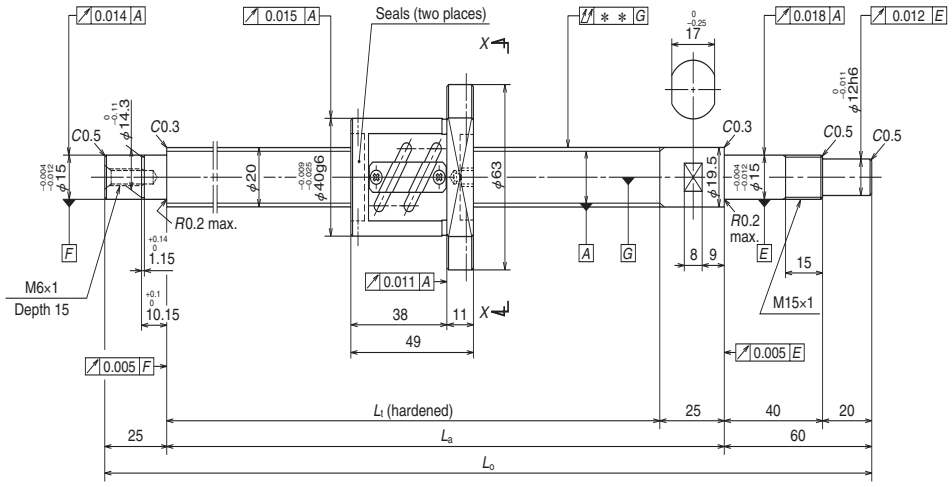Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.





View *X-X*

Unit: mm

Ball screw specifications		
Shaft dia. x Lead / Direction of turn		20 × 4 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		2.381 / 20.3
Effective turns of balls		2.5 × 2
Screw shaft root diameter		17.8
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	6 550
	Static C_{0a}	10 900
Preload (N)		294
Dynamic friction torque, median, (N·cm)		3.9
Spacer ball		Yes
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		2.7
Standard volume of grease replenishing (cm^3)		1.4

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01A (square)	WBK15S-01 (square)
WBK15-11 (round)	

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W2002SA-1P-C5Z4	150	170	225	250	335
W2002SA-2P-C5Z4	200	220	275	300	385
W2003SA-1P-C5Z4	300	320	375	400	485
W2004SA-1P-C5Z4	400	420	475	500	585
W2005SA-1P-C5Z4	500	520	575	600	685
W2006SA-1P-C5Z4	600	620	675	700	785

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
					Supporting condition	
T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
–0.005	0.023	0.018	0.045	1.1	3 000	3 000
–0.007	0.023	0.018	0.045	1.2	3 000	3 000
–0.009	0.025	0.020	0.055	1.5	3 000	3 000
–0.011	0.027	0.020	0.070	1.7	3 000	3 000
–0.014	0.030	0.023	0.085	1.9	3 000	3 000
–0.016	0.035	0.025	0.085	2.1	3 000	3 000

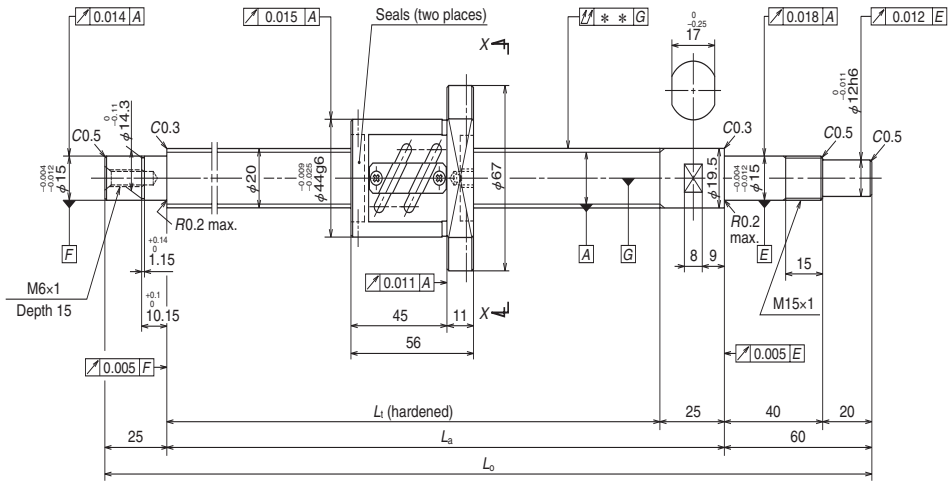Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).




NSK

Screw shaft ø20

Lead 5

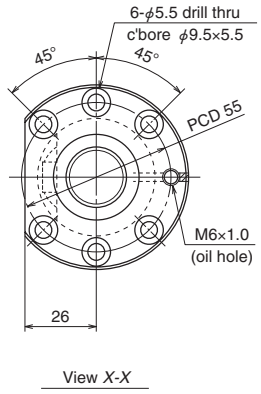Unit: mm



View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		20 × 5 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		3.175 / 20.5
Screw shaft root diameter		17.2
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	11 100
	Static C_{0a}	17 100
Preload (N)		490
Dynamic friction torque, median, (N·cm)		7.8
Spacer ball		Yes
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		4.3
Standard volume of grease replenishing (cm^3)		2.2

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01A (square)	WBK15S-01 (square)
WBK15-11 (round)	

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W2002SA-3P-C5Z5	150	163	225	250	335
W2002SA-4P-C5Z5	200	213	275	300	385
W2003SA-2P-C5Z5	300	313	375	400	485
W2004SA-2P-C5Z5	400	413	475	500	585
W2005SA-2P-C5Z5	500	513	575	600	685
W2007SA-1P-C5Z5	700	713	775	800	885

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
					Supporting condition	
T	e_p	υ_u	↗↗		Fixed - Simple support	Fixed - Fixed
-0.005	0.023	0.018	0.045	1.3	3 000	3 000
-0.007	0.023	0.018	0.045	1.4	3 000	3 000
-0.009	0.025	0.020	0.055	1.6	3 000	3 000
-0.011	0.027	0.020	0.070	1.8	3 000	3 000
-0.014	0.030	0.023	0.085	2.0	3 000	3 000
-0.019	0.035	0.025	0.110	2.5	3 000	3 000

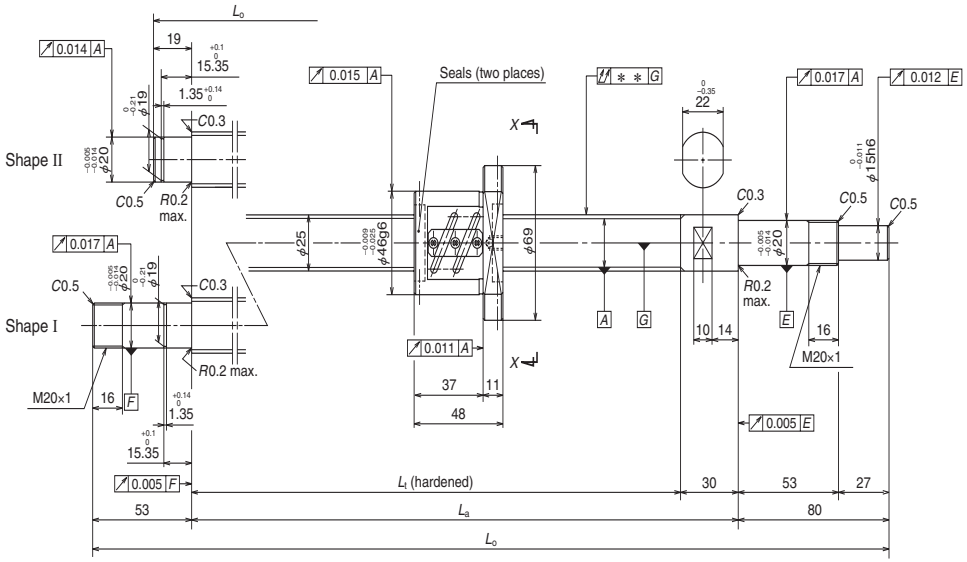Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).




NSK

Screw shaft ø25

Lead 4

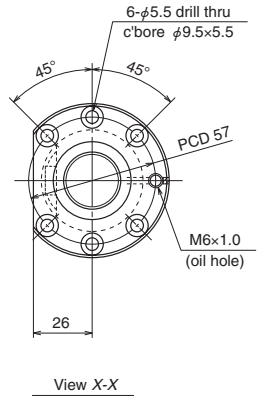Unit: mm



View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		25 × 4 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		2.381 / 25.3
Screw shaft root diameter		22.8
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	7 110
	Static C_{0a}	13 600
Preload (N)		290
Dynamic friction torque, median, (N·cm)		4.9
Spacer ball		Yes
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		3.2
Standard volume of grease replenishing (cm^3)		1.6

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W2502SA-1P-C5Z4	150	166	220	250	349
W2502SA-2P-C5Z4	200	216	270	300	399
W2503SA-1P-C5Z4	300	316	370	400	499
W2504SA-1P-C5Z4	400	416	470	500	599
W2505SA-1P-C5Z4	500	516	570	600	733
W2507SA-1P-C5Z4	700	716	770	800	933

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
						Supporting condition	
	T	e_p	υ_u	↗		Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.005	0.023	0.018	0.035	1.6	2 800	—
Ⅱ	–0.006	0.023	0.018	0.035	1.8	2 800	—
Ⅱ	–0.009	0.025	0.020	0.040	2.2	2 800	—
Ⅱ	–0.011	0.027	0.020	0.050	2.5	2 800	—
Ⅰ	–0.014	0.030	0.023	0.060	3.0	2 800	2 800
Ⅰ	–0.018	0.035	0.025	0.075	3.7	2 800	2 800

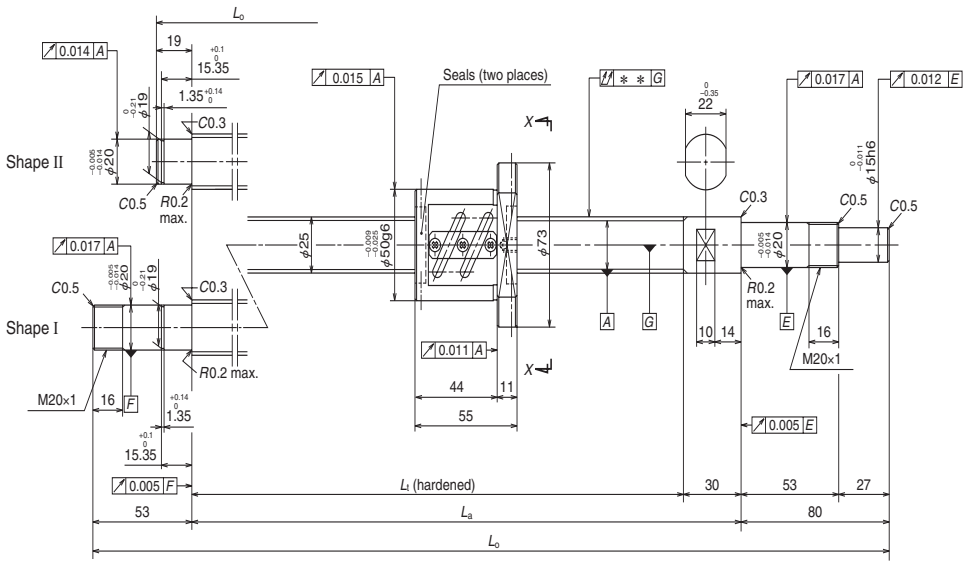Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -8 mm when Fixed-Fixed is used for left shaft end shape Ⅰ.




NSK

Screw shaft ø25

Lead 5

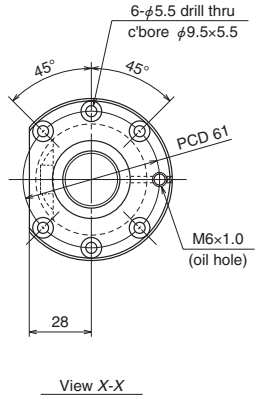Unit: mm



View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		25 × 5 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		3.175 / 25.5
Screw shaft root diameter		22.2
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	12 300
	Static C_{0a}	21 800
Preload (N)		540
Dynamic friction torque, median, (N·cm)		8.8
Spacer ball		Yes
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		5.0
Standard volume of grease replenishing (cm³)		2.5

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	


Unit: mm

Ball screw No.	Stroke		Screw shaft length			Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
	Nominal	Maximum	L_t	L_a	L_o		T	e_p	υ_u			Supporting condition: Fixed - Simple support	Supporting condition: Fixed - Fixed
W2502SA-3P-C5Z5	150	159	220	250	349	Ⅱ	–0.005	0.023	0.018	0.035	1.8	2 800	—
W2502SA-4P-C5Z5	200	209	270	300	399	Ⅱ	–0.006	0.023	0.018	0.035	2.0	2 800	—
W2503SA-2P-C5Z5	300	309	370	400	499	Ⅱ	–0.009	0.025	0.020	0.040	2.3	2 800	—
W2504SA-2P-C5Z5	400	409	470	500	599	Ⅱ	–0.011	0.027	0.020	0.050	2.7	2 800	—
W2505SA-2P-C5Z5	500	509	570	600	733	Ⅰ	–0.014	0.030	0.023	0.060	3.1	2 800	2 800
W2506SA-1P-C5Z5	600	609	670	700	833	Ⅰ	–0.016	0.035	0.025	0.075	3.4	2 800	2 800
W2507SA-2P-C5Z5	700	709	770	800	933	Ⅰ	–0.018	0.035	0.025	0.075	3.8	2 800	2 800
W2509SA-1P-C5Z5	900	909	970	1 000	1 133	Ⅰ	–0.023	0.040	0.027	0.090	4.5	2 800	2 800
W2511SA-1P-C5Z5	1 100	1 109	1 170	1 200	1 333	Ⅰ	–0.028	0.046	0.030	0.120	5.2	2 520	2 800

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the the permissible rotational speed is to be exceeded.
4. The maximum stroke is -8 mm when Fixed-Fixed is used for left shaft end shape Ⅰ.

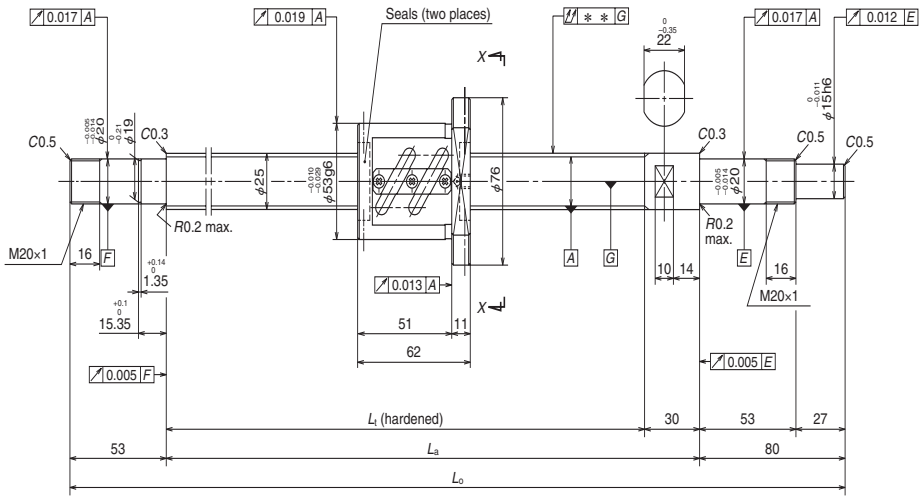SA





View X-X

NSK

Screw shaft ø25

Lead 6

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		25 × 6 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		3.969 / 25.5
Screw shaft root diameter		21.4
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	16 600
	Static C_{0a}	26 700
Preload (N)		685
Dynamic friction torque, median, (N·cm)		13.8
Spacer ball		Yes
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		7.0
Standard volume of grease replenishing (cm^3)		3.5

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W2503SA-3P-C5Z6	250	302	370	400	533
W2505SA-3P-C5Z6	450	502	570	600	733
W2507SA-3P-C5Z6	650	702	770	800	933
W2511SA-2P-C5Z6	1 050	1 102	1 170	1 200	1 333

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
					Supporting condition	
T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
–0.009	0.025	0.020	0.050	2.5	2 800	2 800
–0.014	0.030	0.023	0.060	3.2	2 800	2 800
–0.018	0.035	0.025	0.075	3.9	2 800	2 800
–0.028	0.046	0.030	0.120	5.2	2 450	2 800

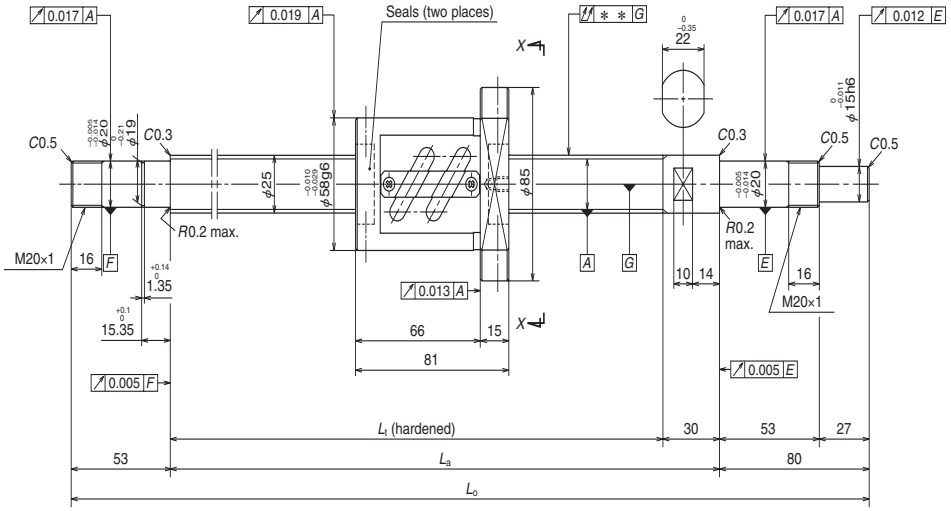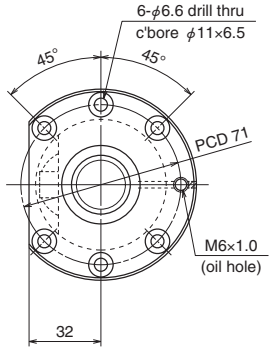Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -8 mm when Fixed-Fixed is used.





View *X-X*

Screw shaft ø25

Lead 10

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		25 × 10 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		4.762 / 25.5
Screw shaft root diameter		20.5
Effective turns of balls		1.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	13 600
	Static C_{0a}	18 900
Preload (N)		585
Dynamic friction torque, median, (N·cm)		13.8
Spacer ball		Yes
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		9.5
Standard volume of grease replenishing (cm³)		4.8


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Ball screw No.	Stroke		Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Supporting condition: Fixed - Simple support	Supporting condition: Fixed - Fixed
W2503SA-4P-C5Z10	250	283	370	400	533	–0.009	0.025	0.020	0.050	3.2	2 800	2 800
W2505SA-4P-C5Z10	450	483	570	600	733	–0.014	0.030	0.023	0.060	3.8	2 800	2 800
W2507SA-4P-C5Z10	650	683	770	800	933	–0.018	0.035	0.025	0.075	4.5	2 800	2 800
W2509SA-2P-C5Z10	850	883	970	1 000	1 133	–0.023	0.040	0.027	0.090	5.2	2 800	2 800
W2511SA-3P-C5Z10	1 050	1 083	1 170	1 200	1 333	–0.028	0.046	0.030	0.120	5.9	2 390	2 800
W2514SA-1P-C5Z10	1 350	1 383	1 470	1 500	1 633	–0.035	0.054	0.035	0.150	6.9	1 490	2 060

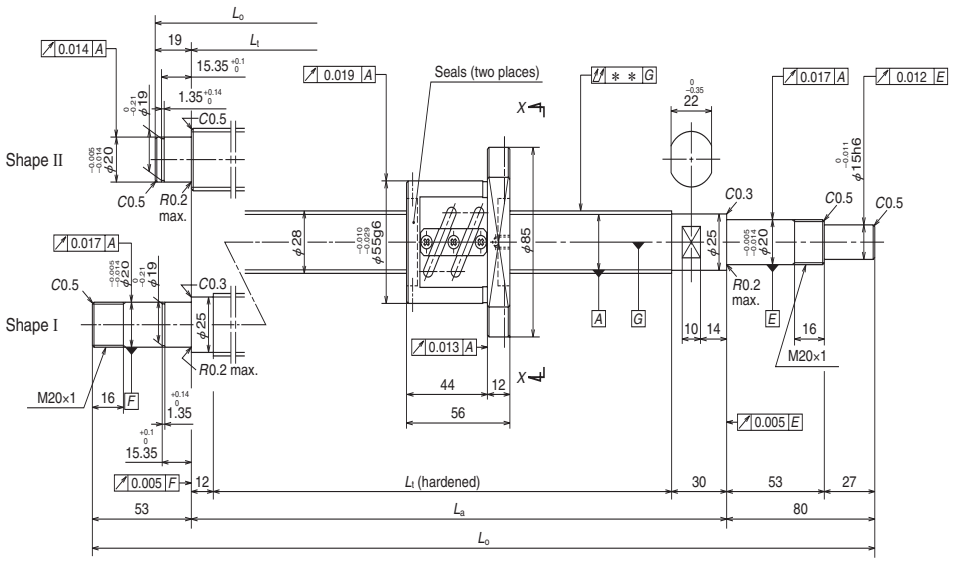Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -8 mm when Fixed-Fixed is used.




NSK

Screw shaft ø28

Lead 5

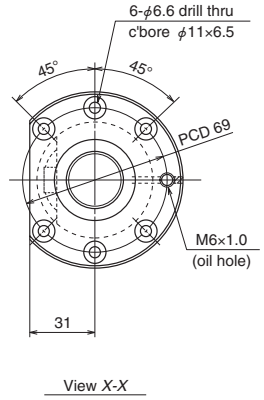Unit: mm



Ball screw specifications		
Shaft dia. × Lead / Direction of turn		28 × 5 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		3.175 / 28.5
Screw shaft root diameter		25.2
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	13 000
	Static C_{0a}	24 400
Preload (N)		540
Dynamic friction torque, median, (N·cm)		9.8
Spacer ball		Yes
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		6.0
Standard volume of grease replenishing (cm³)		3.0

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	


Unit: mm


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W2802SA-1P-C5Z5	200	208	270	300	399
W2803SA-1P-C5Z5	300	308	370	400	499
W2804SA-1P-C5Z5	400	408	470	500	599
W2805SA-1P-C5Z5	450	502	558	600	733
W2807SA-1P-C5Z5	650	702	758	800	933
W2809SA-1P-C5Z5	850	902	958	1 000	1 133
W2811SA-1P-C5Z5	1 050	1 102	1 158	1 200	1 333

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.006	0.023	0.018	0.035	2.5	2 500	—
Ⅱ	–0.009	0.025	0.020	0.040	2.9	2 500	—
Ⅱ	–0.011	0.027	0.020	0.050	3.3	2 500	—
Ⅰ	–0.014	0.030	0.023	0.060	3.8	2 500	2 500
Ⅰ	–0.018	0.035	0.025	0.075	4.7	2 500	2 500
Ⅰ	–0.024	0.040	0.027	0.090	5.6	2 500	2 500
Ⅰ	–0.028	0.046	0.030	0.120	6.5	2 500	2 500

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -2 mm when Fixed-Fixed is used for left shaft end shape Ⅰ.

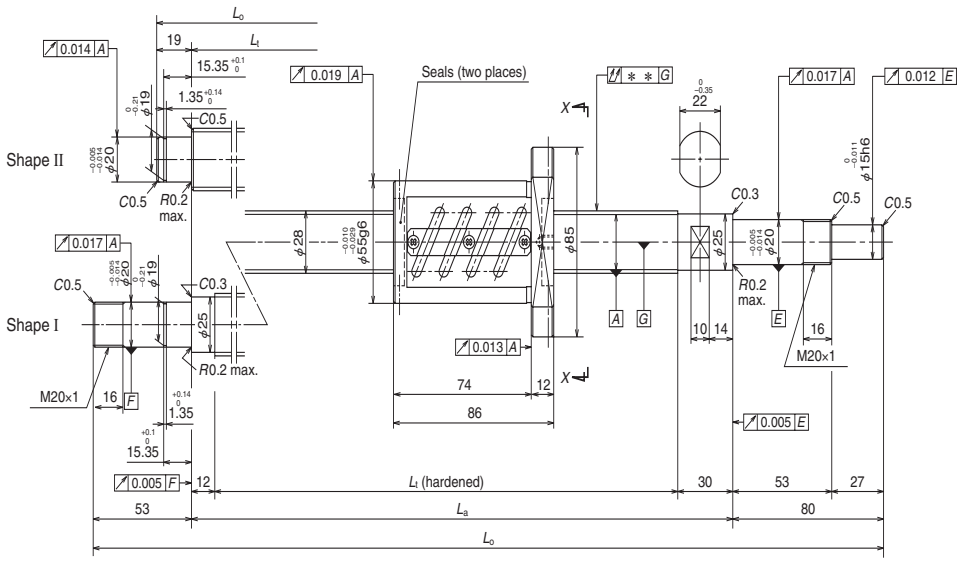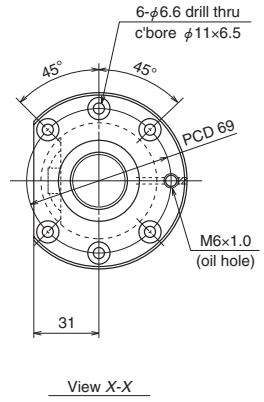SA





View *X-X*

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		28 × 5 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		3.175 / 28.5
Screw shaft root diameter		25.2
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	20 600
	Static C_{0a}	48 700
Preload (N)		1 220
Dynamic friction torque, median, (N·cm)		21.5
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		9.0
Standard volume of grease replenishing (cm³)		4.5

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W2802SA-2Z-C5Z5	150	178	270	300	399
W2803SA-2Z-C5Z5	250	278	370	400	499
W2804SA-2Z-C5Z5	350	378	470	500	599
W2805SA-2Z-C5Z5	450	472	558	600	733
W2807SA-2Z-C5Z5	650	672	758	800	933
W2809SA-2Z-C5Z5	850	872	958	1 000	1 133
W2811SA-2Z-C5Z5	1 050	1 072	1 158	1 200	1 333

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.006	0.023	0.018	0.035	2.8	2 500	—
Ⅱ	–0.009	0.025	0.020	0.040	3.2	2 500	—
Ⅱ	–0.011	0.027	0.020	0.050	3.7	2 500	—
Ⅰ	–0.013	0.030	0.023	0.060	4.2	2 500	2 500
Ⅰ	–0.018	0.035	0.025	0.075	5.1	2 500	2 500
Ⅰ	–0.023	0.040	0.027	0.090	5.9	2 500	2 500
Ⅰ	–0.028	0.046	0.030	0.120	6.8	2 500	2 500

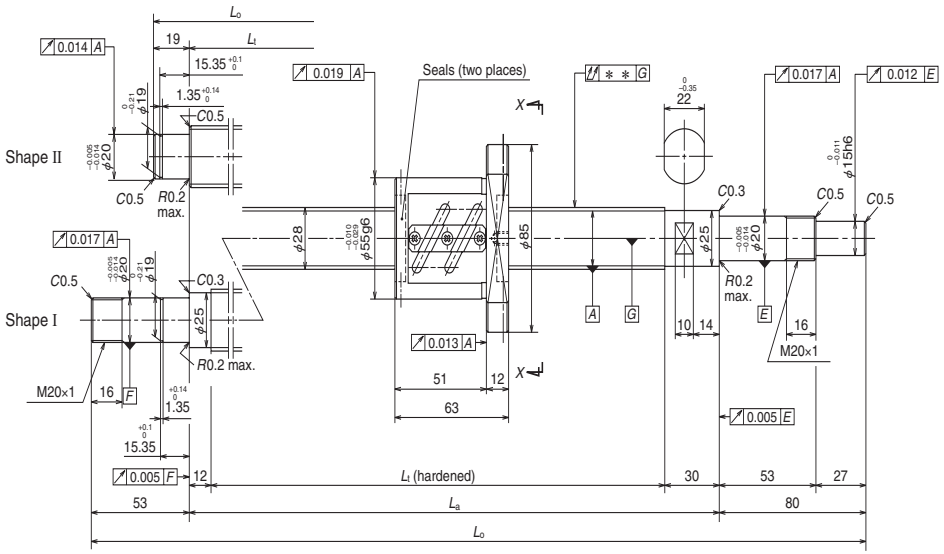Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -2 mm when Fixed-Fixed is used for left shaft end shape Ⅰ.




NSK

Screw shaft ø28

Lead 6

Unit: mm



View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		28 × 6 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		3.175 / 28.5
Screw shaft root diameter		25.2
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	12 900
	Static C_{0a}	24 300
Preload (N)		540
Dynamic friction torque, median, (N·cm)		11.8
Spacer ball		Yes
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		6.0
Standard volume of grease replenishing (cm³)		3.0

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W2803SA-3P-C5Z6	250	301	370	400	499
W2805SA-3P-C5Z6	450	501	570	600	699
W2807SA-3P-C5Z6	650	695	758	800	933
W2809SA-3P-C5Z6	850	895	958	1 000	1 133
W2811SA-3P-C5Z6	1 050	1 095	1 158	1 200	1 333

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
						Supporting condition	
	T	e_p	υ_u	↗↗		Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.009	0.025	0.020	0.040	3.0	2 500	—
Ⅱ	–0.014	0.030	0.023	0.060	3.9	2 500	—
Ⅰ	–0.018	0.035	0.025	0.075	4.9	2 500	2 500
Ⅰ	–0.023	0.040	0.027	0.090	5.8	2 500	2 500
Ⅰ	–0.028	0.046	0.030	0.120	6.6	2 500	2 500

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -2 mm when Fixed-Fixed is used for left shaft end shape Ⅰ.

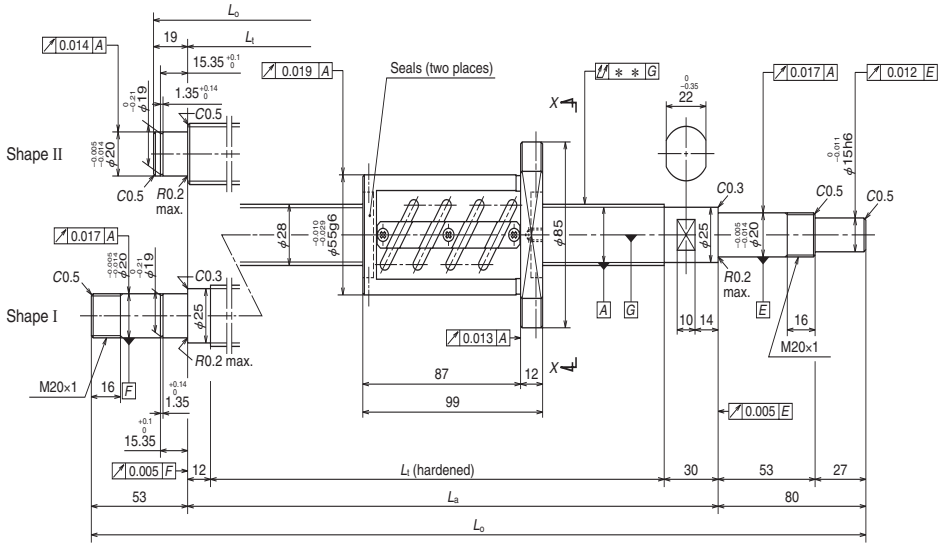SA




NSK

Screw shaft ø28

Lead 6

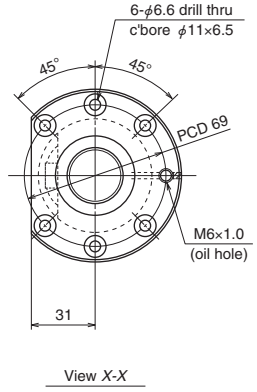Unit: mm



Ball screw specifications		
Shaft dia. × Lead / Direction of turn		28 × 6 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		3.175 / 28.5
Screw shaft root diameter		25.2
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	20 600
	Static C_{0a}	48 700
Preload (N)		1 220
Dynamic friction torque, median, (N·cm)		23.5
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		9.5
Standard volume of grease replenishing (cm³)		4.8

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W2803SA-4Z-C5Z6	250	265	370	400	499
W2805SA-4Z-C5Z6	450	465	570	600	699
W2807SA-4Z-C5Z6	650	659	758	800	933
W2809SA-4Z-C5Z6	850	859	958	1 000	1 133
W2811SA-4Z-C5Z6	1 050	1 059	1 158	1 200	1 333

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.009	0.025	0.020	0.040	3.4	2 500	—
Ⅱ	–0.014	0.030	0.023	0.060	4.3	2 500	—
Ⅰ	–0.018	0.035	0.025	0.075	5.3	2 500	2 500
Ⅰ	–0.023	0.040	0.027	0.090	6.2	2 500	2 500
Ⅰ	–0.028	0.046	0.030	0.120	7.1	2 500	2 500

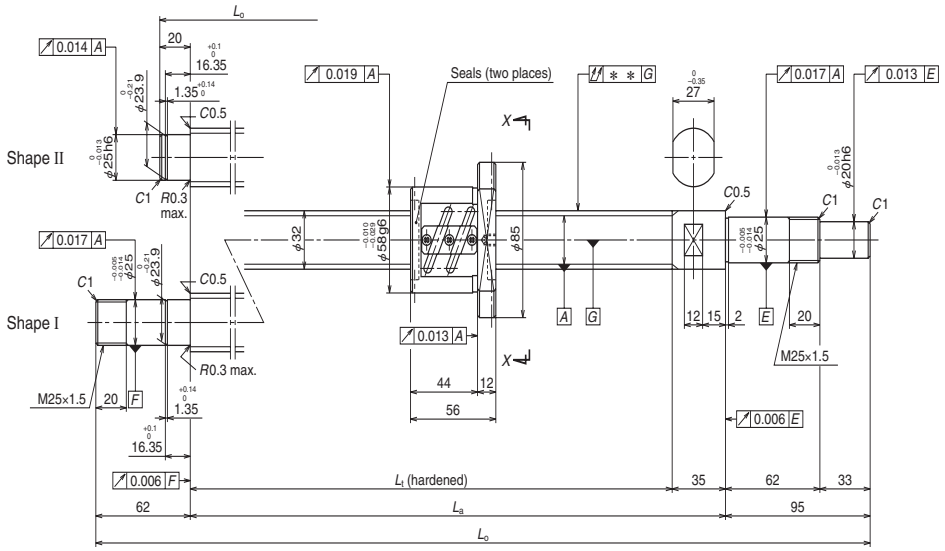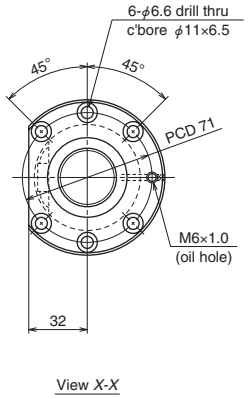Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -2 mm when Fixed-Fixed is used for left shaft end shape Ⅰ.





View *X-X*

NSK

Screw shaft ø32

Lead 5

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		32 × 5 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		3.175 / 32.5
Screw shaft root diameter		29.2
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	13 700
	Static C_{0a}	28 000
Preload (N)		590
Dynamic friction torque, median, (N·cm)		11.8
Spacer ball		Yes
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		7.0
Standard volume of grease replenishing (cm^3)		3.5


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK25-01W (square)	WBK25-01W (square)	WBK25S-01W (square)
WBK25-11 (round)	WBK25-11 (round)	

Unit: mm

Ball screw No.	Stroke		Screw shaft length			Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
	Nominal	Maximum	L_t	L_a	L_o		T	e_p	υ_u			Supporting condition: Fixed - Simple support	Supporting condition: Fixed - Fixed
W3202SA-1P-C5Z5	150	201	265	300	415	Ⅱ	–0.006	0.023	0.018	0.040	3.1	2 180	—
W3203SA-1P-C5Z5	250	301	365	400	515	Ⅱ	–0.009	0.025	0.020	0.050	3.7	2 180	—
W3204SA-1P-C5Z5	350	401	465	500	615	Ⅱ	–0.011	0.027	0.020	0.050	4.2	2 180	—
W3205SA-1P-C5Z5	450	501	565	600	715	Ⅱ	–0.014	0.030	0.023	0.060	4.8	2 180	—
W3206SA-1P-C5Z5	550	601	665	700	857	Ⅰ	–0.016	0.035	0.025	0.075	5.6	2 180	2 180
W3207SA-1P-C5Z5	650	701	765	800	957	Ⅰ	–0.018	0.035	0.025	0.075	6.1	2 180	2 180
W3209SA-1P-C5Z5	850	901	965	1 000	1 157	Ⅰ	–0.023	0.040	0.027	0.090	7.3	2 180	2 180
W3211SA-1P-C5Z5	1 050	1 101	1 165	1 200	1 357	Ⅰ	–0.028	0.046	0.030	0.120	8.5	2 180	2 180
W3214SA-1P-C5Z5	1 350	1 401	1 465	1 500	1 657	Ⅰ	–0.035	0.054	0.035	0.150	10.2	2 100	2 180

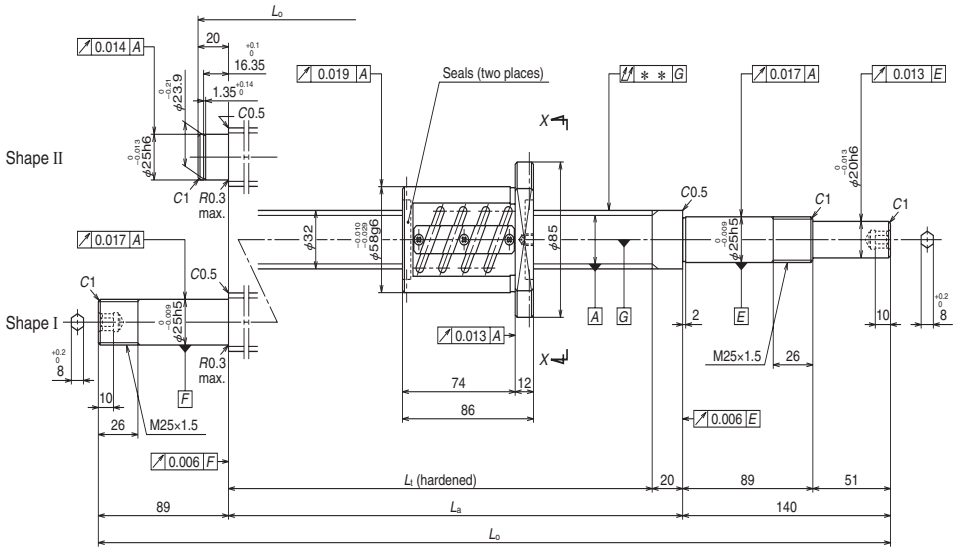Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -9 mm when Fixed-Fixed is used for left shaft end shape Ⅰ.




NSK

Screw shaft ø32

Lead 5

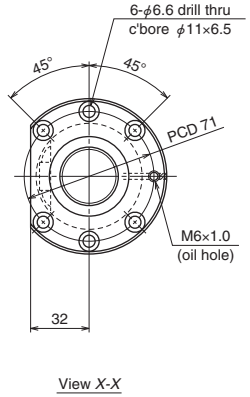Unit: mm



View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		32 × 5 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		3.175 / 32.5
Screw shaft root diameter		29.2
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	21 800
	Static C_{0a}	56 000
Preload (N)		1 270
Dynamic friction torque, median, (N·cm)		23.5
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		10
Standard volume of grease replenishing (cm^3)		5

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK25DF-31H (round)


SA

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W3202SA-2Z-C5Z5	150	186	280	300	460
W3203SA-2Z-C5Z5	250	286	380	400	560
W3204SA-2Z-C5Z5	350	386	480	500	660
W3205SA-2Z-C5Z5	450	486	580	600	760
W3206SA-2Z-C5Z5	550	586	680	700	929
W3207SA-2Z-C5Z5	650	686	780	800	1 029
W3209SA-2Z-C5Z5	850	886	980	1 000	1 229
W3211SA-2Z-C5Z5	1 050	1 086	1 180	1 200	1 429
W3214SA-2Z-C5Z5	1 350	1 386	1 480	1 500	1 729

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.007	0.023	0.018	0.040	3.5	2 180	—
Ⅱ	–0.009	0.025	0.020	0.050	4.1	2 180	—
Ⅱ	–0.012	0.027	0.020	0.060	4.7	2 180	—
Ⅱ	–0.014	0.030	0.023	0.060	5.3	2 180	—
Ⅰ	–0.016	0.035	0.025	0.075	6.1	2 180	2 180
Ⅰ	–0.019	0.035	0.025	0.090	6.7	2 180	2 180
Ⅰ	–0.024	0.040	0.027	0.090	7.9	2 180	2 180
Ⅰ	–0.028	0.046	0.030	0.120	9.0	2 180	2 180
Ⅰ	–0.036	0.054	0.035	0.150	10.8	2 100	2 180

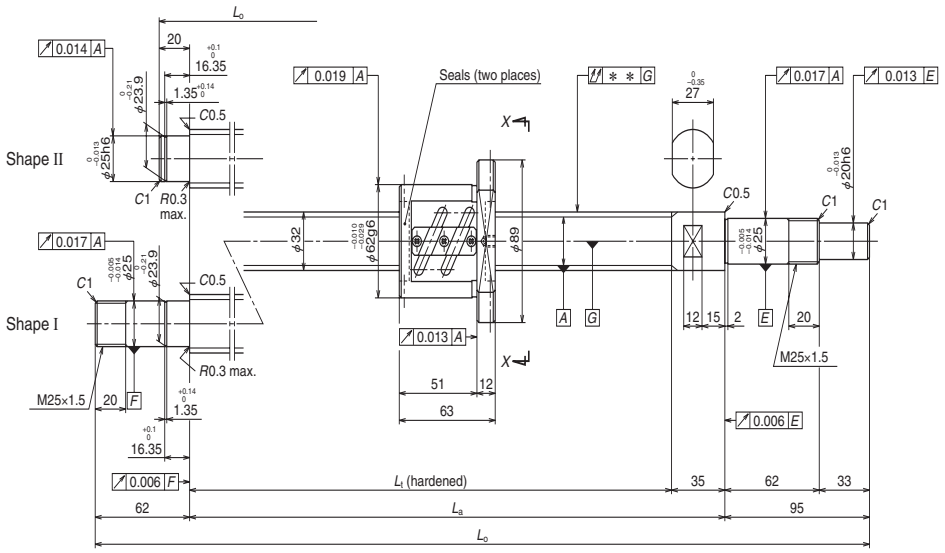Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -9 mm when Fixed-Fixed is used for left shaft end shape Ⅰ.




NSK

Screw shaft ø32

Lead 6

Unit: mm



View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		32 × 6 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		3.969 / 32.5
Screw shaft root diameter		28.4
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	18 300
	Static C_{0a}	34 700
Preload (N)		780
Dynamic friction torque, median, (N·cm)		15.7
Spacer ball		Yes
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		9.5
Standard volume of grease replenishing (cm³)		4.8

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Fixed)	For opposite to drive side (Simple)
WBK25-01W (square)	WBK25-01W (square)	WBK25S-01W (square)
WBK25-11 (round)	WBK25-11 (round)	


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W3203SA-3P-C5Z6	250	294	365	400	515
W3205SA-3P-C5Z6	450	494	565	600	715
W3207SA-3P-C5Z6	650	694	765	800	957
W3209SA-3P-C5Z6	850	894	965	1 000	1 157
W3211SA-3P-C5Z6	1 050	1 094	1 165	1 200	1 357
W3214SA-3P-C5Z6	1 350	1 394	1 465	1 500	1 657

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
						Supporting condition	
	T	e_p	υ_u	↗↗		Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.009	0.025	0.020	0.050	3.8	2 180	—
Ⅱ	–0.014	0.030	0.023	0.060	5.0	2 180	—
Ⅰ	–0.018	0.035	0.025	0.075	6.3	2 180	2 180
Ⅰ	–0.023	0.040	0.027	0.090	7.4	2 180	2 180
Ⅰ	–0.028	0.046	0.030	0.120	8.5	2 180	2 180
Ⅰ	–0.035	0.054	0.035	0.150	10.2	2 050	2 180

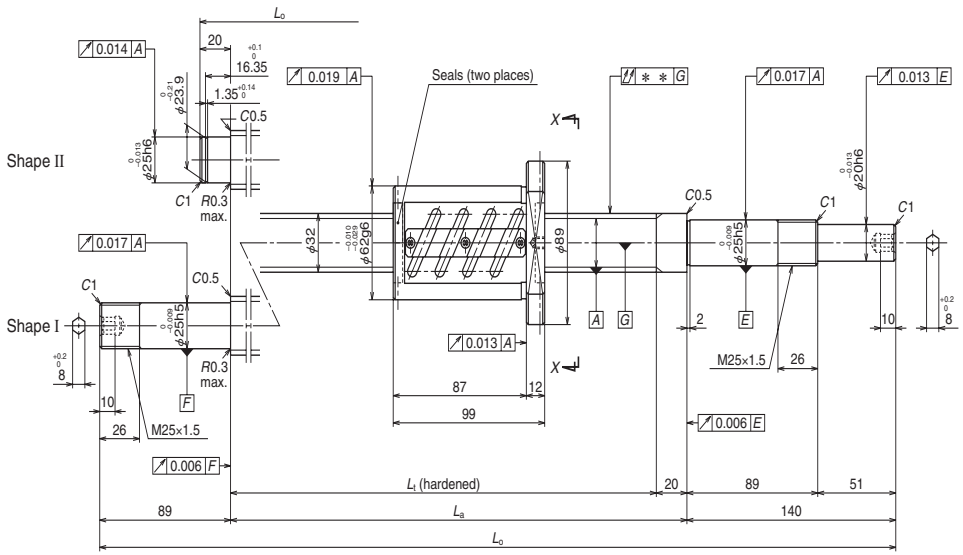Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -9 mm when Fixed-Fixed is used for left shaft end shape Ⅰ.





View *X-X*

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		32 × 6 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		3.969 / 32.5
Screw shaft root diameter		28.4
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	29 100
	Static C_{0a}	69 300
Preload (N)		1 710
Dynamic friction torque, median, (N·cm)		35.0
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		14
Standard volume of grease replenishing (cm^3)		7

Recommended support unit


For drive side, for opposite to drive side (Fixed)
WBK25DF-31H (round)

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W3203SA-4Z-C5Z6	250	273	380	400	560
W3205SA-4Z-C5Z6	450	473	580	600	760
W3207SA-4Z-C5Z6	650	673	780	800	1 029
W3209SA-4Z-C5Z6	850	873	980	1 000	1 229
W3211SA-4Z-C5Z6	1 050	1 073	1 180	1 200	1 429
W3214SA-4Z-C5Z6	1 350	1 373	1 480	1 500	1 729

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.009	0.025	0.020	0.050	4.5	2 180	—
Ⅱ	–0.014	0.030	0.023	0.060	5.6	2 180	—
Ⅰ	–0.019	0.035	0.025	0.090	7.0	2 180	2 180
Ⅰ	–0.024	0.040	0.027	0.090	8.1	2 180	2 180
Ⅰ	–0.028	0.046	0.030	0.120	9.3	2 180	2 180
Ⅰ	–0.036	0.054	0.035	0.150	11.0	2 060	2 180

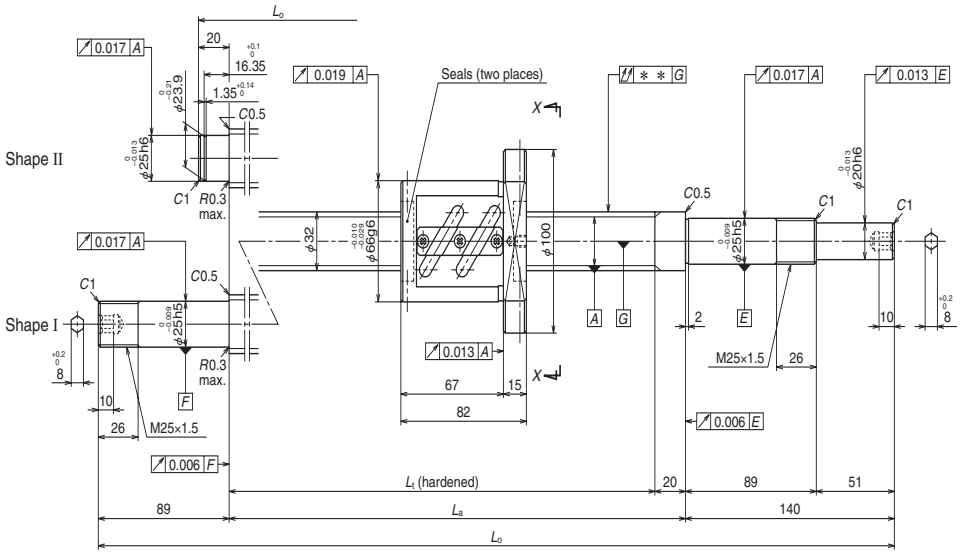Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.



NSK

Screw shaft ø32

Lead 8

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		32 × 8 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		4.762 / 32.5
Screw shaft root diameter		27.5
Effective turns of balls		2.5 × 1
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	20 600
	Static C_{0a}	40 900
Preload (N)		1 320
Dynamic friction torque, median, (N·cm)		31.0
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		13
Standard volume of grease replenishing (cm³)		6.5

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK25DF-31H (round)


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W3203SA-5Z-C5Z8	250	290	380	400	560
W3205SA-5Z-C5Z8	450	490	580	600	760
W3207SA-5Z-C5Z8	650	690	780	800	1 029
W3209SA-5Z-C5Z8	850	890	980	1 000	1 229
W3214SA-5Z-C5Z8	1 350	1 390	1 480	1 500	1 729

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.009	0.025	0.020	0.050	4.7	2 180	—
Ⅱ	–0.014	0.030	0.023	0.060	5.8	2 180	—
Ⅰ	–0.019	0.035	0.025	0.090	7.2	2 180	2 180
Ⅰ	–0.024	0.040	0.027	0.090	8.3	2 180	2 180
Ⅰ	–0.036	0.054	0.035	0.150	11.1	1 960	2 180

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

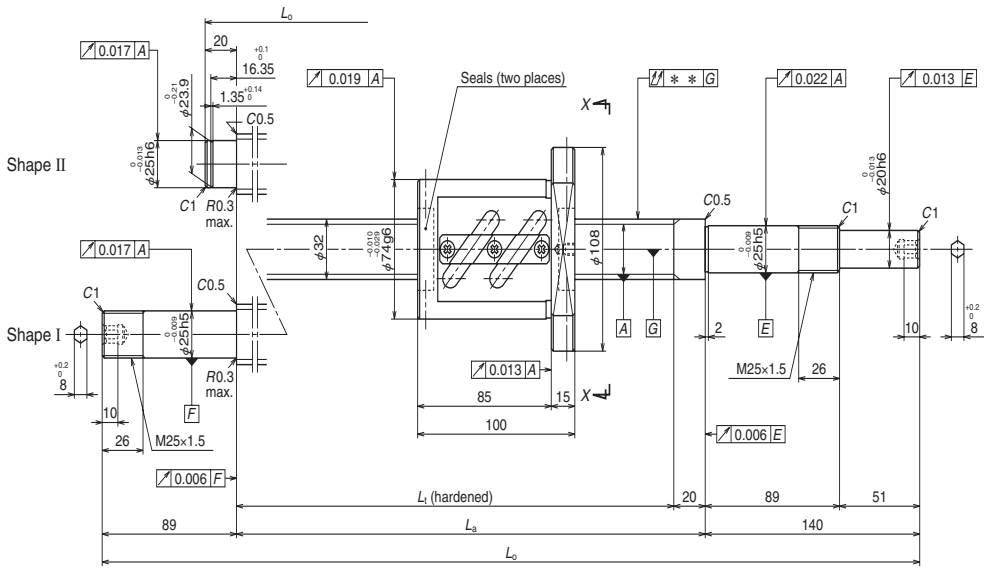SA



Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		32 × 10 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		6.35 / 33
Screw shaft root diameter		26.4
Effective turns of balls		2.5 × 1
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	30 000
	Static C_{0a}	55 100
Preload (N)		1 960
Dynamic friction torque, median, (N·cm)		54.0
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		22
Standard volume of grease replenishing (cm^3)		11

Recommended support unit


For drive side, for opposite to drive side (Fixed)
WBK25DF-31H (round)

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W3203SA-6Z-C5Z10	250	272	380	400	560
W3204SA-3Z-C5Z10	350	372	480	500	660
W3205SA-6Z-C5Z10	450	472	580	600	760
W3206SA-3Z-C5Z10	550	572	680	700	929
W3207SA-6Z-C5Z10	650	672	780	800	1 029
W3209SA-6Z-C5Z10	850	872	980	1 000	1 229
W3211SA-5Z-C5Z10	1 050	1 072	1 180	1 200	1 429
W3214SA-6Z-C5Z10	1 350	1 372	1 480	1 500	1 729
W3217SA-1Z-C5Z10	1 650	1 672	1 780	1 800	2 029

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.009	0.025	0.020	0.050	5.5	2 180	—
Ⅱ	–0.012	0.027	0.020	0.060	6.0	2 180	—
Ⅱ	–0.014	0.030	0.023	0.060	6.6	2 180	—
Ⅰ	–0.016	0.035	0.025	0.075	7.4	2 180	2 180
Ⅰ	–0.019	0.035	0.025	0.090	7.9	2 180	2 180
Ⅰ	–0.024	0.040	0.027	0.090	9.0	2 180	2 180
Ⅰ	–0.028	0.046	0.030	0.120	10.1	2 180	2 180
Ⅰ	–0.036	0.054	0.035	0.150	11.7	1 920	2 180
Ⅰ	–0.043	0.065	0.040	0.200	13.3	1 310	1 810

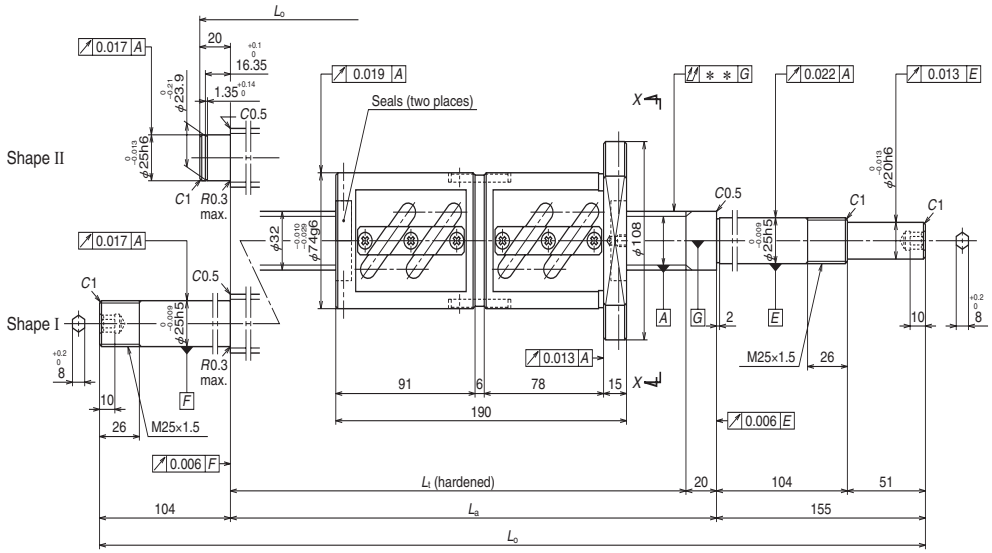Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.




NSK

Screw shaft ø32

Lead 10

Unit: mm



View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		32 × 10 / Right
Preload / Ball recirculation		D-preload / Return tube
Ball dia. / Ball circle dia.		6.35 / 33
Screw shaft root diameter		26.4
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	54 500
	Static C_{0a}	110 000
Preload (N)		3 230
Dynamic friction torque, median, (N·cm)		83.0
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		44
Standard volume of grease replenishing (cm³)		22

Recommended support unit


For drive side, for opposite to drive side (Fixed)
WBK25DFD-31H (round)

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W3203SA-7D-C5Z10	150	182	380	400	575
W3204SA-4D-C5Z10	250	282	480	500	675
W3205SA-7D-C5Z10	350	382	580	600	775
W3206SA-4D-C5Z10	450	482	680	700	959
W3207SA-7D-C5Z10	550	582	780	800	1 059
W3209SA-7D-C5Z10	750	782	980	1 000	1 259
W3211SA-6D-C5Z10	950	982	1 180	1 200	1 459
W3214SA-7D-C5Z10	1 250	1 282	1 480	1 500	1 759
W3217SA-2D-C5Z10	1 550	1 582	1 780	1 800	2 059

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.009	0.025	0.020	0.050	7.5	2 180	—
Ⅱ	–0.012	0.027	0.020	0.060	8.1	2 180	—
Ⅱ	–0.014	0.030	0.023	0.060	8.6	2 180	—
Ⅰ	–0.016	0.035	0.025	0.075	9.5	2 180	2 180
Ⅰ	–0.019	0.035	0.025	0.090	10.0	2 180	2 180
Ⅰ	–0.024	0.040	0.027	0.120	11.1	2 180	2 180
Ⅰ	–0.028	0.046	0.030	0.120	12.2	2 180	2 180
Ⅰ	–0.036	0.054	0.035	0.150	13.8	2 050	2 180
Ⅰ	–0.043	0.065	0.040	0.200	15.4	1 380	1 910

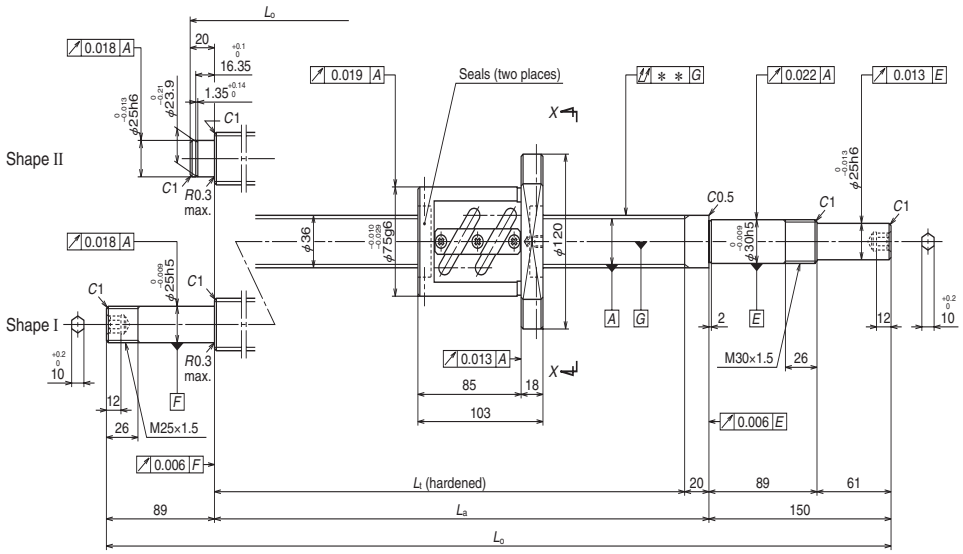Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.




NSK

Screw shaft ø36

Lead 10

Unit: mm



View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		36 × 10 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		6.35 / 37
Screw shaft root diameter		30.4
Effective turns of balls		2.5 × 1
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	32 000
	Static C_{0a}	61 100
Preload (N)		2 060
Dynamic friction torque, median, (N·cm)		59.0
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		32
Standard volume of grease replenishing (cm^3)		16

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK30DF-31H (round)	WBK25DF-31H (round)


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W3604SA-1Z-C5Z10	350	370	480	500	670
W3606SA-1Z-C5Z10	550	570	680	700	870
W3609SA-1Z-C5Z10	850	870	980	1 000	1 239
W3613SA-1Z-C5Z10	1 250	1 270	1 380	1 400	1 639
W3617SA-1Z-C5Z10	1 650	1 670	1 780	1 800	2 039

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.012	0.027	0.020	0.040	7.4	1 940	—
Ⅱ	–0.016	0.035	0.025	0.050	8.8	1 940	—
Ⅰ	–0.024	0.040	0.027	0.065	11.1	1 940	1 940
Ⅰ	–0.033	0.054	0.035	0.100	13.9	1 940	1 940
Ⅰ	–0.043	0.065	0.040	0.130	16.6	1 510	1 940

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

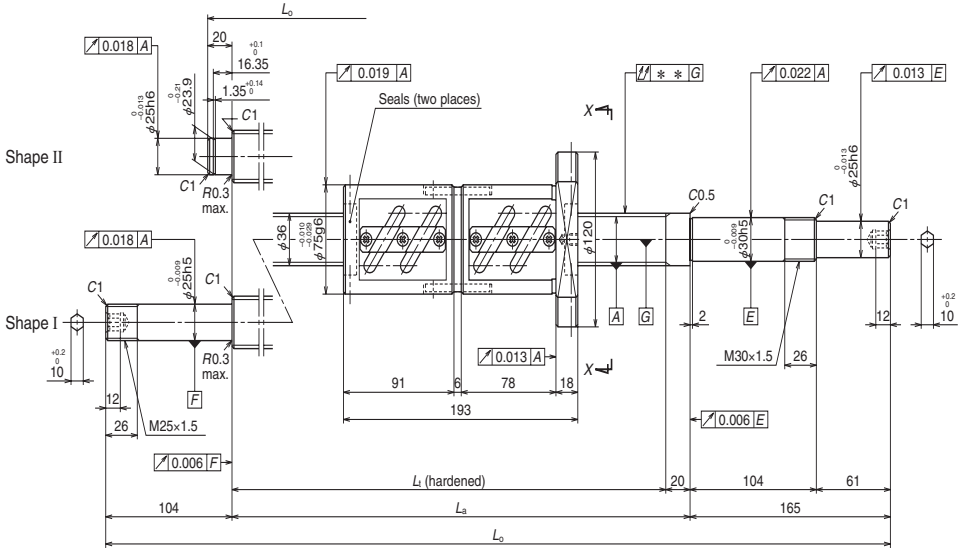SA




NSK

Screw shaft ø36

Lead 10

Unit: mm



View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		36 × 10 / Right
Preload / Ball recirculation		D-preload / Return tube
Ball dia. / Ball circle dia.		6.35 / 37
Screw shaft root diameter		30.4
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	58 000
	Static C_{0a}	122 000
Preload (N)		3 430
Dynamic friction torque, median, (N·cm)		93.0
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		64
Standard volume of grease replenishing (cm³)		27


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Fixed)
WBK30DFD-31H (round)	WBK25DFD-31H (round)

Unit: mm

Ball screw No.	Stroke		Screw shaft length			Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
	Nominal	Maximum	L_t	L_a	L_o		T	e_p	υ_u			Supporting condition	
												Fixed - Simple support	Fixed - Fixed
W3604SA-2D-C5Z10	250	280	480	500	685	Ⅱ	–0.012	0.027	0.020	0.040	9.3	1 940	—
W3606SA-2D-C5Z10	450	480	680	700	885	Ⅱ	–0.016	0.035	0.025	0.050	10.7	1 940	—
W3609SA-2D-C5Z10	750	780	980	1 000	1 269	Ⅰ	–0.024	0.040	0.027	0.080	13.1	1 940	1 940
W3613SA-2D-C5Z10	1 150	1 180	1 380	1 400	1 669	Ⅰ	–0.033	0.054	0.035	0.100	15.9	1 940	1 940
W3617SA-2D-C5Z10	1 550	1 580	1 780	1 800	2 069	Ⅰ	–0.043	0.065	0.040	0.130	18.6	1 600	1 940

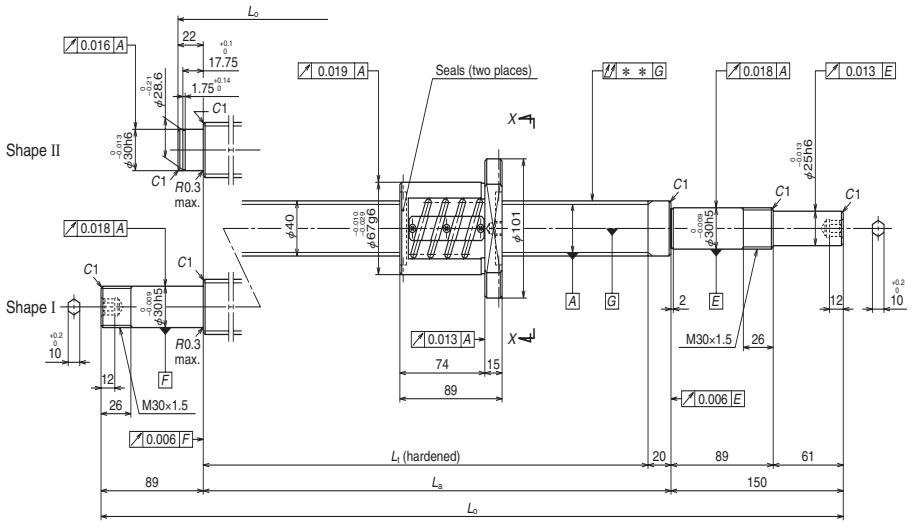Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.




NSK

Screw shaft ø40

Lead 5

Unit: mm



View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		40 × 5 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		3.175 / 40.5
Screw shaft root diameter		37.2
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	23 900
	Static C_{0a}	70 500
Preload (N)		1 420
Dynamic friction torque, median, (N·cm)		29.5
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		14
Standard volume of grease replenishing (cm³)		7

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK30DF-31H (round)

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W4003SA-1Z-C5Z5	250	284	380	400	572
W4005SA-1Z-C5Z5	450	484	580	600	772
W4007SA-1Z-C5Z5	650	684	780	800	1 039
W4009SA-1Z-C5Z5	850	884	980	1 000	1 239
W4011SA-1Z-C5Z5	1 050	1 084	1 180	1 200	1 439
W4015SA-1Z-C5Z5	1 450	1 484	1 580	1 600	1 839

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.009	0.025	0.020	0.035	6.3	1 750	—
Ⅱ	–0.014	0.030	0.023	0.040	8.1	1 750	—
Ⅰ	–0.019	0.035	0.025	0.065	10.3	1 750	1 750
Ⅰ	–0.024	0.040	0.027	0.065	12.2	1 750	1 750
Ⅰ	–0.028	0.046	0.030	0.080	14.0	1 750	1 750
Ⅰ	–0.038	0.054	0.035	0.100	17.7	1 750	1 750


Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.


NSK

Screw shaft ø40

Lead 8

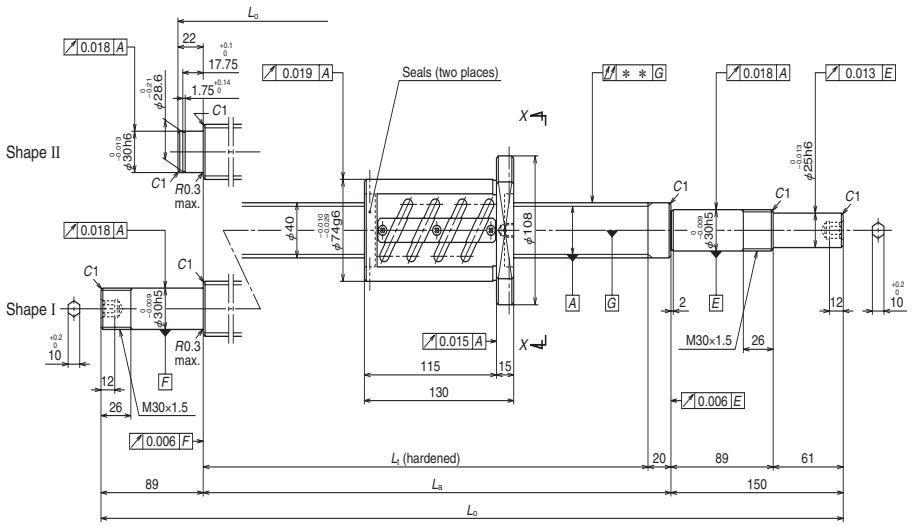Unit: mm





View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		40 × 8 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		4.762 / 40.5
Screw shaft root diameter		35.5
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	41 100
	Static C_{0a}	103 000
Preload (N)		2 450
Dynamic friction torque, median, (N·cm)		64.0
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		27
Standard volume of grease replenishing (cm^3)		14

Recommended support unit


For drive side, for opposite to drive side (Fixed)
WBK30DF-31H (round)


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W4003SA-2Z-C5Z8	200	243	380	400	572
W4005SA-2Z-C5Z8	400	443	580	600	772
W4007SA-2Z-C5Z8	600	643	780	800	1 039
W4009SA-2Z-C5Z8	800	843	980	1 000	1 239
W4011SA-2Z-C5Z8	1 000	1 043	1 180	1 200	1 439
W4015SA-2Z-C5Z8	1 400	1 443	1 580	1 600	1 839

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.009	0.025	0.020	0.035	7.4	1 750	—
Ⅱ	–0.014	0.030	0.023	0.040	9.2	1 750	—
Ⅰ	–0.019	0.035	0.025	0.065	11.3	1 750	1 750
Ⅰ	–0.024	0.040	0.027	0.065	13.1	1 750	1 750
Ⅰ	–0.028	0.046	0.030	0.080	14.9	1 750	1 750
Ⅰ	–0.038	0.054	0.035	0.100	18.5	1 750	1 750

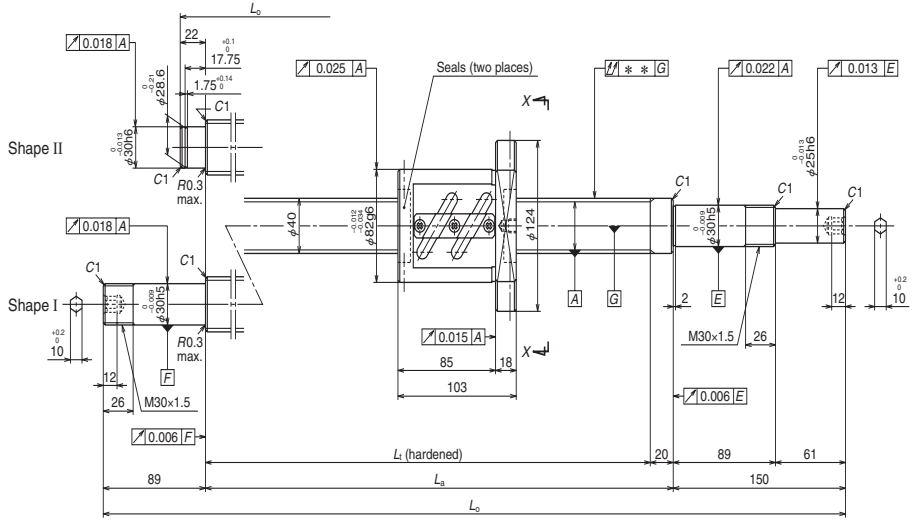Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.





View *X-X*

NSK

Screw shaft ø40

Lead 10

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		40 × 10 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		6.35 / 41
Screw shaft root diameter		34.4
Effective turns of balls		2.5 × 1
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	33 700
	Static C_{0a}	68 300
Preload (N)		2 160
Dynamic friction torque, median, (N·cm)		64.0
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		30
Standard volume of grease replenishing (cm^3)		15

Recommended support unit


For drive side, for opposite to drive side (Fixed)
WBK30DF-31H (round)

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W4004SA-1Z-C5Z10	350	370	480	500	672
W4005SA-3Z-C5Z10	450	470	580	600	772
W4006SA-1Z-C5Z10	550	570	680	700	872
W4007SA-3Z-C5Z10	650	670	780	800	1 039
W4009SA-3Z-C5Z10	850	870	980	1 000	1 239
W4011SA-3Z-C5Z10	1 050	1 070	1 180	1 200	1 439
W4013SA-1Z-C5Z10	1 250	1 270	1 380	1 400	1 639
W4015SA-3Z-C5Z10	1 450	1 470	1 580	1 600	1 839
W4017SA-1Z-C5Z10	1 650	1 670	1 780	1 800	2 039
W4023SA-1Z-C5Z10	2 250	2 270	2 380	2 400	2 639

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.012	0.027	0.020	0.040	8.7	1 750	—
Ⅱ	–0.014	0.030	0.023	0.040	9.6	1 750	—
Ⅱ	–0.016	0.035	0.025	0.050	10.4	1 750	—
Ⅰ	–0.019	0.035	0.025	0.065	11.7	1 750	1 750
Ⅰ	–0.024	0.040	0.027	0.065	13.4	1 750	1 750
Ⅰ	–0.028	0.046	0.030	0.080	15.1	1 750	1 750
Ⅰ	–0.033	0.054	0.035	0.100	16.9	1 750	1 750
Ⅰ	–0.038	0.054	0.035	0.100	18.6	1 750	1 750
Ⅰ	–0.043	0.065	0.040	0.130	20.3	1 710	1 750
Ⅰ	–0.057	0.077	0.046	0.170	25.5	940	1 320

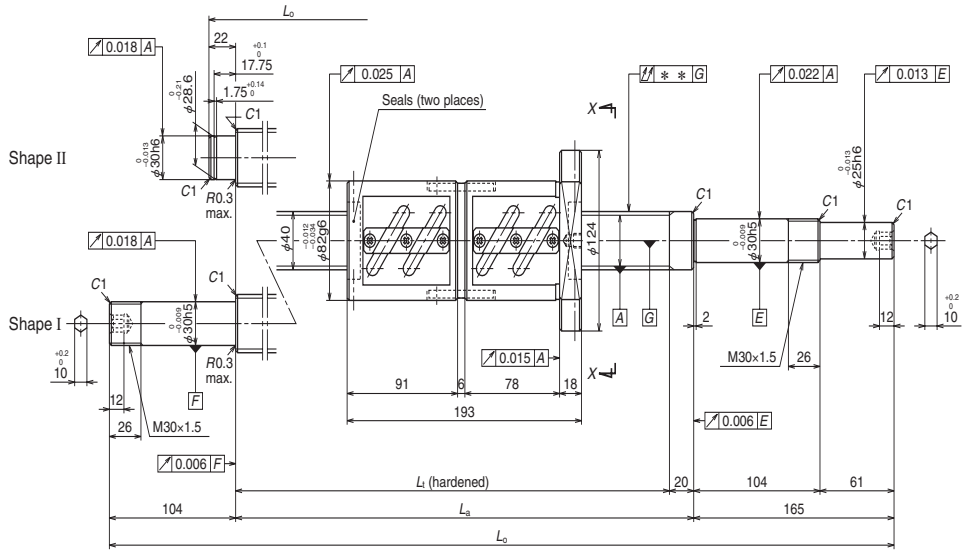Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.




NSK

Screw shaft ø40

Lead 10

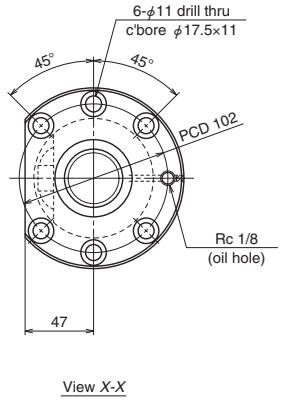Unit: mm



Ball screw specifications		
Shaft dia. × Lead / Direction of turn		40 × 10 / Right
Preload / Ball recirculation		D-preload / Return tube
Ball dia. / Ball circle dia.		6.35 / 41
Screw shaft root diameter		34.4
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	61 200
	Static C_{0a}	137 000
Preload (N)		3 630
Dynamic friction torque, median, (N·cm)		108
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		59
Standard volume of grease replenishing (cm^3)		30

Recommended support unit


For drive side, for opposite to drive side (Fixed)
WBK30DFD-31H (round)


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W4004SA-2D-C5Z10	250	280	480	500	687
W4005SA-4D-C5Z10	350	380	580	600	787
W4006SA-2D-C5Z10	450	480	680	700	887
W4007SA-4D-C5Z10	550	580	780	800	1 069
W4009SA-4D-C5Z10	750	780	980	1 000	1 269
W4011SA-4D-C5Z10	950	980	1 180	1 200	1 469
W4013SA-2D-C5Z10	1 150	1 180	1 380	1 400	1 669
W4015SA-4D-C5Z10	1 350	1 380	1 580	1 600	1 869
W4017SA-2D-C5Z10	1 550	1 580	1 780	1 800	2 069
W4023SA-2D-C5Z10	2 150	2 180	2 380	2 400	2 669

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
						Supporting condition	
	T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
Ⅱ	–0.012	0.027	0.020	0.040	11.0	1 750	—
Ⅱ	–0.014	0.030	0.023	0.040	11.9	1 750	—
Ⅱ	–0.016	0.035	0.025	0.050	12.7	1 750	—
Ⅰ	–0.019	0.035	0.025	0.065	14.1	1 750	1 750
Ⅰ	–0.024	0.040	0.027	0.080	15.8	1 750	1 750
Ⅰ	–0.028	0.046	0.030	0.080	17.5	1 750	1 750
Ⅰ	–0.033	0.054	0.035	0.100	19.3	1 750	1 750
Ⅰ	–0.038	0.054	0.035	0.100	21.0	1 750	1 750
Ⅰ	–0.043	0.065	0.040	0.130	22.7	1 750	1 750
Ⅰ	–0.057	0.077	0.046	0.170	27.9	980	1 370

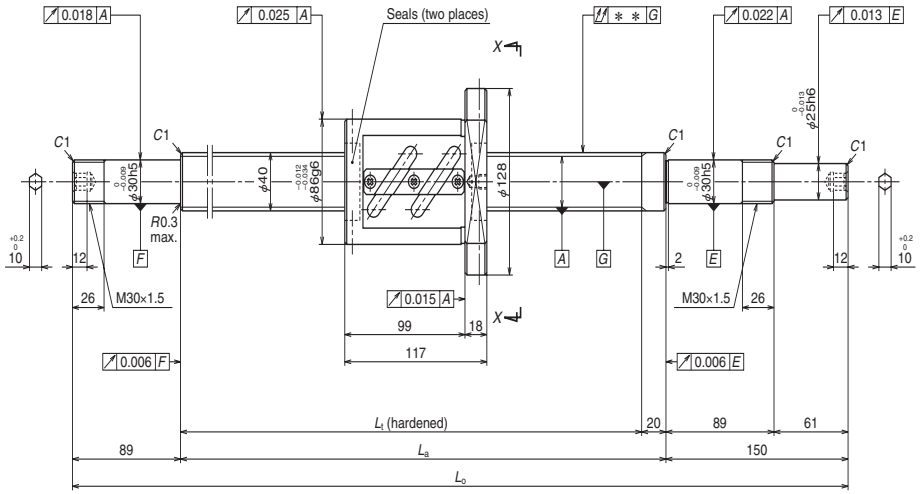Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.





View *X-X*

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		40 × 12 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		7.144 / 41.5
Screw shaft root diameter		34.1
Effective turns of balls		2.5 × 1
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	39 500
	Static C_{0a}	77 200
Preload (N)		2 550
Dynamic friction torque, median, (N·cm)		83.0
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		33
Standard volume of grease replenishing (cm^3)		17

Recommended support unit


For drive side, for opposite to drive side (Fixed)
WBK30DF-31H (round)


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W4006SA-3Z-C5Z12	500	556	680	700	939
W4009SA-5Z-C5Z12	800	856	980	1 000	1 239
W4013SA-3Z-C5Z12	1 200	1 256	1 380	1 400	1 639
W4017SA-3Z-C5Z12	1 600	1 656	1 780	1 800	2 039
W4024SA-1Z-C5Z12	2 300	2 356	2 480	2 500	2 739

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
					Supporting condition	
T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
–0.016	0.035	0.025	0.050	11.6	1 750	1 750
–0.024	0.040	0.027	0.065	14.2	1 750	1 750
–0.033	0.054	0.035	0.100	17.7	1 750	1 750
–0.043	0.065	0.040	0.130	21.2	1 710	1 750
–0.060	0.077	0.046	0.170	27.2	870	1 210

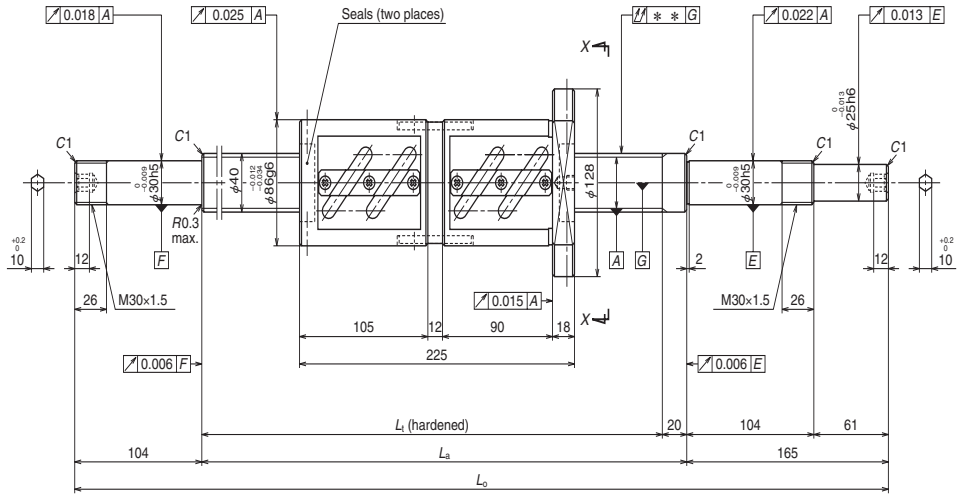Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.





View *X-X*

NSK

Screw shaft ø40

Lead 12

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		40 × 12 / Right
Preload / Ball recirculation		D-preload / Return tube
Ball dia. / Ball circle dia.		7.144 / 41.5
Screw shaft root diameter		34.1
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	71 700
	Static C_{0a}	154 000
Preload (N)		4 310
Dynamic friction torque, median, (N·cm)		137
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		76
Standard volume of grease replenishing (cm^3)		38

Recommended support unit


For drive side, for opposite to drive side (Fixed)
WBK30DFD-31H (round)


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W4006SA-4D-C5Z12	400	448	680	700	969
W4009SA-6D-C5Z12	700	748	980	1 000	1 269
W4013SA-4D-C5Z12	1 100	1 148	1 380	1 400	1 669
W4017SA-4D-C5Z12	1 500	1 548	1 780	1 800	2 069
W4024SA-2D-C5Z12	2 200	2 248	2 480	2 500	2 769

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
					Supporting condition	
T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
–0.016	0.035	0.025	0.050	14.8	1 750	1 750
–0.024	0.040	0.027	0.080	17.4	1 750	1 750
–0.033	0.054	0.035	0.100	20.9	1 750	1 750
–0.043	0.065	0.040	0.130	24.3	1 750	1 750
–0.060	0.077	0.046	0.170	30.4	910	1 270

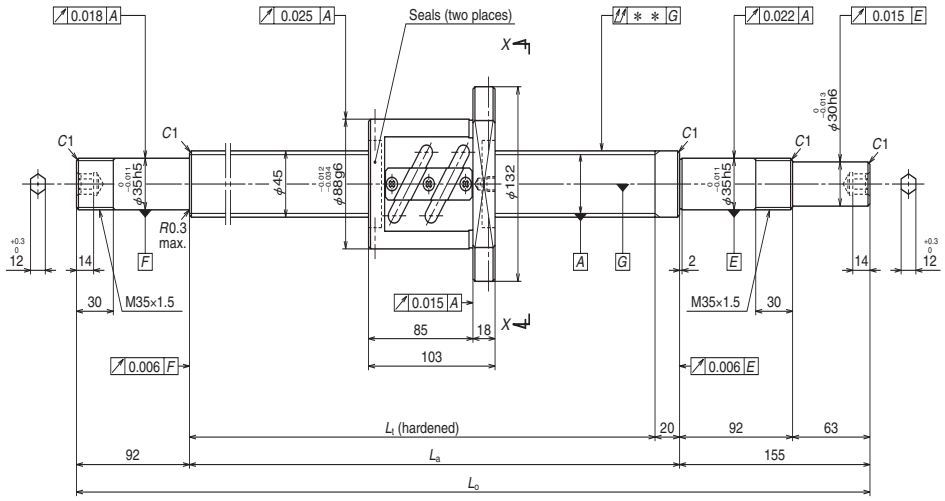Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.





View *X-X*

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W4506SA-1Z-C5Z10	550	568	680	700	947
W4509SA-1Z-C5Z10	850	868	980	1 000	1 247
W4513SA-1Z-C5Z10	1 250	1 268	1 380	1 400	1 647
W4517SA-1Z-C5Z10	1 650	1 668	1 780	1 800	2 047
W4524SA-1Z-C5Z10	2 350	2 368	2 480	2 500	2 747

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

NSK

Screw shaft ø45

Lead 10

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		45 × 10 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		6.35 / 46
Screw shaft root diameter		39.4
Effective turns of balls		2.5 × 1
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	36 300
	Static C_{0a}	78 500
Preload (N)		2 260
Dynamic friction torque, median, (N·cm)		69.0
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		33
Standard volume of grease replenishing (cm^3)		17


Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK35DF-31H (round)

Unit: mm

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
					Supporting condition	
T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
–0.016	0.035	0.025	0.050	13.4	1 550	1 550
–0.024	0.040	0.027	0.065	16.7	1 550	1 550
–0.033	0.054	0.035	0.100	21.2	1 550	1 550
–0.043	0.065	0.040	0.130	25.6	1 550	1 550
–0.060	0.077	0.046	0.170	33.4	990	1 390

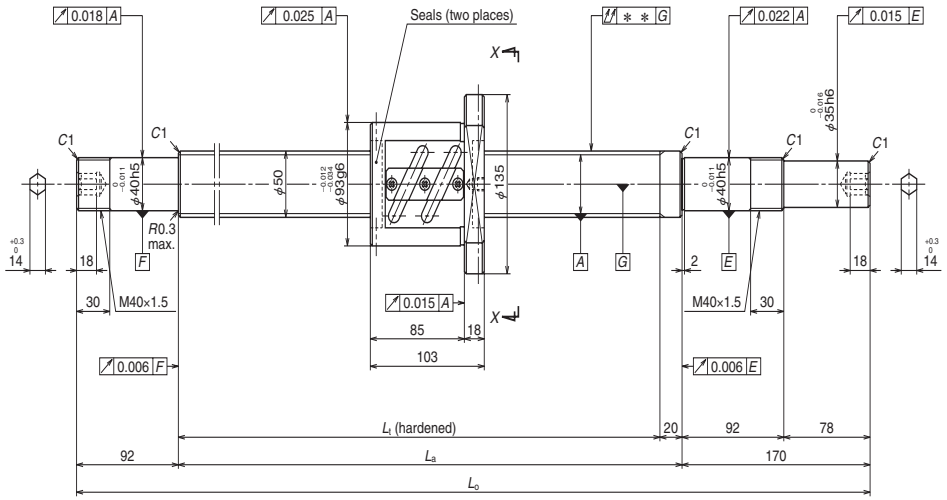SA




NSK

Screw shaft ø50

Lead 10

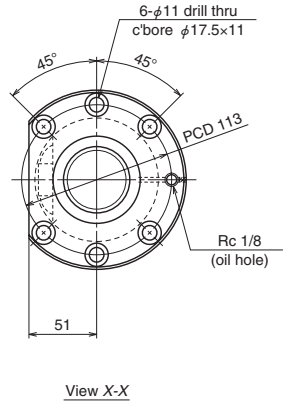Unit: mm



View *X-X*

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		50 × 10 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		6.35 / 51
Screw shaft root diameter		44.4
Effective turns of balls		2.5 × 1
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	37 500
	Static C_{0a}	87 200
Preload (N)		2 450
Dynamic friction torque, median, (N·cm)		79.0
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm³)		37
Standard volume of grease replenishing (cm³)		19

Recommended support unit


For drive side, for opposite to drive side (Fixed)
WBK40DF-31H (round)


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W5005SA-1Z-C5Z10	450	468	580	600	862
W5007SA-1Z-C5Z10	650	668	780	800	1 062
W5009SA-1Z-C5Z10	850	868	980	1 000	1 262
W5011SA-1Z-C5Z10	1 050	1 068	1 180	1 200	1 462
W5014SA-1Z-C5Z10	1 350	1 368	1 480	1 500	1 762
W5019SA-1Z-C5Z10	1 850	1 868	1 980	2 000	2 262
W5025SA-1Z-C5Z10	2 450	2 468	2 580	2 600	2 862

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)	
					Supporting condition	
T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
–0.014	0.030	0.023	0.050	14.8	1 400	1 400
–0.019	0.035	0.025	0.065	17.6	1 400	1 400
–0.024	0.040	0.027	0.080	20.3	1 400	1 400
–0.028	0.046	0.030	0.080	23.1	1 400	1 400
–0.036	0.054	0.035	0.100	27.3	1 400	1 400
–0.048	0.065	0.040	0.130	34.2	1 400	1 400
–0.062	0.093	0.054	0.170	42.5	1 030	1 400

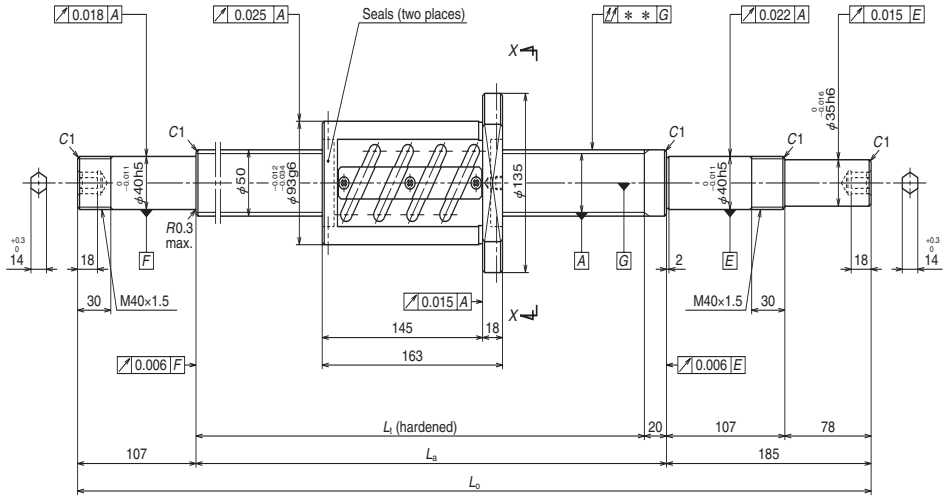Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.





View X-X

NSK

Screw shaft ø50

Lead 10

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		50 × 10 / Right
Preload / Ball recirculation		Z-preload / Return tube
Ball dia. / Ball circle dia.		6.35 / 51
Screw shaft root diameter		44.4
Effective turns of balls		2.5 × 2
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	68 100
	Static C_{0a}	174 000
Preload (N)		4 020
Dynamic friction torque, median, (N·cm)		137
Spacer ball		None
Factory-packed grease		**Refer to Notes 2.**
Internal spatial volume of nut (cm^3)		59
Standard volume of grease replenishing (cm^3)		30

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK40DFD-31H (round)

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W5005SA-2Z-C5Z10	350	408	580	600	892
W5007SA-2Z-C5Z10	550	608	780	800	1 092
W5009SA-2Z-C5Z10	750	808	980	1 000	1 292
W5011SA-2Z-C5Z10	950	1 008	1 180	1 200	1 492
W5014SA-2Z-C5Z10	1 250	1 308	1 480	1 500	1 792
W5019SA-2Z-C5Z10	1 750	1 808	1 980	2 000	2 292
W5025SA-2Z-C5Z10	2 350	2 408	2 580	2 600	2 892

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})	
					Supporting condition	
T	e_p	υ_u			Fixed - Simple support	Fixed - Fixed
–0.014	0.030	0.023	0.050	16.8	1 400	1 400
–0.019	0.035	0.025	0.065	19.6	1 400	1 400
–0.024	0.040	0.027	0.080	22.3	1 400	1 400
–0.028	0.046	0.030	0.080	25.1	1 400	1 400
–0.036	0.054	0.035	0.100	29.3	1 400	1 400
–0.048	0.065	0.040	0.130	36.2	1 400	1 400
–0.062	0.093	0.054	0.170	44.6	1 060	1 400

Notes: 1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

B-3-1.4 Finished Shaft End Ball Screws Made of Stainless Steel KA Type

1. Order of the dimension tables

The tables begin with the smallest shaft diameter ball screw, and proceeds to larger sizes. If ball screws have the same shaft diameter, those with smaller leads appear first. Page numbers of shaft diameter and lead combinations are shown in **Table 1.**

2. Dimension tables

The dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

●Stroke

Nominal stroke : A reference for your use.

Maximum stroke : The stroke limit that the nut can move.

●Lead accuracy

Lead accuracy is C3 and C5 grades.

T : Travel compensation

e_p : Tolerance on specified travel

υ_u : Travel variation

See "Technical Description: Lead Accuracy" (page B37) for details of the codes.

●Permissible rotational speed

d • n : Limited by the relative peripheral speed between screw shaft and nut.

Critical speed : Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.

The lower of the two criteria, the d·n and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).

3. Material

A martensitic stainless steel is used. A special heat treatment technology provides the ball groove section with sufficient hardness which produces high load carrying capacity and durability.

4. Other

Seal of the ball screw, ball recirculating deflector, and end cap are made of synthetic resin. Consult NSK when using the ball screws under extreme environments or special environments, or using special lubricant or oil.

For special environments, see pages B70 and D2. See pages B67 and D13 for lubricants.

Note: For details of standard stock products, contact NSK.

Table 1 Combinations of screw shaft diameter and lead


Screw shaft diameter (mm) \ Lead (mm)	1	2	4	5	10	20
6	B275					
8	B277	B279				
10		B281	B283			
12		B285		B287	B289	
15					B291	B293
16		B295				
20						B297


NSK

Screw shaft ø6

Lead 1

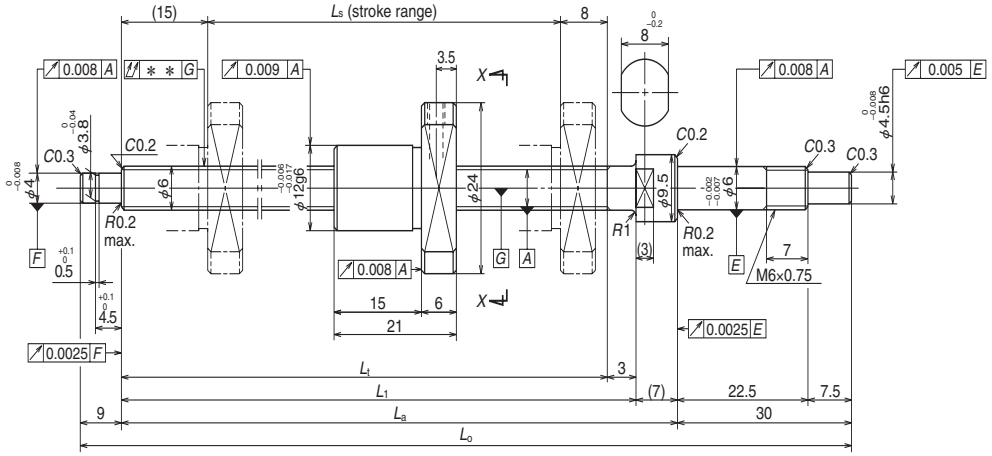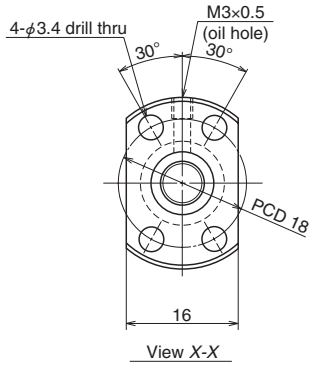Unit: mm





Ball screw specifications		
Shaft dia. x Lead / Direction of turn		6 × 1 / Right
Preload / Ball recirculation		P-preload / Deflector (bridge)
Ball dia. / Ball circle dia.		0.800 / 6.2
Screw shaft root diameter		5.2
Effective turns of balls		1 × 3
Accuracy grade / Preload		C3 / Z
Basic load rating (N)	Dynamic C_a	555
	Static C_{0a}	680
Axial play		0
Preload (N)		24.5
Dynamic friction torque, (N·cm)		1.3 or less
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**


Unit: mm


Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_o
W0601KA-3PY-C3Z1	100	102	125	128	135	174

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})
					Supporting condition
T	e_p	υ_u			Fixed - Simple support
0	0.010	0.008	0.025	0.06	3 000

Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Ball nut does not have seal.
3. Contact NSK if the permissible rotational speed is to be exceeded.

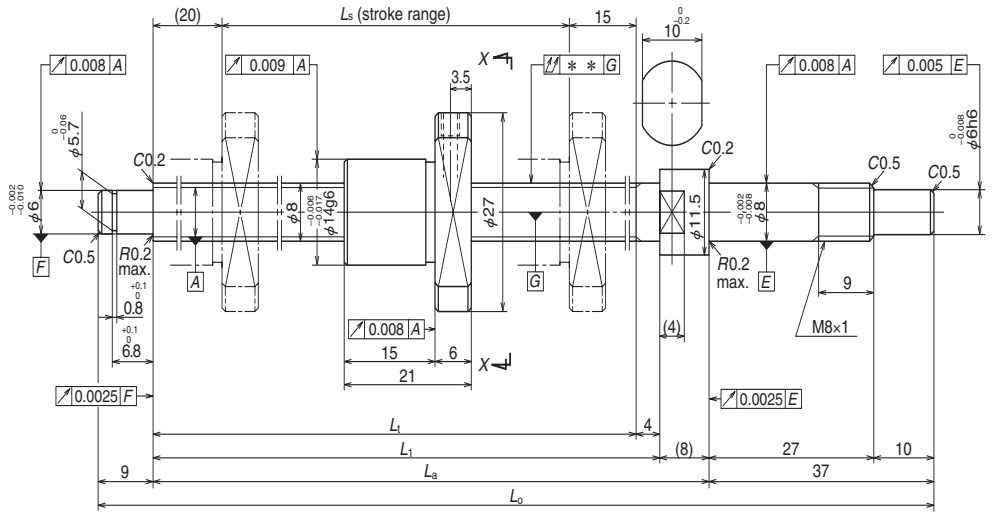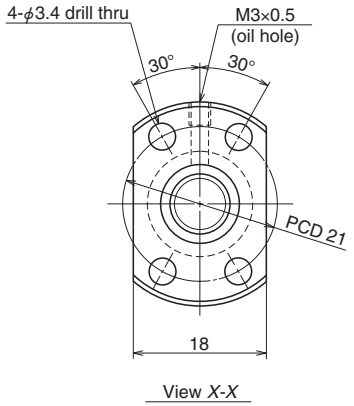KA





NSK

Screw shaft ø8

Lead 1

Unit: mm

Ball screw specifications		
Shaft dia. x Lead / Direction of turn		8 × 1 / Right
Preload / Ball recirculation		P-preload / Deflector (bridge)
Ball dia. / Ball circle dia.		0.800 / 8.2
Screw shaft root diameter		7.2
Effective turns of balls		1 × 3
Accuracy grade / Preload		C3 / Z
Basic load rating (N)	Dynamic C_a	645
	Static C_{0a}	955
Axial play		0
Preload (N)		29.4
Dynamic friction torque, (N·cm)		1.8 or less
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK08-01C (square, clean)	WBK08S-01C (square, clean)
WBK08-11C (round, clean)	


Unit: mm


Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_o
W0802KA-1PY-C3Z1	150	155	190	194	202	248

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
					Supporting condition
T	e_p	υ_u			Fixed - Simple support
0	0.010	0.008	0.035	0.12	3 000

Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Ball nut does not have seal.
3. Contact NSK if the permissible rotational speed is to be exceeded.

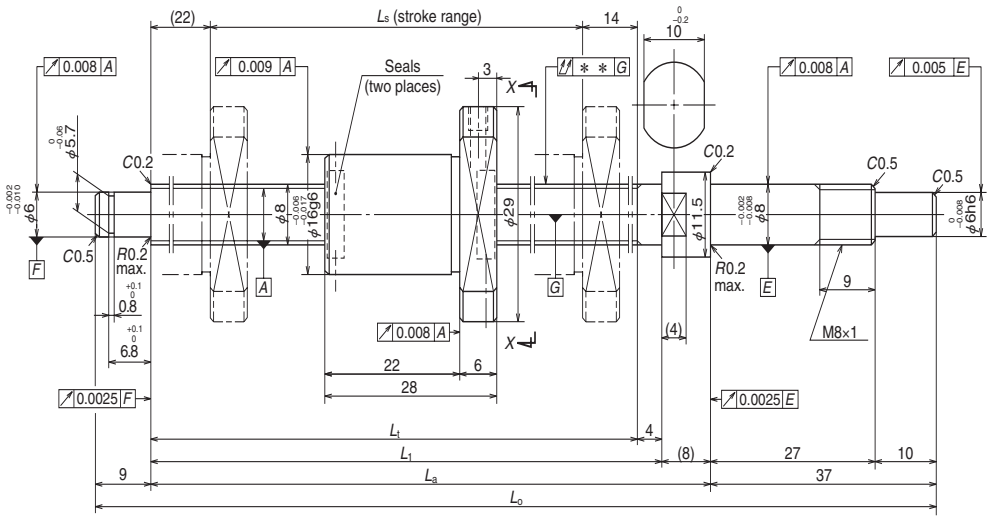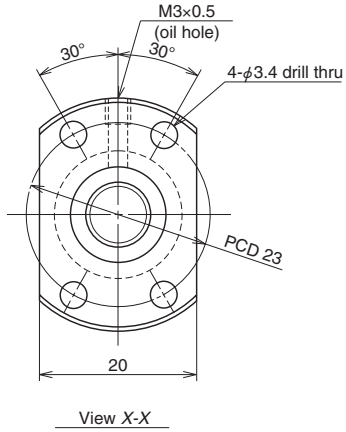KA





View *X-X*

NSK

Screw shaft ø8

Lead 2

Unit: mm

Ball screw specifications		
Shaft dia. x Lead / Direction of turn		8 × 2 / Right
Preload / Ball recirculation		P-preload / Deflector (bridge)
Ball dia. / Ball circle dia.		1.200 / 8.3
Screw shaft root diameter		6.9
Effective turns of balls		1 × 3
Accuracy grade / Preload		C3 / Z
Basic load rating (N)	Dynamic C_a	1 270
	Static C_{0a}	1 630
Axial play		0
Preload (N)		49.0
Dynamic friction torque, (N·cm)		2.0 or less
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**
Internal spatial volume of nut (cm³)		0.34
Standard volume of grease replenishing (cm³)		0.17

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Free)
WBK08-01C (square, clean)	WBK08S-01C (square, clean)
WBK08-11C (round, clean)	


Unit: mm

Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_o
W0802KA-5PY-C3Z2	150	154	190	194	202	248

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
					Supporting condition
T	e_p	υ_u			Fixed - Simple support
0	0.010	0.008	0.035	0.13	3 000

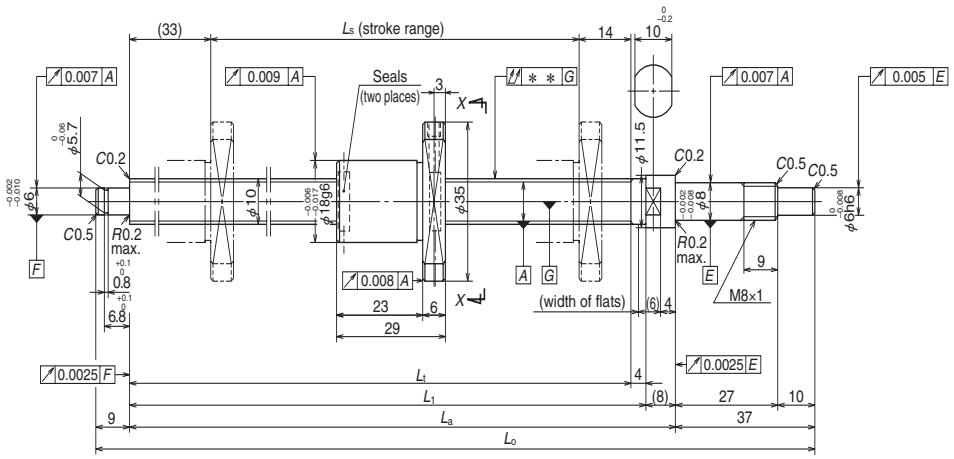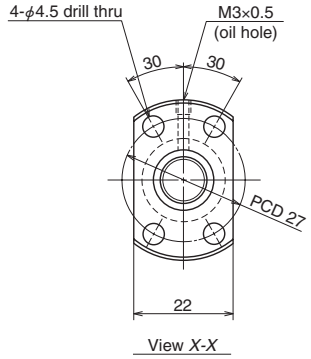Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.





Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		10 × 2 / Right
Preload / Ball recirculation		P-preload / Deflector (bridge)
Ball dia. / Ball circle dia.		1.200 / 10.3
Screw shaft root diameter		8.9
Effective turns of balls		1 × 3
Accuracy grade / Preload		C3 / Z
Basic load rating (N)	Dynamic C_a	1 470
	Static C_{0a}	2 190
Axial play		0
Preload (N)		58.8
Dynamic friction torque, (N·cm)		0.10 – 2.5
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**
Internal spatial volume of nut (cm³)		0.44
Standard volume of grease replenishing (cm³)		0.22

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK08-01C (square, clean)	WBK08S-01C (square, clean)
WBK08-11C (round, clean)	

Unit: mm

Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_o
W1002KA-3PY-C3Z2	200	203	250	254	262	308

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
					Supporting condition
T	e_p	υ_u	↗↗		Fixed - Simple support
0	0.012	0.008	0.030	0.22	3 000


Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.

NSK

Screw shaft ø10

Lead 4

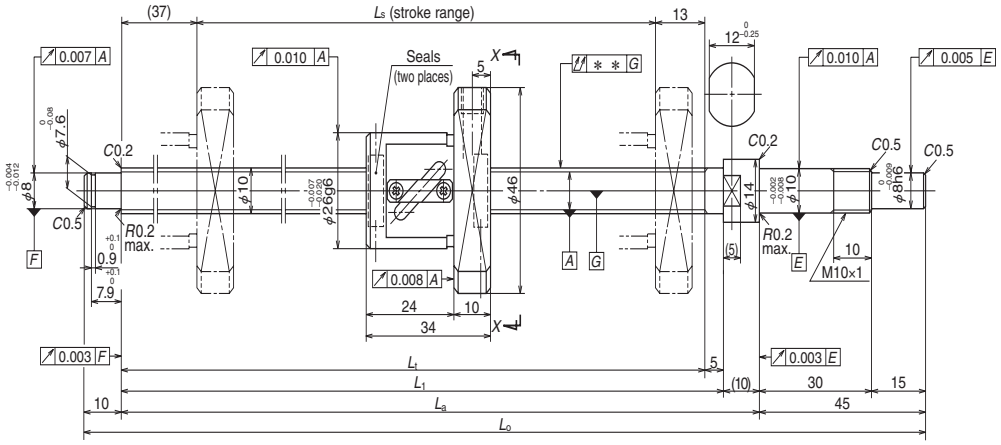Unit: mm



Ball screw specifications		
Shaft dia. × Lead / Direction of turn		10 × 4 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		2.000 / 10.3
Screw shaft root diameter		8.2
Effective turns of balls		2.5 × 1
Accuracy grade / Preload		C3 / Z
Basic load rating (N)	Dynamic C_a	2 630
	Static C_{0a}	3 270
Axial play		0
Preload (N)		98.1
Dynamic friction torque, (N·cm)		0.5 – 3.9
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**
Internal spatial volume of nut (cm³)		0.8
Standard volume of grease replenishing (cm³)		0.4

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK10-01C (square, clean)	WBK10S-01C (square, clean)
WBK10-11C (round, clean)	


Unit: mm


Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_o
W1001KA-3P-C3Z4	100	110	160	165	175	230
W1003KA-3P-C3Z4	300	310	360	365	375	430

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
					Supporting condition
T	e_p	υ_u			Fixed - Simple support
0	0.010	0.008	0.030	0.29	3 000
0	0.013	0.008	0.050	0.39	3 000

Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.

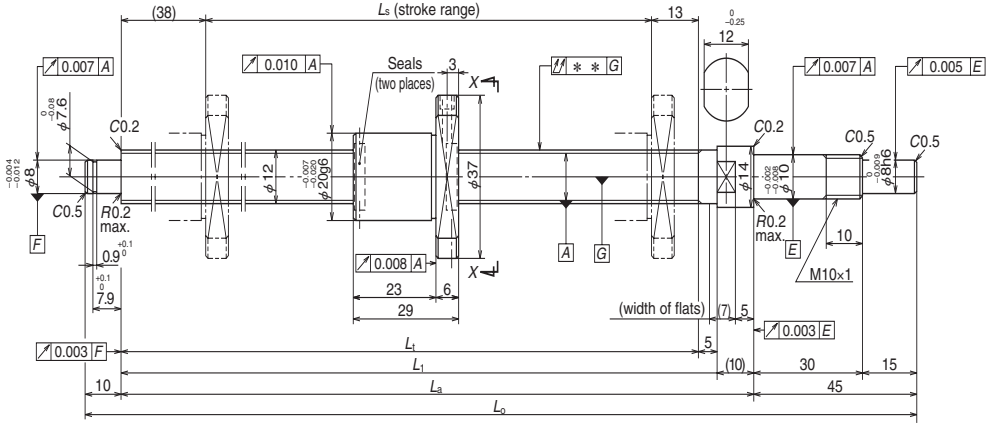KA





NSK

Screw shaft ø12

Lead 2

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn		12 × 2 / Right
Preload / Ball recirculation		P-preload / Deflector (bridge)
Ball dia. / Ball circle dia.		1.200 / 12.3
Screw shaft root diameter		10.9
Effective turns of balls		1 × 3
Accuracy grade / Preload		C3 / Z
Basic load rating (N)	Dynamic C_a	1 600
	Static C_{0a}	2 670
Axial play		0
Preload (N)		98.1
Dynamic friction torque, (N·cm)		0.4 – 3.4
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**
Internal spatial volume of nut (cm³)		0.53
Standard volume of grease replenishing (cm³)		0.27

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK10-01C (square, clean)	WBK10S-01C (square, clean)
WBK10-11C (round, clean)	

KA

Unit: mm

Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_o
W1201KA-3PY-C3Z2	100	109	160	165	175	230
W1203KA-1PY-C3Z2	250	259	310	315	325	380

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
					Supporting condition
T	e_p	υ_u			Fixed - Simple support
0	0.010	0.008	0.030	0.24	3 000
0	0.012	0.008	0.040	0.36	3 000


Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.


NSK

Screw shaft ø12

Lead 5

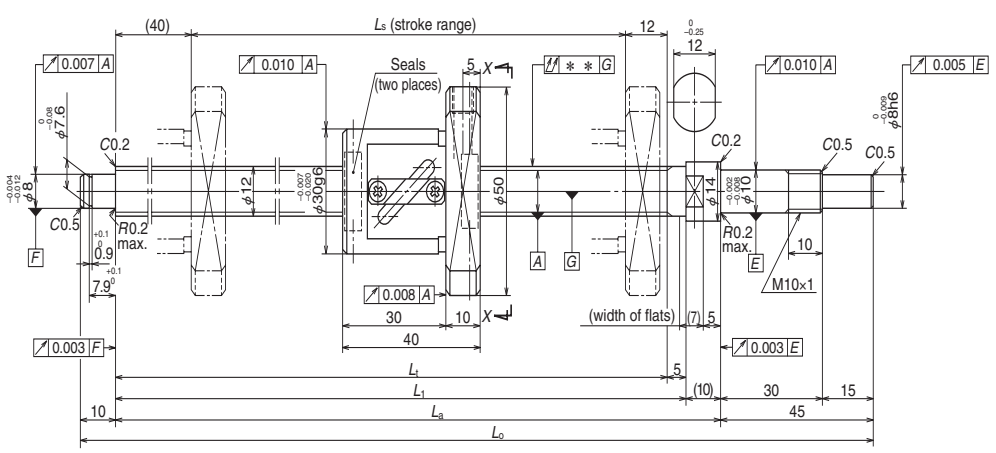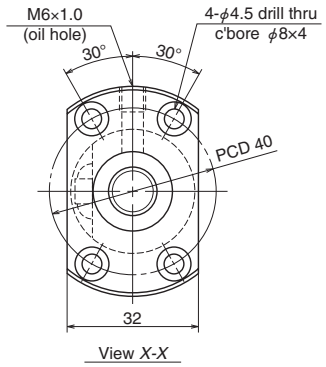Unit: mm





Ball screw specifications		
Shaft dia. x Lead / Direction of turn		12 × 5 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		2.381 / 12.3
Screw shaft root diameter		9.8
Effective turns of balls		2.5 × 1
Accuracy grade / Preload		C3 / Z
Basic load rating (N)	Dynamic C_a	3 590
	Static C_{0a}	4 630
Axial play		0
Preload (N)		98.1
Dynamic friction torque, (N·cm)		1.0 – 4.4
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**
Internal spatial volume of nut (cm^3)		1.2
Standard volume of grease replenishing (cm^3)		0.6

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK10-01C (square, clean)	WBK10S-01C (square, clean)
WBK10-11C (round, clean)	


Unit: mm

Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_o
W1202KA-3P-C3Z5	200	208	260	265	275	330
W1205KA-1P-C3Z5	450	458	510	515	525	580

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})
					Supporting condition
T	e_p	υ_u			Fixed - Simple support
0	0.012	0.008	0.040	0.47	3 000
0	0.016	0.012	0.065	0.66	3 000

Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.

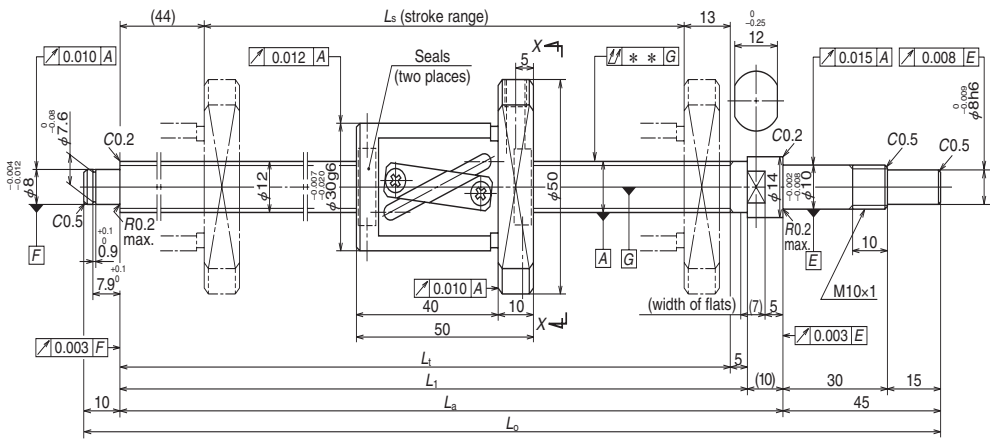KA




NSK

Screw shaft ø12

Lead 10

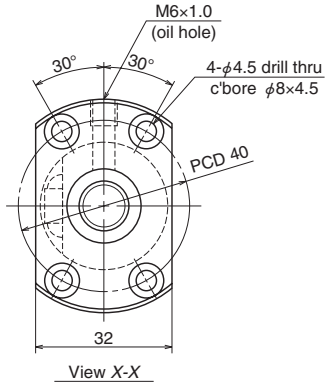Unit: mm



Ball screw specifications		
Shaft dia. x Lead / Direction of turn		12 × 10 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		2.381 / 12.5
Screw shaft root diameter		10.0
Effective turns of balls		2.5 × 1
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	3 620
	Static C_{0a}	4 750
Axial play		0
Preload (N)		98.1
Dynamic friction torque, (N·cm)		1.0 – 4.9
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**
Internal spatial volume of nut (cm³)		1.4
Standard volume of grease replenishing (cm³)		0.7

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK10-01C (square, clean)	WBK10S-01C (square, clean)
WBK10-11C (round, clean)	


KA


Unit: mm

Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_o
W1203KA-3P-C5Z10	250	253	310	315	325	380
W1205KA-3P-C5Z10	450	453	510	515	525	580

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
					Supporting condition
T	e_p	υ_u			Fixed - Simple support
0	0.023	0.018	0.050	0.56	3 000
0	0.030	0.023	0.075	0.72	3 000

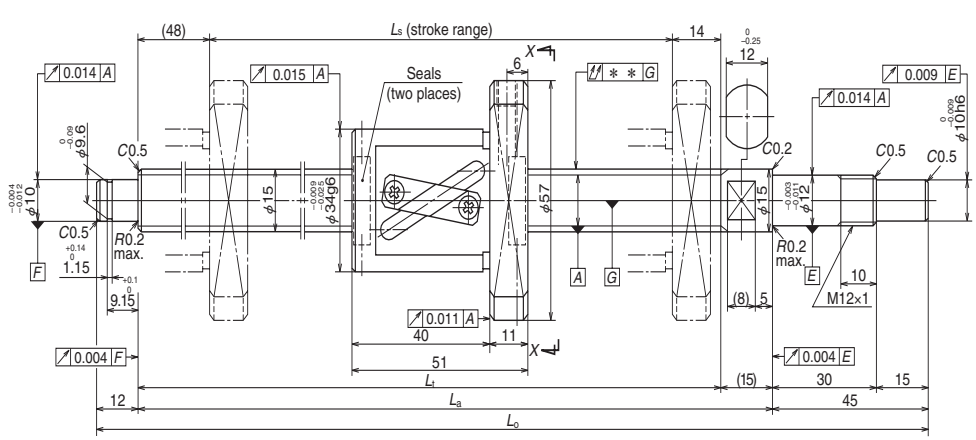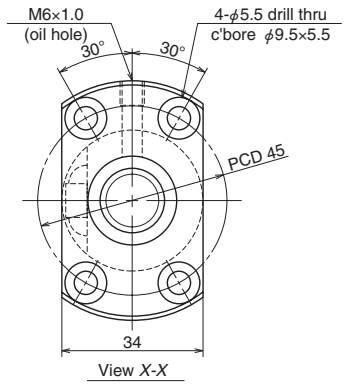Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.





Unit: mm

Ball screw specifications		
Shaft dia. x Lead / Direction of turn		15 × 10 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		3.175 / 15.5
Screw shaft root diameter		12.2
Effective turns of balls		2.5 × 1
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	6 660
	Static C_{0a}	9 480
Axial play		0
Preload (N)		147
Dynamic friction torque, (N·cm)		1.5 – 7.9
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**
Internal spatial volume of nut (cm³)		2.3
Standard volume of grease replenishing (cm³)		1.4

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK12-01C (square, clean)	WBK12S-01C (square, clean)
WBK12-11C (round, clean)	


KA


Unit: mm

Ball screw No.	Stroke L_s		Thread length		
	Nominal	Maximum	L_t	L_a	L_o
W1504KA-3P-C5Z10	400	427	489	504	561
W1506KA-3P-C5Z10	600	627	689	704	761
W1510KA-1P-C5Z10	1 000	1 027	1 089	1 104	1 161

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
					Supporting condition
T	e_p	υ_u			Fixed - Simple support
0	0.027	0.020	0.050	0.99	3 000
0	0.035	0.025	0.065	1.2	3 000
0	0.046	0.030	0.110	1.7	1 610

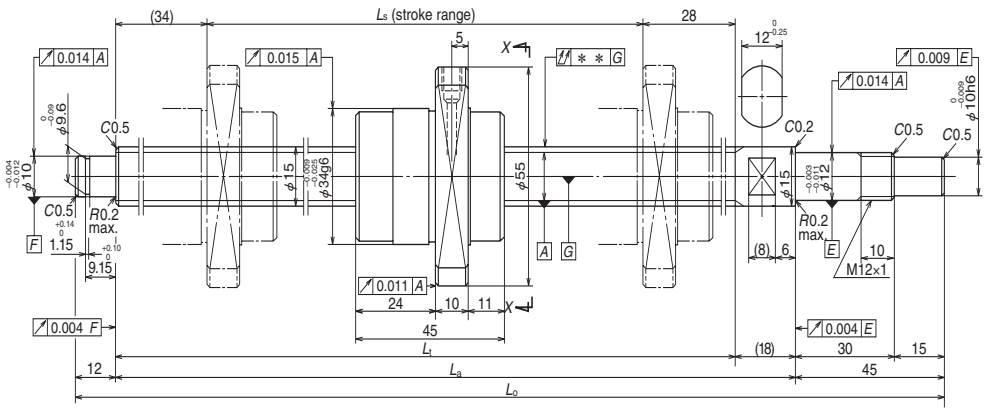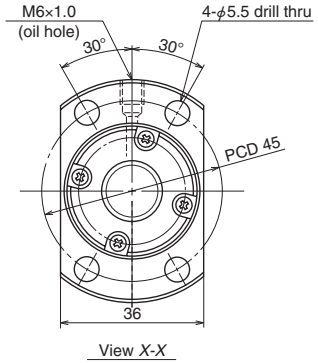Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.





Unit: mm

Ball screw specifications		
Shaft dia. x Lead / Direction of turn		15 × 20 / Right
Preload / Ball recirculation		P-preload / End cap
Ball dia. / Ball circle dia.		3.175 / 15.5
Screw shaft root diameter		12.2
Effective turns of balls		1.7 × 1
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	4 630
	Static C_{0a}	6 430
Axial play		0
Preload (N)		147
Dynamic friction torque, (N·cm)		1.5 – 7.9
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**
Internal spatial volume of nut (cm^3)		1.9
Standard volume of grease replenishing (cm^3)		1.0

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK12-01C (square, clean)	WBK12S-01C (square, clean)
WBK12-11C (round, clean)	

Unit: mm

Ball screw No.	Stroke L_s		Thread length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min^{-1})
	Nominal	Maximum	L_t	L_a	L_o	T	e_P	v_u			Supporting condition: Fixed - Simple support
W1504KA-7PG-C5Z20	400	424	486	504	561	0	0.027	0.020	0.050	1.0	3 000
W1506KA-7PG-C5Z20	600	624	686	704	761	0	0.035	0.025	0.065	1.3	3 000
W1510KA-3PG-C5Z20	1 000	1 024	1 086	1 104	1 161	0	0.046	0.030	0.110	1.8	1 610


Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.


NSK

Screw shaft ø16

Lead 2

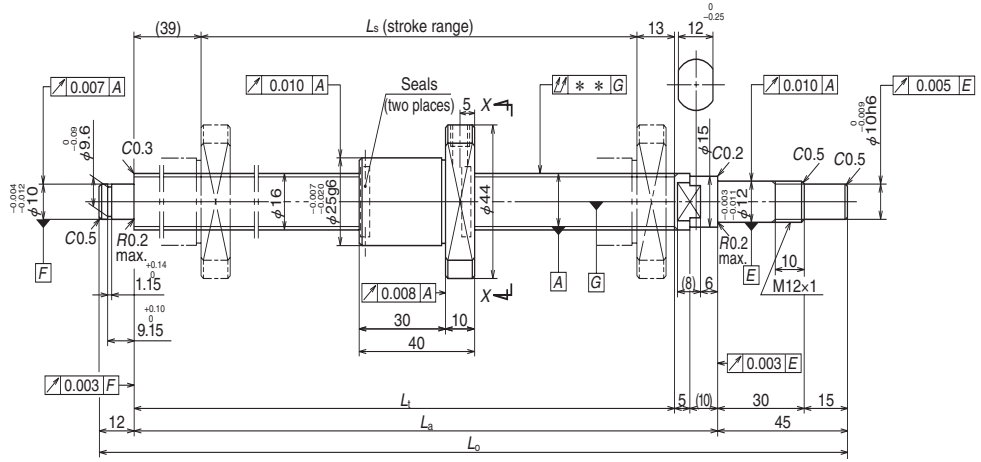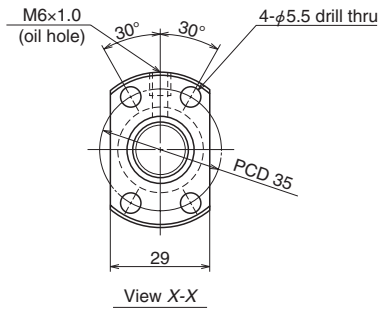Unit: mm





Ball screw specifications		
Shaft dia. x Lead / Direction of turn		16 × 2 / Right
Preload / Ball recirculation		P-preload / Deflector (bridge)
Ball dia. / Ball circle dia.		1.588 / 16.4
Screw shaft root diameter		14.6
Effective turns of balls		1 × 4
Accuracy grade / Preload		C3 / Z
Basic load rating (N)	Dynamic C_a	3 400
	Static C_{0a}	6 240
Axial play		0
Preload (N)		147
Dynamic friction torque, (N·cm)		0.5 – 4.9
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**
Internal spatial volume of nut (cm³)		1.6
Standard volume of grease replenishing (cm³)		0.8

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK12-01C (square, clean)	WBK12S-01C (square, clean)
WBK12-11C (round, clean)	

KA

Unit: mm

Ball screw No.	Stroke L_s		Thread length		
	Nominal	Maximum	L_t	L_a	L_o
W1601KA-3PY-C3Z2	100	137	189	204	261
W1603KA-1PY-C3Z2	300	337	389	404	461

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
					Supporting condition
T	e_p	υ_u			Fixed - Simple support
0	0.010	0.008	0.020	0.46	3 000
0	0.013	0.010	0.035	0.75	3 000


Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.


NSK

Screw shaft ø20

Lead 20

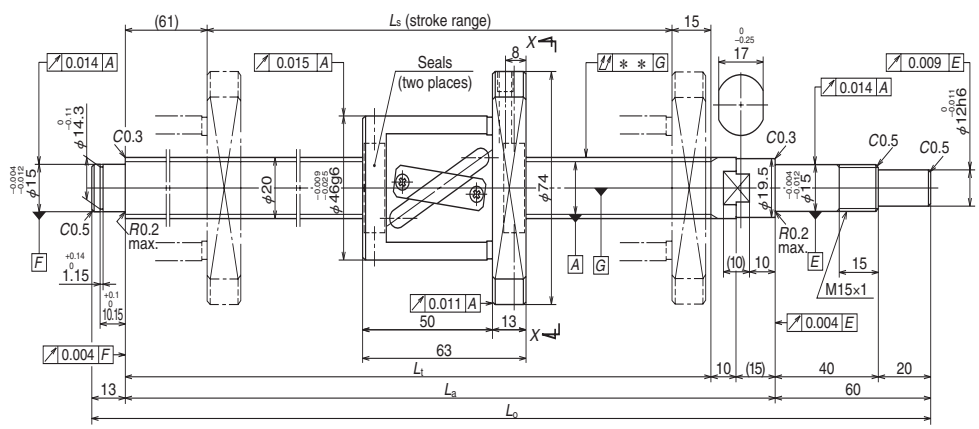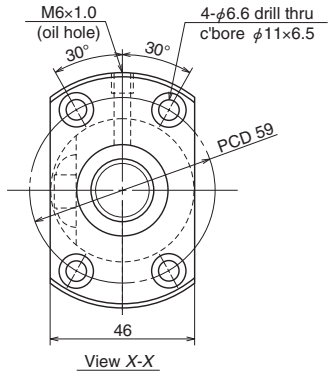Unit: mm





Ball screw specifications		
Shaft dia. x Lead / Direction of turn		20 × 20 / Right
Preload / Ball recirculation		P-preload / Return tube
Ball dia. / Ball circle dia.		3.969 / 21
Screw shaft root diameter		16.9
Effective turns of balls		1.5 × 1
Accuracy grade / Preload		C5 / Z
Basic load rating (N)	Dynamic C_a	6 700
	Static C_{0a}	9 710
Axial play		0
Preload (N)		196
Dynamic friction torque, (N·cm)		2.0 – 11.8
Spacer ball		None
Factory-packed grease		**Refer to Notes 1.**
Internal spatial volume of nut (cm³)		4.2
Standard volume of grease replenishing (cm³)		2.1

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK15-01C (square, clean)	WBK15S-01C (square, clean)
WBK15-11C (round, clean)	

KA

Unit: mm

Ball screw No.	Stroke L_s		Thread length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min⁻¹)
	Nominal	Maximum	L_t	L_a	L_o	T	e_p	υ_u			Supporting condition: Fixed - Simple support
W2005KA-3P-C5Z20	400	434	510	535	608	0	0.030	0.023	0.050	2.0	3 000
W2007KA-3P-C5Z20	600	634	710	735	808	0	0.035	0.025	0.085	2.5	3 000
W2011KA-3P-C5Z20	1 000	1 034	1 110	1 135	1 208	0	0.046	0.030	0.110	3.4	2 160

Notes: **1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.

B-3-1.5 Blank Shaft End MS Type, FS Type, SS Type

1. Order of the dimension tables

The dimension table begins with the smallest shaft diameter of each MS, FS and SS type ball screws, and proceed to larger sizes. If ball screws have the same shaft diameter, those with smaller leads appear first. Page numbers of shaft diameter and lead combinations are shown in the **Table 1.**

2. Dimension tables

The dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

● **Lead accuracy**

Lead accuracy is either C3 or C5 grades.

T : Travel compensation

e_p : Tolerance of specified travel

υ_u : Travel variation

See "Technical Description: Lead Accuracy" (page B37) for details of the codes.

● **Permissible rotational speed**

d • n: Limited by the relative peripheral speed between the screw shaft and the nut.

Critical speed : Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.

Criterion of maximum rotational speed

: 3 000 min^{-1}

The lower of the two criteria, d·n and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).

3. Shaft end processing

MS, FS, and SS types require shaft end processing to your specification. The exclusive support units (page B389) are available to design the bearing seats. See "Configuration of shaft end" (page B27 and following pages) when using a support unit. See "Technical Description: Shaft End Processing" (page B86) for procedures of shaft end processing and precautions.

4. Other

The seals of the ball screw, ball recirculating deflectors and end caps are made of synthetic resin. Consult NSK when using the ball screws under extreme environments or special environments, or using special lubricant or oil.

For special environments, see pages B70 and D2. See pages B67 and D13 for lubricants.


Shaft end appearance, including thread ends, may vary depending on manufacturing.

Note: For details of standard stock products, contact NSK.


Table 1 Combinations of screw shaft diameter and lead

Screw shaft diameter(mm) \ Lead(mm)	1	1.5	2	2.5	4	5	6	8	10	12	16	20	25	32	40	50
4	B301															
6	B301															
8	B301	B303	B303													
10			B303	B305	B309											
12			B305	B305		B309			B309							
14						B311		B311								
15									B311			B313				
16			B307	B307		B315					B315			B313		
20					B321	B321			B315			B315			B313	
25					B323	B323 B325	B323		B325 B327			B317	B317			B317
28						B327 B329	B327 B329									
32						B331 B333 B335	B331 B333	B333	B335 B337 B339				B319	B319		
36									B337 B339							
40						B337		B341	B341 B343 B345	B341 B343						
45									B347							
50									B345 B347							

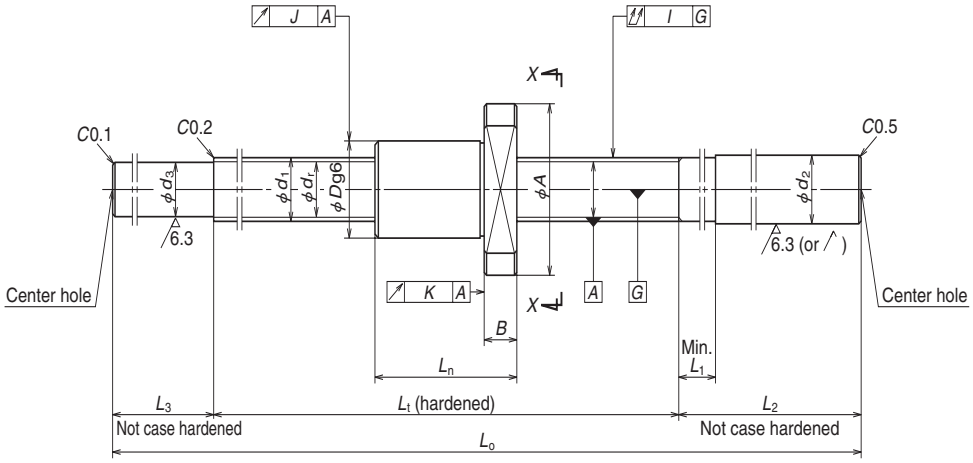Screw shaft ø4, ø6, ø8,
Lead 1



Nut type code: MSFD



View X-X


Unit: mm

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial play Max.	Nut Outside dia. D	Nut Flange A	Nut Flange H	Nut Flange B
W0400MS-1Y-C3T1	68	4	1	0.8	4.2	3.2	2	370	370	0.005	10	20	14	3
W0601MS-1Y-C3T1	110	6	1	0.8	6.2	5.2	3	680	920	0.005	12	24	16	3.5
W0801MS-1Y-C3T1	94	8	1	0.8	8.2	7.2	3	790	1 290	0.005	14	27	18	4
W0802MS-1Y-C3T1	174													


dimensions Overall length L_n	Bolt hole W	Bolt hole X	Screw shaft dimensions Threaded length L_t	Shaft end, right d_2	Shaft end, right L_1	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy T	Lead accuracy Deviation e_p	Lead accuracy Variation v_u	Run-out Shaft straightness I	Run-out Radial run-out J	Run-out Radial run-out K	Mass (kg)	Permissible rotational speed N (min^{-1})
12	15	2.9	80	6.0	4	40	3.3	10	130	0	0.008	0.008	0.030	0.009	0.008	0.026	3 000
15	18	3.4	125	8.0	4	50	5.3	15	190	0	0.010	0.008	0.030	0.009	0.008	0.063	3 000
16	21	3.4	110	10.2	4	60	7.3	25	195	0	0.010	0.008	0.030	0.009	0.008	0.11	3 000
			190						275				0.050			0.14	

Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. Ball nut does not have seal.
4. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

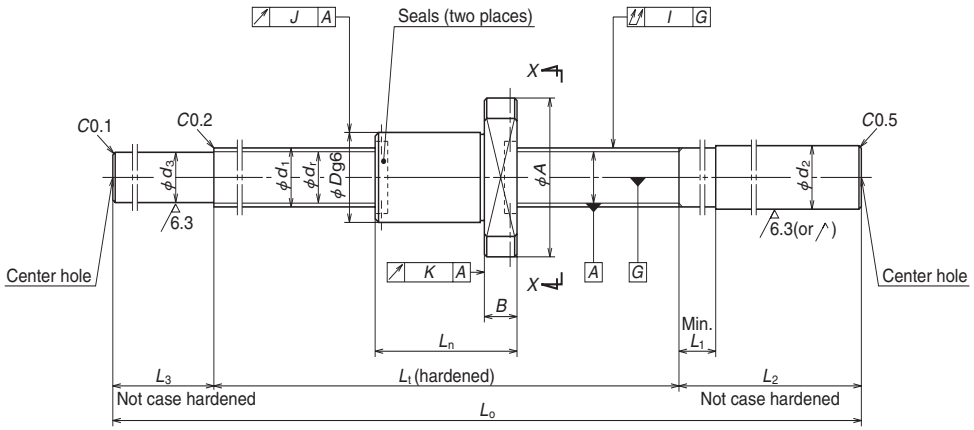Screw shaft ø8
Lead 1.5, 2
Screw shaft ø10
Lead 2



Nut type code: MSFD



View X-X


Unit: mm

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial play Max.	Nut Outside dia. D	Nut Flange A	Nut Flange H	Nut Flange B
W0801MS-2Y-C3T1.5	88	8	1.5	1.0	8.3	7.0	3	1 270	1 970	0.005	15	28	19	4
W0802MS-2Y-C3T1.5	168													
W0801MS-3Y-C3T2	84	8	2	1.2	8.3	6.9	3	1 560	2 200	0.005	16	29	20	4
W0802MS-3Y-C3T2	164													
W1001MS-1Y-C3T2	122	10	2	1.2	10.3	8.9	3	1 800	2 970	0.005	18	35	22	5
W1002MS-1Y-C3T2	222													


dimensions Overall length L_n	Bolt hole W	Bolt hole X	Screw shaft dimensions Threaded length L_t	Shaft end, right d_2	Shaft end, right L_1	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy T	Deviation e_p	Variation v_u	Run-out Shaft straightness I	Run-out Radial run-out J	Run-out Radial run-out K	Mass (kg)	Permissible rotational speed N (min^{-1})
22	22	3.4	110	10.2	4	60	7.2	25	195	0	0.010	0.008	0.030	0.009	0.008	0.12	3 000
			190						275				0.050			0.15	
26	23	3.4	110	10.2	4	60	7.0	25	195	0	0.010	0.008	0.030	0.009	0.008	0.12	3 000
			190						275				0.050			0.15	
28	27	4.5	150	12.2	4	70	9.0	30	250	0	0.010	0.008	0.035	0.009	0.008	0.22	3 000
			250						350		0.012		0.050			0.17	

Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

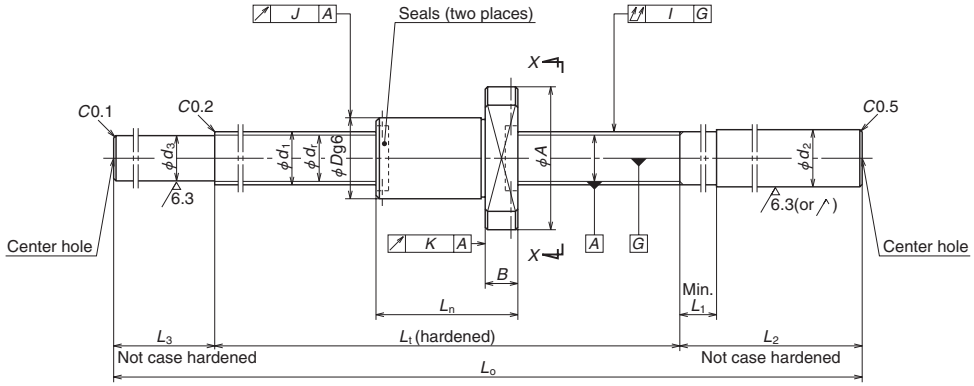Screw shaft ø10
Lead 2.5
Screw shaft ø12
Lead 2, 2.5



Nut type code: MSFD




View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial play Max.	Nut Outside dia. D	Nut Flange A	Nut Flange H	Nut Flange B
W1001MS-2Y-C3T2.5	118	10	2.5	1.588	10.4	8.6	3	2 500	3 630	0.005	19	36	23	5
W1002MS-2Y-C3T2.5	218													
W1202MS-1Y-C3T2	182	12	2	1.200	12.3	10.9	3	1 960	3 620	0.005	20	37	24	5
W1203MS-1Y-C3T2	282													
W1202MS-2Y-C3T2.5	178	12	2.5	1.588	12.4	10.6	3	2 790	4 530	0.005	21	38	25	5
W1203MS-2Y-C3T2.5	278													

dimensions Overall length L_n	Bolt hole W	Bolt hole X	Screw shaft dimensions Threaded length L_t	Shaft end, right d_2	Shaft end, right L_1	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy T	Deviation e_p	Variation v_u	Run-out Shaft straightness I	Run-out Radial run-out J	Run-out Radial run-out K	Mass (kg)	Permissible rotational speed N (min^{-1})
32	28	4.5	150	12.2	4	70	8.7	30	250	0	0.010	0.008	0.035	0.010	0.008	0.23	3 000
			250						350		0.012		0.050			0.28	
28	29	4.5	210	14.2	5	80	11.0	35	325	0	0.012	0.008	0.050	0.010	0.008	0.36	3 000
			310						425				0.060			0.44	
32	30	4.5	210	14.2	5	80	10.7	35	325	0	0.012	0.008	0.050	0.010	0.008	0.37	3 000
			310						425				0.060			0.45	

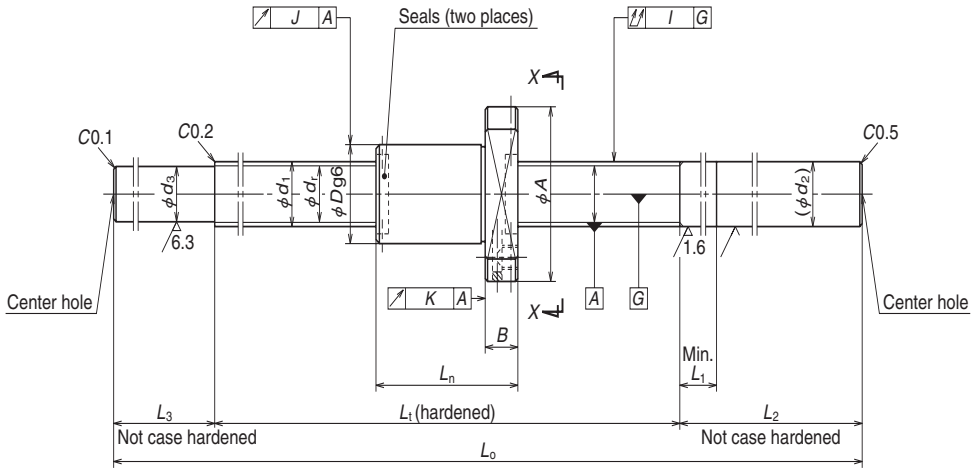Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: MSFD

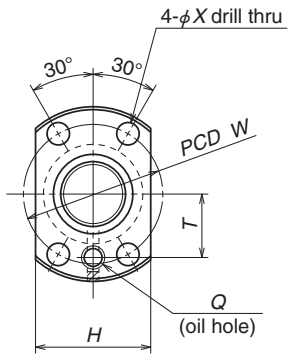


View X-X

Unit: mm

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial play Max.	Nut Outside dia. D	Nut Flange A	Nut Flange H	Nut Flange B	Nut Overall length L_n	Nut Bolt hole W	Nut Bolt hole X
W1602MS-1Y-C3T2	210	16	2	1.588	16.4	14.6	4	4 150	8 450	0.005	25	44	29	10	40	35	5.5
W1604MS-1Y-C3T2	360																
W1602MS-2Y-C3T2.5	206	16	2.5	1.588	16.4	14.6	4	4 150	8 440	0.005	25	44	29	10	44	35	5.5
W1604MS-2Y-C3T2.5	356																

dimensions Oil hole Q	T	Screw shaft dimensions Threaded length L_t	Shaft end, right d_2	L_1	L_2	Shaft end, left d_3	L_3	Overall length L_o	Lead accuracy T	Deviation e_p	Variation v_u	Run-out Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min^{-1})	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
M6×1	16	250	16	30	100	14.7	40	390	0	0.012	0.008	0.035	0.010	0.008	0.71	3 000	1.5	0.8
		400						540		0.013	0.010	0.050			0.93			
M6×1	16	250	16	30	100	14.7	40	390	0	0.012	0.008	0.035	0.010	0.008	0.73	3 000	1.5	0.8
		400						540		0.013	0.010	0.050			0.95			

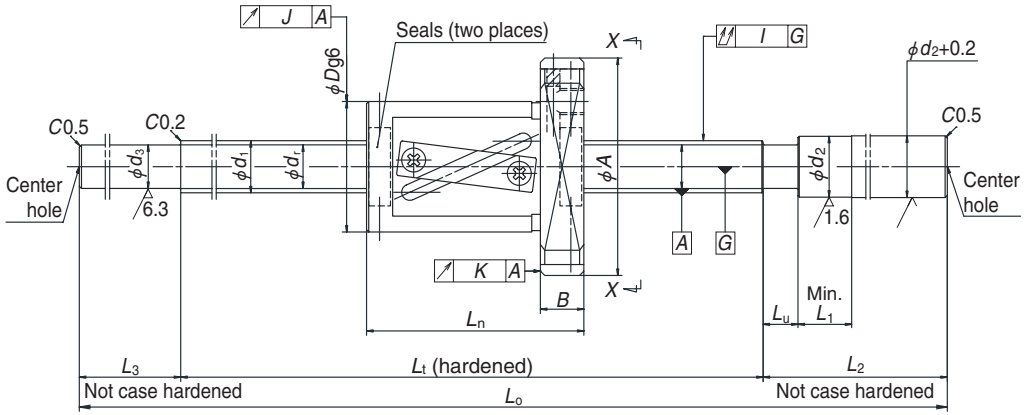
Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: SFT, LSFT

NSK

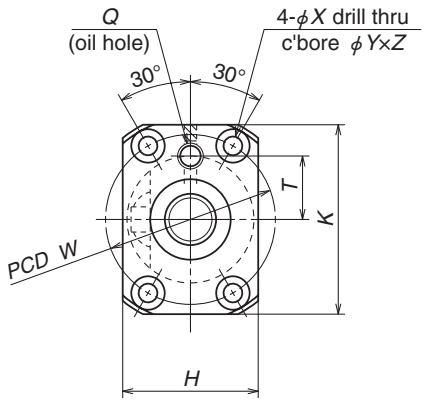Screw shaft ø10
Lead 4
Screw shaft ø12
Lead 5, 10




View X-X

Unit: mm

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial play Max.	Nut: Outside dia. D	Nut: Flange A	Nut: Flange H	Nut: Flange K	Nut: Flange B	Nut: Overall length L_n	Nut: Bolt hole W	Nut: Bolt hole X	Nut: Bolt hole Y	Nut: Bolt hole Z
W1001FS-1-C3T4	126	10	4	2.000	10.3	8.2	2.5×1	3 210	4 420	0.005	26	46	28	42	10	34	36	4.5	8	4.5
W1002FS-1-C3T4	226																			
W1003FS-1-C3T4	326																			
W1201FS-1-C3T5	110	12	5	2.381	12.3	9.8	2.5×1	4 390	6 260	0.005	30	50	32	45	10	40	40	4.5	8	4.5
W1202FS-1-C3T5	210																			
W1204FS-1-C3T5	410																			
W1202FS-2-C5T10	200	12	10	2.381	12.5	10.0	2.5×1	4 430	6 430	0.005	30	50	32	45	10	50	40	4.5	8	4.5
W1204FS-2-C5T10	400																			

dimensions: Oil hole Q	Oil hole T	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	Shaft end, right L_u	Shaft end, right L_1	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy T	Lead accuracy: Deviation e_p	Lead accuracy: Variation v_u	Run-out: Shaft straightness I	Run-out: Radial run-out J	Run-out: Radial run-out K	Mass (kg)	Permissible rotational speed N (min^{-1})	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
M6×1	14	160	14	5	40	70	8.2	35	265	0	0.010	0.008	0.030	0.010	0.008	0.34	3 000	0.86	0.43
		260							365		0.012	0.008	0.040			0.39			
		360							465		0.013	0.010	0.050			0.45			
M6×1	15	150	14	5	40	70	9.8	35	255	0	0.010	0.008	0.030	0.010	0.008	0.44	3 000	1.2	0.6
		250							355		0.012	0.008	0.040			0.52			
		450							555		0.015	0.010	0.065			0.67			
M6×1	15	250	14	8	40	70	10.0	35	355	0	0.023	0.018	0.050	0.012	0.010	0.57	3 000	1.4	0.7
		450							555		0.027	0.020	0.075			0.74			

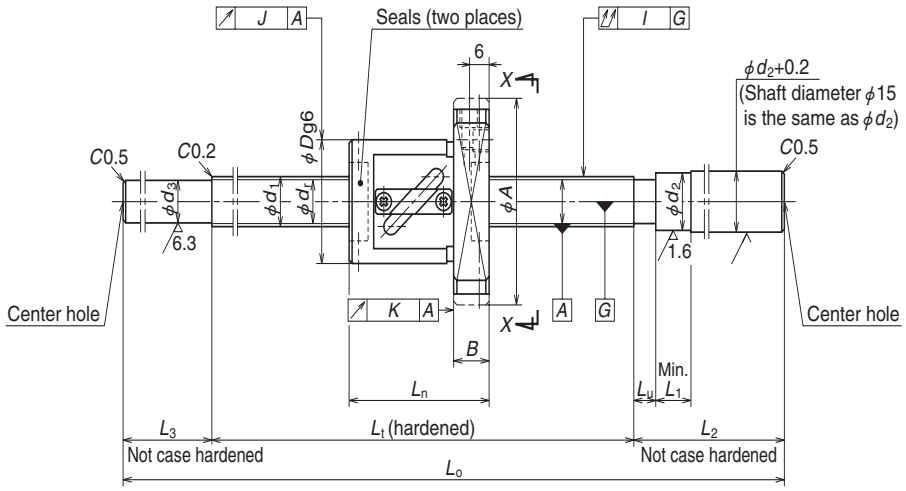Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.




Nut type code: SFT, LSFT

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial play Max.	Nut: Outside dia. D	Nut: Flange A	Nut: Flange H	Nut: Flange K	Nut: Flange B	Nut: Overall length L_n	Nut: Bolt hole W	Nut: Bolt hole X	Nut: Bolt hole Y	Nut: Bolt hole Z
W1403FS-1-C3T5	310	14	5	3.175	14.5	11.2	2.5×1	7 970	11 900	0.005	34	57	34	50	11	40	45	5.5	9.5	5.5
W1406FS-1-C3T5	560																			
W1405FS-1-C5T8	454	14	8	3.175	14.5	11.2	2.5×1	7 880	11 800	0.005	34	57	34	50	11	46	45	5.5	9.5	5.5
W1408FS-1-C5T8	754																			
W1504FS-1-C5T10	349	15	10	3.175	15.5	12.2	2.5×1	8 140	12 800	0.005	34	57	34	50	11	51	45	5.5	9.5	5.5
W1506FS-1-C5T10	549																			
W1509FS-1-C5T10	849																			
W1511FS-1-C5T10	1 049																			

Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

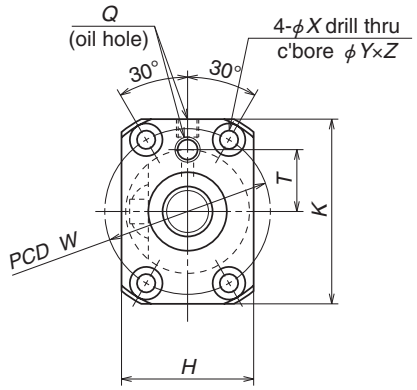Screw shaft ø14
Lead 5, 8
Screw shaft ø15
Lead 10




View X-X


Unit: mm

dimensions: Oil hole Q	Oil hole T	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	Shaft end, right L_u	Shaft end, right L_1	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy T	Lead accuracy Deviation e_p	Lead accuracy Variation v_u	Run-out Shaft straightness I	Run-out Radial run-out J	Run-out Radial run-out K	Mass (kg)	Permissible rotational speed N (min^{-1})	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
M6×1	17	350	15	5	40	100	11.2	40	490	0	0.013	0.010	0.035	0.012	0.008	0.78	3 000	2.0	1.0
		600							740		0.016	0.012	0.055			1.0			
M6×1	17	500	15	8	40	100	11.2	40	640	0	0.027	0.020	0.065	0.015	0.011	1.0	3 000	2.0	1.0
		800							940		0.035	0.025	0.085			1.3			
M6×1	17	400	15	8	40	120	12.2	50	570	0	0.025	0.020	0.050	0.015	0.011	1.0	3 000	2.3	1.2
		600							770		0.030	0.023	0.065			1.3			
		900							1 070		0.040	0.027	0.110			1.7			
		1 100							1 270		0.046	0.030	0.150			1.9			

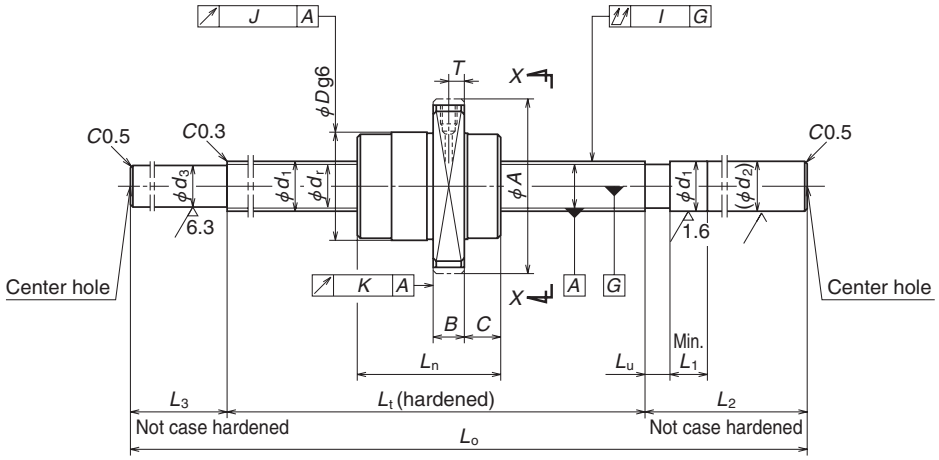Screw shaft ø15
Lead 20
Screw shaft ø16
Lead 32
Screw shaft ø20
Lead 40



Nut type code: USFC

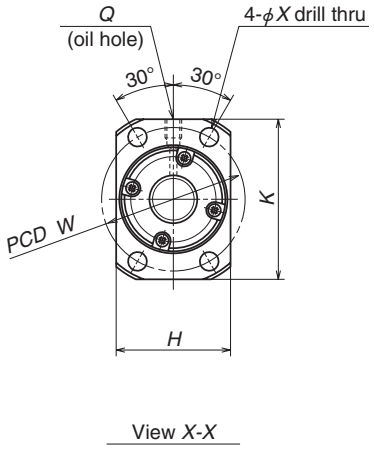


View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial play Max.	Nut: Outside dia. D	Nut: Flange A	Nut: Flange H	Nut: Flange K	Nut: Flange B	Nut: Flange C	Nut: Overall length L_n	Nut: Bolt hole W	Nut: Bolt hole X
W1504FS-2G-C5T20	355	15	20	3.175	15.5	12.2	1.7×1	5 660	8 700	0.005	34	55	36	50	10	11	45	45	5.5
W1506FS-2G-C5T20	555																		
W1509FS-2G-C5T20	855																		
W1511FS-2G-C5T20	1 055																		
W1609FS-2GX-C5T32	866	16	32	3.175	16.75	13.4	0.7×2	4 800	7 510	0.005	34	55	36	50	10	10.5	34	45	5.5
W1613FS-1GX-C5T32	1 266																		
W2011FS-1GX-C5T40	1 059	20	40	3.175	20.75	17.4	0.7×2	5 410	9 360	0.005	38	58	40	52	10	11	41	48	5.5
W2017FS-1GX-C5T40	1 659																		

dimensions: Oil hole Q	Oil hole T	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	Shaft end, right L_u	Shaft end, right L_1	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy: Travel compensation T	Lead accuracy: Deviation e_o	Lead accuracy: Variation v_u	Run-out: Shaft straightness I	Run-out: Radial run-out J	Run-out: Radial run-out K	Mass (kg)	Permissible rotational speed N (min^{-1})	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
M6×1	5	400	15	13	40	120	12.2	50	570	0	0.025	0.020	0.050	0.015	0.011	1.0	3 000	1.9	1.0
		600							770		0.030	0.023	0.065			1.3			
		900							1 070		0.040	0.027	0.110			1.7			
		1 100							1 270		0.046	0.030	0.150			2.0			
M6×1	5	900	16	19	40	150	13.4	60	1 110	0	0.040	0.027	0.110	0.015	0.011	1.9	3 000	2.0	1.0
		1 300							1 510		0.054	0.035	0.150			2.5			
M6×1	5	1 100	20	22	60	150	17.4	80	1 330	0	0.046	0.030	0.150	0.015	0.011	3.5	3 000	2.7	1.4
		1 700							1 930		0.065	0.040	0.200			4.9			

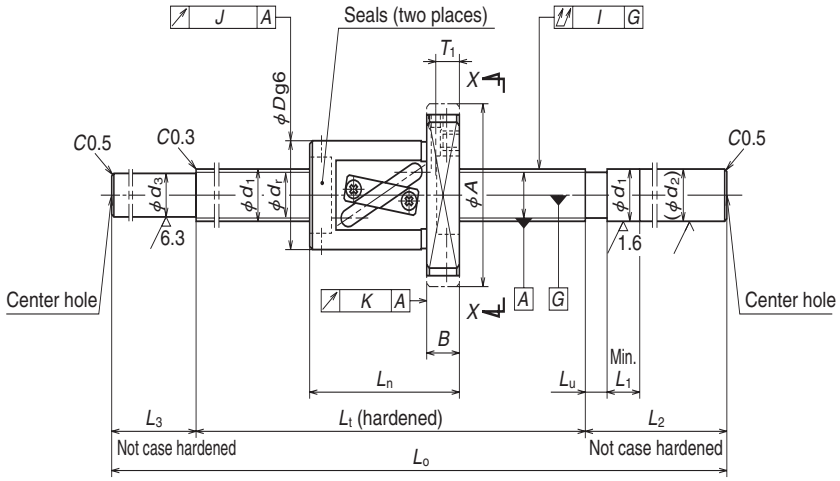
Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: SFT, LSFT

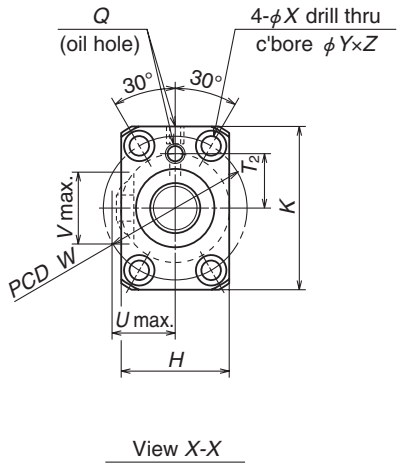

View X-X




Housing hole and its clearance
(only applicable to shaft dia. φ16, lead 16)

Unit: mm

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial play Max.	Nut: Outside dia. D	Nut: Flange A	Nut: Flange H	Nut: Flange K	Nut: Flange B	Nut: Overall length L_n	Nut: Bolt hole W	Nut: Bolt hole X	Nut: Y	Nut: Z
W1605FS-1-C3T5	458	16	5	3.175	16.5	13.2	2.5×1	8 620	13 800	0.005	40	63	40	55	11	42	51	5.5	9.5	5.5
W1609FS-1-C3T5	858																			
W1606FS-1-C5T16	544	16	16	3.175	16.75	13.4	1.5×1	5 480	8 080	0.005	34	57	34	50	12	56	45	5.5	9.5	5.5
W1611FS-1-C5T16	1 044																			
W2009FS-1-C5T10	846	20	10	3.969	21	16.9	2.5×1	13 300	21 900	0.005	46	74	46	66	13	54	59	6.6	11	6.5
W2013FS-1-C5T10	1 246																			
W2010FS-1-C5T20	937	20	20	3.969	21	16.9	1.5×1	8 190	13 100	0.005	46	74	46	66	13	63	59	6.6	11	6.5
W2015FS-1-C5T20	1 437																			

Projecting tube U	Projecting tube V	Projecting tube R	Oil hole Q	Oil hole T_1	Oil hole T_2	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	Shaft end, right L_u	Shaft end, right L_1	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy T	Deviation e_p	Variation v_u	Run-out: Shaft straightness I	Run-out: Radial run-out J	Run-out: Radial run-out K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
—	—	—	M6×1	6	17	500	16	5	40	150	13.2	60	710	0	0.015	0.010	0.055	0.012	0.008	1.4	3 000	2.6	1.3
						900							1 110		0.021	0.015	0.095			1.9			
19	20	8	M6×1	8	17	600	16	10	40	150	13.4	60	810	0	0.030	0.023	0.085	0.015	0.011	1.5	3 000	2.1	1.1
						1 100							1 310		0.046	0.030	0.150			2.3	2 480		
—	—	—	M6×1	6	24	900	20	10	60	150	16.9	80	1 130	0	0.040	0.027	0.110	0.015	0.011	3.2	3 000	4.7	2.4
						1 300							1 530		0.054	0.035	0.150			4.1	2 190		
—	—	—	M6×1	8	24	1 000	20	13	60	150	16.9	80	1 230	0	0.040	0.027	0.110	0.015	0.011	3.6	3 000	4.2	2.1
						1 500							1 730		0.054	0.035	0.200			4.8	1 610		

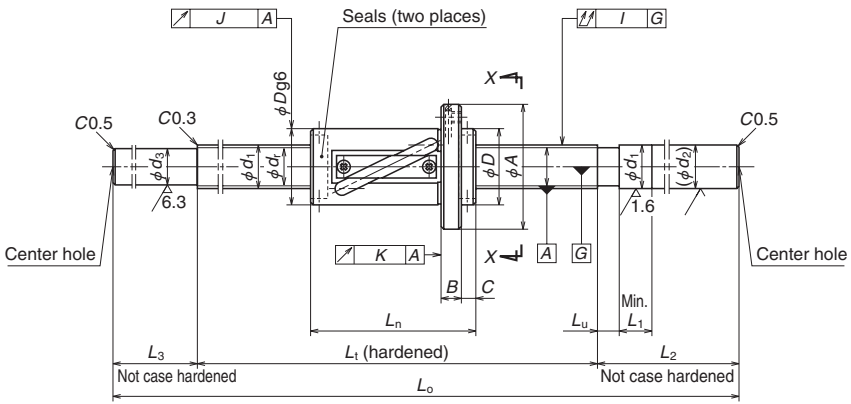Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.




Nut type code: LSFT

NSK

Screw shaft ø25

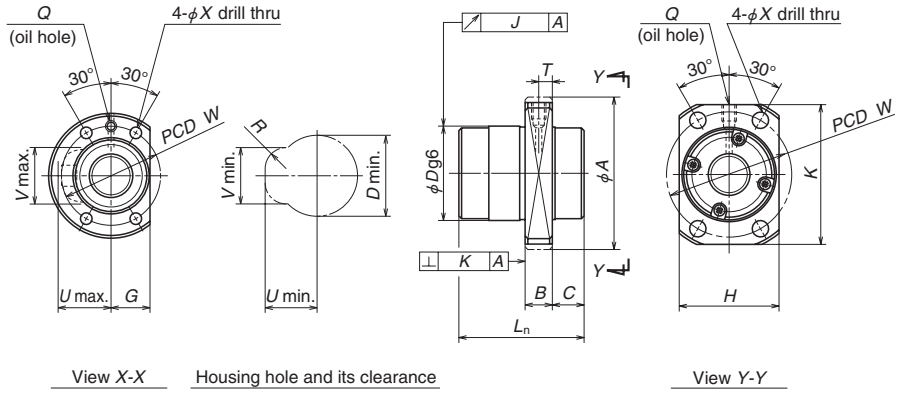Lead 20, 25, 50




Nut type code: USFC

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial play Max.	Nut: Nut type code	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange H	Nut: Flange K	Nut: Flange B	Nut: Flange C	Nut: Overall length L_n	Nut: Bolt hole W	Nut: Bolt hole X
W2513FS-1-C5T20	1 254	25	20	4.762	26.25	21.3	2.5×1	18 600	32 600	0.005	LSFT	44	71	23	—	—	12	8	96	57	6.6
W2521FS-1-C5T20	2 054																				
W2513FS-2-C5T25	1 260	25	25	4.762	26.25	21.3	1.5×1	11 700	19 700	0.005	LSFT	44	71	23	—	—	12	10	90	57	6.6
W2521FS-2-C5T25	2 060																				
W2515FS-1GX-C5T50	1 450	25	50	3.969	26	21.9	0.7×2	7 280	13 200	0.005	USFC	46	70	—	48	63	12	13	50	58	6.6
W2521FS-3GX-C5T50	2 100																				

dimensions: Projecting tube U	V	R	Oil hole Q	T	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	L_u	L_1	L_2	Shaft end, left d_3	L_3	Overall length L_o	Lead accuracy T	Deviation e_o	Variation υ_u	Run-out: Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
31	35	12	M6×1	—	1 350	25	13	70	200	21.3	100	1 650	0	0.054	0.035	0.120	0.015	0.011	6.8	2 550	12	6.0
					2 150							2 450		0.077	0.046	0.160			9.8	1 000		
32	34	12	M6×1	—	1 350	25	15	70	200	21.3	100	1 650	0	0.054	0.035	0.120	0.015	0.011	6.8	2 540	10	5.0
					2 150							2 450		0.077	0.046	0.160			9.8	1 000		
—	—	—	M6×1	6	1 500	25	26	70	200	21.9	100	1 800	0	0.054	0.035	0.120	0.015	0.011	7.3	1 250	5.3	2.7
					2 150							2 450		0.077	0.046	0.160			9.8	1 000		

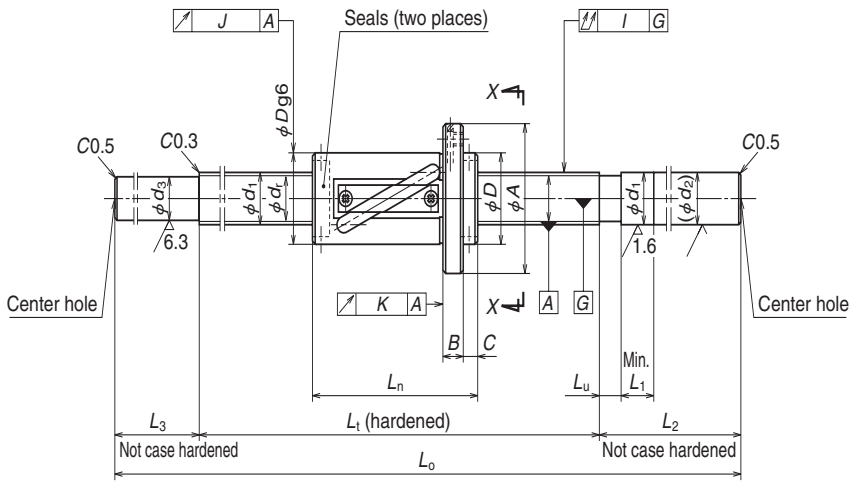
Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: LSFT

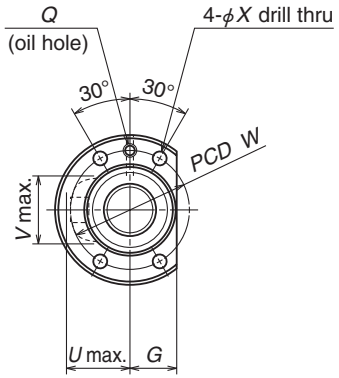

View X-X




Housing hole and its clearance


Unit: mm

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial play Max.	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Flange C	Nut: Overall length L_n	Nut: Bolt hole W	Nut: Bolt hole X
W3217FS-1-C5T25	1 583	32	25	4.762	33.25	28.3	2.5×1	20 400	42 200	0.005	51	85	26	15	10	117	67	9
W3227FS-1-C5T25	2 583																	
W3217FS-2-C5T32	1 591	32	32	4.762	33.25	28.3	1.5×1	13 300	25 200	0.005	51	85	26	15	12	109	67	9
W3227FS-2-C5T32	2 591																	

dimensions: Projecting tube U	V	R	Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	L_u	L_1	Shaft end, left L_2	d_3	L_3	Overall length L_o	Lead accuracy: Travel compensation T	Deviation e_p	Variation v_u	Run-out: Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
34	42	12	M6×1	1 700	32	15	70	250	28.3	120	2 070	0	0.065	0.040	0.160	0.019	0.013	13.8	2 180	17	8.5
				2 700							3 070		0.093	0.054	0.210			20.0	800		
34	42	12	M6×1	1 700	32	19	70	250	28.3	120	2 070	0	0.065	0.040	0.160	0.019	0.013	13.9	2 180	15	7.5
				2 700							3 070		0.093	0.054	0.210			20.0	790		

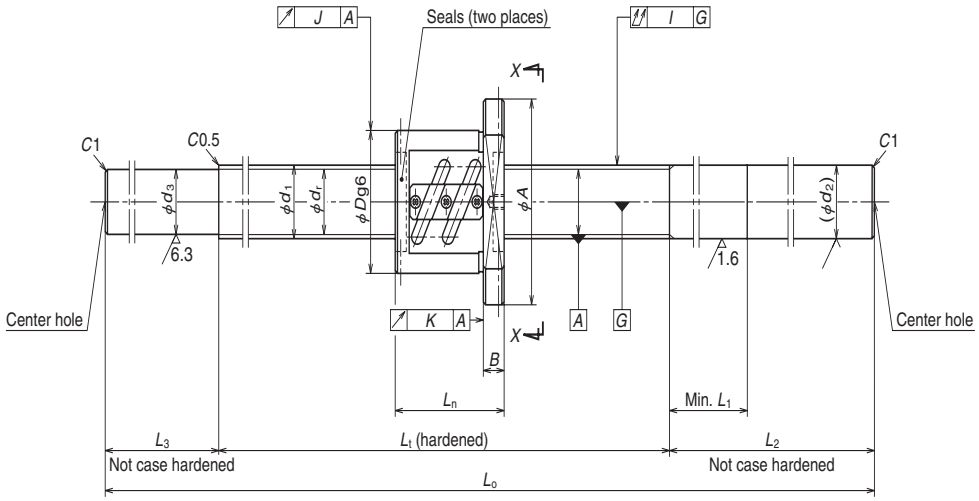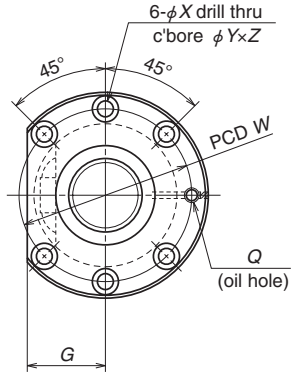Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.





View X-X


Nut type code: PFT

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Overall length L_n	Nut: Bolt hole W	Nut: Bolt hole X
W2003SS-1P-C5Z4	251	20	4	2.381	20.3	17.8	2.5×2	6 550	10 900	290	3.9	40	63	24	11	49	51	5.5
W2005SS-1P-C5Z4	451																	
W2008SS-1P-C5Z4	751																	
W2003SS-2P-C5Z5	244	20	5	3.175	20.5	17.2	2.5×2	11 100	17 100	490	7.8	44	67	26	11	56	55	5.5
W2005SS-2P-C5Z5	444																	
W2007SS-1P-C5Z5	644																	
W2010SS-1P-C5Z5	944																	

dimensions: Bolt hole Y	dimensions: Bolt hole Z	dimensions: Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	Shaft end, right L_1	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy: Travel compensation T	Lead accuracy: Deviation e_p	Lead accuracy: Variation v_u	Run-out: Shaft straightness I	Run-out: Radial run-out J	Run-out: Radial run-out K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
9.5	5.5	M6×1	300	20	40	150	17.8	—	450	-0.007	0.023	0.018	0.055	0.015	0.011	1.5	3 000	2.7	1.4
			500			150		50	700	-0.012	0.027	0.020	0.085			2.0			
			800			200		100	1 100	-0.019	0.035	0.025	0.140			2.9			
9.5	5.5	M6×1	300	20	40	150	17.2	—	450	-0.007	0.023	0.018	0.055	0.015	0.011	1.6	3 000	4.3	2.2
			500			150		50	700	-0.012	0.027	0.020	0.085			2.2			
			700			200		100	1 000	-0.017	0.035	0.025	0.110			2.8			
			1 000			200		100	1 300	-0.024	0.040	0.027	0.180			3.5			

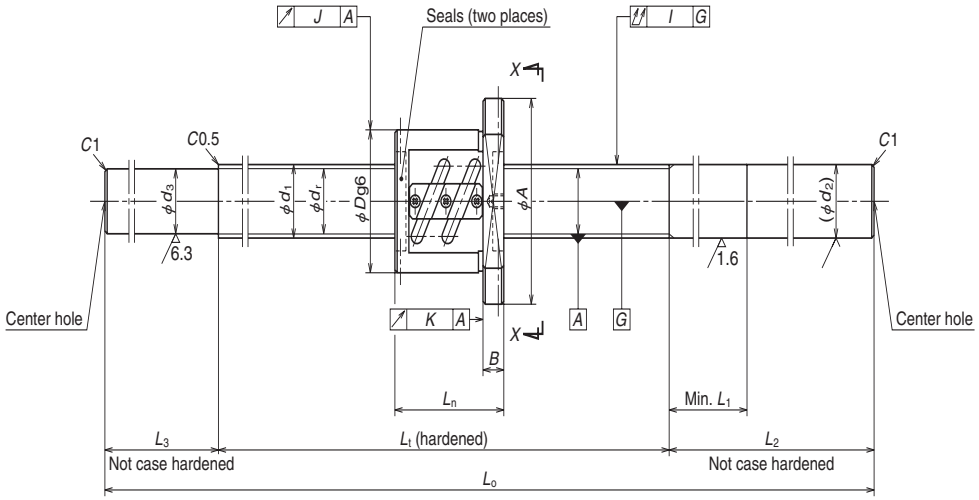Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: PFT

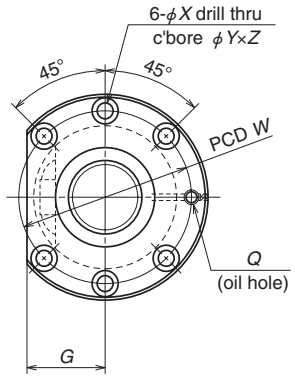


View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Overall length L_n	Nut: Bolt hole W	Nut: Bolt hole X
W2503SS-1P-C5Z4	252	25	4	2.381	25.3	22.8	2.5×2	7 110	13 600	290	4.9	46	69	26	11	48	57	5.5
W2506SS-1P-C5Z4	552																	
W2510SS-1P-C5Z4	952																	
W2503SS-2P-C5Z5	245	25	5	3.175	25.5	22.2	2.5×2	12 300	21 800	540	8.8	50	73	28	11	55	61	5.5
W2505SS-1P-C5Z5	445																	
W2508SS-1P-C5Z5	745																	
W2512SS-1P-C5Z5	1 145																	
W2504SS-1P-C5Z6	338	25	6	3.969	25.5	21.4	2.5×2	16 600	26 700	690	13.8	53	76	29	11	62	64	5.5
W2508SS-2P-C5Z6	738																	
W2512SS-2P-C5Z6	1 138																	

dimensions: Bolt hole Y	dimensions: Bolt hole Z	dimensions: Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	Shaft end, right L_1	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy: Travel compensation T	Lead accuracy: Deviation e_p	Lead accuracy: Variation v_u	Run-out: Shaft straightness I	Run-out: Radial run-out J	Run-out: Radial run-out K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
9.5	5.5	M6×1	300	25	40	150	22.8	—	450	-0.007	0.023	0.018	0.040	0.015	0.011	2.2	2 800	3.2	1.6
			600			200		100	900	-0.014	0.030	0.023	0.075			3.8			
			1 000			200		100	1 300	-0.024	0.040	0.027	0.120			5.2			
9.5	5.5	M6×1	300	25	40	200	22.2	—	500	-0.007	0.023	0.018	0.040	0.015	0.011	2.5	2 800	5.2	2.6
			500			200		50	750	-0.012	0.027	0.020	0.060			3.4			
			800			250		100	1 150	-0.019	0.035	0.025	0.090			4.8			
			1 200			300		100	1 600	-0.029	0.046	0.030	0.120			6.3			
9.5	5.5	M6×1	400	25	40	200	21.4	—	600	-0.010	0.025	0.020	0.050	0.019	0.013	3.0	2 800	7.0	3.5
			800			250		100	1 150	-0.019	0.035	0.025	0.090			4.8			
			1 200			300		100	1 600	-0.029	0.046	0.030	0.120			6.3			

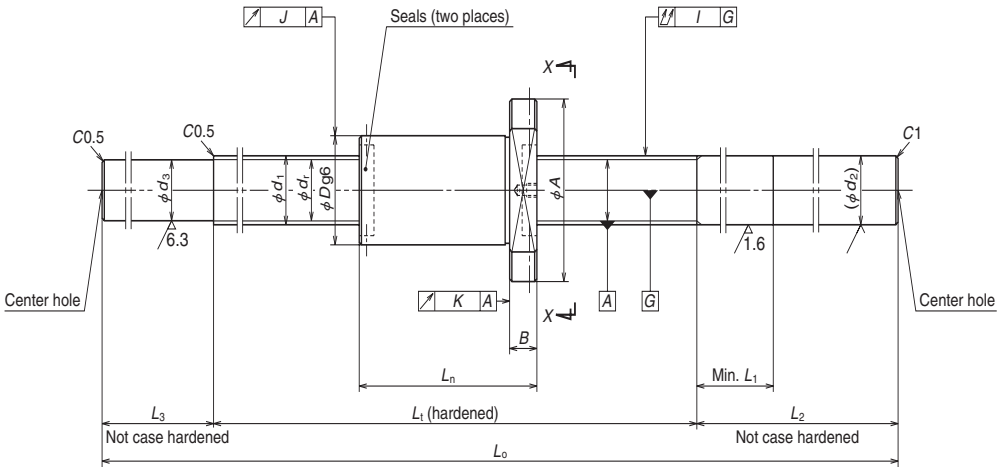Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: ZFD

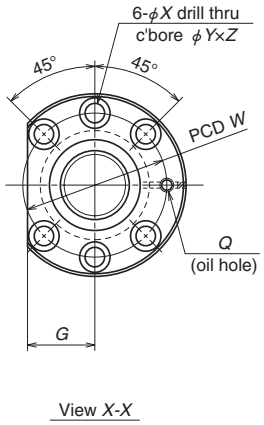


View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Overall length L_n	Nut: Bolt hole W	Nut: Bolt hole X
W2502SS-1ZY-C5Z5	184	25	5	3.175	25.75	22.4	1×3	11 600	22 900	740	13.8	40	63	24	11	66	51	5.5
W2504SS-3ZY-C5Z5	334																	
W2506SS-2ZY-C5Z5	534																	
W2509SS-1ZY-C5Z5	834																	
W2512SS-3ZY-C5Z5	1 134																	
W2504SS-4ZY-C5Z10	312	25	10	4.762	26.25	21.3	1×2	13 300	21 200	880	21.5	42	69	26	15	88	55	6.6
W2506SS-3ZY-C5Z10	512																	
W2508SS-3ZY-C5Z10	712																	
W2511SS-1ZY-C5Z10	1 012																	
W2515SS-2ZY-C5Z10	1 412																	

dimensions: Bolt hole Y	dimensions: Bolt hole Z	dimensions: Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right: d_2	Shaft end, right: L_1	Shaft end, right: L_2	Shaft end, left: d_3	Shaft end, left: L_3	Overall length L_o	Lead accuracy: Travel compensation T	Lead accuracy: Deviation e_p	Lead accuracy: Variation v_u	Run-out: Shaft straightness I	Run-out: Radial run-out J	Run-out: Radial run-out K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
9.5	5.5	M6×1	250	25	40	200	22.4	—	450	-0.005	0.023	0.018	0.040	0.015	0.011	2.1	2 800	5.4	2.7
			400			200		50	650	-0.009	0.025	0.020	0.060			2.8			
			600			250		100	950	-0.013	0.030	0.023	0.075			3.9			
			900			250		100	1 250	-0.021	0.040	0.027	0.090			4.9			
			1 200			300		100	1 600	-0.028	0.046	0.030	0.120			6.2			
11	6.5	M6×1	400	25	60	200	21.3	50	650	-0.008	0.025	0.020	0.060	0.015	0.011	3.0	2 800	9.0	4.5
			600			250		100	950	-0.012	0.030	0.023	0.075			4.1			
			800			250		100	1 150	-0.017	0.035	0.025	0.090			4.8			
			1 100			300		100	1 500	-0.024	0.046	0.030	0.120			6.0			
			1 500			300		100	1 900	-0.034	0.054	0.035	0.150			7.4			

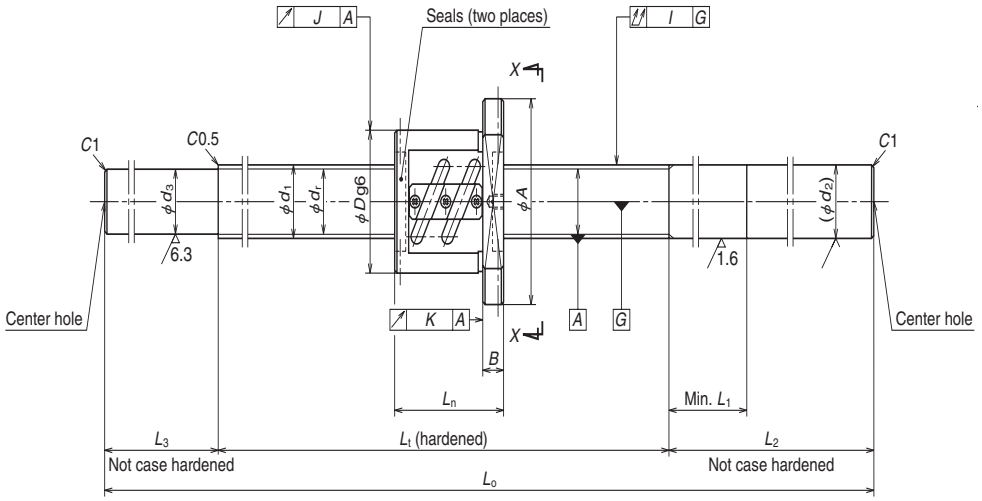Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: PFT

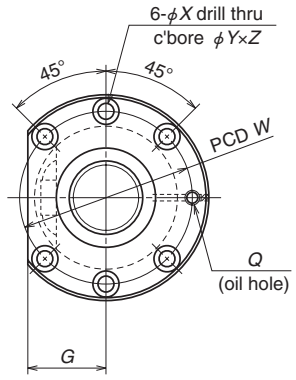


View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Overall length L_n	Nut: Bolt hole W	Nut: Bolt hole X
W2504SS-2P-C5Z10	319	25	10	4.762	25.5	20.5	1.5×2	13 600	18 900	590	13.8	58	85	32	15	81	71	6.6
W2507SS-1P-C5Z10	619																	
W2510SS-2P-C5Z10	919																	
W2515SS-1P-C5Z10	1 419																	
W2804SS-1P-C5Z5	344	28	5	3.175	28.5	25.2	2.5×2	13 000	24 400	540	9.8	55	85	31	12	56	69	6.6
W2806SS-1P-C5Z5	544																	
W2808SS-1P-C5Z5	744																	
W2812SS-1P-C5Z5	1 144																	
W2804SS-3P-C5Z6	337	28	6	3.175	28.5	25.2	2.5×2	12 900	24 300	540	10.8	55	85	31	12	63	69	6.6
W2806SS-3P-C5Z6	537																	
W2808SS-3P-C5Z6	737																	
W2812SS-3P-C5Z6	1 137																	

dimensions: Bolt hole Y	Bolt hole Z	Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	Shaft end, right L_1	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy: Travel compensation T	Deviation e_p	Variation v_u	Run-out: Shaft straightness I	Radial run-out J	Radial run-out K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
11	6.5	M6×1	400	25	60	200	20.5	50	650	–0.010	0.025	0.020	0.060	0.019	0.013	3.8	2 800	9.7	4.9
			700			250		100	1 050	–0.017	0.035	0.025	0.090			5.1			
			1 000			250		100	1 350	–0.024	0.040	0.027	0.120			6.1			
			1 500			300		100	1 900	–0.036	0.054	0.035	0.150			8.0	2 050		
11	6.5	M6×1	400	28	40	200	25.2	—	600	–0.010	0.025	0.020	0.050	0.019	0.013	3.7	2 500	6.1	3.1
			600			250		100	950	–0.014	0.030	0.023	0.075			5.2			
			800			250		100	1 150	–0.019	0.035	0.025	0.090			6.1			
			1 200			300		100	1 600	–0.029	0.046	0.030	0.120			8.1			
11	6.5	M6×1	400	28	40	200	25.2	—	600	–0.010	0.025	0.020	0.050	0.019	0.013	3.8	2 500	6.1	3.1
			600			250		100	950	–0.014	0.030	0.023	0.075			5.3			
			800			250		100	1 150	–0.019	0.035	0.025	0.090			6.2			
			1 200			300		100	1 600	–0.029	0.046	0.030	0.120			8.2			

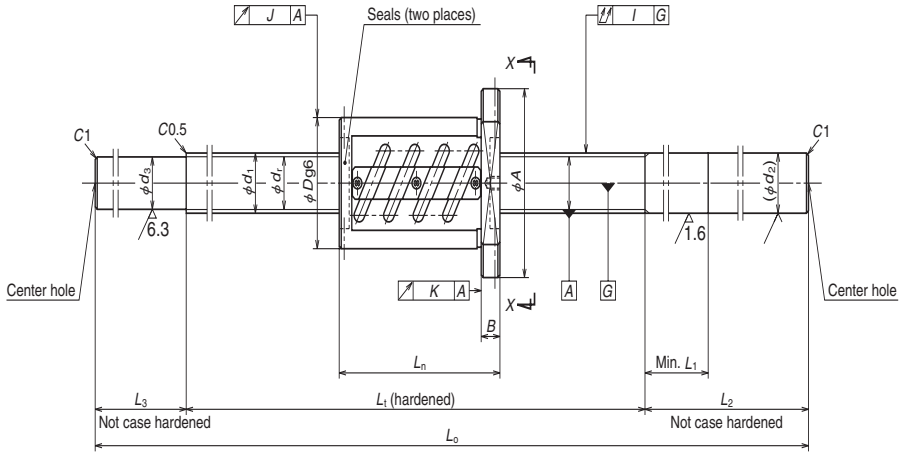Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: ZFT




View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Overall length L_n	Nut: Bolt hole W	Nut: Bolt hole X
W2804SS-2Z-C5Z5	314	28	5	3.175	28.5	25.2	2.5×2	20 600	48 700	1 225	21.5	55	85	31	12	86	69	6.6
W2806SS-2Z-C5Z5	514																	
W2808SS-2Z-C5Z5	714																	
W2812SS-2Z-C5Z5	1 114																	
W2804SS-4Z-C5Z6	301	28	6	3.175	28.5	25.2	2.5×2	20 600	48 700	1 225	22.5	55	85	31	12	99	69	6.6
W2806SS-4Z-C5Z6	501																	
W2808SS-4Z-C5Z6	701																	
W2812SS-4Z-C5Z6	1 101																	

dimensions: Bolt hole Y	dimensions: Bolt hole Z	dimensions: Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	Shaft end, right L_1	Shaft end, right L_2	Shaft end, left d_3	Shaft end, left L_3	Overall length L_o	Lead accuracy: Travel compensation T	Lead accuracy: Deviation e_p	Lead accuracy: Variation v_u	Run-out: Shaft straightness I	Run-out: Radial run-out J	Run-out: Radial run-out K	Mass (kg)	Permissible rotational speed N(min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
11	6.5	M6×1	400	28	40	200	25.2	—	600	–0.010	0.025	0.020	0.050	0.019	0.013	4.7	2 500	9.2	4.6
			600			250		100	950	–0.014	0.030	0.023	0.075			5.5			
			800			250		100	1 150	–0.019	0.035	0.025	0.090			6.4			
			1 200			300		100	1 600	–0.029	0.046	0.030	0.120			8.4			
11	6.5	M6×1	400	28	40	200	25.2	—	600	–0.010	0.025	0.020	0.050	0.019	0.013	4.2	2 500	9.5	4.8
			600			250		100	950	–0.014	0.030	0.023	0.075			5.7			
			800			250		100	1 150	–0.019	0.035	0.025	0.090			6.6			
			1 200			300		100	1 600	–0.029	0.046	0.030	0.120			8.6			

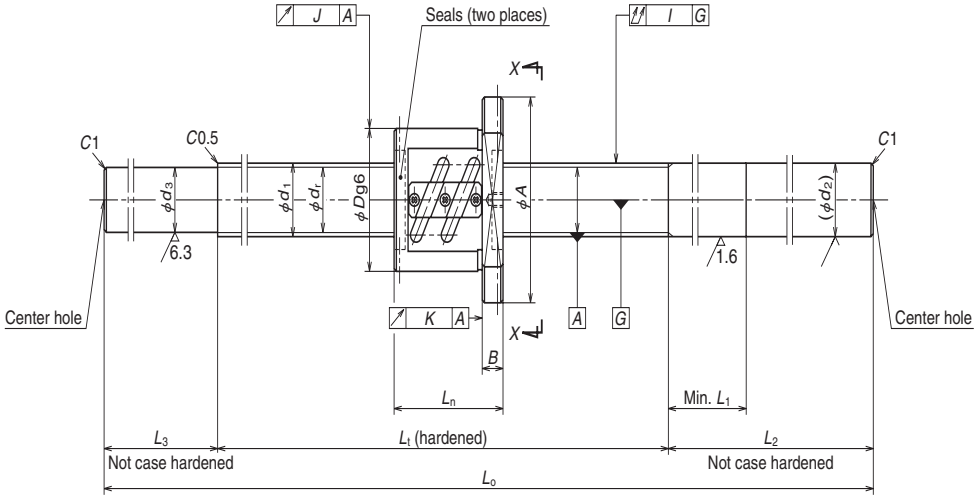Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: PFT

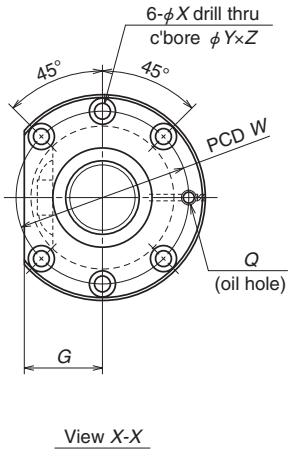

View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut Outside dia. D	Nut Flange A	Nut Flange G	Nut Flange B	Nut Overall length L_n
W3204SS-1P-C5Z5	344	32	5	3.175	32.5	29.2	2.5×2	13 700	28 000	590	10.8	58	85	32	12	56
W3206SS-1P-C5Z5	544															
W3208SS-1P-C5Z5	744															
W3212SS-1P-C5Z5	1 144															
W3215SS-1P-C5Z5	1 444															
W3206SS-3P-C5Z6	537	32	6	3.969	32.5	28.4	2.5×2	18 300	34 700	780	15.6	62	89	34	12	63
W3210SS-1P-C5Z6	937															
W3215SS-3P-C5Z6	1 437															

dimensions Bolt hole W	X	Y	Z	Oil hole Q	Screw shaft dimensions Threaded length L_t	Shaft end, right d_2	L_1	L_2	Shaft end, left d_3	L_3	Overall length L_o	Lead accuracy Travel compensation T	Deviation e_p	Variation v_u	Run-out Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
71	6.6	11	6.5	M6×1	400	32	40	200	29.2	50	650	-0.010	0.025	0.020	0.060	0.019	0.013	4.8	2 180	6.9	3.5
					600			250		100	950	-0.014	0.030	0.023	0.075			6.5			
					800			250		100	1 150	-0.019	0.035	0.025	0.090			7.7			
					1 200			300		100	1 600	-0.029	0.046	0.030	0.120			10.3			
					1 500			300		100	1 900	-0.036	0.054	0.035	0.150			12.1			
75	6.6	11	6.5	M6×1	600	32	40	250	28.4	100	950	-0.014	0.030	0.023	0.075	0.019	0.013	6.7	2 180	9.4	4.7
					1 000			300			1 400	-0.024	0.040	0.027	0.120			9.2			
					1 500			300			1 900	-0.036	0.054	0.035	0.150			12.1			


Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Screw shaft ø32

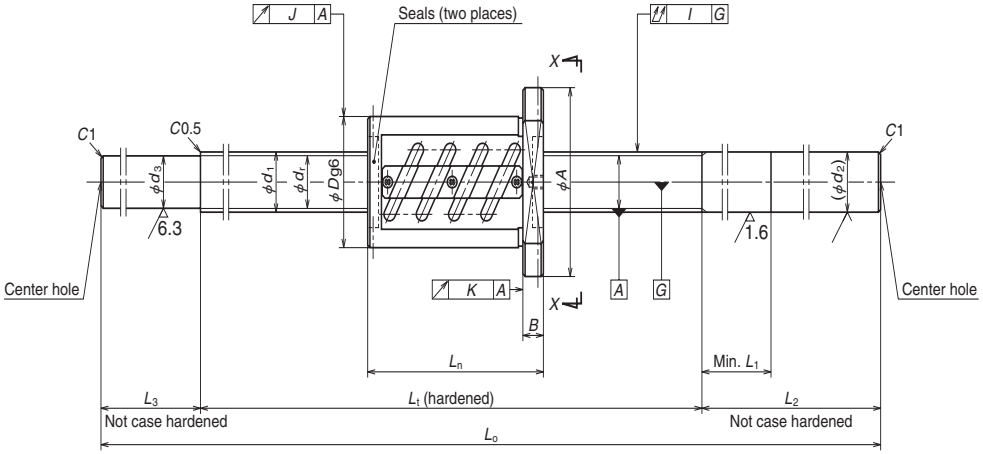Lead 5, 6, 8



Nut type code: ZFT

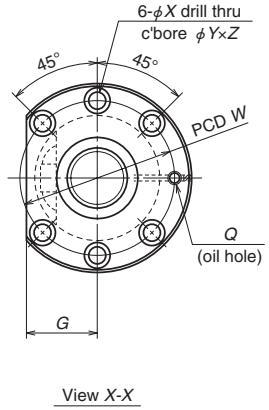


View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Overall length L_n
W3204SS-2Z-C5Z5	314	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	1 270	22.5	58	85	32	12	86
W3206SS-2Z-C5Z5	514															
W3208SS-2Z-C5Z5	714															
W3212SS-2Z-C5Z5	1 114															
W3215SS-2Z-C5Z5	1 414															
W3206SS-4Z-C5Z6	501	32	6	3.969	32.5	28.4	2.5×2	29 100	69 300	1 720	34.5	62	89	34	12	99
W3210SS-2Z-C5Z6	901															
W3215SS-4Z-C5Z6	1 401															
W3206SS-5Z-C5Z8	518	32	8	4.762	32.5	27.5	2.5×1	20 600	40 900	1 320	30.5	66	100	38	15	82
W3210SS-3Z-C5Z8	918															
W3215SS-5Z-C5Z8	1 418															

dimensions: Bolt hole W	X	Y	Z	Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	L_1	L_2	Shaft end, left d_3	L_3	Overall length L_o	Lead accuracy: Travel compensation T	Deviation e_p	Variation v_u	Run-out: Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
71	6.6	11	6.5	M6×1	400	32	40	200	29.2	50	650	-0.010	0.025	0.020	0.060	0.019	0.013	5.1	2 180	10	5.0
					600			250		100	950	-0.014	0.030	0.023	0.075			6.9			
					800			250		100	1 150	-0.019	0.035	0.025	0.090			8.0			
					1 200			300		100	1 600	-0.029	0.046	0.030	0.120			10.1			
					1 500			300		100	1 900	-0.036	0.054	0.035	0.150			12.4			
75	6.6	11	6.5	M6×1	600	32	40	250	28.4	100	950	-0.014	0.030	0.023	0.075	0.019	0.013	7.1	2 180	15	7.5
					1 000			300		100	1 400	-0.024	0.040	0.027	0.120			9.7			
					1 500			300		100	1 900	-0.036	0.054	0.035	0.150			12.6			
82	9	14	8.5	M6×1	600	32	50	250	27.5	100	950	-0.014	0.030	0.023	0.075	0.019	0.013	7.3	2 180	7.9	4.0
					1 000			300		100	1 400	-0.024	0.040	0.027	0.120			9.8			
					1 500			300		100	1 900	-0.036	0.054	0.035	0.150			12.6			

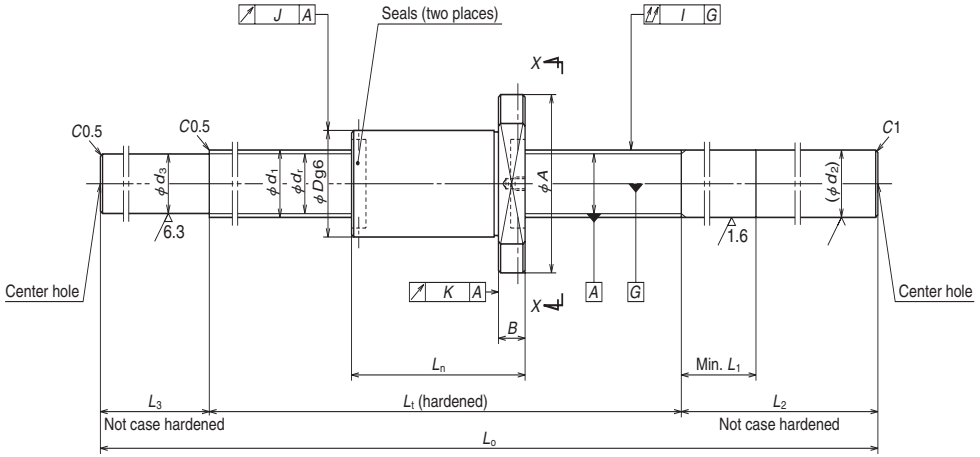Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: ZFD

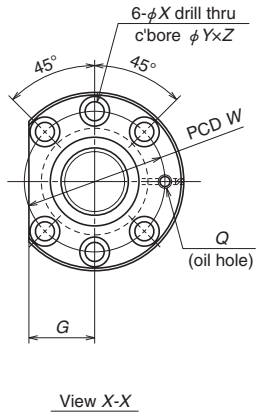

View X-X


Unit: mm

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Overall length L_n
W3204SS-3ZY-C5Z5	323	32	5	3.175	32.75	29.4	4	16 800	40 600	1 080	19.6	48	75	29	12	77
W3206SS-6ZY-C5Z5	523															
W3209SS-1ZY-C5Z5	823															
W3212SS-3ZY-C5Z5	1 123															
W3216SS-1ZY-C5Z5	1 523															
W3205SS-3ZY-C5Z10	380	32	10	6.35	33.75	27.1	3	30 500	52 500	1 860	49.0	54	88	34	15	120
W3207SS-3ZY-C5Z10	580															
W3210SS-6ZY-C5Z10	880															
W3214SS-3ZY-C5Z10	1 280															
W3218SS-3ZY-C5Z10	1 680															


dimensions: Bolt hole W	X	Y	Z	Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	L_1	L_2	Shaft end, left d_3	L_3	Overall length L_o	Lead accuracy: Travel compensation T	Deviation e_p	Variation v_u	Run-out: Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
61	6.6	11	6.5	M6×1	400	32	40	200	29.4	50	650	-0.009	0.025	0.020	0.060	0.015	0.011	4.6	2 180	22	11
					600			250		100	950	-0.013	0.030	0.023	0.075			6.4			
					900			250		100	1 250	-0.021	0.040	0.027	0.090			8.1			
					1 200			300		100	1 600	-0.028	0.046	0.030	0.120			10.2			
					1 600			300		100	2 000	-0.037	0.054	0.035	0.150			12.6			
70	9	14	8.5	M6×1	500	32	60	250	27.1	100	850	-0.010	0.027	0.020	0.075	0.019	0.013	6.2	2 180	23	12
					700			250		100	1 050	-0.015	0.035	0.025	0.090			7.3			
					1 000			300		100	1 400	-0.022	0.040	0.027	0.120			9.3			
					1 400			350		120	1 870	-0.032	0.054	0.035	0.150			11.9			
					1 800			350		120	2 270	-0.041	0.065	0.040	0.200			14.1			

Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

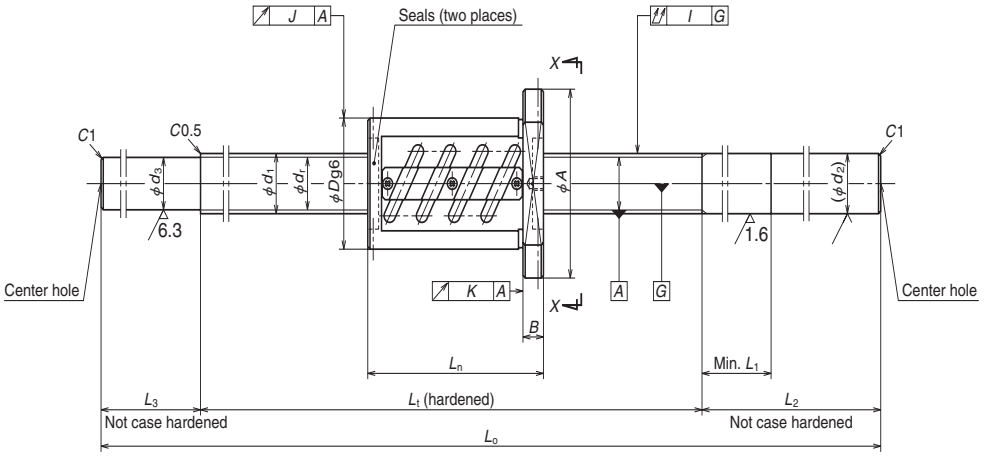Screw shaft ø32, ø36
Lead 10
Screw shaft ø40
Lead 5



Nut type code: ZFT




View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Overall length L_n
W3205SS-1Z-C5Z10	400	32	10	6.350	33	26.4	2.5×1	30 000	55 100	1 960	50	74	108	41	15	100
W3207SS-1Z-C5Z10	600															
W3210SS-4Z-C5Z10	900															
W3214SS-1Z-C5Z10	1 300															
W3218SS-1Z-C5Z10	1 700															
W3607SS-1Z-C5Z10	597	36	10	6.350	37	30.4	2.5×1	32 000	61 100	2 060	56	75	120	45	18	103
W3612SS-1Z-C5Z10	1 097															
W3620SS-1Z-C5Z10	1 897															
W4006SS-1Z-C5Z5	511	40	5	3.175	40.5	37.2	2.5×2	23 900	70 500	1 420	28.5	67	101	39	15	89
W4010SS-1Z-C5Z5	911															
W4016SS-1Z-C5Z5	1 511															

dimensions: Bolt hole W	X	Y	Z	Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	L_1	L_2	Shaft end, left d_3	L_3	Overall length L_o	Lead accuracy: Travel compensation T	Deviation e_p	Variation v_u	Run-out: Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
90	9	14	8.5	M6×1	500	32	60	250	26.4	100	850	-0.012	0.027	0.020	0.075	0.019	0.013	7.5	2 180	22	11
					700			250		100	1 050	-0.017	0.035	0.025	0.090			8.5			
					1 000			300		100	1 400	-0.024	0.040	0.027	0.120			10.5			
					1 400			350		120	1 870	-0.034	0.054	0.035	0.150			13.1			
					1 800			350		120	2 270	-0.043	0.065	0.040	0.200			15.2	1 820		
98	11	17.5	11	M6×1	700	36	60	300	30.4	100	1 100	-0.017	0.035	0.025	0.065	0.019	0.013	10.9	1 940	27	14
					1 200			350		120	1 670	-0.029	0.046	0.030	0.100			14.9			
					2 000			350		120	2 470	-0.048	0.065	0.040	0.130			20.4			
83	9	14	8.5	Rc1/8	600	40	50	300	37.2	100	1 000	-0.014	0.030	0.023	0.050	0.019	0.013	11.1	1 750	14	7.0
					1 000			300			1 400	-0.024	0.040	0.027	0.080			14.8			
					1 600			350			2 050	-0.038	0.054	0.035	0.130			20.8			

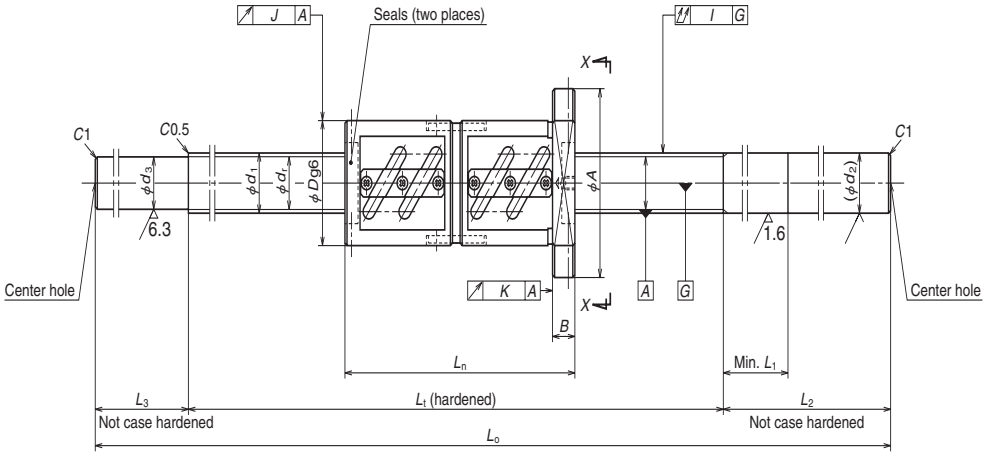Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: DFT




View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Overall length L_n
W3205SS-2D-C5Z10	310	32	10	6.350	33	26.4	2.5×2	54 500	110 000	3 240	83	74	108	41	15	190
W3207SS-2D-C5Z10	510															
W3210SS-5D-C5Z10	810															
W3214SS-2D-C5Z10	1 210															
W3218SS-2D-C5Z10	1 610															
W3607SS-2D-C5Z10	507	36	10	6.350	37	30.4	2.5×2	58 000	122 000	3 430	93	75	120	45	18	193
W3612SS-2D-C5Z10	1 007															
W3620SS-2D-C5Z10	1 807															

dimensions: Bolt hole W	X	Y	Z	Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	L_1	L_2	Shaft end, left d_3	L_3	Overall length L_o	Lead accuracy: Travel compensation T	Deviation e_p	Variation v_u	Run-out: Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
90	9	14	8.5	M6×1	500	32	60	250	26.4	100	850	-0.012	0.027	0.020	0.075	0.019	0.013	9.5	2 180	57	29
					700			250		100	1 050	-0.017	0.035	0.025	0.090			10.6			
					1 000			300		100	1 400	-0.024	0.040	0.027	0.120			12.5			
					1 400			350		120	1 870	-0.034	0.054	0.035	0.150			15.1			
					1 800			350		120	2 270	-0.043	0.065	0.040	0.200			17.2	1 910		
98	11	17.5	11	M6×1	700	36	60	300	30.4	100	1 100	-0.017	0.035	0.025	0.065	0.019	0.013	12.8	1 940	67	34
					1 200			350		120	1 670	-0.029	0.046	0.030	0.100			16.8			
					2 000			350		120	2 470	-0.048	0.065	0.040	0.130			22.3			

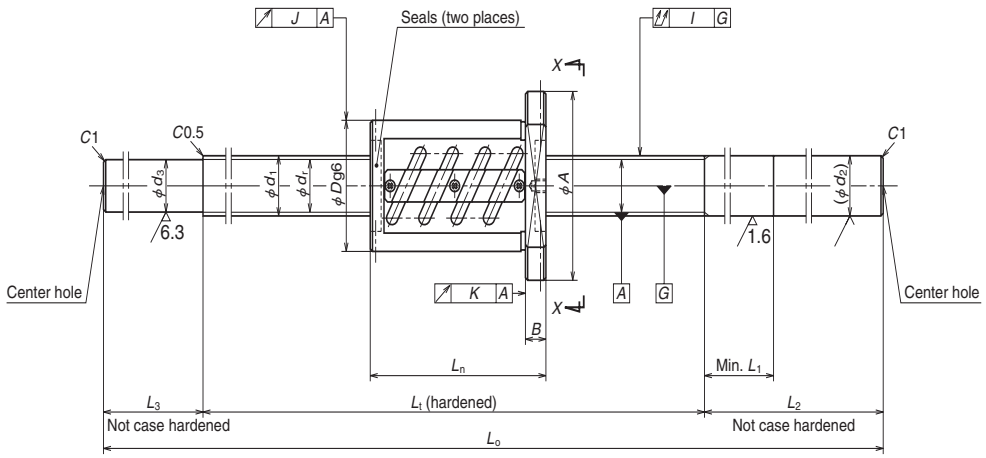Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: ZFT




View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Overall length L_n
W4007SS-1Z-C5Z8	570	40	8	4.762	40.5	35.5	2.5×2	41 100	103 000	2 450	64	74	108	41	15	130
W4012SS-1Z-C5Z8	1 070															
W4018SS-1Z-C5Z8	1 670															
W4007SS-2Z-C5Z10	597	40	10	6.350	41	34.4	2.5×1	33 700	68 300	2 160	64	82	124	47	18	103
W4010SS-2Z-C5Z10	897															
W4014SS-1Z-C5Z10	1 297															
W4018SS-2Z-C5Z10	1 697															
W4024SS-1Z-C5Z10	2 297															
W4010SS-4Z-C5Z12	883	40	12	7.144	41.5	34.1	2.5×1	39 500	77 200	2 550	83	86	128	48	18	117
W4016SS-2Z-C5Z12	1 483															
W4025SS-1Z-C5Z12	2 383															

dimensions: Bolt hole W	X	Y	Z	Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	L_1	L_2	Shaft end, left d_3	L_3	Overall length L_o	Lead accuracy: Travel compensation T	Deviation e_p	Variation v_u	Run-out: Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
90	9	14	8.5	Rc1/8	700	40	50	300	35.5	100	1 100	–0.017	0.035	0.025	0.065	0.019	0.013	13.0	1 750	27	14
					1 200			350		100	1 650	–0.029	0.046	0.030	0.100			18.0			
					1 800			350		120	2 270	–0.043	0.065	0.040	0.130			23.5			
102	11	17.5	11	Rc1/8	700	40	60	300	34.4	100	1 100	–0.017	0.035	0.025	0.065	0.025	0.015	13.3	1 750	30	15
					1 000			300		100	1 400	–0.024	0.040	0.027	0.080			15.9			
					1 400			350		120	1 870	–0.034	0.054	0.035	0.100			20.0			
					1 800			350		120	2 270	–0.043	0.065	0.040	0.130			23.4			
					2 400			400		150	2 950	–0.058	0.077	0.046	0.170			29.4			
106	11	17.5	11	Rc1/8	1 000	40	70	300	34.1	100	1 400	–0.024	0.040	0.027	0.080	0.025	0.015	16.7	1 750	35	18
					1 600			350		150	2 100	–0.038	0.054	0.035	0.130			22.9			
					2 500			400		150	3 050	–0.060	0.077	0.046	0.170			31.1	1 220		

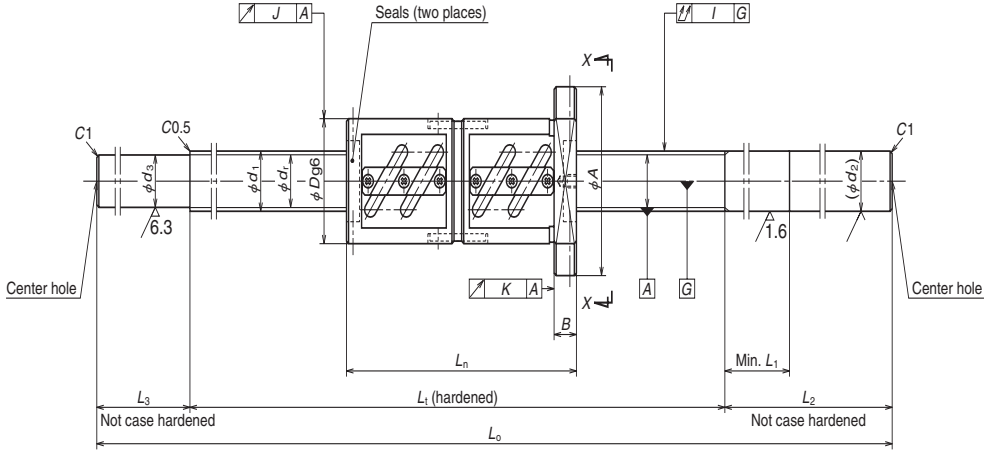Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: DFT




View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut Outside dia. D	Nut Flange A	Nut Flange G	Nut Flange B	Nut Overall length L_n
W4007SS-3D-C5Z10	507	40	10	6.350	41	34.4	2.5×2	61 200	137 000	3 630	108	82	124	47	18	193
W4010SS-3D-C5Z10	807															
W4014SS-2D-C5Z10	1 207															
W4018SS-3D-C5Z10	1 607															
W4024SS-2D-C5Z10	2 207															
W4010SS-5D-C5Z12	775	40	12	7.144	41.5	34.1	2.5×2	71 700	154 000	4 310	138	86	128	48	18	225
W4016SS-3D-C5Z12	1 375															
W4025SS-2D-C5Z12	2 275															

dimensions Bolt hole W	X	Y	Z	Oil hole Q	Screw shaft dimensions Threaded length L_t	Shaft end, right d_2	L_1	L_2	Shaft end, left d_3	L_3	Overall length L_o	Lead accuracy Travel compensation T	Deviation e_p	Variation v_u	Run-out Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
102	11	17.5	11	Rc1/8	700	40	60	300	34.4	100	1 100	–0.017	0.035	0.025	0.065	0.025	0.015	15.5	1 750	74	37
					1 000			300		100	1 400	–0.024	0.040	0.027	0.080			18.1			
					1 400			350		120	1 870	–0.034	0.054	0.035	0.100			22.2			
					1 800			350		120	2 270	–0.043	0.065	0.040	0.130			25.6			
					2 400			400		150	2 950	–0.058	0.077	0.046	0.170			31.6	1 370		
106	11	17.5	11	Rc1/8	1 000	40	70	300	34.1	100	1 400	–0.024	0.040	0.027	0.080	0.025	0.015	19.7	1 750	93	47
					1 600			350		150	2 100	–0.038	0.054	0.035	0.130			25.8			
					2 500			400		150	3 050	–0.060	0.077	0.046	0.170			34.0	1 260		

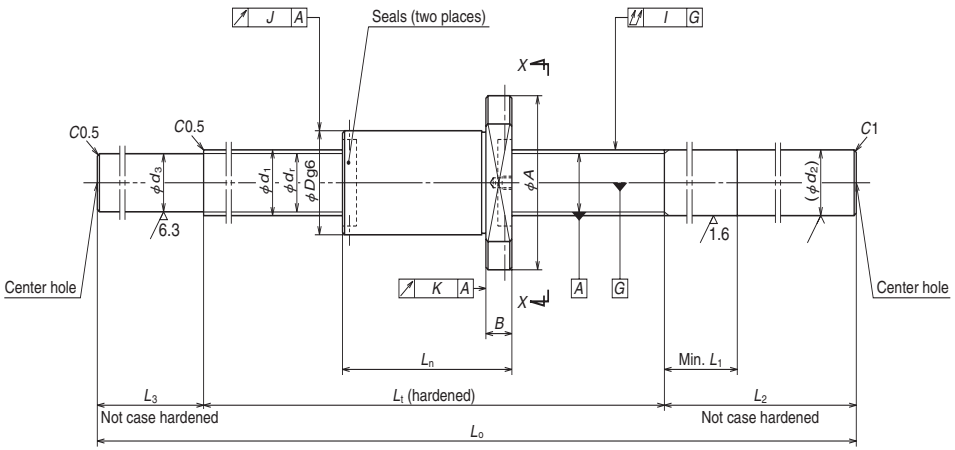Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: ZFD




View X-X

Unit: mm


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut Outside dia. D	Nut Flange A	Nut Flange G	Nut Flange B	Nut Overall length L_n
W4007SS-4ZY-C5Z10	557	40	10	6.350	41.75	35.1	4	45 200	93 100	2 840	83	62	104	40	18	143
W4010SS-6ZY-C5Z10	857															
W4014SS-3ZY-C5Z10	1 257															
W4018SS-4ZY-C5Z10	1 657															
W4024SS-3ZY-C5Z10	2 257															
W5007SS-1ZY-C5Z10	557	50	10	6.350	51.75	45.1	4	51 500	122 000	3 240	108	72	114	44	18	143
W5010SS-3ZY-C5Z10	857															
W5015SS-3ZY-C5Z10	1 357															
W5020SS-3ZY-C5Z10	1 857															
W5026SS-3ZY-C5Z10	2 457															

dimensions Bolt hole W	X	Y	Z	Oil hole Q	Screw shaft dimensions Threaded length L_t	Shaft end, right d_2	L_1	L_2	Shaft end, left d_3	L_3	Overall length L_o	Lead accuracy Travel compensation T	Deviation e_p	Variation v_u	Run-out Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min^{-1})	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
82	11	17.5	11	Rc1/8	700	40	60	300	35.1	100	1 100	–0.015	0.035	0.025	0.065	0.019	0.013	12.1	1 750	32	16
					1 000			300		100	1 400	–0.022	0.040	0.027	0.080			14.7			
					1 400			350		120	1 870	–0.032	0.054	0.035	0.100			18.9			
					1 800			350		120	2 270	–0.041	0.065	0.040	0.130			22.5			
					2 400			400		150	2 950	–0.056	0.077	0.046	0.170			28.5	1 320		
92	11	17.5	11	Rc1/8	700	50	60	300	45.1	100	1 100	–0.015	0.035	0.025	0.065	0.019	0.013	18.3	1 400	39	20
					1 000			300		100	1 400	–0.022	0.040	0.027	0.080			22.5			
					1 500			400		150	2 050	–0.034	0.054	0.035	0.130			31.8			
					2 000			400		150	2 550	–0.046	0.065	0.040	0.170			38.9			
					2 600			500		200	3 300	–0.060	0.093	0.054	0.220			49.5			

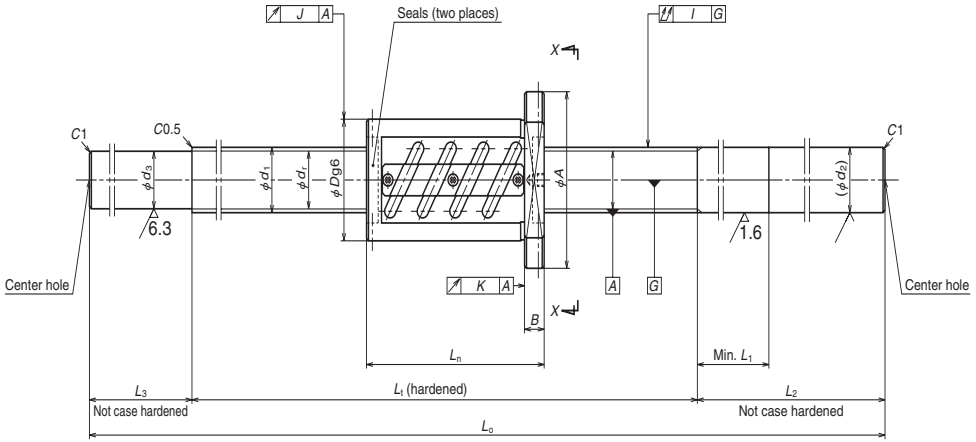Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.



Nut type code: ZFT



View X-X

Unit: mm

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Preload (N)	Dynamic friction torque, median (N·cm)	Nut: Outside dia. D	Nut: Flange A	Nut: Flange G	Nut: Flange B	Nut: Overall length L_n
W4510SS-1Z-C5Z10	897	45	10	6.350	46	39.4	2.5×1	36 300	78 500	2 260	69	88	132	50	18	103
W4516SS-1Z-C5Z10	1 497															
W4525SS-1Z-C5Z10	2 397															
W5010SS-1Z-C5Z10	897	50	10	6.350	51	44.4	2.5×1	37 500	87 200	2 450	78	93	135	51	18	103
W5015SS-1Z-C5Z10	1 397															
W5020SS-1Z-C5Z10	1 897															
W5026SS-1Z-C5Z10	2 497															
W5010SS-2Z-C5Z10	837	50	10	6.350	51	44.4	2.5×2	68 100	174 000	4 020	138	93	135	51	18	163
W5015SS-2Z-C5Z10	1 337															
W5020SS-2Z-C5Z10	1 837															
W5026SS-2Z-C5Z10	2 437															

dimensions: Bolt hole W	X	Y	Z	Oil hole Q	Screw shaft dimensions: Threaded length L_t	Shaft end, right d_2	L_1	L_2	Shaft end, left d_3	L_3	Overall length L_o	Lead accuracy: Travel compensation T	Deviation e_p	Variation v_u	Run-out: Shaft straightness I	Radial run-out J	K	Mass (kg)	Permissible rotational speed N (min⁻¹)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
110	11	17.5	11	Rc1/8	1 000	45	60	300	39.4	100	1 400	-0.024	0.040	0.027	0.080	0.025	0.015	19.7	1 550	34	17
					1 600			400		150	2 150	-0.038	0.054	0.035	0.130			28.1			
					2 500			450		150	3 100	-0.060	0.077	0.046	0.170			38.8	1 400		
113	11	17.5	11	Rc1/8	1 000	50	60	300	44.4	100	1 400	-0.024	0.040	0.027	0.080	0.025	0.015	23.8	1 400	37	19
					1 500			400		150	2 050	-0.036	0.054	0.035	0.130			32.9			
					2 000			400		150	2 550	-0.048	0.065	0.040	0.170			39.8			
					2 600			450		150	3 200	-0.062	0.093	0.054	0.220			48.9			
113	11	17.5	11	Rc1/8	1 000	50	60	300	44.4	100	1 400	-0.024	0.040	0.027	0.080	0.025	0.015	25.5	1 400	59	30
					1 500			400		150	2 050	-0.036	0.054	0.035	0.130			34.6			
					2 000			400		150	2 550	-0.048	0.065	0.040	0.170			41.5			
					2 600			450		150	3 200	-0.062	0.093	0.054	0.220			50.7			

Notes: 1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

B-3-1.6 Ball Screws for Transfer Equipment

1. Features

● Transporting mechanism

A series with accuracy grades of Ct7 and Ct10 only demonstrates high ball screw performance for transporting mechanism of Cartesian type robots and single axis actuators.

The following types are categorized ball screw for transfer equipment. VFA and RMA types have finished shaft ends. RMS type, R series of RNFTL, RNFBL, RNCT, RNFCL, and RNSTL types have blank shaft ends.

Table 1 Classifications of ball screws for transfer equipment

Finished shaft end	VFA type, RMA type
Blank shaft end	RMS type
	R Series RNFTL type, RNFBL type RNCT type, RNFCL type, RNSTL type

● Interchangeable screw shaft and ball nut

Screw shaft and nut assembly components are sold separately, and randomly-matched. The maximum axial play after assembly is shown in the dimension tables.

2. Specifications

(1) Ball recirculation system

Figs. 1, **2**, and **3** show the structures of ball return tube, deflector (bridge type), and end cap ball recirculation systems.

Deflector (bridge type) recirculation system has the feature of compact nut outside diameter for small lead. End cap recirculation system is for screws with high helix lead and multiple start threads. Since the leads are in the range larger than 1.3 times of the screw shaft diameter, it is suitable for high-speed operation.

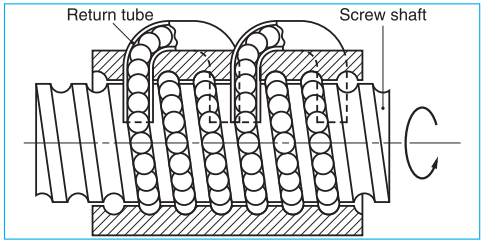


Fig. 1 Structure of return tube recirculation system

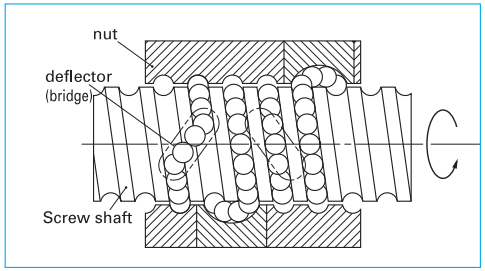


Fig. 2 Structure of deflector (bridge type) recirculation system

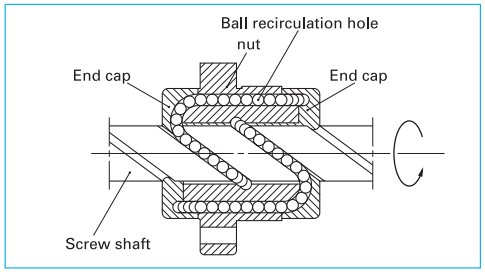


Fig. 3 Structure of end cap recirculation system

(2) Accuracy grade and axial play

Standard lead accuracy and axial play are shown on **Table 2**. Axial play varies with internal specification. Refer to the dimension tables.

Table 2 Accuracy grade and axial play

Accuracy grade	VFA type, RMA type, RMS type: Ct7 R Series: Ct10
Axial play	See dimension tables

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Table 3 Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value	50 000 or less
Criterion of maximum rotational speed	3 000 min^{-1}






d·n value: shaft dia. d [mm] × rotational speed n [min^{-1}]

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

3. Product categories

Ball screws for transfer equipment have models as follows.

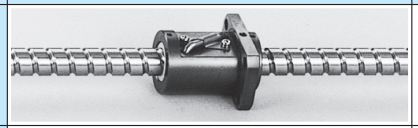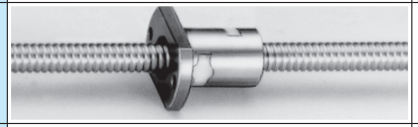Table 4 Product categories of ball screws for transfer equipment

Nut model	Shape	Flange shape	Recirculation system	Preload system	Page
VFA		Flanged rectangular	Return tube type	Non-preload Slight axial play	353 – B358
RMA RMS		Flanged Circular Ⅲ	Deflector (bridge) type	Non-preload Slight axial play	B359 – B372
RNFTL		Flanged Circular Ⅰ Projecting tube type	Return tube type	Non-preload Slight axial play	B373 – B378
RNFBL		Flanged Circular Ⅱ	Return tube type	Non-preload Slight axial play	B379 – B380
RNCT		V-thread (no flange) Projecting tube type	Return tube type	Non-preload Slight axial play	B381 – B382
RNFCL		Flanged Circular Ⅲ	End cap type	Non-preload Slight axial play	B383 – B386
RNSTL		Square type	Return tube type	Non-preload Slight axial play	B387 – B388

4. Structure of reference number

The followings describe the structure of "Reference number for ball screw".

◇Reference number for VFA, RMA, and RMS types

VFA 15 10 - C7 S - 500

- VFA: Ball screw for transfer equipment: VFA, RMA, RMS
- 15: Screw shaft diameter (mm)
- 10: Lead (mm)
- C7: Accuracy grade code
- S: Axial play
- 500: Screw shaft length (mm)

◇Reference number for R series

Nut assembly (example)

RNFTL 25 10 A5 S

- RNFTL: Nut model : RNFTL, RNFBL, RNCT, RNFCL, RNSTL
- 25: Screw shaft diameter (mm)
- 10: Lead (mm)
- A: Internal design code
- 5: Effective turns of balls (turns of balls × number of circuit)
- S: Seal code S: With seal / No code: Without seal

Screw shaft (example)

RS 25 10 A 20

- RS: Product code
- 25: Screw shaft diameter (mm)
- 10: Lead (mm)
- A: Internal design code
- 20: Screw shaft length (in the unit of 100 mm)

5. Combinations of shaft diameter and lead

Combinations of shaft diameter and lead are shown below.
For details of standard stock products, contact NSK.

Table 5 Combinations of shaft diameter and lead for VFA, RMA, RMS types

Screw shaft diameter \ Lead	1	1.5	2	10	20
6	B359, 371				
8	B361, 371	B363, 371	B365, 371		
10			B367, 371		
12			B369, 371	B353	
15				B355	B357

Table 6 Combinations of shaft diameter and lead for R series

Screw shaft diameter (mm)	Lead (mm) 3	4	5	6	8	10	12	16	20	25	32	40	50	64	80
10	○B373 △B381			○B373 ●B379											
12					○B373 ●B379		○B377 ◎B383								
14		○B373 ●B379 △B381 □B387	○B373 ●B379 △B381 □B387												
15									◎B383						
16						○B373		○B377 ◎B383			◎B385				
18					○B373 ●B379 △B381 □B387										
20			○B373 ●B379 △B381 □B387			○B373 ●B379 □B387			○B377 ◎B383			◎B385			
25			○B373 ●B379 △B381 □B387			○B359 ●B365 △B367 □B373				○B377 ◎B383			◎B385		
28				○B375 ●B379 △B381 □B387											
32						○B375 ●B379 △B381 □B387					○B377 ◎B383			◎B385	
36						○B375 ●B379 △B381 □B387									
40						○B375 △B381 ●B379						○B377 ◎B383			◎B385
45							○B375 △B381 □B387								
50						○B375 △B381		○B375 △B381					◎B383		

○: RNFTL ●: RNFBL △: RNCT ◎: RNFCL □: RNSTL

6. Precautions for designing

As shown in the illustration on Page B83 and B103, general precautions for ball screw.

(1) Nut assembly

When delivered, the nut of R series is separated from the screw shaft, and inserted into an arbor shaft. The nut must be inserted to the screw shaft when mounting ball screw.

(a) Consideration to end configuration of screw shaft

The balls may fall out during moving the assembled nut from the arbor to the screw shaft if the sizes and shapes of the arbor and the screw shaft are not appropriate.
If the end of the ball groove can touch the end of the arbor, connect both ends and move the assembled nut from the arbor to the screw shaft (**Fig. 4**).
If the end face of the arbor cannot connect to the end face of the screw because of configuration of both ends of screw shaft, wrap a tape outside of ball screw shaft so that the layers of tape is equal

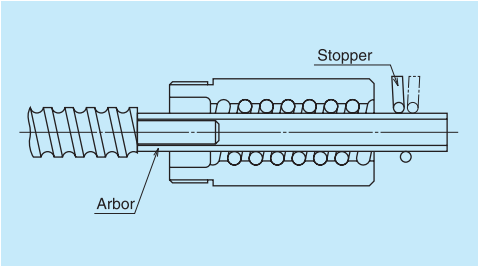


Fig. 4 Inserting nut into screwshaft

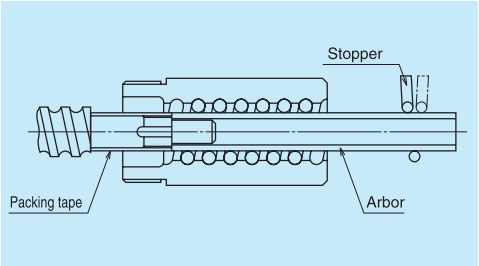


Fig. 5 Arbor and shaft end configuration

with the outside diameter of the arbor (**Fig. 5**).
If there is a key way or a nick along the way, fill such gaps prior to moving the ball nut.

(b) Installation of arbor

Confirm the correct nut orientation for installation.
Remove the stop ring on the side from where the assembled nut is to be removed. Align the centers of the screw shaft and the arbor while pressing firmly the screw shaft end against the arbor.

(c) Moving the nut

Slide the nut until it lightly touches the shoulder of the ball groove section, and stop it. Turn the ball nut to the direction so that it moves to the ball grooves, while pressing the arbor to the screw shaft. Do not separate the arbor from the screw shaft until the ball groove end appears completely in the ball nut.

(2) Shaft end configuration

RMS type and R seriese must be machining of blank shaft ends. See page B27, use of NSK suport unit.

(a) Cutting screw shaft

Carry out the same process as "(1) Machining of blank shaft ends of precision ball screws" above.

(b) Annealing the shaft end (Heat the section of the shaft end to be machined with an acetylene torch. Then gradually cool it in ambient atmosphere.)

* The area not machined loses hardness if exposed to heat. This may shorten the all screw life. Cool with water the areas where should not be heated to avoid heat conduction.

(c) Turning by lathe

Cut to the length, turn shaft end steps, turn thread screw, and provide the center hole. Refer to JIS B1192 which sets standards for the shaft end accuracy.

(d) Processing by grinding

Apply the same precautions as for cutting for centering, securing nut, and work rest. Grind sections where the bearings and a "Spann ring" are installed.

(e) Milling processing
Process keyways and tooth seats for lock washers.


(f) Deburring, washing, and rust prevention
Wash with clean white kerosene after processing. Apply lubricant for immediate use. For later use, apply rust preventive agent.
Note: Contact NSK if nut is accidentally removed.


NSK

Screw shaft ø12

Lead 10

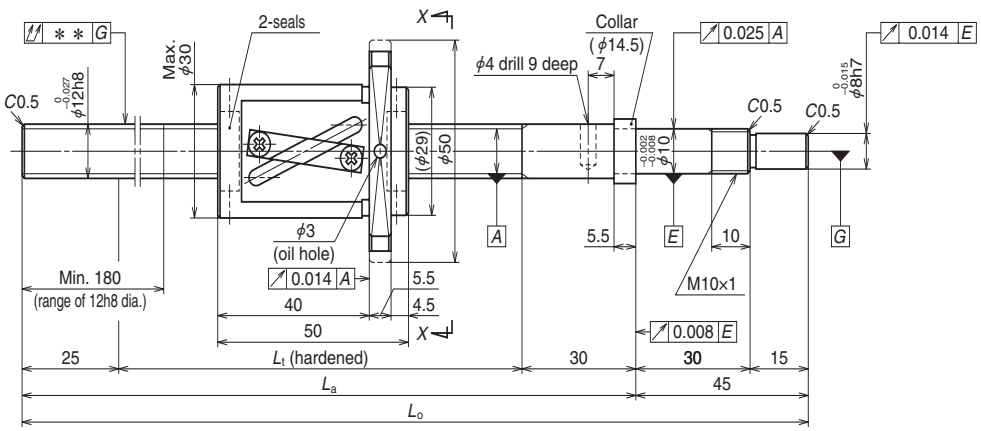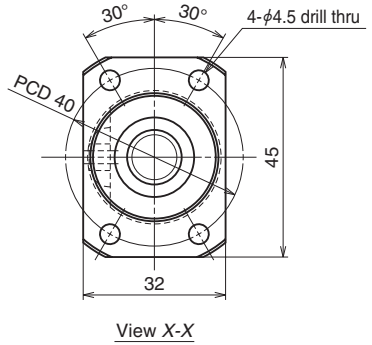Unit: mm





View *X-X*

Ball screw specification		
Shaft dia.xLead / Direction of turn		12 × 10 / Right
Ball recirculation		Return tube
Ball dia. / Ball circle dia.		2.381 / 12.5
Screw shaft root dia.		10.0
Effective turns of balls		2.5 × 1
Accuracy grade / Axial play code		Ct7 / S
Basic load rating (N)	Dynamic C_a	4 430
	Static C_{0a}	6 430
Axial play		0.010 or less
Dynamic friction torque (N·cm)		1.5 or less
Spacer ball		None
Factory-packed grease		NSK grease LR3
Internal spatial volume of nut (cm^3)		1.4
Reference of grease replenishing amount		0.7

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK10-01A (square)	WBK12SF-01 (square)
WBK10-11 (round)	


VFA


Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum (L_t-nut length)	L_t	L_a	L_o
VFA1210C7S-410	250	260	310	365	410
VFA1210C7S-610	450	460	510	565	610

Lead accuracy			Shaft run-out**	Mass (kg)	Permissible rotational speed N (min^{-1})	
					Supporting condition	
T	e_p	υ_{300}			Fixed - Simple support	Fixed - Free
0	0.085	0.052	0.100	0.56	3 000	3 000
0	0.155	0.052	0.160	0.73	3 000	1 300

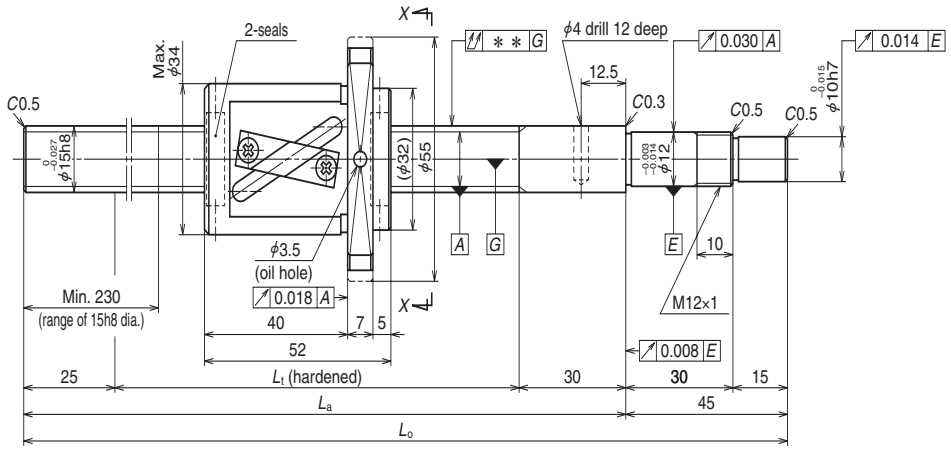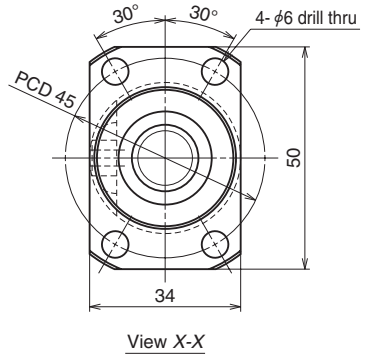Notes: 1. We recommend NSK support units (page B389). WBK12SF-01 (on simple support side) supports ball screw directly on shaft outside diameter.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Permissible rotational speed is determined by d · n value and critical speed. See pages B47 and B349.





View *X-X*

NSK

Screw shaft ø15

Lead 10

Unit: mm

Ball screw specification		
Shaft dia.xLead / Direction of turn		15 × 10 / Right
Ball recirculation		Return tube
Ball dia. / Ball circle dia.		3.175 / 15.5
Screw shaft root dia.		12.2
Effective turns of balls		2.5 × 1
Accuracy grade / Axial play code		Ct7 / S
Basic load rating (N)	Dynamic C_a	8 140
	Static C_{0a}	12 800
Axial play		0.010 or less
Dynamic friction torque (N·cm)		2.5 or less
Spacer ball		None
Factory-packed grease		NSK grease LR3
Internal spatial volume of nut (cm^3)		2.3
Reference of grease replenishing amount		1.2

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK15SF-01 (square)
WBK12-11 (round)	

VFA

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum (L_t-nut length)	L_t	L_a	L_o
VFA1510C7S-500	300	348	400	455	500
VFA1510C7S-700	500	548	600	655	700
VFA1510C7S-1000	800	848	900	955	1 000

Lead accuracy			Shaft run-out**	Mass (kg)	Permissible rotational speed N (min^{-1})	
					Supporting condition	
T	e_p	υ_{300}			Fixed - Simple support	Fixed - Free
0	0.120	0.052	0.075	0.89	3 000	2 600
0	0.195	0.052	0.110	1.1	3 000	1 150
0	0.310	0.052	0.180	1.5	2 340	510


Notes: 1. We recommend NSK support units (page B389). WBK12SF-01 (on simple support side) supports ball screw directly on shaft outside diameter.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Permissible rotational speed is determined by d · n value and critical speed. See pages B47 and B349.


NSK

Screw shaft ø15

Lead 20

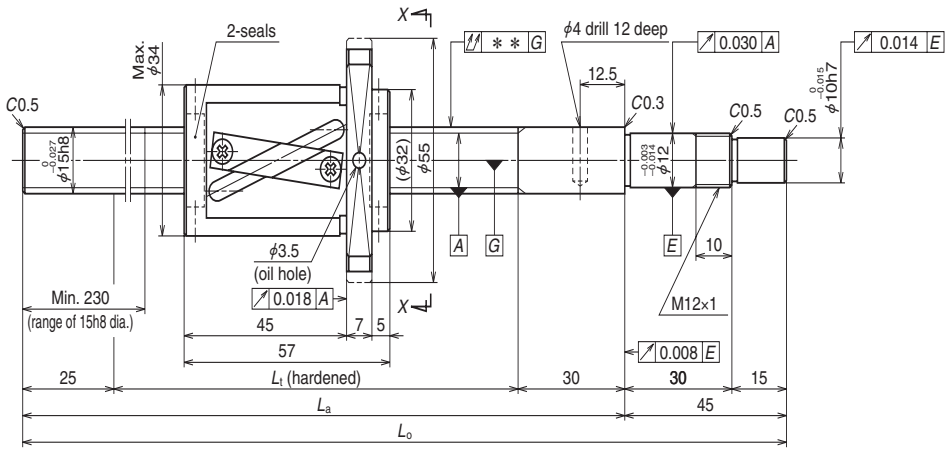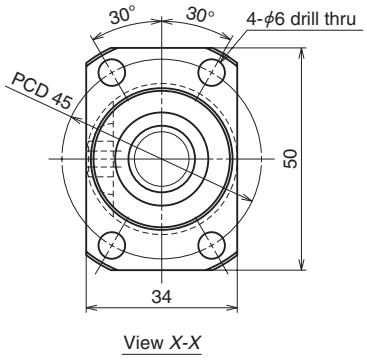Unit: mm





View *X-X*

Ball screw specification		
Shaft dia.xLead / Direction of turn		15 × 20 / Right
Ball recirculation		Return tube
Ball dia. / Ball circle dia.		3.175 / 15.5
Screw shaft root dia.		12.2
Effective turns of balls		1.5 × 1
Accuracy grade / Axial play code		Ct7 / S
Basic load rating (N)	Dynamic C_a	5 080
	Static C_{0a}	7 460
Axial play		0.010 or less
Dynamic friction torque (N·cm)		2.5 or less
Spacer ball		None
Factory-packed grease		NSK grease LR3
Internal spatial volume of nut (cm^3)		2.3
Reference of grease replenishing amount		1.4

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK15SF-01 (square)
WBK12-11 (round)	

VFA

Unit: mm

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum (L_t-nut length)	L_t	L_a	L_o
VFA1520C7S-500	300	343	400	455	500
VFA1520C7S-700	500	543	600	655	700
VFA1520C7S-1000	800	843	900	955	1 000


Lead accuracy			Shaft run-out**	Mass (kg)	Permissible rotational speed N (min^{-1})	
					Supporting condition	
T	e_p	υ_{300}			Fixed - Simple support	Fixed - Free
0	0.120	0.052	0.075	0.94	3 000	2 630
0	0.195	0.052	0.110	1.2	3 000	1 160
0	0.310	0.052	0.180	1.6	2 350	510


Notes: 1. We recommend NSK support units (page B389). WBK12SF-01 (on simple support side) supports ball screw directly on shaft outside diameter.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Permissible rotational speed is determined by d · n value and critical speed. See pages B47 and B349.

Screw shaft ø6

Lead 1

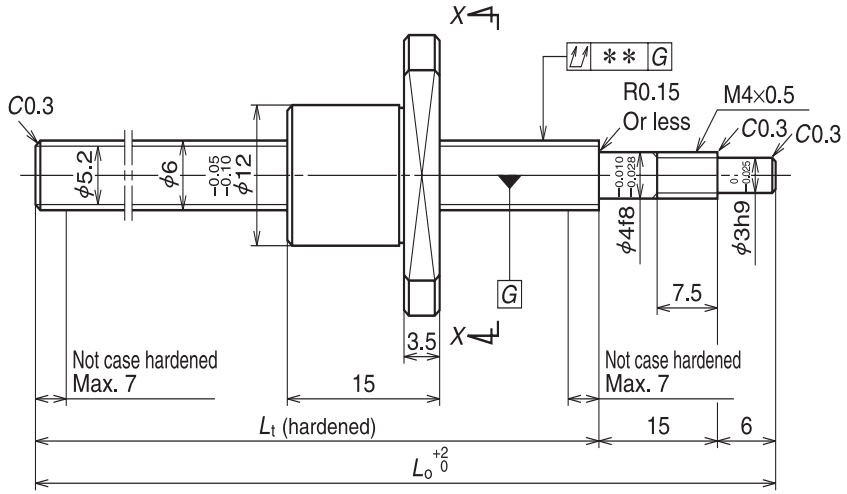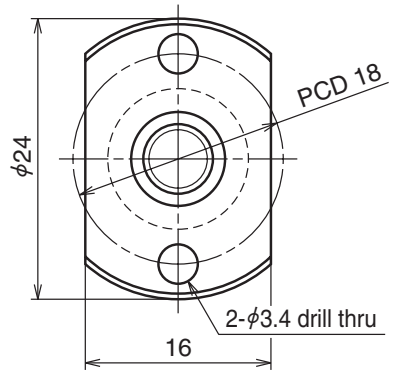Unit: mm





View *X-X*

Ball screw specification		
Shaft dia.xLead / Direction of turn		6 × 1 / Right
Ball recirculation		Deflector (bridge)
Ball dia. / Ball circle dia.		0.800 / 6.2
Screw shaft root dia.		5.2
Effective turns of balls		1 × 3
Accuracy grade / Axial play code		Ct7 / S
Basic load rating (N)	Dynamic C_a	610
	Static C_{0a}	920
Axial play		0.020 or less
Dynamic friction torque (N·cm)		1.0 or less
Spacer ball		None
Factory-packed grease		**See Notes 2.**

Recommended support unit

For drive side (Fixed)
WBK04R-11 (round)

RMA

Unit: mm

Ball screw No.	Stroke		Screw shaft length	
	Nominal	Maximum (L_t-Nut length)	L_t	L_o
RMA0601C7S-160	100	124	139	160
RMA0601C7S-260	200	224	239	260

Lead accuracy			Shaft run-out**	Mass (kg)	Permissible rotational speed N (min^{-1})
Target compensation T	Deviation e_p	Variation v_{300}			
0	0.052	0.052	0.060	0.045	3 000
0	0.085	0.052	0.090	0.065	3 000


Notes: 1. We recommend NSK support bearing kit (page B401).
2. Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. Permissible rotational speed is determined by d·n value and critical speed. See pages B47 and B349.


NSK

Screw shaft ø8

Lead 1

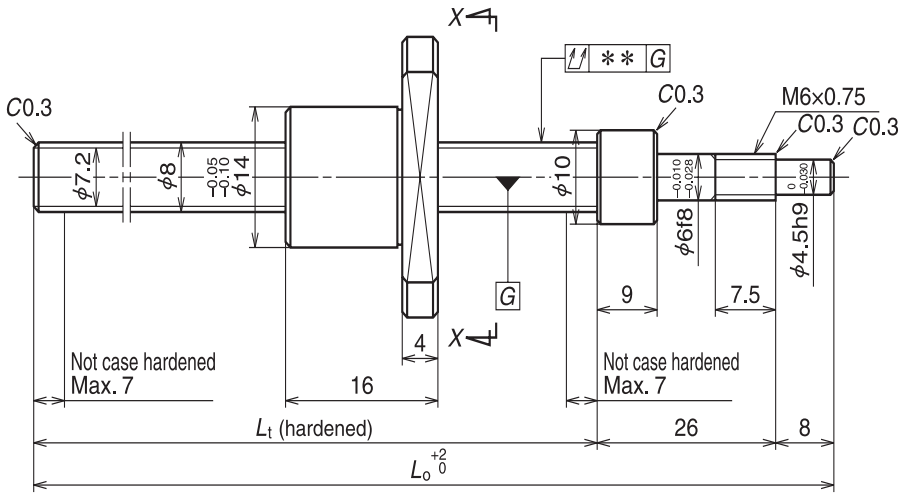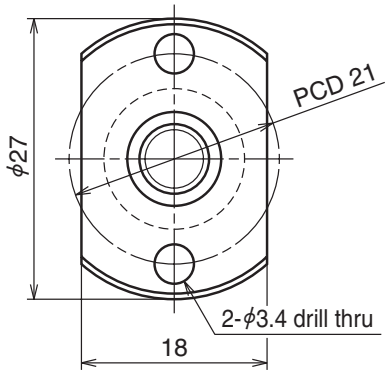Unit: mm





View *X-X*

Ball screw specification		
Shaft dia.xLead / Direction of turn		8 × 1 / Right
Ball recirculation		Deflector (bridge)
Ball dia. / Ball circle dia.		0.800 / 8.2
Screw shaft root dia.		7.2
Effective turns of balls		1 × 3
Accuracy grade / Axial play code		Ct7 / S
Basic load rating (N)	Dynamic C_a	710
	Static C_{0a}	1 290
Axial play		0.020 or less
Dynamic friction torque (N·cm)		1.0 or less
Spacer ball		None
Factory-packed grease		**See Notes 2.**

Recommended support unit

For drive side (Fixed)
WBK06R-11 (round)

RMA

Unit: mm

Ball screw No.	Stroke		Screw shaft length	
	Nominal	Maximum (L_t-Nut length)	L_t	L_o
RMA0801C7S-180	100	130	146	180
RMA0801C7S-280	200	230	246	280

Lead accuracy			Shaft run-out**	Mass (kg)	Permissible rotational speed N (min^{-1})
Target compensation T	Deviation e_p	Variation v_{300}			
0	0.052	0.052	0.060	0.085	3 000
0	0.085	0.052	0.090	0.12	3 000


Notes: 1. We recommend NSK support bearing kit (page B401).
2. Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. Permissible rotational speed is determined by d·n value and critical speed. See pages B47 and B349.


NSK

Screw shaft ø8

Lead 1.5

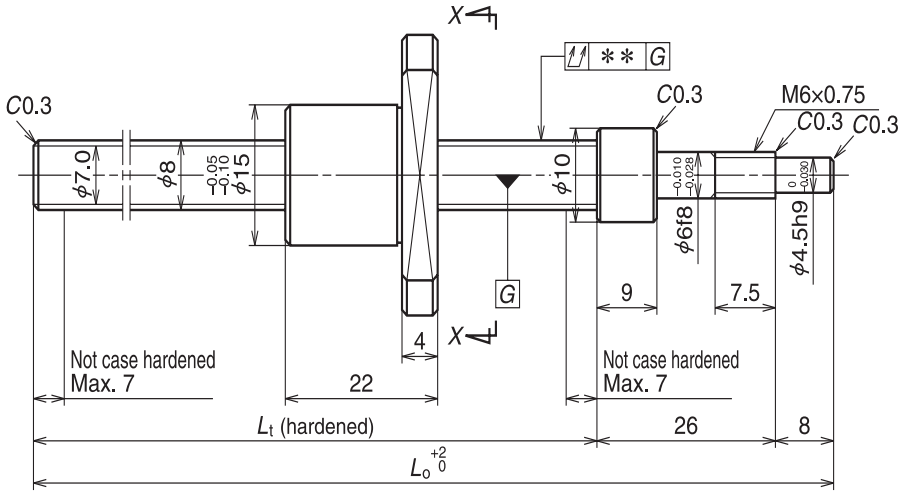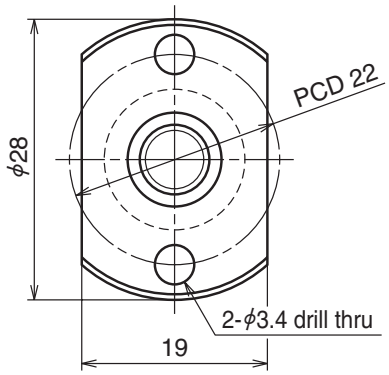Unit: mm





View *X-X*

Ball screw specification		
Shaft dia.xLead / Direction of turn		8 × 1.5 / Right
Ball recirculation		Deflector (bridge)
Ball dia. / Ball circle dia.		1.000 / 8.3
Screw shaft root dia.		7.0
Effective turns of balls		1 × 3
Accuracy grade / Axial play code		Ct7 / S
Basic load rating (N)	Dynamic C_a	955
	Static C_{0a}	1 580
Axial play		0.020 or less
Dynamic friction torque (N·cm)		1.0 or less
Spacer ball		None
Factory-packed grease		**See Notes 2.**

Recommended support unit

For drive side (Fixed)
WBK06R-11 (round)

RMA

Unit: mm

Ball screw No.	Stroke		Screw shaft length	
	Nominal	Maximum (L_t-Nut length)	L_t	L_o
RMA0801.5C7S-180	100	124	146	180
RMA0801.5C7S-280	200	224	246	280

Lead accuracy			Shaft run-out**	Mass (kg)	Permissible rotational speed N (min^{-1})
Target compensation T	Deviation e_p	Variation v_{300}			
0	0.052	0.052	0.060	0.093	3 000
0	0.085	0.052	0.090	0.13	3 000


Notes: 1. We recommend NSK support bearing kit (page B401).
2. Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. Permissible rotational speed is determined by d·n value and critical speed. See pages B47 and B349.


NSK

Screw shaft ø8

Lead 2

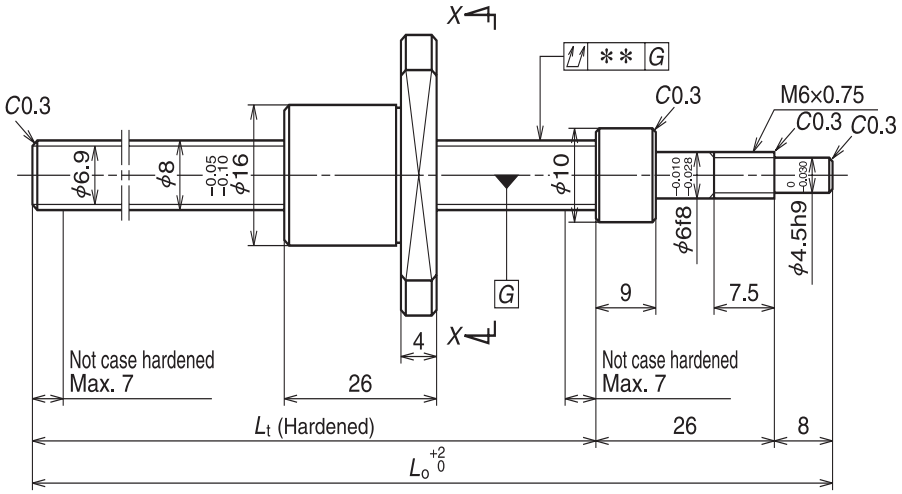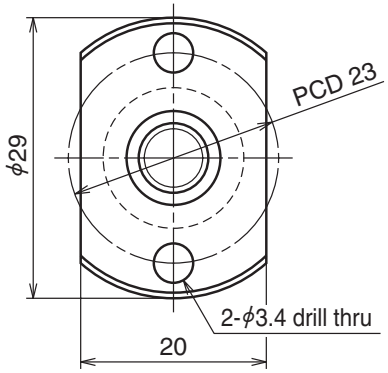Unit: mm





View *X-X*

Ball screw specification		
Shaft dia.xLead / Direction of turn		8 × 2 / Right
Ball recirculation		Deflector (bridge)
Ball dia. / Ball circle dia.		1.200 / 8.3
Screw shaft root dia.		6.9
Effective turns of balls		1 × 3
Accuracy grade / Axial play code		Ct7 / S
Basic load rating (N)	Dynamic C_a	1 260
	Static C_{0a}	1 940
Axial play		0.020 or less
Dynamic friction torque (N·cm)		1.0 or less
Spacer ball		None
Factory-packed grease		**See Notes 2.**

Recommended support unit

For drive side (Fixed)
WBK06R-11 (round)

RMA

Unit: mm

Ball screw No.	Stroke		Screw shaft length	
	Nominal	Maximum (L_t-Nut length)	L_t	L_o
RMA0802C7S-180	100	120	146	180
RMA0802C7S-280	200	220	246	280


Lead accuracy			Shaft run-out**	Mass (kg)	Permissible rotational speed N (min^{-1})
Target compensation T	Deviation e_p	Variation v_{300}			
0	0.052	0.052	0.060	0.10	3 000
0	0.085	0.052	0.090	0.14	3 000


Notes: 1. We recommend NSK support bearing kit (page B401).
2. Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. Permissible rotational speed is determined by d·n value and critical speed. See pages B47 and B349.

Screw shaft ø10

Lead 2

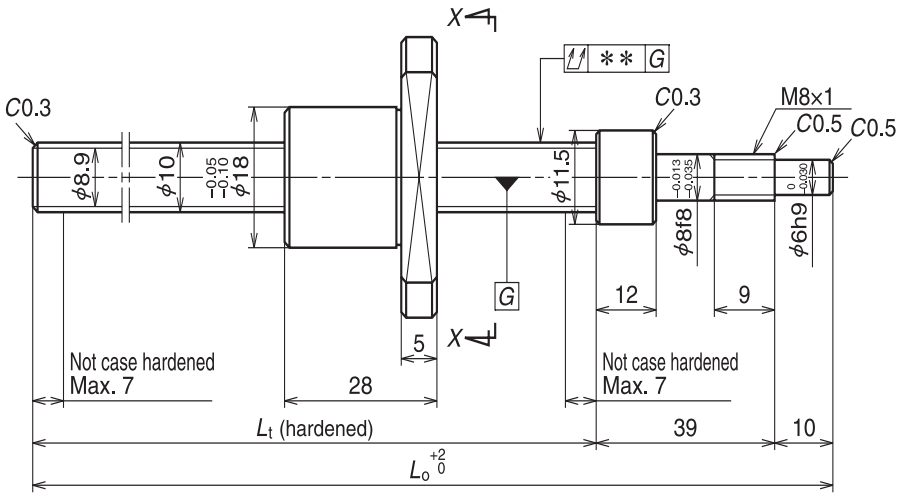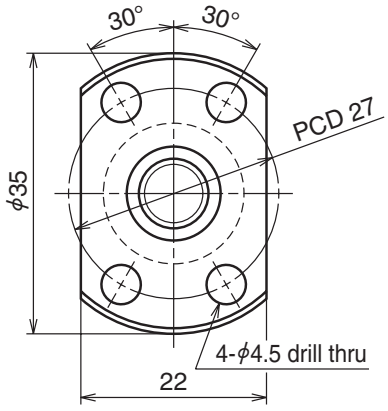Unit: mm





View *X-X*

Ball screw specification		
Shaft dia.×Lead / Direction of turn		10 × 2 / Right
Ball recirculation		Deflector (bridge)
Ball dia. / Ball circle dia.		1.200 / 10.3
Screw shaft root dia.		8.9
Effective turns of balls		1 × 3
Accuracy grade / Axial play code		Ct7 / S
Basic load rating (N)	Dynamic C_a	1 460
	Static C_{0a}	2 620
Axial play		0.020 or less
Dynamic friction torque (N·cm)		1.0 or less
Spacer ball		None
Factory-packed grease		**See Notes 2.**

Recommended support unit

For drive side (Fixed)
WBK08-01A (square)
WBK08-11 (round)

RMA

Unit: mm

Ball screw No.	Stroke		Screw shaft length	
	Nominal	Maximum (L_t-Nut length)	L_t	L_o
RMA1002C7S-250	150	173	201	250
RMA1002C7S-350	250	273	301	350

Lead accuracy			Shaft run-out**	Mass (kg)	Permissible rotational speed N (min^{-1})
Target compensation T	Deviation e_p	Variation v_{300}			
0	0.085	0.052	0.070	0.19	3 000
0	0.085	0.052	0.100	0.25	3 000


Notes: 1. We recommend NSK support bearing kit (page B389).
2. Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. Permissible rotational speed is determined by d·n value and critical speed. See pages B47 and B349.


NSK

Screw shaft ø12

Lead 2

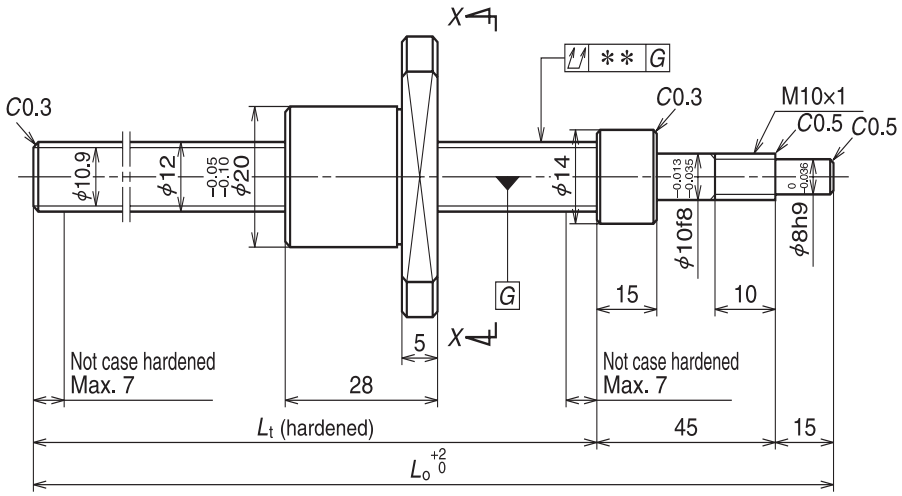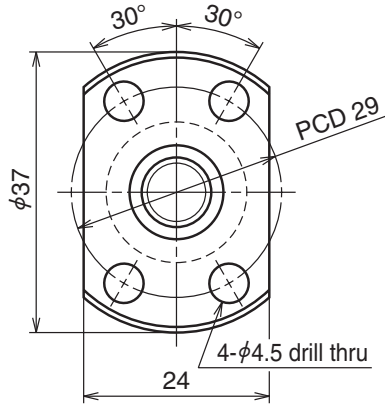Unit: mm





View *X-X*

Ball screw specification		
Shaft dia.xLead / Direction of turn		12 × 2 / Right
Ball recirculation		Deflector (bridge)
Ball dia. / Ball circle dia.		1.200 / 12.3
Screw shaft root dia.		10.9
Effective turns of balls		1 × 3
Accuracy grade / Axial play code		Ct7 / S
Basic load rating (N)	Dynamic C_a	1 590
	Static C_{0a}	3 190
Axial play		0.020 or less
Dynamic friction torque (N·cm)		1.0 or less
Spacer ball		None
Factory-packed grease		**See Notes 2.**

Recommended support unit

For drive side (Fixed)
WBK10-01A (square)
WBK10-11 (round)

RMA


Unit: mm


Ball screw No.	Stroke		Screw shaft length	
	Nominal	Maximum (L_t-Nut length)	L_t	L_o
RMA1202C7S-250	150	162	190	250
RMA1202C7S-350	250	262	290	350

Lead accuracy			Shaft run-out**	Mass (kg)	Permissible rotational speed N (min^{-1})
Target compensation T	Deviation e_p	Variation v_{300}			
0	0.060	0.052	0.070	0.26	3 000
0	0.085	0.052	0.100	0.34	3 000


Notes: 1. We recommend NSK support bearing kit (page B389).
2. Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. Permissible rotational speed is determined by d·n value and critical speed. See pages B47 and B349.

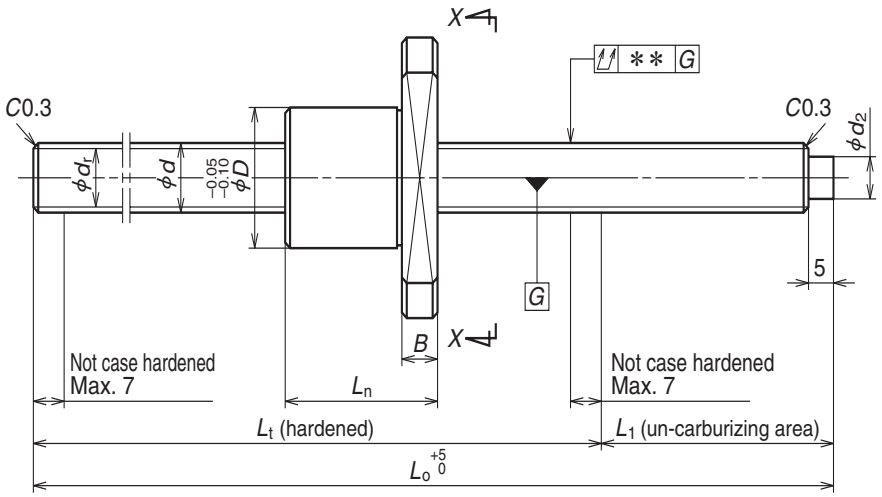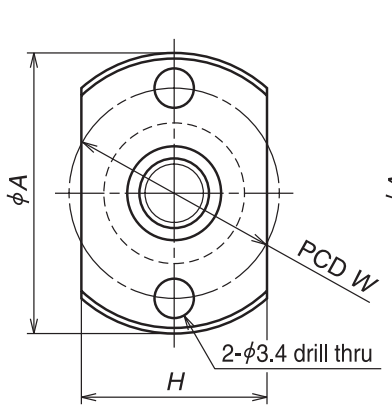Screw shaft ø6
Lead 1
Screw shaft ø8
Lead 1, 1.5, 2
Screw shaft ø10, ø12
Lead 2





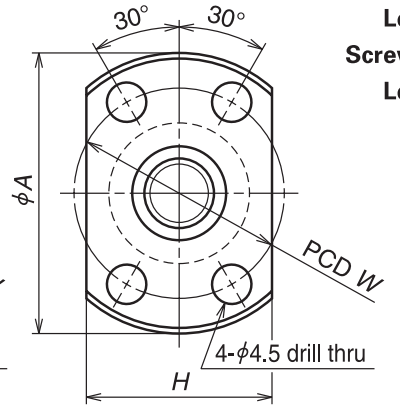View *X-X*
(for screw shaft of 6 and 8 dia.)




View *X-X*
(for screw shaft of 10 and 12 dia.)


Unit: mm

Ball screw No.	Stroke Max. L_t-L_n	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial play Max.
RMS0601C7S-300	235	6	1	0.800	6.2	5.3	3	610	920	0.02
RMS0801C7S-300	234		1	0.800	8.2	7.3		710	1 290	
RMS0801.5C7S-300	228	8	1.5	1.000	8.3	7.2	3	955	1 580	0.02
RMS0802C7S-300	224		2	1.200	8.3	7.0		1 260	1 940	
RMS1002C7S-350	262	10	2	1.200	10.3	9.0	3	1 460	2 620	0.02
RMS1202C7S-350	262	12	2	1.200	12.3	11.0	3	1 590	3 190	0.02

Nut dimensions D	A	H	B	L_n	W	Screw shaft dimensions Effective thread length L_t	Shaft end L_1	Shaft end d_2	Overall length L_o	Lead accuracy Target compensation T	Deviation e_p	Variation v_{300}	Shaft run-out**	Mass (Kg)	Permissible rotational speed N (min^{-1})
12	24	16	3.5	15	18	250	50	4	300	0	0.085	0.052	0.09	0.075	
14	27	18		16	21									0.13	
15	28	19	4	22	22	250	50	6	300	0	0.085	0.052	0.09	0.14	3 000
16	29	20		26	23									0.15	
18	35	22	5	28	27	290	60	8	350	0	0.085	0.052	0.10	0.25	
20	37	24	5	28	29	290	60	10	350	0	0.085	0.052	0.10	0.35	

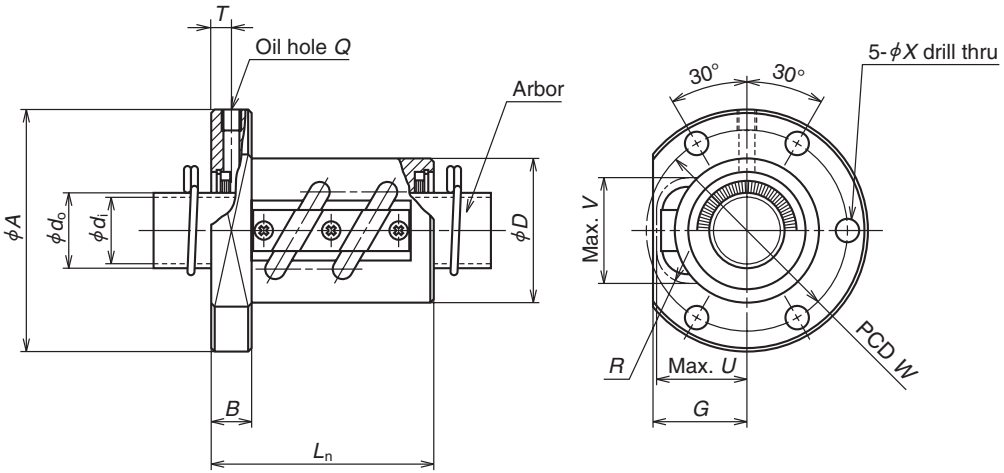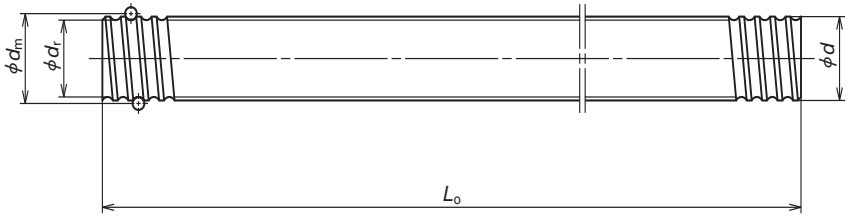Notes: 1. We recommend NSK support unit (page B389) or support kit (page B401).
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
3. Seal is not installed.
4. Permissible rotational speed is determined by d·n value and critical speed. See pages B47 and B349.







Unit: mm

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial play Max.	Ball nut dimensions: Outside dia. D
RNFTL 1003A3.5	10	3	2.381	10.65	8.1	3.5×1	4 440	6 700	0.10	20
RNFTL 1006A2.5S	10	6	2.381	10.65	8.1	2.5×1	3 280	4 730	0.10	20
RNFTL 1208A2.5S	12	8	2.778	12.65	9.6	2.5×1	4 290	6 610	0.10	25
RNFTL 1404A3.5S	14	4	2.778	14.5	11.5	3.5×1	6 310	10 800	0.10	25
RNFTL 1405A2.5S	14	5	3.175	14.5	11.0	2.5×1	6 170	9 940	0.10	30
RNFTL 1610A2.5 **RNFTL 1610A2.5S**	16	10	3.175	16.75	13.3	2.5×1	6 810	11 600	0.10	30
RNFTL 1808A3.5 **RNFTL 1808A3.5S**	18	8	4.762	18.5	13.6	3.5×1	15 500	26 200	0.15	34
RNFTL 2005A2.5 **RNFTL 2005A2.5S**	20	5	3.175	20.5	17.0	2.5×1	7 500	14 200	0.10	40
RNFTL 2010A2.5 **RNFTL 2010A2.5S**	20	10	4.762	21.25	16.2	2.5×1	12 700	21 600	0.15	40
RNFTL 2505A5 **RNFTL 2505A5S**	25	5	3.175	25.5	22.0	2.5×2	15 100	36 300	0.10	42
RNFTL 2510A2.5 **RNFTL 2510A2.5S**	25	10	6.35	26	19.0	2.5×1	20 500	34 900	0.20	44
RNFTL 2510A5 **RNFTL 2510A5S**						2.5×2	37 300	69 800		44

Ball nut dimensions: Flange A	G	B	Length L_n	Bolt hole W	X	Oil hole Q	T	Projecting tube U	V	R	Nut Mass. (kg)	Arbor: Outside dia. d_0	Bore d_r	Screw shaft: Standard length L_o			Screw shaft No.	Shaft mass/m (kg)	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
40	15	6	34	30	4.5	M3×0.5	3.0	15	15	7	0.092	8.1	6.1	400	800	–	RS1003A··	0.50	–	–
40	15	6	36	30	4.5	M3×0.5	3.5	15	15	5	0.095	8.1	6.1	400	800	–	RS1006A··	0.56	1.1	0.6
45	19	8	46	35	4.5	M3×0.5	5.5	19	18	7	0.18	9.6	7.6	400	800	–	RS1208A··	0.74	1.8	0.9
50	19	10	43	40	4.5	M6×1	5.0	19	20	7	0.20	11.5	9.5	500	1 000	–	RS1404A··	1.02	2.0	1.0
50	22	10	45	40	4.5	M6×1	5.0	22	21	8	0.26	11.0	9.0	500	1 000	–	RS1405A··	1.00	2.4	1.2
53	23	10	54	41	5.5	M6×1	5.5	23	22.5	8	0.28	13.3	11.3	500	1 000	1 500	RS1610A··	1.37	2.7	1.4
63	27	12	58	49	6.6	M6×1	6.0	27	27	8	0.43	13.6	11.6	500	1 000	1 500	RS1808A··	1.60	5.2	2.6
60	28	10	46	50	4.5	M6×1	5.0	28	27	10	0.42	17.0	14.6	500	1 000	2 000	RS2005A··	2.17	3.5	1.8
67	30	12	59	53	6.6	M6×1	6.0	30	29	12	0.55	16.2	13.8	500	1 000	2 000	RS2010A··	2.18	7.1	3.6
71	28	12	66	57	6.6	M6×1	6.0	28	31	10	0.62	22.0	19.6	1 000	2 000	2 500	RS2505A··	3.47	6.5	3.3
80	34	15	62	62	9	M6×1	7.5	34	37	17	0.75	19.0	16.6	1 000	2 000	2 500	RS2510A··	3.13	13	6.5
80	34	15	92	62	9	M6×1	7.5	34	37	17									18	9.0

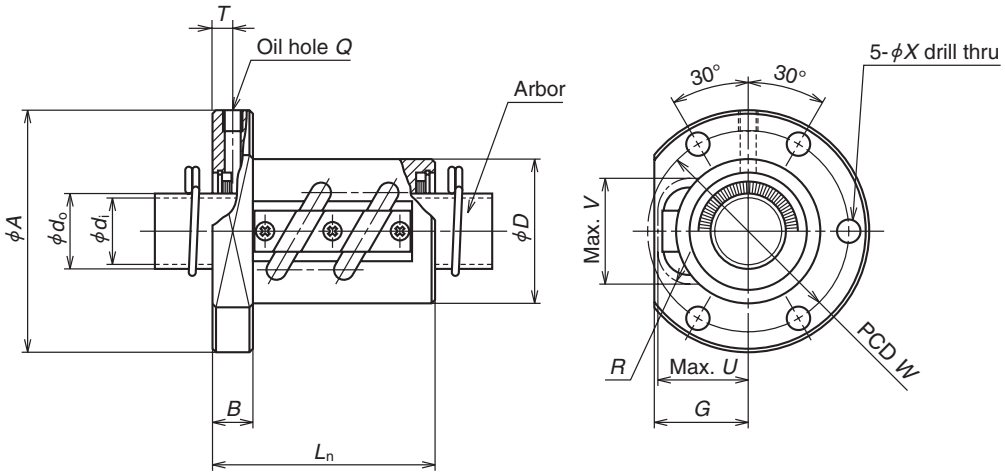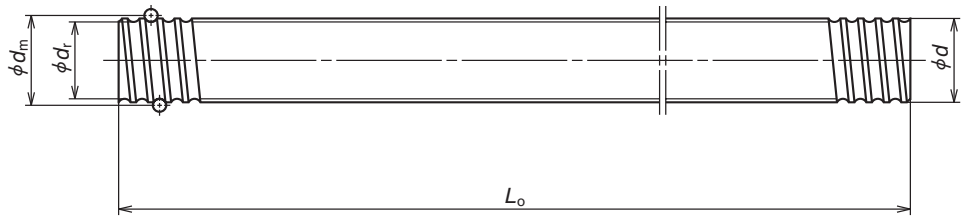Notes: 1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
2. Actual screw shaft length may become slightly longer than nominal length L_o due to manufacturing tolerance.
3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without.
In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal.
Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.
4. Nut assembly with arbor and screw shaft are separate at time of delivery.
5. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with ··.
6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.
7. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
8. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals.
Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas.
See page D16 for details.







Unit: mm

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial play Max.	Ball nut dimensions: Outside dia. D
RNFTL 2806A2.5 **RNFTL 2806A2.5S**	28	6	3.175	28.5	25.0	2.5×1	8 760	20 200	0.10	50
RNFTL 2806A5 **RNFTL 2806A5S**						2.5×2	15 900	40 500		50
RNFTL 3210A5 **RNFTL 3210A5S**	32	10	6.35	33.75	27.0	2.5×2	42 000	91 800	0.20	55
RNFTL 3610A2.5 **RNFTL 3610A2.5S**	36	10	6.35	37	30.0	2.5×1	24 700	50 800	0.20	60
RNFTL 3610A5 **RNFTL 3610A5S**						2.5×2	44 900	102 000		60
RNFTL 4010A7 **RNFTL 4010A7S**	40	10	6.35	41.75	35.0	3.5×2	63 100	164 000	0.20	65
RNFTL 4512A5 **RNFTL 4512A5S**	45	12	7.144	46.5	39.0	2.5×2	58 500	147 000	0.23	70
RNFTL 5010A7 **RNFTL 5010A7S**	50	10	6.35	51.75	45.0	3.5×2	70 100	205 000	0.20	80
RNFTL 5016A5 **RNFTL 5016A5S**	50	16	9.525	52	42.0	2.5×2	117 000	299 000	0.23	85

Ball nut dimensions: Flange A	G	B	Length L_n	Bolt hole W	X	Oil hole Q	T	Projecting tube U	V	R	Nut Mass. (kg)	Arbor: Outside dia. d_0	Bore d_r	Screw shaft: Standard length L_o			Screw shaft No.	Shaft mass/m (kg)	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
79	33	15	55	65	6.6	M6×1	7.5	33	34	10	0.85	25.0	22.6	1 000	2 000	2 500	RS2806A··	4.47	5.9	3.0
79	33	15	79	65	6.6	M6×1	7.5	33	34	10	1.07								8.4	4.2
97	39	18	97	75	11	M6×1	9.0	39	42	17	1.55	27.0	24.6	1 000	2 000	3 000	RS3210A··	5.53	29	15
102	42	18	68	80	11	M6×1	9.0	42	46	17	1.47	30.0	27.6	1 000	2 000	3 000	RS3610A··	6.91	21	11
102	42	18	98	80	11	M6×1	9.0	42	46	17	1.80								33	17
114	44	20	120	90	14	M6×1	10.0	44	50	20	2.49	35.0	31.8	2 000	3 000	4 000	RS4010A··	8.87	42	21
130	47	22	116	100	18	M6×1	11.0	47	55	20	3.07	39.0	35.8	2 000	3 000	4 000	RS4512A··	11.16	49	25
140	52	22	122	110	18	M6×1	11.0	52	59	20	4.06	45.0	41.8	2 000	3 000	4 000	RS5010A··	14.15	53	27
163	57	28	146	125	22	M6×1	14.0	57	63	25	6.42	42.0	38.8	2 000	3 000	4 000	RS5016A··	13.48	94	47

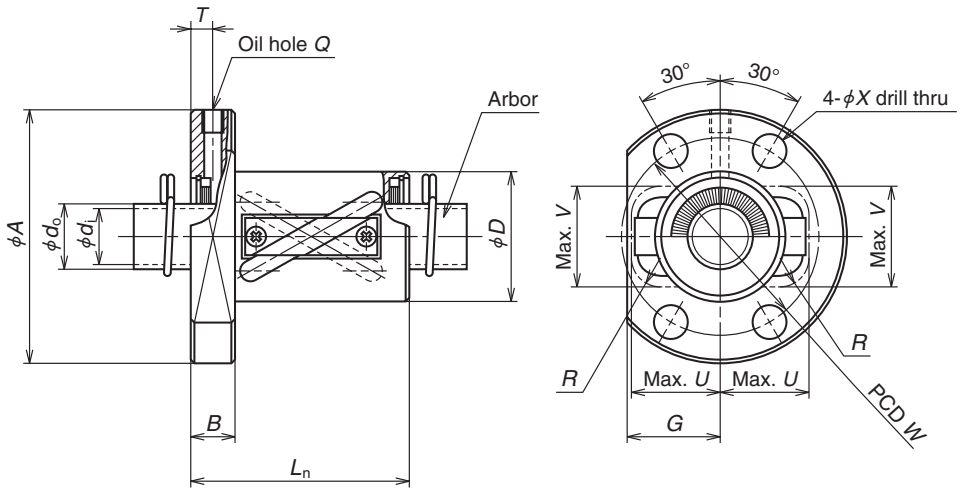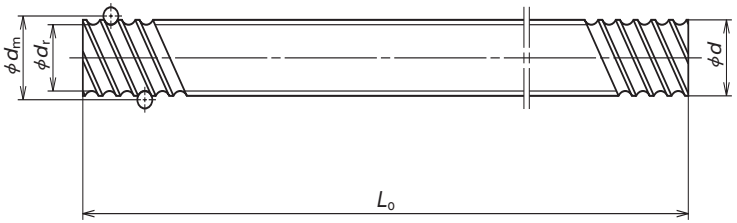Notes: 1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
2. Actual screw shaft length may become slightly longer than nominal length L_o due to manufacturing tolerance.
3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without.
In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal.
Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.
4. Nut assembly with arbor and screw shaft are separate at time of delivery.
5. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with ··.
6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.
7. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
8. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas.
See page D16 for details.






Unit: mm


Ball nut No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial play Max.	Ball nut dimensions: Outside dia. D
RNFTL 1212A3	12	12	2.381	12.65	10.1	1.5 × 2	3 900	6 250	0.10	24
RNFTL 1616A3 **RNFTL 1616A3S**	16	16	2.778	16.65	13.6	1.5 × 2	5 440	9 550	0.10	30
RNFTL 2020A3 **RNFTL 2020A3S**	20	20	3.175	20.75	17.3	1.5 × 2	8 080	15 700	0.10	35
RNFTL 2525A3 **RNFTL 2525A3S**	25	25	3.969	26	22.0	1.5 × 2	12 100	24 500	0.12	45
RNFTL 3232A3 **RNFTL 3232A3S**	32	32	4.762	33.25	28.0	1.5 × 2	17 600	37 700	0.15	55
RNFTL 4040A3 **RNFTL 4040A3S**	40	40	6.35	41.75	35.0	1.5 × 2	28 100	62 900	0.20	70

Notes: 1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
2. Actual screw shaft length may become slightly longer than nominal length L_o due to manufacturing tolerance.
3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without.
In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal.
Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.

Ball nut dimensions: Flange A	Flange G	Flange B	Length L_n	Bolt hole W	Bolt hole X	Oil hole Q	Projecting tube T	Projecting tube U	Projecting tube V	Projecting tube R	Nut Mass. (kg)	Arbor: Outside dia. d_0	Arbor: Bore d_i	Screw shaft: Standard length L_o			Screw shaft No.	Shaft mass/m (kg)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
44	17	8	44	34	4.5	M3 × 0.5	4.0	17	16	5	0.16	10.1	8.1	400	800	–	RS1212A··	0.74	1.7	0.9
55	22	10	50	43	6.6	M6 × 1	5.0	22	22	7	0.29	13.6	11.6	500	1 000	1 500	RS1616A··	1.37	2.8	1.4
68	25	12	59	52	9	M6 × 1	6.0	25	27	8	0.49	17.3	14.9	500	1 000	2 000	RS2020A··	2.19	4.9	2.5
80	31	12	69	63	9	M6 × 1	6.0	31	32	10	0.80	22.0	19.6	1 000	2 000	2 500	RS2525A··	3.43	9.1	4.6
100	37	15	84	80	11	M6 × 1	7.5	37	40	12	1.46	28.0	25.6	1 000	2 000	3 000	RS3232A··	5.71	19	9.5
120	46	18	103	95	14	M6 × 1	9.0	46	49	15	2.69	35.0	31.8	2 000	3 000	4 000	RS4040A··	8.82	39	20

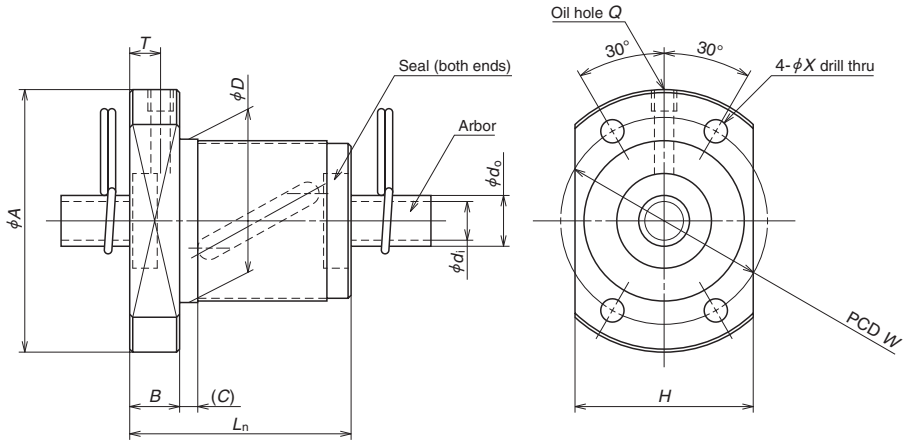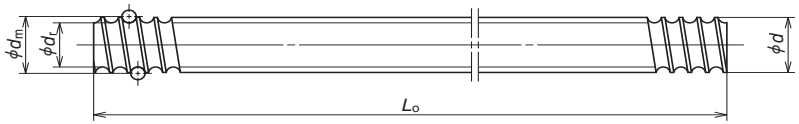4. Nut assembly with arbor and screw shaft are separate at time of delivery.
5. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with ··.
6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.
7. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
8. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.






Unit: mm


Ball nut No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{oa}	Axial play Max.	Ball nut dimensions: Outside dia. D
RNFBL 1006A2.5S	10	6	2.381	10.65	8.1	2.5×1	3 280	4 730	0.10	26
RNFBL 1208A2.5S	12	8	2.778	12.65	9.6	2.5×1	4 290	6 610	0.10	29
RNFBL 1404A3.5S	14	4	2.778	14.5	11.5	3.5×1	6 310	10 800	0.10	31
RNFBL 1405A2.5S	14	5	3.175	14.5	11.0	2.5×1	6 170	9 940	0.10	32
RNFBL 1808A3.5S	18	8	4.762	18.5	13.6	3.5×1	15 500	26 200	0.15	50
RNFBL 2005A2.5S	20	5	3.175	20.5	17.0	2.5×1	7 500	14 200	0.10	40
RNFBL 2010A2.5S	20	10	4.762	21.25	16.2	2.5×1	12 700	21 600	0.15	52
RNFBL 2505A2.5S	25	5	3.175	25.5	22.0	2.5×1	8 340	18 100	0.10	43
RNFBL 2505A5S						2.5×2	15 100	36 300		
RNFBL 2510A2.5S	25	10	6.35	26	19.0	2.5×1	20 500	34 900	0.20	60
RNFBL 2510A5S						2.5×2	37 300	69 800		
RNFBL 2806A2.5S	28	6	3.175	28.5	25.0	2.5×1	8 760	20 200	0.10	50
RNFBL 2806A5S						2.5×2	15 900	40 500		
RNFBL 3210A2.5S	32	10	6.35	33.75	27.0	2.5×1	23 100	45 900	0.20	67
RNFBL 3210A5S						2.5×2	42 000	91 800		
RNFBL 3610A2.5S	36	10	6.35	37	30.0	2.5×1	24 700	50 800	0.20	70
RNFBL 3610A5S						2.5×2	44 900	102 000		
RNFBL 4010A5S	40	10	6.35	41.75	35.0	2.5×2	47 200	116 000	0.20	76

Notes: 1. Actual screw shaft length may become slightly longer than nominal length L_o due to manufacturing tolerance.
2. Nut assembly with arbor and screw shaft are separate at time of delivery.
3. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with ··.

Ball nut dimensions: Flange A	Flange H	Flange B	Length: Overall length L_n	Length (C)	Bolt hole W	Bolt hole X	Oil hole Q	Oil hole T	Nut Mass. (kg)	Arbor: Outside dia. d_0	Arbor: Bore d_i	Screw shaft: Standard length L_o			Screw shaft No.	Shaft mass/m (kg)	Internal spatial volume of nut (cm³)	Standard volume of grease replenishing (cm³)
42	29	8	36	3	34	4.5	M3×0.5	5.0	0.16	8.1	6.1	400	800	–	RS1006A··	0.56	1.1	0.6
45	32	8	44	3	37	4.5	M3×0.5	5.5	0.21	9.6	7.6	400	800	–	RS1208A··	0.81	1.6	0.8
50	37	10	40	4	40	4.5	M6×1	5.0	0.25	11.5	9.5	500	1 000	–	RS1404A··	1.02	2.4	1.2
50	38	10	40	4	40	4.5	M6×1	5.0	0.26	11.0	9.0	500	1 000	–	RS1405A··	1.00	1.9	1.0
80	60	12	61	4	65	6.6	M6×1	6.0	1.00	13.6	11.6	500	1 000	1 500	RS1808A··	1.60	5.8	2.9
60	46	10	40	4	50	4.5	M6×1	5.0	0.37	17.0	14.6	500	1 000	2 000	RS2005A··	2.17	2.8	1.4
82	64	12	61	5	67	6.6	M6×1	6.0	1.05	16.2	13.8	500	1 000	2 000	RS2010A··	2.18	7.6	3.8
67	50	10	40	4	55	5.5	M6×1	5.0	0.40	22.0	19.6	1 000	2 000	2 500	RS2505A··	3.47	3.5	1.8
			55						0.50								4.7	2.4
96	72	15	66	5	78	9.0	M6×1	7.5	1.52	19.0	16.6	1 000	2 000	2 500	RS2510A··	3.13	14	7.0
			96						1.99								19	9.5
80	60	12	47	5	65	6.6	M6×1	6.0	0.70	25.0	22.6	1 000	2 000	2 500	RS2806A··	4.47	4.5	2.3
			65						0.87								7.6	3.8
103	78	15	67	5	85	9.0	M6×1	7.5	1.72	27.0	24.6	1 000	2 000	3 000	RS3210A··	5.53	20	10
			97						2.25								28	14
110	82	17	69	5	90	11.0	M6×1	8.5	1.97	30.0	27.6	1 000	2 000	3 000	RS3610A··	6.91	21	11
			99						2.53								29	15
116	88	17	99	5	96	11.0	M6×1	8.5	2.86	35.0	31.8	2 000	3 000	4 000	RS4010A··	8.87	36	18

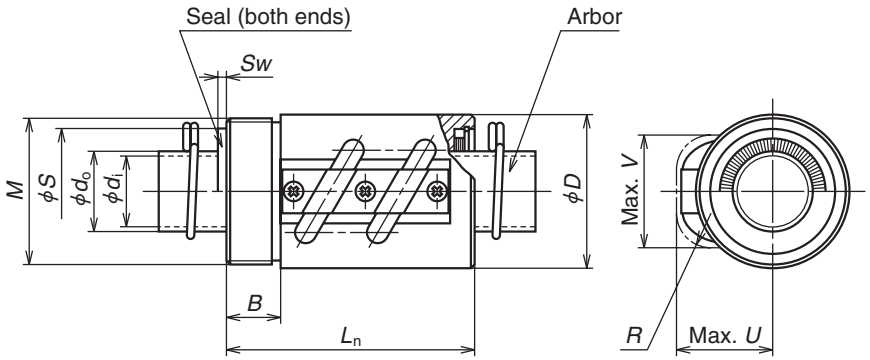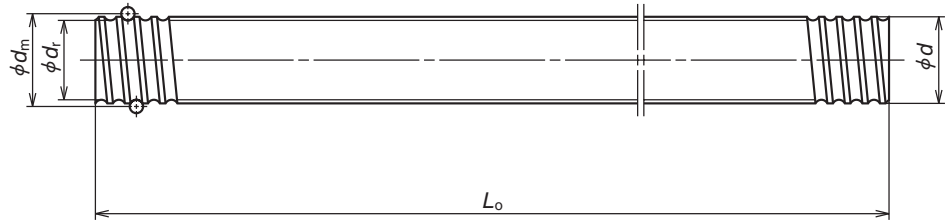4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.
5. Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.
6. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
7. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.






Unit: mm


Ball nut No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{oa}	Axial play Max.	Ball nut dimensions: Outside dia. D
RNCT 1003A3.5	10	3	2.381	10.65	8.1	3.5 × 1	4 440	6 700	0.10	20
RNCT 1404A3.5S	14	4	2.778	14.5	11.5	3.5 × 1	6 310	10 800	0.10	25
RNCT 1405A2.5S	14	5	3.175	14.5	11.0	2.5 × 1	6 170	9 940	0.10	30
RNCT 1808A3.5 **RNCT 1808A3.5S**	18	8	4.762	18.5	13.6	3.5 × 1	15 500	26 200	0.15	34
RNCT 2005A2.5 **RNCT 2005A2.5S**	20	5	3.175	20.5	17.0	2.5 × 1	7 500	14 200	0.10	40
RNCT 2505A5 **RNCT 2505A5S**	25	5	3.175	25.5	22.0	2.5 × 2	15 100	36 300	0.10	42
RNCT 2510A5 **RNCT 2510A5S**	25	10	6.35	26	19.0	2.5 × 2	37 300	69 800	0.20	44
RNCT 2806A5 **RNCT 2806A5S**	28	6	3.175	28.5	25.0	2.5 × 2	15 900	40 500	0.10	50
RNCT 3210A5 **RNCT 3210A5S**	32	10	6.35	33.75	27.0	2.5 × 2	42 000	91 800	0.20	55
RNCT 3610A5 **RNCT 3610A5S**	36	10	6.35	37	30.0	2.5 × 2	44 900	102 000	0.20	60
RNCT 4010A7 **RNCT 4010A7S**	40	10	6.35	41.75	35.0	3.5 × 2	63 100	164 000	0.20	65
RNCT 4512A5 **RNCT 4512A5S**	45	12	7.144	46.5	39.0	2.5 × 2	58 500	147 000	0.23	70
RNCT 5010A7 **RNCT 5010A7S**	50	10	6.35	51.75	45.0	3.5 × 2	70 100	205 000	0.20	80
RNCT 5016A5 **RNCT 5016A5S**	50	16	9.525	52	42.0	2.5 × 2	117 000	299 000	0.23	85

Notes: 1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
2. Actual screw shaft length may become slightly longer than nominal length L_o due to manufacturing tolerance.
3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without.
In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal.
Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.

Ball nut dimensions: V-thread M	B	Length L_n	Projecting tube U	V	R	Nut Mass. (kg)	Seal dimensions: Diameter S	Thickness Sw	Arbor: Outside dia. d_o	Bore d_i	Screw shaft: Standard length L_o			Screw shaft No.	Shaft mass/m (kg)	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
M18 × 1	10	38	15	15	7	0.049	–	–	8.1	6.1	400	800	–	RS1003A··	0.50	–	–
M24 × 1	10	43	19	20	7	0.083	–	–	11.5	9.5	500	1 000	–	RS1404A··	1.02	2.7	1.4
M26 × 1.5	10	45	22	21	8	0.15	–	–	11.0	9.0	500	1 000	–	RS1405A··	1.00	3.1	1.6
M32 × 1.5	12	58	27	27	8	0.21	28.5	2.5	13.6	11.6	500	1 000	1 500	RS1808A··	1.60	6.6	3.3
M36 × 1.5	12	48	28	27	10	0.28	29.5	2.5	17.0	14.6	500	1 000	2 000	RS2005A··	2.17	4.8	2.4
M40 × 1.5	15	69	28	31	10	0.38	34.5	2.5	22.0	19.6	1 000	2 000	2 500	RS2505A··	3.47	8.4	4.2
M42 × 1.5	15	92	34	37	17	0.49	38.5	2.5	19.0	16.6	1 000	2 000	2 500	RS2510A··	3.13	21	1
M45 × 1.5	15	79	33	34	10	0.68	37.5	2.5	25.0	22.6	1 000	2 000	2 500	RS2806A··	4.47	9.7	4.9
M50 × 1.5	18	97	39	42	17	0.79	45.5	2.5	27.0	24.6	1 000	2 000	3 000	RS3210A··	5.53	32	16
M55 × 2	18	98	42	46	17	0.97	50.5	3.0	30.0	27.6	1 000	2 000	3 000	RS3610A··	6.91	32	16
M60 × 2	25	125	44	50	20	1.37	54.5	3.0	35.0	31.8	2 000	3 000	4 000	RS4010A··	8.87	51	26
M65 × 2	30	124	47	55	20	1.42	60.5	3.0	39.0	35.8	2 000	3 000	4 000	RS4512A··	11.16	60	30
M75 × 2	40	140	52	59	20	2.41	64.5	3.0	45.0	41.8	2 000	3 000	4 000	RS5010A··	14.15	76	38
M80 × 2	40	158	57	63	25	3.14	68.5	3.0	42.0	38.8	2 000	3 000	4 000	RS5016A··	13.48	114	57

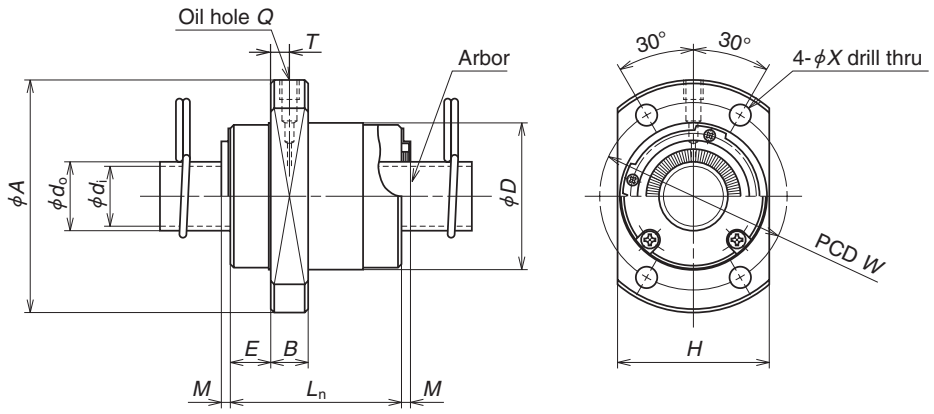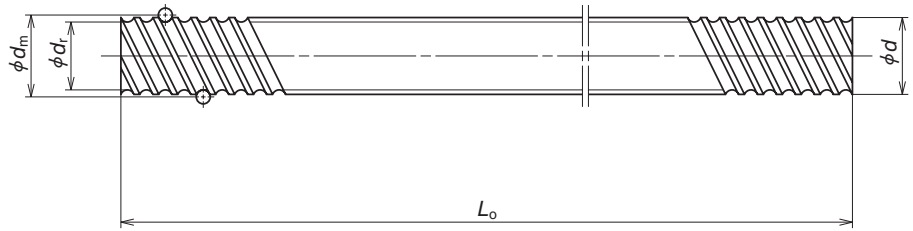4. Nut assembly with arbor and screw shaft are separate at time of delivery.
5. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with ··.
6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.
7. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
8. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals.
Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas.
See page D16 for details.







Unit: mm

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{oa}	Axial play Max.	Ball nut dimensions: Outside dia. D
RNFCL 1212A3	12	12	2.381	12.65	10.1	1.7 × 2	4 350	6 580	0.10	26
RNFCL 1212A6						1.7 × 4	7 890	13 200		
RNFCL 1520A3	15	20	3.175	15.5	12.2	1.7 × 2	7 510	12 300	0.10	33
RNFCL 1520A3S										
RNFCL 1616A3	16	16	2.778	16.65	13.5	1.7 × 2	6 060	10 300	0.10	32
RNFCL 1616A3S										
RNFCL 1616A6						1.7 × 4	11 000	20 500		
RNFCL 1616A6S										
RNFCL 2020A3	20	20	3.175	20.75	17.3	1.7 × 2	9 000	16 700	0.10	39
RNFCL 2020A3S										
RNFCL 2020A6						1.7 × 4	16 300	33 400		
RNFCL 2020A6S										
RNFCL 2525A3	25	25	3.969	26	22.0	1.7 × 2	13 400	26 100	0.12	47
RNFCL 2525A3S										
RNFCL 2525A6						1.7 × 4	24 400	52 200		
RNFCL 2525A6S										
RNFCL 3232A3	32	32	4.762	33.25	28.0	1.7 × 2	19 600	39 800	0.15	58
RNFCL 3232A3S										
RNFCL 3232A6						1.7 × 4	35 600	79 600		
RNFCL 3232A6S										
RNFCL 4040A3	40	40	6.35	41.75	35.0	1.7 × 2	31 300	66 800	0.20	73
RNFCL 4040A3S										
RNFCL 4040A6						1.7 × 4	56 900	134 000		
RNFCL 4040A6S										
RNFCL 5050A3	50	50	7.938	52.25	44.0	1.7 × 2	46 800	104 000	0.25	90
RNFCL 5050A3S										
RNFCL 5050A6						1.7 × 4	85 000	209 000		
RNFCL 5050A6S										

Ball nut dimensions: Flange A	H	B	Length E	L_n	M	Bolt hole W	X	Oil hole Q	T	Nut Mass. (kg)	Arbor: Outside dia. d_o	Arbor: Bore d_i	Screw shaft: Standard length L_o			Screw shaft No.	Shaft mass/m (kg)	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
44	28	6	9	30	–	35	4.5	M3 × 0.5	3.0	0.12	10.1	8.1	400	800	–	RS1212A··	0.74	–	–
51	35	10	11	45	–	42	4.5	M6 × 1	5.0	0.28	12.2	10.2	500	1 000	1 500	RS1520A··	1.15	3.3	1.7
					3														
53	34	10	10	38	–	42	4.5	M6 × 1	5.0	0.23	13.5	11.5	500	1 000	1 500	RS1616A··	1.37	2.6	1.3
					3														
					–													2.6	1.3
					3														
62	41	10	11.5	46	–	50	5.5	M6 × 1	5.0	0.37	17.3	14.9	500	1 000	2 000	RS2020A··	2.19	4.4	2.2
					3														
					–													4.9	2.5
					3														
74	49	12	13	55	–	60	6.6	M6 × 1	6.0	0.62	22.0	19.6	1 000	2 000	2 500	RS2525A··	3.43	8.2	4.1
					3														
					–													8.9	4.5
					3														
92	60	12	16	70	–	74	9	M6 × 1	5.5	1.10	28.0	25.6	1 000	2 000	3 000	RS3232A··	5.71	16	8.0
					3														
					–													17	8.5
					3														
114	75	15	19.5	85	–	93	11	M6 × 1	6.5	2.09	35.0	31.8	2 000	3 000	4 000	RS4040A··	8.82	32	16
					3.5														
					–													33	17
					3.5														
135	92	20	21.5	107	–	112	14	M6 × 1	7.0	3.90	44.0	40.8	2 000	3 000	4 000	RS5050A··	13.81	64	32
					3.5														
					–													68	34
					3.5														

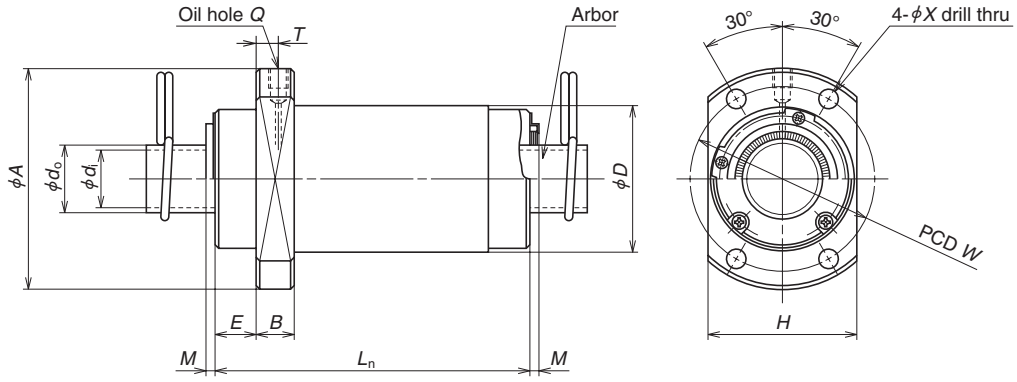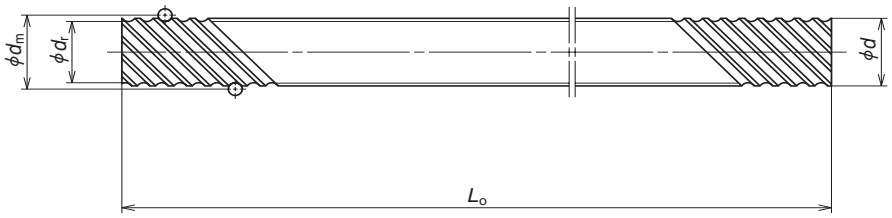Notes: 1. Actual screw shaft length may become slightly longer than nominal length L_o due to manufacturing tolerance.
2. Nut assembly with arbor and screw shaft are separate at time of delivery.
3. Value obtained by diving the standard screw shaft length by 100 mm will be entered at end of the part number where marked with ··.
4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.
5. Length of nut becomes longer (2 x M) for those with "brush" seals.
6. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
7. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.







Unit: mm

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{oa}	Axial play Max.	Ball nut dimensions: Outside dia. D
RNFCL 1632A2	16	32	2.778	16.65	13.5	0.7 × 4	4 880	8 330	0.10	32
RNFCL 1632A2S										
RNFCL 1632A3						1.7 × 2	5 760	10 300		
RNFCL 1632A3S										
RNFCL 1632A6						1.7 × 4	10 500	20 500		
RNFCL 1632A6S										
RNFCL 2040A2	20	40	3.175	20.75	17.3	0.7 × 4	7 170	13 200	0.10	38
RNFCL 2040A2S										
RNFCL 2040A3						1.7 × 2	8 480	16 500		
RNFCL 2040A3S										
RNFCL 2040A6						1.7 × 4	15 400	33 100		
RNFCL 2040A6S										
RNFCL 2550A2	25	50	3.969	26	22.0	0.7 × 4	10 700	20 700	0.12	46
RNFCL 2550A2S										
RNFCL 2550A3						1.7 × 2	12 700	26 500		
RNFCL 2550A3S										
RNFCL 2550A6						1.7 × 4	23 000	53 000		
RNFCL 2550A6S										
RNFCL 3264A3	32	64	4.762	33.25	28.0	1.7 × 2	17 900	40 200	0.15	58
RNFCL 3264A3S										
RNFCL 3264A6						1.7 × 4	32 400	80 300		
RNFCL 3264A6S										
RNFCL 4080A3	40	80	6.350	41.75	35.0	1.7 × 2	29 500	67 900	0.20	73
RNFCL 4080A3S										
RNFCL 4080A6						1.7 × 4	53 600	136 000		
RNFCL 4080A6S										

Ball nut dimensions: Flange A	H	B	Length E	L_n	M	Bolt hole W	X	Oil hole Q	T	Nut Mass. (kg)	Arbor: Outside dia. d_0	Arbor: Bore d_i	Screw shaft: Standard length L_o				Screw shaft No.	Shaft mass/m (kg)	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
50	34	10	10	34	–	41	4.5	M6 × 1	5.5	0.21	13.5	11.5	500	1 000	1 500	–	RS1632A··	1.34	2.4	1.2
					3															
				66	–					0.33									3.9	2.0
					3															
				66	–					0.33									4.1	2.1
					3															
58	40	10	11	41	–	48	5.5	M6 × 1	5.5	0.31	17.3	14.9	500	1 000	1 500	2 000	RS2040A··	2.15	4.1	2.1
					3															
				81	–					0.53									6.3	3.2
					3															
				81	–					0.53									7.0	3.5
					3															
70	48	12	13	50	–	58	6.6	M6 × 1	7.0	0.53	22.0	19.6	1 000	2 000	2 500	–	RS2550A··	3.37	8.4	4.2
					3															
				100	–					0.91									14	7.0
					3															
				100	–					0.91									15	7.5
					3															
92	60	12	15.5	126	–	74	9	M6 × 1	7.5	1.76	28.0	25.6	1 000	2 000	3 000	4 000	RS3264A··	5.63	24	12
					3															
					–														26	13
					3															
114	75	15	19	158	–	93	11	M6 × 1	10.0	3.44	35.0	31.8	2 000	3 000	4 000	5 000	RS4080A··	8.69	52	26
					3.5															
					–														55	28
					3.5															

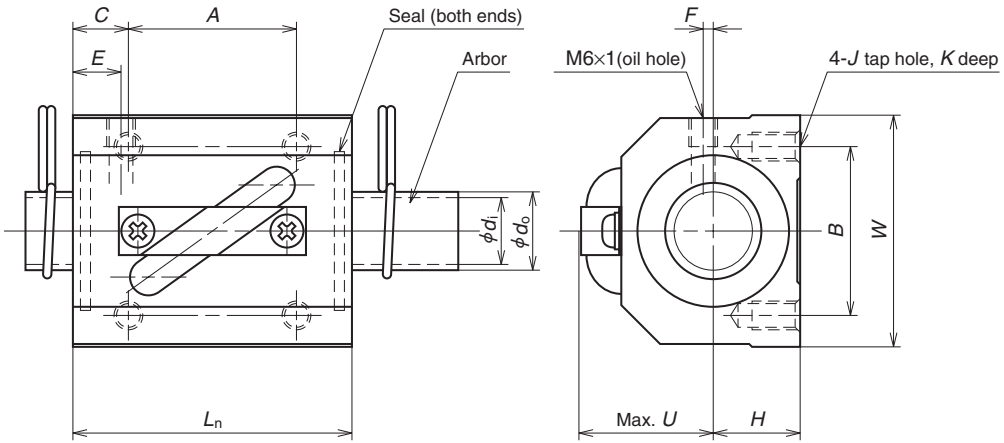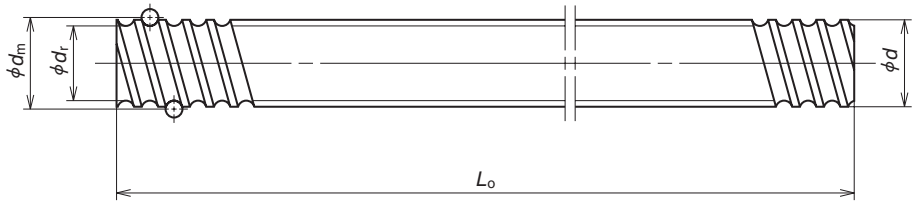Notes: 1. Actual screw shaft length may become slightly longer than nominal length L_o due to manufacturing tolerance.
2. Nut assembly with arbor and screw shaft are separate at time of delivery.
3. Value obtained by diving the standard screw shaft length by 100 mm will be entered at end of the part number where marked with ··.
4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.
5. Length of nut becomes longer (2 x M) for those with "brush" seals.
6. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
7. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.





Unit: mm

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{oa}	Axial play Max.	Ball nut dimensions: Length L_n
RNSTL 1404A3.5S	14	4	2.778	14.5	11.5	3.5 × 1	6 310	10 800	0.10	38
RNSTL 1405A2.5S	14	5	3.175	14.5	11.0	2.5 × 1	6 170	9 940	0.10	38
RNSTL 1808A3.5S	18	8	4.762	18.5	13.6	3.5 × 1	15 500	26 200	0.15	56
RNSTL 2005A2.5S	20	5	3.175	20.5	17.0	2.5 × 1	7 500	14 200	0.10	38
RNSTL 2010A2.5S	20	10	4.762	21.25	16.2	2.5 × 1	12 700	21 600	0.15	58
RNSTL 2505A2.5S	25	5	3.175	25.5	22.0	2.5 × 1	8 340	18 100	0.10	35
RNSTL 2510A5S	25	10	6.35	26	19.0	2.5 × 2	37 300	69 800	0.20	94
RNSTL 2806A2.5S	28	6	3.175	28.5	25.0	2.5 × 1	8 760	20 200	0.10	42
RNSTL 2806A5S						2.5 × 2	15 900	40 500		67
RNSTL 3210A2.5S	32	10	6.35	33.75	27.0	2.5 × 1	23 100	45 900	0.20	64
RNSTL 3210A5S						2.5 × 2	42 000	91 800		94
RNSTL 3610A2.5S	36	10	6.35	37	30.0	2.5 × 1	24 700	50 800	0.20	64
RNSTL 3610A5S						2.5 × 2	44 900	102 000		96
RNSTL 4512A5S	45	12	7.144	46.5	39.0	2.5 × 2	58 500	147 000	0.23	115




Ball nut dimensions: Width W	Center height H	Bolt hole: A	B	C	J	K	Oil hole: E	F	U	Nut Mass. (kg)	Arbor: Outside dia. d_0	Arbor: Bore d_1	Screw shaft: Standard length L_o			Screw shaft No.	Shaft mass/m (kg)	Internal spatial volume of nut (cm^3)	Standard volume of grease replenishing (cm^3)
34	13	22	26	8	M4	7	7	3	20	0.20	11.5	9.5	500	1 000	–	RS1404A··	1.02	1.6	0.8
34	13	22	26	8	M4	7	7	3	21	0.20	11.0	9.0	500	1 000	–	RS1405A··	1.00	1.8	0.9
48	17	35	35	10.5	M6	10	8	3	26	0.31	13.6	11.6	500	1 000	1 500	RS1808A··	1.60	3.4	1.7
48	17	22	35	8	M6	9	6	2	27	0.24	17.0	14.6	500	1 000	2 000	RS2005A··	2.17	2.5	1.3
48	18	35	35	11.5	M6	10	10	2	28	0.35	16.2	13.8	500	1 000	2 000	RS2010A··	2.18	6.3	3.2
60	20	22	40	6.5	M8	10	6	0	27	0.31	22.0	19.6	1 000	2 000	2 500	RS2505A··	3.47	2.6	1.3
60	23	60	40	17	M8	12	10	0	32	1.32	19.0	16.6	1 000	2 000	2 500	RS2510A··	3.13	18	9.0
60	22	18	40	12	M8	12	8	0	32	0.65	25.0	22.6	1 000	2 000	2 500	RS2806A··	4.47	3.5	1.8
60	22	40	40	13.5						1.04								7.0	3.5
70	26	45	50	9.5	M8	12	10	0	38	1.12	27.0	24.6	1 000	2 000	3 000	RS3210A··	5.53	18	9.0
70	26	60	50	17						1.75								27	14
86	29	45	60	9.5	M10	16	11	0	41	1.76	30.0	27.6	1 000	2 000	3 000	RS3610A··	6.91	18	9.0
86	29	60	60	18						2.64								27	14
100	36	75	75	20	M12	20	13	0	46	1.22	39.0	35.8	2 000	3 000	4 000	RS4512A··	11.16	47	24

Notes: 1. Actual screw shaft length may become slightly longer than nominal length L_o due to manufacturing tolerance.
2. Nut assembly with arbor and screw shaft are separate at time of delivery.
3. Value obtained by diving the standard screw shaft length by 100 mm will be entered at end of the part number where marked with ··
4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.
5. Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.
6. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
7. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

B-3-1.7 Accessories

Accessories to use with NSK ball screws are available.

Table 1 Support unit categories

Application		Shape	Support side	Bearing in use	Bearing bore, Bearing seat diameter	Page
Small equipment, light load	Square	WBK**-01* 	Fixed support side	Angular contact ball bearing	ϕ4 – ϕ25	B395 –
		WBK**S-01* 	Simple support side	Deep groove ball bearing	ϕ6 – ϕ25	B399 –
		WBK**SF-01 		Deep groove ball bearing	ϕ12, ϕ15 (exclusive for VFA type)	B399
Small equipment, light load	Round	WBK**R-11 (Support kit) 	Fixed support side	Deep groove ball bearing (arranged to have angular contact)	ϕ4, ϕ6 (exclusive for RMA and RMS types)	B401
		WBK**-11* 		Angular contact ball bearing	ϕ4 – ϕ25	B397 –
Machine tools, high speed, heavy load	Round	WBK**DF*-31H 	Fixed support side	Thrust angular contact ball bearing	ϕ17 – ϕ40	B407 –

1. Classification

Ball screw support units are classified into categories by their shape (**Table 1**). Select the type that best suits your particular needs.

2. Features

●Bearings and seals

On the fixed support side, the angular contact ball bearing is used. It has great rigidity and low friction torque, which match the rigidity of the ball screw. The thrust angular contact ball bearing with high precision and great rigidity is another choice for the fixed support side.

An oil seal is installed to the fixed support side used with an angular contact ball bearing. Fine clearance may occur with this seal.

A deep-groove ball bearing with a shield on both sides is used on the simple support side.

●Lock nut is provided.

A lock nut with fine grade finish is provided to fix the bearing with high precision.

The lock nuts are designed to be difficult to loosen, but they can still loosen if subjected to strong mechanical vibration. If necessary, this should be prevented by applying threadlocking adhesive or taking similar precautions.

3. Reference number coding

(For light load)

Example: WBK 08 S - 01 A

- Product code for support unit
- Nominal size code*
- Mounting code
  - No code: Fixed support unit
  - S: Simple support unit
  - SF: Simple support unit (for FSS and VFA)
  - R: Fixed support unit (support kit for miniature ball screws)
- 01: Square type
  11: Round type
- No code or A: For general use
  - B: Low-profile type (only for square type)
  - C: For clean environment use
  - M: Miniature general-purpose use
  - W: Lost-wax product

*) In case of simple support unit, please note that the nominal size code of 12 or less does not strictly represent internal bore of bearing in millimeters. Please refer to the dimensional table for internal bore of bearing.

(For high speed and heavy load)

Example: WBK 25 DF - 31H

- Product code for support unit
- Nominal size code (internal bore of bearing)
- H: High speed type
- Bearing combination code
  - DF: Face to face duplex combination
  - DFD: Face to face triplex combination
  - DFF: Face to face quadruplex combination

(1) Support Units for Light Load and Small Equipment

Support units for light load and small equipment provide both fixed and support side bearing assemblies to support screw shafts. They provide all required parts such as bearing locknuts so that you can mount them directly to NSK standard ball screws, of which shaft ends are machined.

Please refer to the dimensions listed on the dimension table for the configuration of standard screw shaft ends for NSK standard ball screws with blank shaft ends. For ball screws for transfer equipment, you require optional spacers when mounting fixed support side support units.

(a) Features

●Prompt delivery

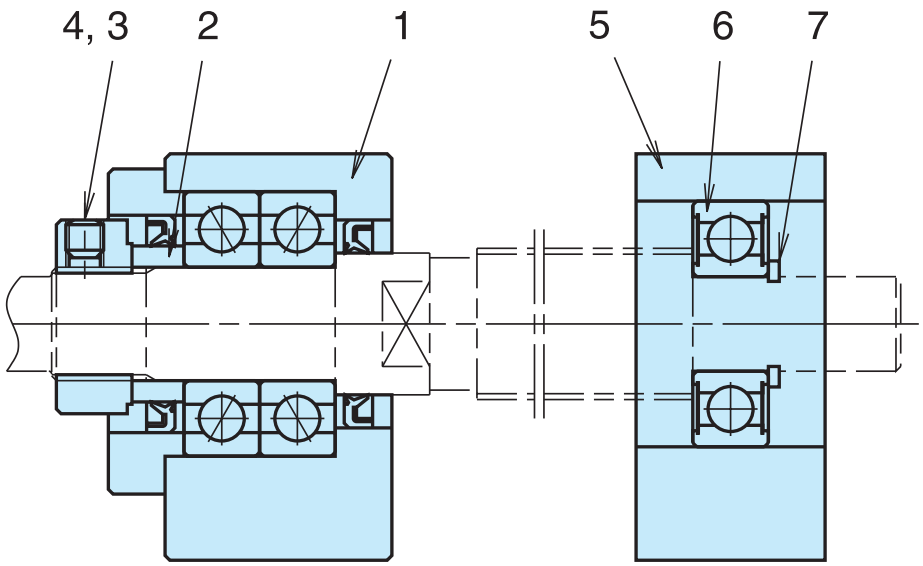
Support units are standard products.

●Best selection of bearings for your application

General use support units for fixed support side are equipped with highly rigid angular contact ball bearings that have been assembled with proper preload, and packed with the appropriate volume of grease. On the other hand, clean support units for fixed support side uses low dust emission grease, and low torque special bearings. Sealed deep groove ball bearings are used for simple support side units for both general and clean environment use.

●Accessories
Support units provide everything necessary for mounting ball screws to machines. (Please refer to the table below.)

* Do not disassemble fixed support side units as they are equipped with bearings and oil seals.




●Antirust treatment
The table on the right shows the surface treatment for the bearing housing, and material of small parts.

Fixed support side		Simple support side	
Part No.	Name of parts	Part No.	Name of parts
1	Bearing housing	5	Bearing housing
2	Spacer	6	Bearing
3	Locknut	7	Snap ring
4	Set screw with brass pad		


	General support unit
Bearings and grease	Angular contact ball bearings, PS2
Surface treatment	Black oxide
Screws and snap rings	Standard material

(b) Features of Clean Support Unit

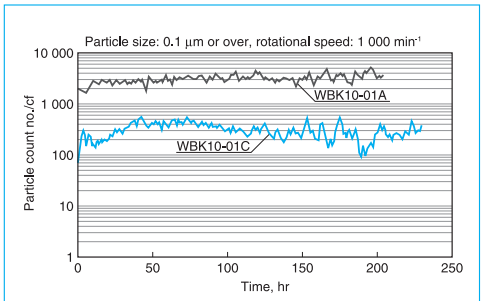●Outstanding low dust emission
Clean support unit uses "NSK clean grease LG2" which has a proven feature of low dust emission. It reduces dust emission to 1/10 of general support units.



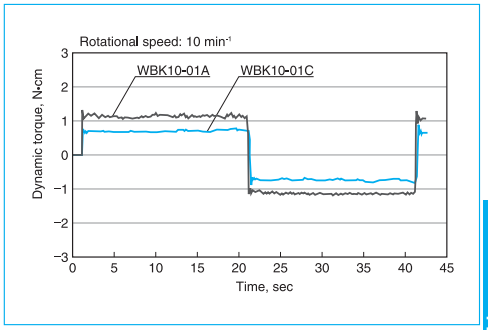●Low torque
It features low torque characteristics because of special bearings. (50% lower than general support unit.)





●High antirust specification
Low temperature chrome plating is applied to bearing housings, retaining plates, locknuts and spacers to improve antirust properties. Moreover, bolts and snap rings are made of stainless steel.
The table below shows the surface treatment of the bearing housing and material of small parts.

	Clean support unit
Bearing • grease	Special bearings, LG2
Surface treatment	Low temperature chrome plating
Set screw and snap ring material	Stainless steel


Support Units for Light Load and Small Equipment


WBK**-01M





WBK**-01*







Fixed support side support unit (square type)

Reference No.	Use	d_1	A	B	C	D	E	F	L	J	K	R
WBK04-01M	General	4	27	17	10	6	14	10	—	14	5.5	7
WBK06-01M	General	6	35	22.5	13	8	19	12	—	17	7.5	9.5
WBK06-01A[*1]	General	6	42	25	13	20	18	12	20	20	5.5	—
WBK08-01A[*1]	General	8	52	32	17	26	25	14	23	23	7	—
WBK08-01B	Low type		62	31	15.5	31	—		21.5	25.5	4.5	
WBK08-01C[*1]	Clean environment		52	32	17	26	25		23	23	7	
WBK10-01A	General	10	70	43	25	35	36	17	24	30	5.5	—
WBK10-01B	Low type			38	20	38	—					
WBK10-01C	Clean environment			43	25	35	36					
WBK12-01A	General	12	70	43	25	35	36	19	24	30	5.5	—
WBK12-01B	Low type			38	20	38	—					
WBK12-01C	Clean environment			43	25	35	36					
WBK15-01A	General	15	80	50	30	40	41	22	25	31	12	—
WBK15-01B	Low type			42	22	42	—					
WBK15-01C	Clean environment			50	30	40	41					
WBK17-01A	General	17	86	64	39	55	50	24	35	44	7	—
WBK20-01	General	20	95	58	30	45	56	30	42	52	10	—
WBK25-01W	General	25	105	68	35	25	66	36	48	61	13	—


Notes: 1. Use datum surface A for mounting to machine base.
2. Tighten set screw after locknut has been adjusted and tightened.
3. Insert brass pad provided with unit into locknut set screw hole, then insert and tighten the set screw.
4. Deep groove ball bearing and snap ring are also provided for simple support side.
(except WBK04-01M, WBK06-01M and WBK06-01A)




Reference No.	Tightening torque (reference) [N·cm]	
	Locknut	Set screw
WBK04-**	100	69 (M3)
WBK06-**	190	69 (M3)
WBK08-**	230	69 (M3)
WBK10-**	280	147 (M4)
WBK12-**	630	147 (M4)
WBK15-**	790	147 (M4)
WBK17-**	910	147 (M4)
WBK20-**	1670	147 (M4)
WBK25-**	2060	490 (M6)



View S (WBK06 – 15)



View S (WBK17 – 20)




View S (WBK25)


Units: mm

T	U	N	Counterbore dimensions							Mass (kg)	Locknut screw M	Attached bearing for support side
			H	P	Q	W	X	Y	Z			
9	2.5	2	7	—	—	21	3.5	—	—	0.03	M4×0.5	—
12	2.5	2.5	8.5	—	—	26	5.5	—	—	0.05	M6×0.75	—
—	—	3.5	10	—	—	30	5.5	9.5	11	0.15	M6×0.75	—
—	—	4	11.5	—	—	38	6.6	11	12	0.25	M8×1	606ZZ
		3.5	11			46	9	14	18	0.3		606ZZ
		4	11.5			38	6.6	11	12	0.25		606VV
—	—	6	12	—	—	52	9	14	11	0.5	M10×1	608ZZ
									19	0.45		608ZZ
									11	0.5		608VV
—	—	6	12	—	—	52	9	14	11	0.5	M12×1	6000ZZ
									19	0.4		6000ZZ
									11	0.5		6000VV
—	—	5	12.5	—	—	60	11	17	15	0.7	M15×1	6002ZZ
									23	0.6		6002ZZ
									15	0.7		6002VV
—	—	7	—	19	8	68	9	14	11	1.3	M17×1	6203ZZ
—	—	10	—	22	10	75	11	17	15	1.4	M20×1	6204ZZ
—	—	14	—	30	9	85	11	—	—	1.9	M25×1.5	6205ZZ


5. Bearings for WBK04-01M and WBK06-01M are equipped with non-contact metal shield.
*1) For retaining cover side of WBK06-01A, WBK08-01A and WBK08-01C, there are no seals.
6. Contact NSK if the rotational speed is 50 min^{-1} and below.


WBK**-11M







WBK**-11*





View X-X (example 1)





(example 2)

Reference No.	Tightening torque (reference) [N·cm]	
	Locknut	Set screw
WBK04-**	100	69 (M3)
WBK06-**	190	69 (M3)
WBK08-**	230	69 (M3)
WBK10-**	280	147 (M4)
WBK12-**	630	147 (M4)
WBK15-**	790	147 (M4)
WBK17-**	910	147 (M4)
WBK20-**	1670	147 (M4)
WBK25-**	2060	490 (M6)

Fixed support side support unit (round type)


Units: mm

Reference No.	Use	d_1	A	C	D_1	D_2	E	H	L	K	F	N
WBK04-11M	General	4	14	26	14	14	13.5	8.5	7	1.5	5.5	6.6
WBK06-11M	General	6	19	34	19	18.5	17	12	9.5	2.5	7.5	8
WBK06-11*	General	6	28	35	22	—	20	13	9.5	3.5	5.5	6.5
WBK08-11B	High-load type	8	42	52	34	—	25.5	15.5	12	3.5	4.5	7
WBK08-11*	General		35	43	28		23	14	10	4	7	8
WBK08-11C*	Clean environment											
WBK10-11	General	10	42	52	34	—	27	17	12	5	7.5	8.5
WBK10-11C	Clean environment											
WBK12-11	General	12	44	54	36	—	27	17	12	5	7.5	8.5
WBK12-11C	Clean environment											
WBK15-11	General	15	52	63	40	—	32	17	11	6	12	14
WBK15-11C	Clean environment											
WBK20-11	General	20	68	85	57	—	52	30	20	10	10	14
WBK25-11	General	25	79	98	63	—	57	30	20	10	13	20


U	P	Q	Counterbore dimensions					Mass (kg)	Locknut screw M	Attached bearing for support side
			J	W	X	Y	Z			
10	2.6	2.4	3	20	3.5	—	—	0.02	M4×0.5	—
12	3	2	4	26	4.5	—	—	0.04	M6×0.75	—
12	4.5	2.5	7	28	2.9	5.5	3.5	0.1	M6×0.75	—
14	6	4	10	42	4.5	8	4	0.2	M8×1	606ZZ
	5		9	35	3.4	6.5		0.15		606ZZ
										606VV
17	6	4	10	42	4.5	8	4	0.2	M10×1	608ZZ
										608VV
19	6	4	10	44	4.5	8	4	0.25	M12×1	6000ZZ
										6000VV
22	8	7	15	50	5.5	9.5	6	0.4	M15×1	6002ZZ
										6002VV
30	14	8	22	70	6.6	11	10	1.1	M20×1	6204ZZ
36	17	10	27	80	9	15	13	1.5	M25×1.5	6205ZZ

Notes: 1. Tighten set screw after locknut has been adjusted and tightened.
2. Insert brass pad provided with unit into locknut set screw hole, then insert and tighten the set screw.
3. Deep groove ball bearing and snap ring are also provided for simple support side. (except WBK04-11M, WBK06-11M and WBK06-11)
4. Bearings for WBK04-11M and WBK06-11M are equipped with non-contact metal shield.
*For retaining cover side of WBK06-11, WBK08-11 and WBK08-11C, there are no seals.
5. Contact NSK if the rotational speed is 50 min^{-1} and below.

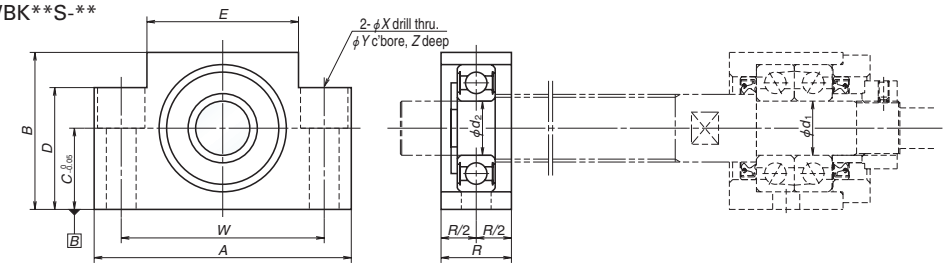WBK**S-**



WBK**SF-**

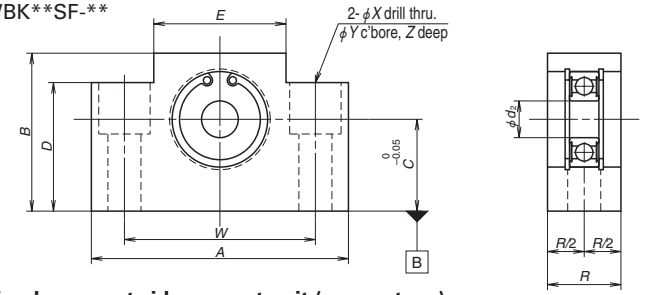

Simple support side support unit (square type)

Units: mm

Reference No.	Use	d_2	A	B	C	D	E	R	Counterbore dimensions				Mass
									W	X	Y	Z	(kg)
WBK08S-01	General	6	52	32	17	26	25	15	38	6.6	11	12	0.15
WBK08S-01B	Low type		62	31	15.5	31	—	16	46	9	14	18	0.2
WBK08S-01C	Clean environment		52	32	17	26	25	15	38	6.6	11	12	0.15
WBK10S-01	General	8	70	43	25	35	36	20	52	9	14	11	0.4
WBK10S-01C	Clean environment												
WBK12S-01	General	10	70	43	25	35	36	20	52	9	14	11	0.35
WBK12S-01B	Low type			38	20	38	—					19	0.4
WBK12S-01C	Clean environment			43	25	35	36					11	0.35
WBK12SF-01*2	General	12											0.3
WBK12SF-01B*1	Low type		62	31	15.5	31	—	18	46			18	0.2
WBK15S-01	General	15	80	50	30	40	41	20	60	9	14	11	0.45
WBK15S-01B	Low type			42	22	42	—					23	0.4
WBK15S-01C	Clean environment			50	30	40	41					11	0.45
WBK15SF-01*2	General		70	43	25	35	36		52				0.3
WBK15SF-01B*1	Low type			38	20	38	—	18				19	
WBK17S-01	General	17	86	64	39	55	50	23	68	9	14	11	0.8
WBK20S-01	General	20	95	58	30	45	56	26	75	11	17	15	0.8
WBK20SF-01B	Low type		80	42	22	42	—	22	60			23	0.4
WBK25S-01W	General	25	105	68	35	25	66	30	85	11	—	—	0.9
WBK25SF-01*1			95	58	30	45	56	22	75	11	17	15	0.55

Notes: 1. Use datum surface B for mounting to machine base.
2. For reference No. 12 or lower numbers, note that the reference numbers and inner dimensions of the bearing are different.
3. WBK ** SF is a type supporting screw shaft OD.
4. See page B400 for bearing reference number and the basic dynamic load rating in the radial direction.
5. *1 is exclusive for FSS type.
6. *2 is exclusive for VFA type.

Specifications of support unit


Fixed support side support unit						Simple support side support unit		
Reference No.	Use	Axial direction: Basic dynamic load rating *Ca* [N]	Axial direction: Load limit [N]	Axial direction: Rigidity [N/μm]	Maximum starting torque [N·cm]	Reference No.	Bearing reference No.	Radial direction Basic dynamic load rating *C* [N]
WBK04-01M	General	1 470	464	39	0.2	—	—	—
WBK04-11M	General	1 470	464	39	0.2	—	—	—
WBK06-01A	General	2 670	1 040	28	0.49	—	—	—
WBK06-01M	General	2 760	854	60	0.35	—	—	—
WBK06-11	General	2 670	1 040	28	0.49	—	—	—
WBK06-11M	General	2 760	854	60	0.35	—	—	—
WBK08-01A	General	4 400	1 450	49	0.88	**WBK08S-01**	606ZZ	2 260
WBK08-01B	Low type	6 600	2 730	94	1.9	**WBK08S-01B**	606ZZ	2 260
						WBK12SF-01B*1	6801ZZ	1 920
WBK08-01C	Clean environment	3 100	1 100	36	0.52	**WBK08S-01C**	606VV	2 260
WBK08-11	General	4 400	1 450	49	0.88	**WBK08S-01**	606ZZ	2 260
WBK08-11B	High load	6 600	2 730	94	1.9	—	606ZZ	2 260
WBK08-11C	Clean environment	3 100	1 100	36	0.52	**WBK08S-01C**	606VV	2 260
WBK10-01A	General	6 600	2 730	94	1.9	**WBK10S-01**	608ZZ	3 300
						WBK12SF-01*2	6001ZZ	5 100
WBK10-01B	Low type	6 600	2 730	94	1.9	—	608ZZ	3 300
WBK10-01C	Clean environment	4 250	1 364	50	1.1	**WBK10S-01C**	608VV	3 300
WBK10-11	General	6 600	2 730	94	1.9	**WBK10S-01**	608ZZ	3 300
WBK10-11C	Clean environment	4 250	1 364	50	1.1	**WBK10S-01C**	608VV	3 300
WBK12-01A	General	7 100	3 040	104	2.1	**WBK12S-01**	6000ZZ	4 550
						WBK15SF-01*2	6902ZZ	4 350
WBK12-01B	Low type	7 100	3 040	104	2.1	**WBK12S-01B**	6000ZZ	4 550
						WBK15SF-01B*1	6902ZZ	4 350
WBK12-01C	Clean environment	4 700	2 443	57	1.2	**WBK12S-01C**	6000VV	4 550
WBK12-11	General	7 100	3 040	104	2.1	**WBK12S-01**	6000ZZ	4 550
WBK12-11C	Clean environment	4 700	2 443	57	1.2	**WBK12S-01C**	6000VV	4 550
WBK15-01A	General	7 600	3 380	113	2.4	**WBK15S-01**	6002ZZ	5 600
WBK15-01B	Low type	7 600	3 380	113	2.4	**WBK15S-01B**	6002ZZ	5 600
						WBK20SF-01B*1	6804ZZ	4 000
WBK15-01C	Clean environment	5 100	2 757	63	1.3	**WBK15S-01C**	6002VV	5 600
WBK15-11	General	7 600	3 380	113	2.4	**WBK15S-01**	6002ZZ	5 600
WBK15-11C	Clean environment	5 100	2 757	63	1.3	**WBK15S-01C**	6002VV	5 600
WBK17-01A	General	13 400	5 800	120	3.5	**WBK17S-01**	6203ZZ	9 550
WBK20-01	General	17 900	8 240	155	6.2	**WBK20S-01**	6204ZZ	12 800
						WBK25SF-01*1	6005ZZ	10 100
WBK20-11	General	17 900	8 240	155	6.2	**WBK20S-01**	6204ZZ	12 800
WBK25-01W	General	20 200	10 000	192	7.2	**WBK25S-01W**	6205ZZ	14 000
WBK25-11	General	20 200	10 000	192	7.2	**WBK25S-01W**	6205ZZ	14 000
WBK04R-11	General	615	490	6.5	0.59	—	—	—
WBK06R-11	General	1 280	930	9	0.59	—	—	—

Notes: 1. *1 is exclusive for FSS type.
2. *2 is exclusive for VFA type.
3. Permissible axial load is 0.7 times of limiting axial load.

Support kits for ball screws for transfer equipment

Support kits are for RMA type ball screw.

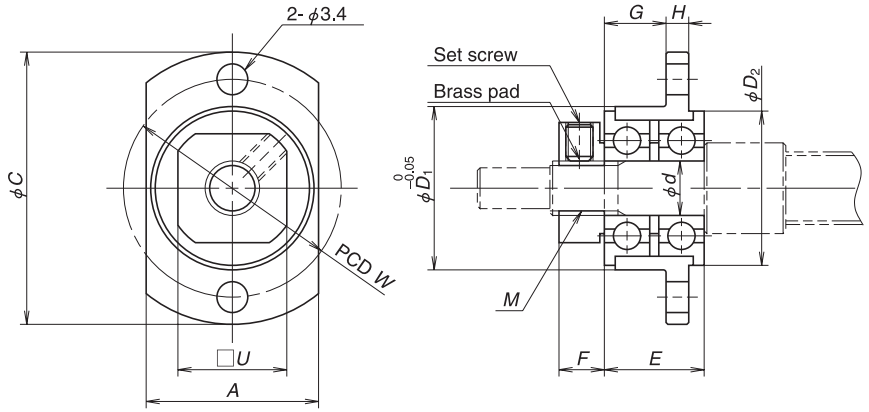In case of RMA1002 or larger rolled ball screws, please use support units for general use.



Units: mm

Reference No.	A	C	d	D_1	D_2	E	F	G	H	W	U	M	Mass (kg)
WBK04R-11	14	25	4	13	12.5	9	5	5	2.5	19	10	M4×0.5	0.13
WBK06R-11	19	30	6	18	17	11	5	6.8	2.5	24	12	M6×0.75	0.23


Reference No.	Applicable ball screw	Locknut tightening torque (reference) [N·cm]	Set screw tightening torque (reference) [N·cm]
WBK04R-11	RMA0601	100	38 (M2.5)
WBK06R-11	RMA0801 RMA0801.5 RMA0802	190	69 (M3)

Notes:

1. Oscillate bearings slowly so that they fall into place in which run-out of mounting surface is minimal, and then tighten locknut.
2. Support kit is on provisional shaft (bolt) during shipping.
3. When securing support unit on shaft, insert brass pad that is provided with support unit into lock nut hole, and then tighten set screw.

Spacer

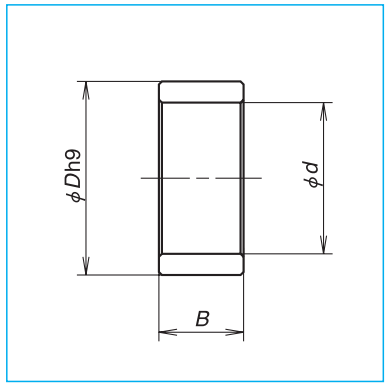When using a fixed support unit, it may require an optional spacer to have an effective shoulder surface at where the ball thread is threaded to the end of the shoulder. This is common for the R series for transporting ball screws.




Units: mm


Reference No.	Internal diameter, d	Outside diameter, D	Width B	Mass (g)	Applicable support unit
WBK06K	6	9.5	5.0	2	WBK06-＊＊
WBK08K	8	11.5	5.5	2	WBK08-＊＊
WBK10K	10	14.5	5.5	4	WBK10-＊＊
WBK12K	12	15.0	5.6	3	WBK12-＊＊
WBK15K	15	19.5	10.0	10	WBK15-＊＊
WBK17K	17	24.4	7.0	13	WBK17-＊＊
WBK20K	20	25.5	11.0	17	WBK20-＊＊
WBK25K	25	32.0	14.0	34	WBK25-＊＊

Screw shaft end configuration

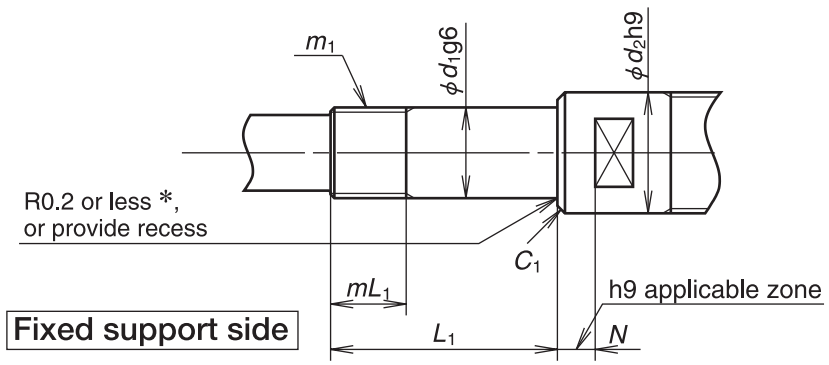Dimensions of the shaft end configurations for light load and small equipment support units are shown in the table below. When using a spacer with a ball screw for transporting equipment, add the width of the spacer (B from the table of spacer dimensions on page B402) to L_1 dimension below.



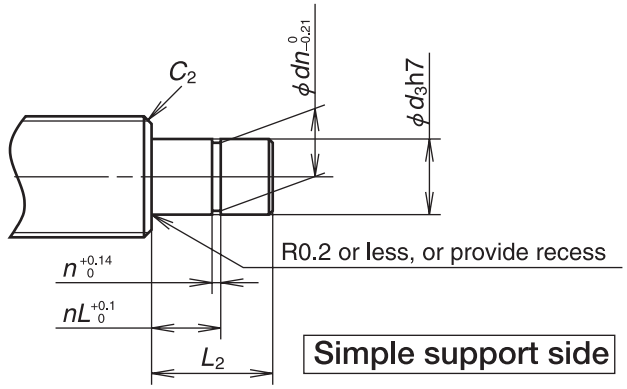Radius marked with * above is 0.15 or less for WBK04R-11 and WBK06R-11.



Units: mm


Reference No.	Fixed support side						
	Bearing journal		Locknut thread		Sealing part		Chamfer
	d_1	L_1	m_1	mL_1	d_2	N	C_1
WBK06-**	6	22.5	M6×0.75	7	9.5	3.5	0.2
WBK08-**	8	27	M8×1	9	11.5	4	0.2
WBK10-**	10	30	M10×1	10	14	6	0.2
WBK12-**	12	30	M12×1	10	15	6	0.2
WBK15-**	15	40	M15×1	15	19.5	5	0.3
WBK17-**	17	46	M17×1	17	24	7	0.3
WBK20-**	20	53	M20×1	16	25	10	0.3
WBK25-**	25	62	M25×1.5	20	32	14	0.5
WBK04R-11	4	15	M4×0.5	7.5	—	—	0.3
WBK06R-11	6	17	M6×0.75	7.5	—	—	0.3

Units: mm


Reference No.	Simple support side					
	Bearing journal		Snap ring groove			Chamfer
	d_3	L_2	n	dn	nL	C_2
————	—	—	—	—	—	—
WBK08S-**	6	9	0.8	5.7	6.8	0.2
WBK10S-**	8	10	0.9	7.6	7.9	0.2
WBK12S-**	10	22	1.15	9.6	9.15	0.5
WBK15S-**	15	25	1.15	14.3	10.15	0.5
WBK17S-**	17	16	1.15	16.2	13.15	0.5
WBK20S-**	20	19	1.35	19	15.35	0.5
WBK25S-**	25	20	1.35	23.9	16.35	0.5

(2) Support unit for ball screws for high-speed and heavy-load machine tools

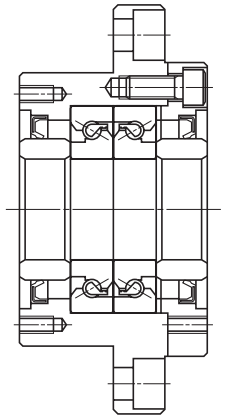
Support units for high-speed and heavy-load machine tools use the ball screw support bearings NSKHPS™ BSBD series. This series has very suitable functions and structure as a ball screw support bearing. There are three bearing combinations as shown below.




DF combination

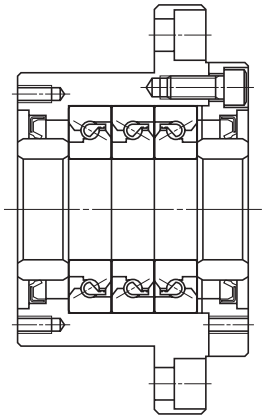

DFD combination

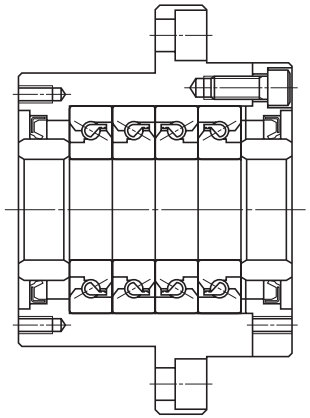


DFF combination

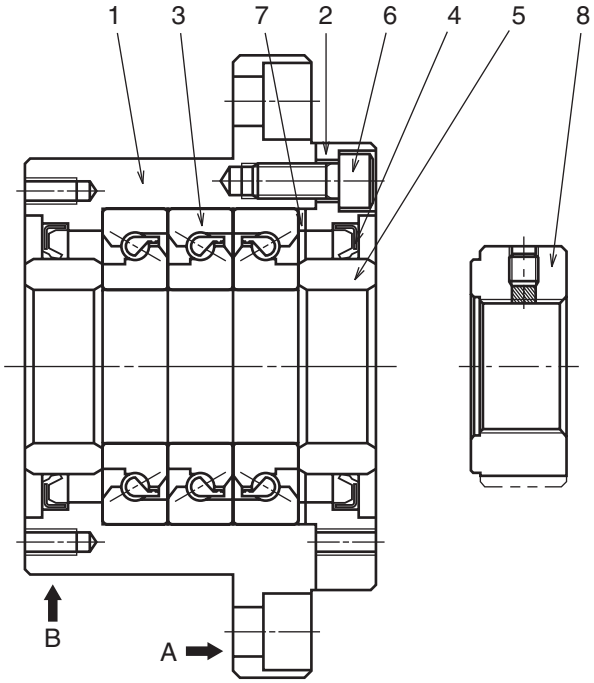


Parts list


Part No.	Part name	Quantity
1	Housing	1
2	Retaining cover	1
3	High accuracy thrust angular contact ball bearing	One set
4	Dust seal	2
5	Collar	2
6	Preload bolt	6 or 8
7	Shim	One set
8	Lock nut	1

Notes:
1. Surface A and B are the datum surfaces to mount a support unit to machine housing.
2. NSK support units are precisely preloaded and adjusted. Do not disassemble the components 1, 2, 3, 4, 5, 6 and 7.
3. Grease(AS2) is packed into the bearings.
4. Lock nut 8 is exclusively prepared for ball screws. End surface of nut is in strict control being precisely perpendicular to the V thread. Secure lock nut using set screw.
   Lock nut is also available as accessory. (See page B409.)
5. See page B415 as well for NSKTAC C Series angular contact thrust ball bearings for ball screw support.






Dimension of bearing seat




Section X-X

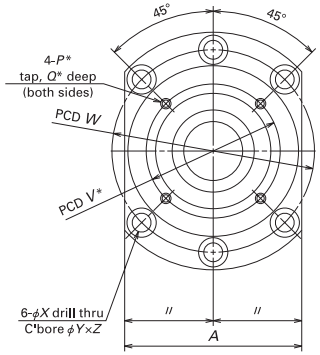Lock nut



Bearing bore $d \leqq 30$

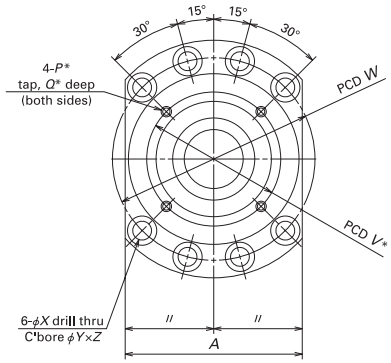

Bearing bore $d \geqq 35$

Unit: mm

Support unit No.	Support unit																	Basic dynamic load rating	Limiting axial load
	d	D	D_1	D_2	L	L_1	L_2	A	W	X	Y	Z	d_1*	ℓ*	V*	P*	Q*	C_a [N]	[N]
WBK17DF-31H	17	70	106	72	60	32	15	80	88	9	14	8.5	45	3	58	M5	10	23 000	26 600
WBK20DF-31H	20	70	106	72	60	32	15	80	88	9	14	8.5	45	3	58	M5	10	23 000	26 600
WBK25DF-31H	25	85	130	90	66	33	18	100	110	11	17.5	11	57	4	70	M6	12	29 900	40 500
WBK25DFD-31H					81	48												48 500 (29 900)	81 500 (40 500)
WBK30DF-31H	30	85	130	90	66	33	18	100	110	11	17.5	11	57	4	70	M6	12	30 500	43 000
WBK30DFD-31H					81	48												50 000 (30 500)	86 000 (43 000)
WBK35DF-31H	35	95	142	102	66	33	18	106	121	11	17.5	11	69	4	80	M6	12	32 500	50 000
WBK35DFD-31H					81	48												53 000 (32 500)	100 000 (50 000)
WBK35DFF-31H					96	48												53 000	100 000
WBK40DF-31H	40	95	142	102	66	33	18	106	121	11	17.5	11	69	4	80	M6	12	33 500	52 000
WBK40DFD-31H					81	48												54 000 (33 500)	104 000 (52 000)
WBK40DFF-31H					96	48												54 000	104 000


Preload	Axial rigidity	Starting torque	Lock nut					Bearing seat for unit			Permissible rotational speed	Mass
			Dimension				Screwing torque (reference)					
C_a [N]	[N/μm]	[N · cm]	M	H	D_3	L_3	[N · cm]	d	L_4	L_5	[min^{-1}]	[kg]
1 450	630	14	M17×1.0	32	37	18	4 100	17	81	23	6 900	1.9
1 450	630	14	M20×1.0	36	40	18	4 500	20	81	23	6 900	1.9
2 280	850	21	M25×1.5	41	45	20	8 500	25	89	26	5 200	3.1
3 100	1 250	28							104			3.4
2 400	890	23	M30×1.5	46	50	20	10 100	30	89	26	4 900	3.0
3 260	1 310	30							104			3.3
2 750	1 030	27	M35×1.5	50	55	22	13 800	35	92	30	4 100	3.4
3 740	1 500	34							107			4.3
5 490	2 060	43							122			5.0
2 860	1 080	28	M40×1.5	55	60	22	15 500	40	92	30	4 100	3.6
3 900	1 590	36							107			4.2
5 730	2 150	46							122			4.7

Notes: 1. Rigidity
Values in the table are theoretical values obtained from the elastic deformation between ball groove and balls.
2. Starting torque
Starting torque indicates torque due to the preload of the bearing. It does not include seal torque.
3. The tolerance of the shaft bearing seat
We recommend h5 class of the fits tolerance.
4. Values in parentheses of basic dynamic load rating and permissible axial load are the values when axial load is applied in a line.
5. Dimensions with * (asterisk) mark
*Pilot diameter and tapped screws marked with asterisk are used for seal unit installation for NSK standard hollow shaft ball screws. They also can be used for dust cover and damper installation.
6. Grease is packed into bearing. It is not necessary to apply grease before use.
7. Permissible axial load is 0.7 times of limiting axial load.
8. Contact NSK if the rotational speed is 50 min^{-1} and below.


In addition to the support units, NSK has other components for ball screws as shown below.

(3) Lock nuts

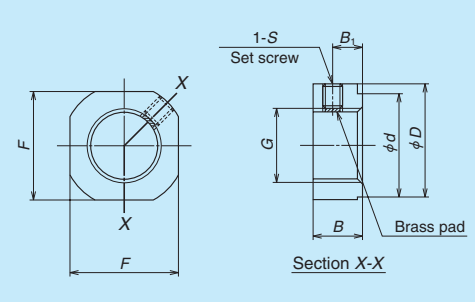
Ball screw support bearings must be installed with minimum inclination against ball screw center. NSK lock nuts exclusive for ball screw support bearings help to reduce this inclination.



Light load Shapes and dimensions

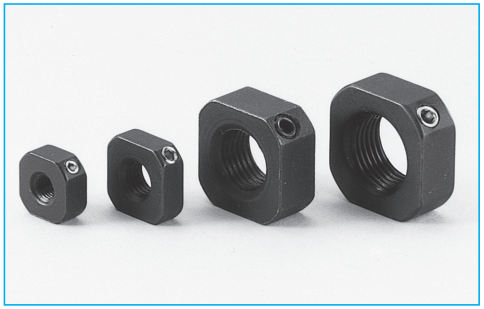

Light load lock nuts

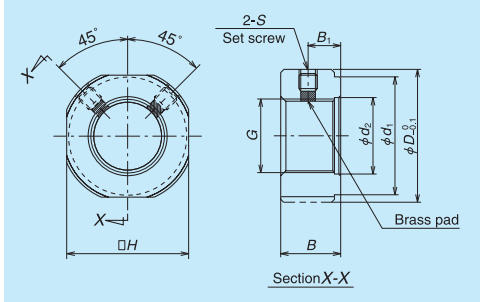

High speed and heavy load Shapes and dimensions



High speed and heavy load lock nuts

Light load lock nuts

Unit: mm

Lock nut reference No.	G	D	F	B	d
WBK04L-01	M4×0.5	11.5	10	5	6
WBK06L-01	M6×0.75	14.5	12	5	10
WBK08L-01	M8×1	17	14	6.5	13
WBK10L-01	M10×1	20	17	8	16
WBK12L-01	M12×1	22	19	8	17
WBK15L-01	M15×1	25	22	10	21
WBK17L-01	M17×1	29	24	13	24
WBK20L-01	M20×1	35	30	13	26
WBK25L-01	M25×1.5	42	36	16	34

Notes: 1. Insert brass pad and then tighten securing set screw.
2. The tightening torque is a reference value when support bearings are used in a face-to-face arrangement.

High speed and heavy load lock nuts

Unit: mm

Lock nut reference No.	G	$D^{0}_{-0.1}$	B	d_1	d_2
WBK17L-31H	M17×1	37	18	30	18
WBK20L-31H	M20×1	40	18	30	21
WBK25L-31H	M25×1.5	45	20	40	26
WBK30L-31H	M30×1.5	50	20	40	31
WBK35L-31H	M35×1.5	55	22	49	36
WBK40L-31H	M40×1.5	60	22	49	41

Note: The tightening torque is a reference value when support bearings are used in a face-to-face arrangement.

Unit: mm

B_1	S	Tightening torque (reference) [N · cm]	Set screw tightening torque (reference) [N · cm]	Mass (g)
2.75	M3, with a brass pad	100	69 (M2.5)	3.0
2.75	M3, with a brass pad	190	69 (M3)	3.8
4	M3, with a brass pad	230	69 (M3)	6.4
5	M4, with a brass pad	280	147 (M4)	11.2
5	M4, with a brass pad	630	147 (M4)	12.8
6	M4, with a brass pad	790	147 (M4)	20.0
8	M4, with a brass pad	910	147 (M4)	33.1
8	M4, with a brass pad	1 670	147 (M4)	50.0
10	M6, with a brass pad	2 060	490 (M6)	87.0


Unit: mm

B_1	H	S	Tightening torque (reference) [N · cm]	Set screw tightening torque (reference) [N · cm]	Mass (g)
10	32	M6	4 100	490 (M6)	100.9
10	36	M6	4 500	490 (M6)	117.3
11	41	M6	8 500	490 (M6)	163.8
11	46	M6	10 100	490 (M6)	186.7
12	50	M6	13 800	490 (M6)	233.4
12	55	M6	15 500	490 (M6)	258.8

Installation of Ball Screw and Support Unit


The illustrations below show typical installation procedures for a standard ball screw and a support unit.

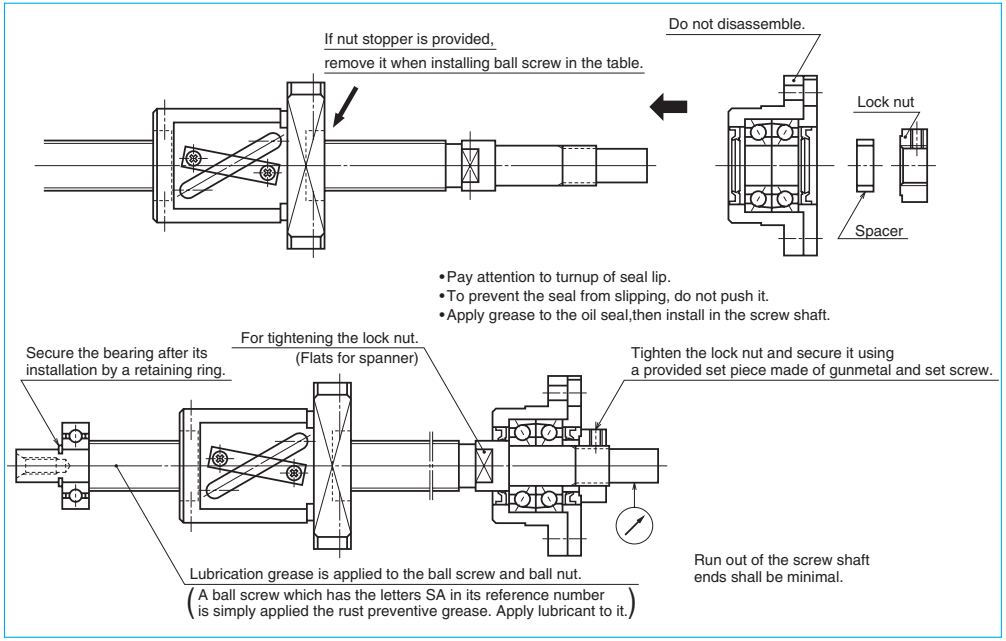1) Assembly of support unit




2) Installation of ball nut to the table

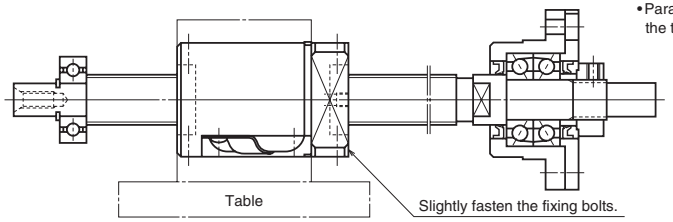Installation example: Turn the table upside down, and install the ball screw.




Accuracy of table
- Perpendicularity of nut housing
- Parallelism and center height deviation between the table center and the guide way bearings.

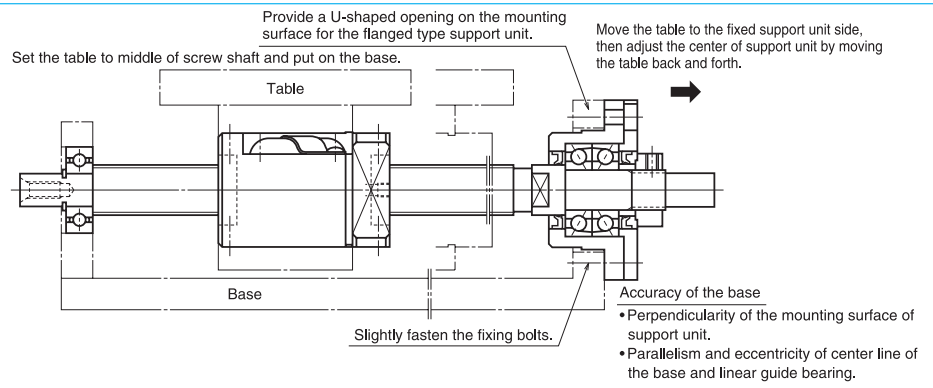3) Base and the support unit installation on the fixed support side




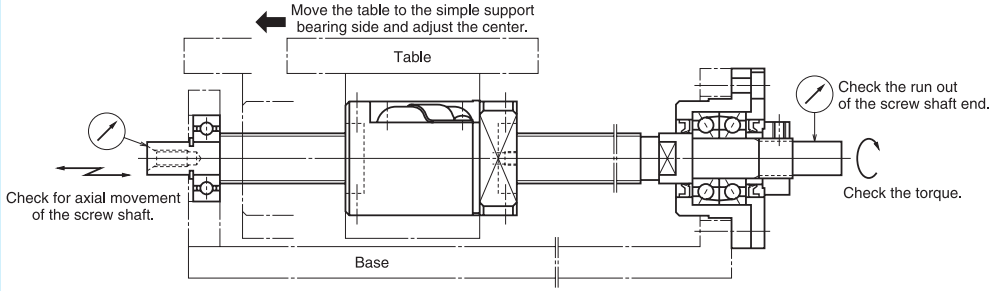4) Base and bearing installation on simple support side, and confirming assembling accuracy.



Adjust the center line by moving the table back and forth. Check for smooth operation of the table.
Repeat the same procedures described above if the table is not moving smoothly.
Tighten the fixing bolts checking the assembly accuracy.

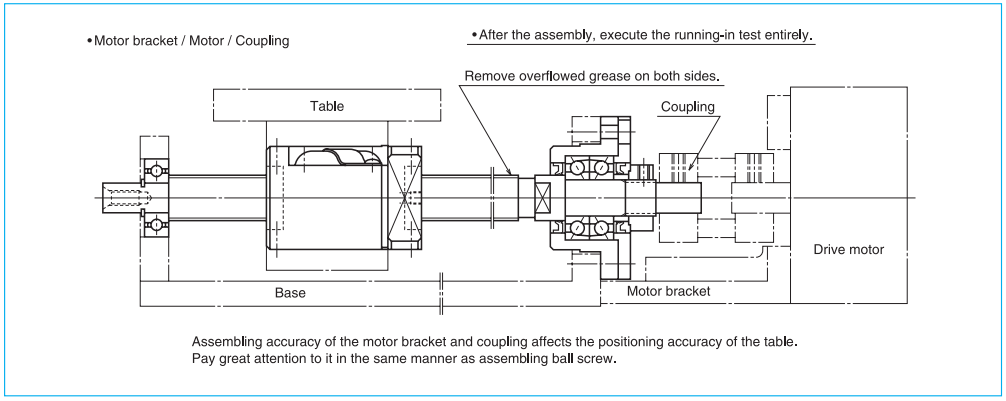
5) Assembly completed.



Assembling accuracy of the motor bracket and coupling affects the positioning accuracy of the table.
Pay great attention to it in the same manner as assembling ball screw.

(4) Grease unit

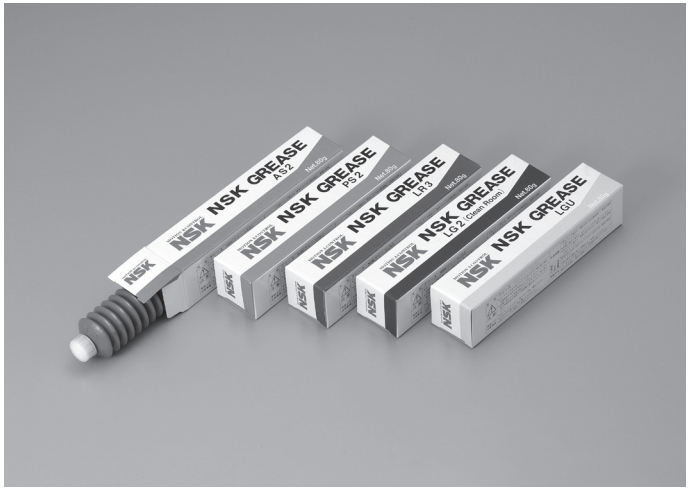NSK has numerous grease types that are exclusive for ball screw lubrication. They come in bellows-shaped tubes, which can be attached to a hand grease pump quickly. For details of grease types, see page D13 and for a hand grease pump and nozzles, see page D19.




NSK greases

Lubricant greases

Name	Use	Base oil viscosity mm²/s (40°C)
NSK Grease AS2	For heavy load	130
NSK Grease PS2	High-speed, light load	15
NSK Grease LR3	High-speed, medium load	30
NSK Grease LG2	Clean environment	30
NSK Grease LGU	Clean environment	100

(5) Travel stopper (made-to-order)

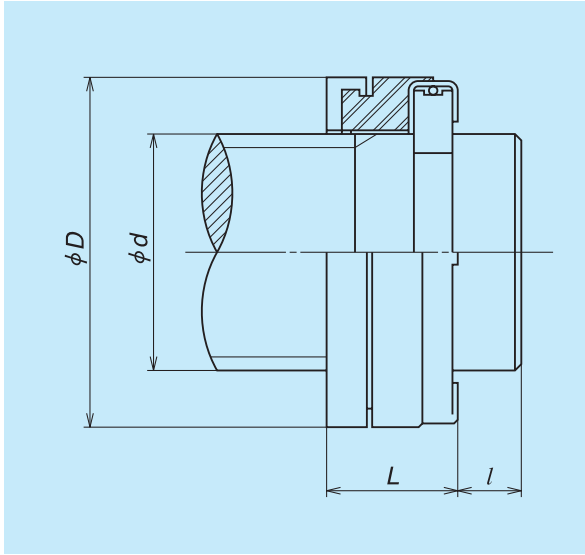
A travel stopper is installed in some cases to prevent the ball nut from overrunning to the end of ball thread due to a malfunction of the safety system of the equipment or by a human error. NSK has several series of shock-absorbing travel stoppers. The travel stopper is not sold as a single item since it is not for general use. Also, a travel stopper cannot be used for ball screw with the end cap type ball recirculation system, because the stopper would come directly into contact with the component for ball recirculation. Please request NSK for the installation of the travel stoppers when ordering a ball screw.



Unit: mm

Stopper No.	Applicable shaft dia. *d*	Outer dia. *D*	Length *L*	Shaft end width (Min.) *l*
BSR 20	20	32	16	5
BSR 25	25	38	16	5
BSR 32	32	46	20	6
BSR 40	40	60	22	6
BSR 50	50	72	24	7
BSR 63	63	85	25	7

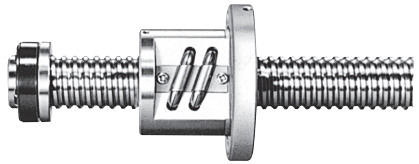Note: This stopper is patented by NSK Ltd.



Shock-absorbing travel stopper

(6) NSKHPS angular contact thrust ball bearings for ball screw support

1. Features

This is highly rigid and accurate ball screw support bearing often used for the machine tools driving mechanism.

NSKHPS:Reliability has been improved by focusing on material cleanliness, which has the biggest impact on bearing life, by employing NSK's proprietary material evaluation technology. The dynamic load rating has been improved by 5% compared with that of conventional bearings.

The NSKTAC C Series features high axial rigidity and is suitable for machine tool feeding mechanisms, while the NSKTAC 03 Series with its high axial load capacity is well suited for the support of large ball screws in high-load drive applications such as electric injection molding machines. With these series users can achieve much lower torque and higher accuracy than with roller bearings.

(a) High axial rigidity

The axial rigidity is high because of a higher contact angle of 60°

(b) Low starting torque

Compared with tapered roller bearings or cylindrical roller bearings, this type has lower starting torque; so smoother rotation is possible with driving force.

(c) Easy Installation

The clearance in each indivisual bearing in a combination is adjusted to obtain the optimum preload. With universal combination bearings (combination symbol SU), a specific preload is obtained when used with others having the same bearing number in any combination (DB, DF, and others).

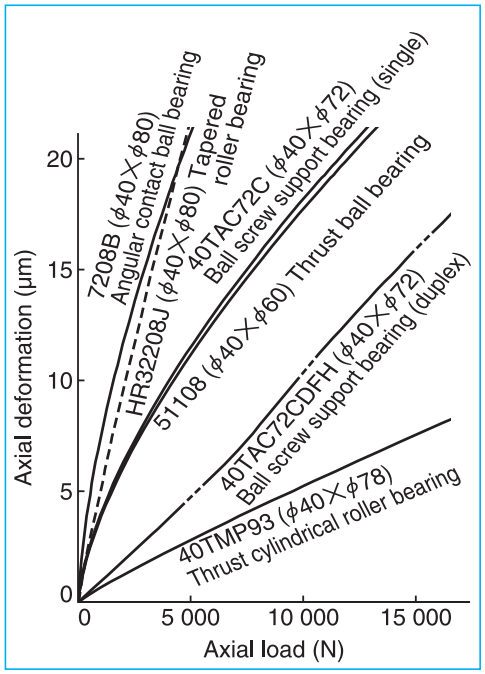


Fig. 1 Axial rigidity of various bearings

(d) Structural simplicity

Since this type can sustain both axial and radial loads, the surrounding structure is simpler and more compact than when using a combination of radial and thrust bearings.

(e) Easy handling

Since the Inner and outer rings are inseparable, handling is easy.

Table 2 Comparison with other types of bearings

Bearing type	Bearing rigidity (See Fig. 1)	Starting torque	Preload adjustment	Installation structure
Ball screw support bearings	High	Low	Not required	Simple
Combined angular contact ball bearing	Low	Low	Not required	Simple
Tapered roller bearing	Low	High	Complicated	Simple
Thrust ball bearing and radial bearing	High	Low	Complicated	Complicated
Thrust cylindrical roller bearing and radial bearing	Extremely high	Extremely high	Complicated	Complicated

Note: Consult NSK when you use these bearings other than the purpose of ball screw support.

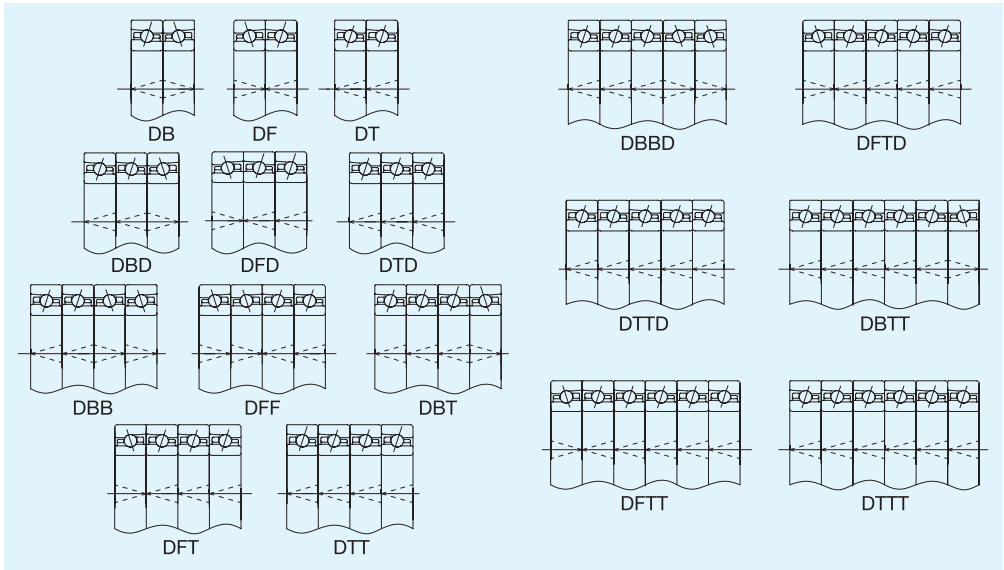
2. Bearing combinations

Angular contact thrust ball bearings for ball screw support are generally used in two or more rows with preload applied.

Universal Combination Bearings

NSK manufactures universal combination bearings which have been controlled to have the same amount of stand-out (offset) on their front and back faces. That way, for bearings with the same bearing number, users will achieve the specified amount for each standard preload, regardless of which combination they chose. Each universal combination bearing comes with a V-shaped mark on the surface of the outer ring to simplify identification of the correct direction when mounting and to ensure that the correct combination is achieved. The V-shaped mark points to the direction of the axial load that the inner ring supports (contact angle).

Combination Mark and Matching Method for Universal Combination Bearings



3. Permissible Axial Load for Angular Contact Ball Bearings

NSK has defined the limiting static axial load as the smaller of the two values listed below:

(1) Limiting axial load that produces shoulder override
The limiting load at which the contact ellipse generated between the ball and the raceway overrides the shoulder of the raceway groove (Fig. 2)

(2) Limiting axial load in terms of surface pressure
The limiting load at which the contact stress at the center of the contact area between the ball and the raceway groove reaches a level that leaves an indentation as defined in the basic static load rating (Fig. 3)

To maintain optimal bearing performance, NSK has defined permissible static axial load values by applying a safety factor to the limiting axial load based on many years of experience.
The formula for calculating the basic static axial load rating C_{0a} does not take the shoulder height of the raceway groove into account. Therefore, in some cases the C_{0a} value may exceed the limiting axial load that produces shoulder override.
In such cases, the maximum load that the bearing can sustain is lower than the C_{0a} value, making the C_{0a} value unsuitable (Fig. 4). Therefore, instead of C_{0a} values, we have listed limiting axial load values in the bearing tables where necessary, particularly for angular contact thrust ball bearings as they are usually used to support heavy axial loads.

4. Rolling contact fatigue life

The relationship between basic load rating, bearing load, and basic rating life for the rolling bearing is presented in the following formula.

$$L_h = \frac{10^6}{60n}\left(\frac{C_a}{P}\right)^3$$

Where, L_h: Basic rating life (h)
C_a: Basic dynamic load rating (N)
P: Dynamic equivalent load (N)
n: Rotational speed (min^{-1})
See the right table for dynamic equivalent load in each combination.

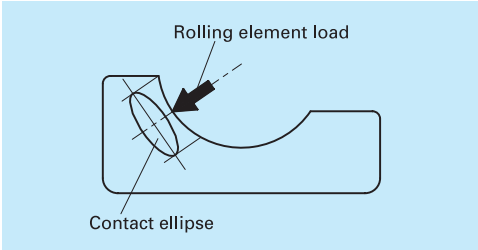


Fig. 2 Ride-over limit axial load

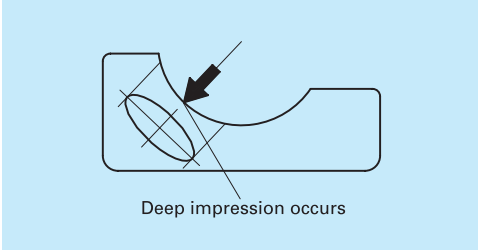


Fig. 3 Contact pressure limit axial load

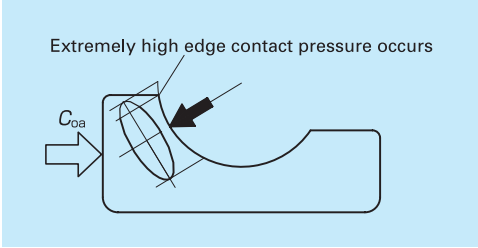


Fig. 4 C_{oa} and limit axial load

Dynamic equivalent load $P_a = XF_r + YF_a$

Bearing configuration / Combination code / Number of the row that receives axial load		Duplex		Triplex			Quadruplet		
		DF	DT	DFD		DTD	DFT	DFF	DFT
$e = 2.17$		One row	Two rows	One row	Two rows	Three rows	One row	Two rows	Three rows
$F_a/F_r \leqq e$	X	1.9	–	1.43	2.33	–	1.17	1.9	2.53
	Y	0.55	–	0.77	0.35	–	0.89	0.55	0.26
$F_a/F_r > e$	X	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
	Y	1	1	1	1	1	1	1	1

5. Fits

Recommended interference values for standard operating conditions of ball screws are listed in Tables 3. When using angular contact thrust ball bearings for high-load drive ball screw support, in cases where a single end is supported and moment loads are high, it is advisable to increase shaft interference, for example by choosing k5 etc. as required.

Table 3 Tolerances for Shaft and Housing Bore Diameters Unit: μm

Shaft Outer Diameter, Housing Bore Diameter (mm)		Tolerance of shaft outer diameter						Tolerance of housing bore diameter		
		Angular contact thrust ball bearings for high-rigidity applications			Angular contact thrust ball bearings for high-load drive applications					
Over	Incl.		Min.	Max.		Min.	Max.		Min.	Max.
10	18	h5	–8	0	js5	–4	4	H6	–	–
18	30		–9	0		–4.5	4.5		–	–
30	50		–10	0		–5.5	5.5		0	16
50	80		–13	0		–6.5	6.5		0	19
80	120		–	–		–7.5	7.5		0	22
120	180		–	–		–9.0	9.0		0	25
180	250		–	–		–	–		0	29
250	315		–	–		–	–		0	32
315	400		–	–		–	–		0	36

6. Bearing Accuracy

Table 4 to 6 shows accuracy for angular contact thrust ball bearings for ball screw support.

Table 4 Tolerances for angular contact thrust ball bearings NSKTAC C for high-rigidity ball screw support (Class PN7C [1]) Unit: μm

Nominal Bore (or outer diameter) (mm)		Single Plane Mean Bore Diameter Deviation Δdmp		Deviation of Single Bore Diameter Δds		Single Plane Mean Outside Diameter Deviation ΔDmp		Deviation of Single Outside Diameter ΔDs		Deviation of Single Inner Ring Width ΔBs		Inner ring (Outer Ring) Face Runout with Raceway *Sia* (*Sea*)
Over	Incl.	High	Low	High	Low	High	Low	High	Low	High	Low	Max.
10	18	0	–4	0	–4	–	–	–	–	0	–120	2.5
18	30	0	–5	0	–5	–	–	–	–	0	–120	2.5
30	50	0	–6	0	–6	0	–6	0	–6	0	–120	2.5
50	80	0	–7	0	–7	0	–7	0	–7	0	–150	2.5
80	120	–	–	–	–	0	–8	0	–8	–	–	2.5

Note: 1. NSK specification

Table 5 Tolerances for angular contact thrust ball bearings NSKTAC 03 for high-load drive applications ball screw support (Class PN5D [2]) Unit: μm

Nominal Bore (or outer diameter) (mm)		Single Plane Mean Bore Diameter Deviation Δdmp		Single Plane Mean Outside Diameter Deviation ΔDmp		Deviation of Single Inner Ring Width ΔBs		Inner ring (Outer Ring) Face Runout with Raceway *Sia* (*Sea*)
Over	Incl.	High	Low	High	Low	High	Low	Max.
10	18	0	–5	–	–	0	–80	5
18	30	0	–6	–	–	0	–120	5
30	50	0	–8	0	–7	0	–120	5
50	80	0	–9	0	–9	0	–150	8
80	120	0	–10	0	–10	0	–200	8
120	150	0	–13	0	–11	0	–250	10
150	180	0	–13	0	–13	0	–250	10
180	250	–	–	0	–15	–	–	10
250	315	–	–	0	–18	–	–	11
315	400	–	–	0	–20	–	–	13

Note: 2. NSK specification

Table 6 Tolerances for BSBD Series double-row bearings (Class P2B [3]) of BSF and BSN series) Unit: μm

Nominal Bore Diameter (mm)		Single Plane Mean Bore Diameter Deviation Δdmp		Single Plane Mean Outside Diameter Deviation ΔDmp		Inner Ring Face Runout with Raceway *Sia*	Radial Runout of Inner Ring *Kia*	Width Tolerance	
Over	Incl.	High	Low	High	Low	Max.	Max.	High	Low
10	18	0	–5	0	–10	1.5	1.5	0	–250
18	30	0	–5	0	–10	2.5	2.5	0	–250
30	50	0	–5	0	–10	2.5	2.5	0	–250
50	80	0	–8	0	–15	2.5	2.5	0	–250

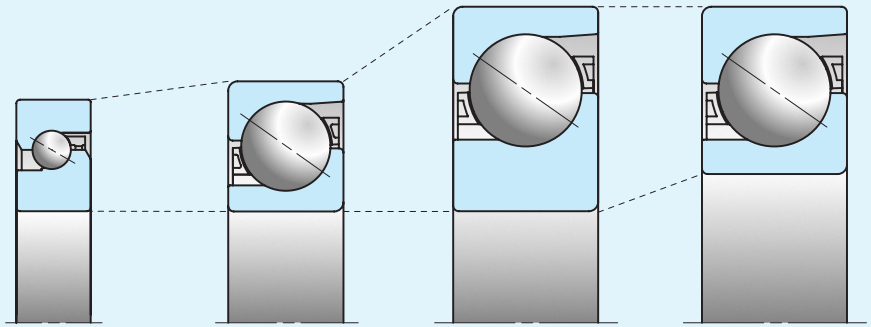
Note: 3. NSK specification

NSKTAC C Angular Contact Thrust Ball Bearings for Ball Screw Support in High-Rigidity Applications

A larger number of balls and a 60° contact angle provide high axial rigidity and make these bearings ideally suited for machine tool feeding mechanisms.
The "DDG" seals used for the sealed bearings of this series are light-contact seals for high-speed capability; a strong sealing effect is achieved by a labyrinth between the seal lip and the seal groove of the inner ring. This ensures that no foreign particles can get into the bearing and no grease can leak out, thus helping to keep the surrounding area clean. Some bearings from this series are also available as non-contact sealed bearings for even lower torque and lower heat generation.
For ease of handling and increased efficiency, NSKTAC C bearings come prepacked with "WPH" grease that resists high temperatures and is less likely to soften and leak.

NSKTAC 03 Angular Contact Thrust Ball Bearings for Ball Screw Support in High-Load Drive Applications

Optimized internal design has led to a higher limiting axial load. The number of rows may be reduced, contributing to smaller sized devices. We also offer bearings with special bore diameters. That way, bearings with higher load capacity may be employed without any need to modify the shaft diameter, allowing for more compact screw shaft ends.
For the validity of this series for industries except Injection molding machines and machine tools, please ask NSK.



60TAC120C (NSK TAC C)	60TAC03D (NSK TAC 03)	TAC60-3 (NSK TAC 03 with special bore diameter)	80TAC03D (NSK TAC 03)
For high-rigidity applications	For high-load drive applications		

Numbering System of NSKTAC C Angular Contact Thrust Ball Bearings for Ball Screw Support in High-Rigidity Applications

Bearing number example: 30 TAC 62 C SU H PN7C

- 30 — Nominal bore diameter
- TAC — Bearing type
- 62 — Nominal outer diameter
- C — Internal design
- SU — Arrangement
- H — Preload
- PN7C — Accuracy

30	Nominal bore diameter	Bore diameter (mm)
TAC	Bearing type	Angular contact thrust ball bearing
62	Nominal outer diameter	Outer diameter (mm)
C	Internal design	Contact angle 60°
	Seal	No symbol: Open type DDG: Contact rubber seal V1V: Non-contact rubber seal
SU	Arrangement	SU: Universal arrangement (single-row)
H	Preload	H: Heavy preload (standard in the HPS Series)
PN7C	Accuracy	PN7C: NES Class 7C (axial runout equivalent to P2)

Numbering System of NSKTAC 03 Angular Contact Thrust Ball Bearings for Ball Screw Support in High-Load Drive Applications


Bearing number example: 60 TAC 03 D T85 SU M PN5D

- 60 — Nominal bore diameter
- TAC — Bearing type
- 03 — Dimension series
- D — Internal design
- T85 — Cage
- SU — Arrangement
- M — Preload
- PN5D — Accuracy


60	Nominal bore diameter	Bore diameter (mm)
TAC	Bearing type	Angular contact thrust ball bearing
03	Dimension series	02: 02 Series 03: 03 Series
D	Internal design	Contact angle 55°
T85	Cage	T85: Polyamide cage M:Brass Cage
SU	Arrangement	SU: Universal arrangement (single-row)
M	Preload	M: Medium preload EL: Extra light preload
PN5D	Accuracy	PN5D: Standard accuracy (equivalent to ISO Class 5)

NSKHPS is not applicable for TAC160-3 and 180TAC03D.


for High-Rigidity




Open type



Sealed type DDG





Calculation of preload, axial rigidity and starting torque for bearing arrangements
Multiply by factors in table B.

Table B

	DFD ⊘Ø⊘	DFF ⊘⊘Ø⊘	DFT ⊘Ø⊘Ø
	DBD Ø⊘Ø	DBB Ø⊘⊘Ø	DBT Ø⊘Ø⊘
Preload factor	1.36	2.00	1.57
Axial rigidity	1.49	2.00	1.89
Starting torque	1.35	2.00	1.55

(Open type)

Bearing Numbers	Boundary Dimensions (mm)					Abutment and Fillet Dimensions (mm)				Recommended Grease Quantities (cc)	Contact angle (degree)	Limiting Speeds[2] (min^{-1})		Mass (kg) (approx.)
	d	D	B	r (Min.)	r_1 (Min.)	D_b (Max.)	d_a (Min.)	D_a (Max.)	d_b (Min.)			Grease	Oil	
15TAC47C	15	47	15	1	0.6	42	19.5	41	19.5	2.2	60	6 900	9 200	0.146
17TAC47C	17	47	15	1	0.6	42	23	41	23	2.2	60	6 900	9 200	0.140
20TAC47C	20	47	15	1	0.6	42	25	41	25	2.2	60	6 900	9 200	0.135
25TAC62C	25	62	15	1	0.6	57	31	56	31	3.0	60	5 200	6 900	0.252
30TAC62C	30	62	15	1	0.6	57	36	56	36	3.2	60	4 900	6 400	0.224
35TAC72C	35	72	15	1	0.6	67	42	66	42	3.8	60	4 100	5 800	0.310
40TAC72C	40	72	15	1	0.6	67	47	66	47	3.9	60	4 100	5 500	0.275
40TAC90C	40	90	20	1	0.6	85	48	84	48	8.8	60	3 500	4 600	0.674
45TAC75C	45	75	15	1	0.6	68	54	67	54	4.2	60	3 700	4 900	0.270
45TAC100C	45	100	20	1	0.6	93	55	92	55	9.7	60	3 000	4 100	0.842
50TAC100C	50	100	20	1	0.6	92	60	91	60	10.2	60	3 000	3 900	0.778
55TAC100C	55	100	20	1	0.6	92	63	91	63	10.2	60	3 000	3 900	0.714
55TAC120C	55	120	20	1	0.6	112	63	111	63	12	60	2 500	3 500	1.23
60TAC120C	60	120	20	1	0.6	112	70	111	70	12	60	2 500	3 500	1.16

Preload (DB and DF Arrangement) (N)	Axial Rigidity (DB and DF Arrangement) (N/μm)	Starting Torque (DB and DF Arrangement)[4] (N·m) (reference)	Basic dynamic load rating Ca by number of rows sustaining Fa			Limiting axial load by number of rows sustaining Fa[3]		
H	H	H	1 row (kN)	2 rows (kN)	3 rows (kN)	1 row (kN)	2 rows (kN)	3 rows (kN)
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
2 280	850	0.15	29.9	48.5	64.5	40.5	81.5	122
2 400	890	0.16	30.5	50.0	66.0	43.0	86.0	129
2 750	1 030	0.18	32.5	53.0	70.5	50.0	100	150
2 860	1 080	0.19	33.5	54.0	72.0	52.0	104	157
3 450	1 150	0.29	62.0	101	134	89.5	179	269
3 100	1 170	0.20	34.5	56.0	74.5	57.0	114	170
4 440	1 340	0.40	64.5	105	140	99.0	198	298
4 650	1 410	0.42	66.0	107	142	104	208	310
4 650	1 410	0.42	66.0	107	142	104	208	310
5 450	1 660	0.49	70.5	115	153	123	246	370
5 450	1 660	0.49	70.5	115	153	123	246	370


(Sealed Type)

Bearing Numbers[1]	Boundary Dimensions (mm)					Abutment and Fillet Dimensions (mm)				Contact angle (degree)	Limiting Speeds[2] (min^{-1})	Mass (kg) (approx.)
	d	D	B	r (Min.)	r_1 (Min.)	D_b (Max.)	d_a (Min.)	D_a (Max.)	d_b (Min.)		Grease	
* **15TAC47CDDG**	15	47	15	1	0.6	42	19.5	41	19.5	60	6 900	0.146
* **17TAC47CDDG**	17	47	15	1	0.6	42	22	41	22	60	6 900	0.140
* **20TAC47CDDG**	20	47	15	1	0.6	42	25	41	25	60	6 900	0.135
* **25TAC62CDDG**	25	62	15	1	0.6	57	30	56	30	60	5 200	0.252
30TAC62CDDG	30	62	15	1	0.6	57	36	56	36	60	4 900	0.224
35TAC72CDDG	35	72	15	1	0.6	67	41	66	41	60	4 100	0.310
40TAC72CDDG	40	72	15	1	0.6	67	46	66	46	60	4 100	0.275
40TAC90CDDG	40	90	20	1	0.6	85	47	84	47	60	3 500	0.674
45TAC100CDDG	45	100	20	1	0.6	93	54	92	54	60	3 000	0.842
50TAC100CDDG	50	100	20	1	0.6	92	59	91	59	60	3 000	0.778
55TAC100CDDG	55	100	20	1	0.6	92	63	91	63	60	3 000	0.714

Preload (DB and DF Arrangement) (N)	Axial Rigidity (DB and DF Arrangement) (N/μm)	Starting Torque (DB and DF Arrangement)[4] (N·m) (reference)	Basic dynamic load rating Ca by number of rows sustaining Fa			Limiting axial load by number of rows sustaining Fa[3]		
H	H	H	1 row (kN)	2 rows (kN)	3 rows (kN)	1 row (kN)	2 rows (kN)	3 rows (kN)
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
2 280	850	0.15	29.9	48.5	64.5	40.5	81.5	122
2 400	890	0.16	30.5	50.0	66.0	43.0	86.0	129
2 750	1 030	0.18	32.5	53.0	70.5	50.0	100	150
2 860	1 080	0.19	33.5	54.0	72.0	52.0	104	157
3 450	1 150	0.29	62.0	101	134	89.5	179	269
4 440	1 340	0.40	64.5	105	140	99.0	198	298
4 650	1 410	0.42	66.0	107	142	104	208	310
4 650	1 410	0.42	66.0	107	142	104	208	310

Note: 1. An asterisk (*) indicates bearings that are also available as non-contact sealed bearings.
2. Limiting speeds are based on high preload (H). The values shown are valid for all types of bearing arrangement.
3. To calculate permissible axial load, multiply limiting axial load by 0.7.
4. The starting torque values in the table apply to grease lubricated bearings. Contact seal torque is not included. For oil lubricated bearings, multiply by 1.4.
5. Abutment and fillet dimensions are recommendable values for the use of standard Machine tool applications. For heavy load applications, please ask NSK

for High-Load Drive Applications



Bearing Numbers[1]	Boundary Dimensions (mm)					Reference Dimensions (mm)				Recommended Grease Quantities (cc/row)	Contact angle (degree)	Limiting Speeds[2] (min^{-1})		Mass (kg) (approx.)
	d	D	B	r (Min.)	r_1 (Min.)	d_1	d_2	D_1	D_2			Grease	Oil	
15TAC02D	15	35	11	0.6	0.3	19.1	24.5	26	31.9	1	55	12 000	14 800	0.047
20TAC03D	20	52	15	1.1	0.6	27.2	35.3	37.5	46.1	2.7	55	8 300	10 300	0.155
25TAC02D	25	52	15	1	0.6	30.8	38.1	39.6	47.3	3	55	7 700	9 700	0.137
TAC35-3	35	90	23	1.5	1	50.4	64.2	67.1	81.7	14	55	4 600	6 000	0.712
40TAC03D	40	90	23	1.5	1	50.4	64.2	67.1	81.7	14	55	4 600	5 700	0.659
TAC40-3	40	110	27	2	1	62	79.1	82.4	100.6	25	55	3 700	5 000	1.28
45TAC03D	45	100	25	1.5	1	56.5	71.7	74.7	90.8	18	55	4 100	5 200	0.877
TAC45-3	45	110	27	2	1	62	79.1	82.4	100.6	25	55	3 700	4 800	1.21
50TAC03D	50	110	27	2	1	62	79.1	82.4	100.6	25	55	3 700	4 700	1.14
TAC50-3	50	130	31	2.1	1.1	73.9	93.8	98	119	40	55	3 100	4 200	2.00
55TAC03D	55	120	29	2	1	68	86.4	90.2	109.7	32	55	3 400	4 300	1.44
60TAC03D	60	130	31	2.1	1.1	73.9	93.8	98	119	40	55	3 100	3 900	1.80
TAC60-3	60	170	39	2.1	1.1	98.5	123.6	128.7	157.5	85	55	2 400	3 300	4.47
70TAC03D	70	150	35	2.1	1.1	86.3	108.6	113.4	137.8	59	55	2 700	3 400	2.67
75TAC03D	75	160	37	2.1	1.1	92.4	116.2	121	146.2	67	55	2 500	3 200	3.20
80TAC03D	80	170	39	2.1	1.1	98.5	123.6	128.7	157.5	85	55	2 400	3 000	3.80
TAC80-3	80	215	47	3	1.1	124	154.9	160.4	194.5	156	55	1 900	2 600	8.66
100TAC03D	100	215	47	3	1.1	124	154.9	160.4	194.5	156	55	1 900	2 400	7.54
TAC100-3	100	260	55	3	1.1	150.5	186.9	193.4	231.7	254	55	1 500	2 100	14.8
120TAC03D	120	260	55	3	1.1	150.5	186.9	193.4	231.7	254	55	1 500	2 000	13.3
* **TAC120-3M**	120	300	62	4	1.5	170.8	215.3	224.1	265.7	336	55	1 300	1 800	24.5
* **140TAC03DM**	140	300	62	4	1.5	170.8	215.3	224.1	265.7	336	55	1 300	1 700	22.5
* **TAC140-3M**	140	340	68	4	1.5	197.5	246.2	254.3	298.8	442	55	1 200	1 600	34.5
* **160TAC03DM**	160	340	68	4	1.5	197.5	246.2	254.3	298.8	442	55	1 200	1 500	32.0
* **TAC160-3M**	160	380	75	4	1.5	221.1	275.6	284.9	334.9	624	55	1 000	1 400	46.8
* **180TAC03DM**	180	380	75	4	1.5	221.1	275.6	284.9	334.9	624	55	1 000	1 400	43.7

Note: 1. An asterisk (*) indicates bearings that are also available equipped with screw holes for mounting bolts.
2. Limiting speeds are based on the standard preload of each bearing. The values shown are valid for all types of bearing arrangement.
3. Preload values for bearings with a bore diameter of 100mm or more as well as for TAC80-3 are based on EL preload.

Multi-row combination calculations

Calculation of preload, axial rigidity and starting torque for bearing arrangements
Multiply by factors in table B.

Table B

Number of load-sustaining rows	2 rows		3 rows			4 rows		5 rows
	DFD ⊘⊘⊘	DFF ⊘⊘⊘⊘	DFT ⊘⊘⊘⊘	DFFD ⊘⊘⊘⊘⊘	DFFF ⊘⊘⊘⊘⊘⊘	DFTD ⊘⊘⊘⊘⊘	DFFT ⊘⊘⊘⊘⊘⊘	DFTT ⊘⊘⊘⊘⊘⊘
	DBD ⊘⊘⊘	DBB ⊘⊘⊘⊘	DBT ⊘⊘⊘⊘	DBBD ⊘⊘⊘⊘⊘	DBBB ⊘⊘⊘⊘⊘⊘	DBTD ⊘⊘⊘⊘⊘	DBBT ⊘⊘⊘⊘⊘⊘	DBTT ⊘⊘⊘⊘⊘⊘
Preload factor	1.36	2.00	1.57	2.42	3.00	1.72	2.72	1.83
Axial rigidity	1.49	2.00	1.89	2.51	3.00	2.24	2.97	2.57
Starting torque	1.35	2.00	1.55	2.41	3.00	1.68	2.71	1.77

Preload[3] (DB and DF Arrangement) (N)	Axial Rigidity[3] (DB and DF Arrangement) (N/μm)	Starting Torque[4] (DB and DF Arrangement) (N·m)	Basic dynamic load rating Ca by number of rows sustaining Fa					Limiting axial load by number of rows sustaining Fa[5]				
			1 row (kN)	2 rows (kN)	3 rows (kN)	4 rows (kN)	5 rows (kN)	1 row (kN)	2 rows (kN)	3 rows (kN)	4 rows (kN)	5 rows (kN)
400	290	0.017	21.0	34.0	45.0	55.5	64.5	18.6	37.5	56.0	74.5	93.0
830	430	0.026	42.5	69.5	92.0	113	132	38.5	77.0	116	154	193
690	430	0.036	37.0	60.0	79.5	97.5	114	36.0	72.5	109	145	181
2 500	780	0.26	113	184	244	299	350	118	235	355	470	590
2 500	780	0.26	113	184	244	299	350	118	235	355	470	590
3 900	970	0.50	166	270	360	440	515	181	360	540	720	905
2 800	830	0.31	133	216	287	350	410	142	283	425	565	710
3 900	970	0.50	166	270	360	440	515	181	360	540	720	905
3 900	970	0.50	166	270	360	440	515	181	360	540	720	905
5 200	1 120	0.78	218	355	470	575	670	242	485	725	965	1 210
4 280	1 060	0.68	190	310	410	500	585	210	420	630	840	1 050
5 200	1 120	0.78	218	355	470	575	670	242	485	725	965	1 210
8 050	1 400	1.5	305	495	660	805	940	390	775	1 170	1 550	1 940
6 400	1 250	1.1	262	425	565	690	810	305	615	920	1 230	1 530
7 230	1 330	1.3	283	460	610	750	875	345	690	1 040	1 380	1 730
8 050	1 400	1.5	305	495	660	805	940	390	775	1 170	1 550	1 940
1 240	880	0.15	420	685	910	1 110	1 300	510	1 020	1 530	2 040	2 550
1 240	880	0.15	420	685	910	1 110	1 300	510	1 020	1 530	2 040	2 550
1 620	1 050	0.21	520	850	1 130	1 380	1 610	680	1 360	2 040	2 720	3 400
1 620	1 050	0.21	520	850	1 130	1 380	1 610	680	1 360	2 040	2 720	3 400
1 710	1 130	0.24	640	1 040	1 380	1 680	1 970	794	1 590	2 380	3 200	3 950
1 710	1 130	0.24	640	1 040	1 380	1 680	1 970	794	1 590	2 380	3 200	3 950
1 850	1 240	0.27	725	1 180	1 570	1 920	2 240	1 040	2 080	3 100	4 150	5 200
1 850	1 240	0.27	725	1 180	1 570	1 920	2 240	1 040	2 080	3 100	4 150	5 200
1 940	1 310	0.30	815	1 330	1 760	2 150	2 520	1 360	2 720	4 100	5 450	6 800
1 940	1 310	0.30	815	1 330	1 760	2 150	2 520	1 360	2 720	4 100	5 450	6 800

4. The starting torque values in the table apply to grease lubrication.
5. To calculate permissible axial load, multiply limiting axial load by 0.7.

NSKHPS™ BSBD Series

The BSBD Series are double-row bearing units for the support of ball screws that can accurately and quickly position a work piece or a spindle unit.




Features

The bearings of this series are double-row angular contact thrust ball bearings with a 60° contact angle and a single outer ring. The specifications are the same as those of the NSKTAC bearings, both series being optimized for the support of ball screws in machine tools. All BSBD Series bearings are equipped with a rubber contact seal and prepacked with high performance grease.


● BSN Type

The BSN type of ball screw support bearings are double row angular contact thrust ball bearings in a back-to-back arrangement, with a single outer ring. The bearings are prepacked with high performance grease. Lubrication holes allow for relubrication during operation if necessary. The contact seal offers minimized friction and temperature rise while providing excellent sealing performance.



● BSF Type

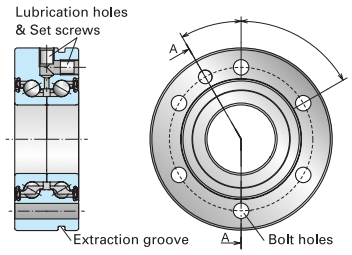The BSF type of bearings is equivalent to the BSN range of bearings, with bolt holes on the outer ring for easy direct mounting. Two lubrication holes – one in the outer surface and one in the face of the outer ring – allow for relubrication during operation if required. If not used, these holes are closed off with set screws. An extraction groove on the outer surface of the outer ring aids removal of the bearing.



Note: BSF type bearings are supplied with seal and set screws included. Mounting bolts are not included.

BSN Type Single product

Bearing Numbers	Boundary Dimensions (mm) d	D	B	r (min)	r1 (min)	Abutment and Fillet Dimensions (mm) φda (min)	φDb (max)	Contact Angle (°)	Basic Load Rating (kN) Ca (Dynamic)	Coa (Static)	Limiting[1] Axial Load (kN)	Preload (N)	Axial Rigidity (N/μm)	Mass (kg)	Limiting speed (min-1) Greased	Starting torque[2] (N·m) H	Recommended Clamping force (N)
BSN1242	12	42	25	0.6	0.3	15	33	60	18.5	24.0	17.6	720	375	0.20	8 000	0.038	4 030
BSN1545	15	45	25	0.6	0.3	19	35	60	19.4	26.9	19.4	675	400	0.22	7 100	0.034	4 050
BSN1747	17	47	25	0.6	0.6	21	37	60	20.3	29.7	21.2	880	450	0.23	6 700	0.05	4 400
BSN2052	20	52	28	0.6	0.6	24	43	60	26.4	41.0	29.3	1 885	650	0.31	5 800	0.13	7 600
BSN2557	25	57	28	0.6	0.6	29	48	60	28.3	48.0	34.0	2 245	750	0.36	5 100	0.16	8 100
BSN3062	30	62	28	0.6	0.6	34	53	60	30.0	55.5	38.5	2 625	850	0.40	4 500	0.19	8 600
BSN3072	30	72	38	0.6	0.6	35	64	60	60.5	94.0	66.5	4 855	950	0.74	3 900	0.59	11 100
BSN3572	35	72	34	0.6	0.6	40	62	60	42.0	77.5	52.0	2 630	900	0.66	3 800	0.21	13 500
BSN4075	40	75	34	0.6	0.6	46	67	60	44.5	88.0	58.5	3 065	1 000	0.65	3 500	0.24	14 100
BSN4090	40	90	46	0.6	0.6	46	80	60	78.5	135	91.0	7 220	1 200	1.38	3 100	1.02	18 700
BSN5090	50	90	34	0.6	0.6	56	82	60	48.0	110	71.5	4 020	1 250	0.93	2 800	0.33	15 400
BSN50110	50	110	54	0.6	0.6	57	98	60	116	219	149	7 435	1 400	2.46	2 500	1.06	19 100
BSN60110	60	110	45	0.6	0.6	68	100	60	86.5	187	126	4 780	1 300	1.82	2 400	0.50	20 900

Notes: 1. Permissible axial load equals 0.7 times of limiting axial load.
2. The values indicate starting torque of preloaded bearings, not including seal torque.

NSKHPS BSBD Series


Bearing number Example: BS F 30 80 DDU H P2B DT

- BS — Bearing type
- F: Flange type / N: No Flange type — F
- 30 — Bore diameter
- 80 — Outer diameter
- DDU — Seal type
- H — Preload
- P2B — Accuracy
- DT — Arrangement

Note:
P2B is an accuracy class specific to the BSBD Series, indicating the following:
Running accuracy: ISO Class 2
Others: NSK-specific


● Seal


Rubber contact seal on both sides. Triple lip structure provides high grease sealing performance and dust resistance.



● Matched DT pairs

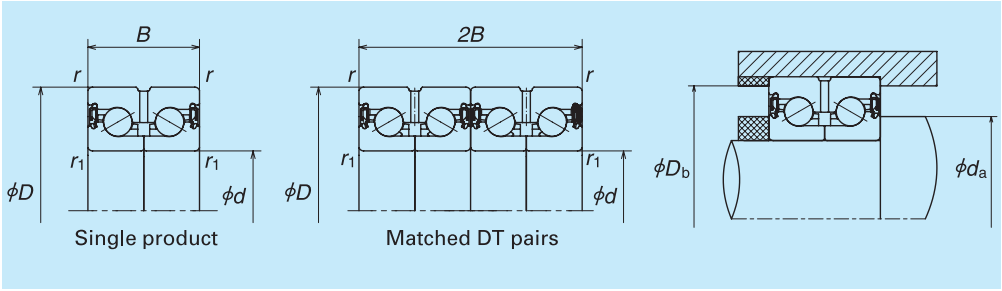BSBD bearings are available in matched DT pairs for applications with large external loads or where high rigidity and long life are required. The mating surfaces of the 2- row bearing set are controlled for offset, so as to have no impact on the preload of each individual bearing.







BSN Type Matched DT pairs

Bearing Numbers	Boundary Dimensions (mm) d	D	2B	r (min)	r1 (min)	Abutment and Fillet Dimensions (mm) φda (min)	φDb (max)	Contact Angle (°)	Basic Load Rating (kN) Ca (Dynamic)	Coa (Static)	Limiting[1] Axial Load (kN)	Axial Rigidity (N/μm)	Mass (kg)	Limiting speed (min-1) Greased	Starting torque[2] (N·m) H	Recommended Clamping force (N)
BSN1747-DT	17	47	50	0.6	0.6	21	37	60	33.0	59.5	42.5	790	0.46	6 700	0.10	4 400
BSN2052-DT	20	52	56	0.6	0.6	24	43	60	43.0	82.0	58.5	1 180	0.62	5 800	0.26	7 600
BSN2557-DT	25	57	56	0.6	0.6	29	48	60	46.0	96.0	68.0	1 370	0.71	5 100	0.32	8 100
BSN3062-DT	30	62	56	0.6	0.6	34	53	60	49.0	111	77.0	1 580	0.80	4 500	0.37	8 600
BSN3072-DT	30	72	76	0.6	0.6	35	64	60	98.0	188	133	1 800	1.47	3 900	1.17	11 100
BSN3572-DT	35	72	68	0.6	0.6	40	62	60	68.0	155	104	1 630	1.32	3 800	0.41	13 500
BSN4075-DT	40	75	68	0.6	0.6	46	67	60	72.0	176	117	1 850	1.30	3 500	0.49	14 100
BSN4090-DT	40	90	92	0.6	0.6	46	80	60	128	269	182	2 300	2.76	3 100	2.03	18 700
BSN5090-DT	50	90	68	0.6	0.6	56	82	60	78.0	220	143	2 330	1.86	2 800	0.66	15 400
BSN50110-DT	50	110	108	0.6	0.6	57	98	60	188	440	299	2 690	4.92	2 500	2.11	19 100


3. Inner rings can be separable easily. Please push or pull bearings by clamping innerring at mounting and dismounting.
4. Abutment and fillet simensionsare recommendable values for the use of standard Machine tool applications. For heavy load applications, please ask NSK.


NSKHPS™ BSBD Series






(BSF60145 Only)

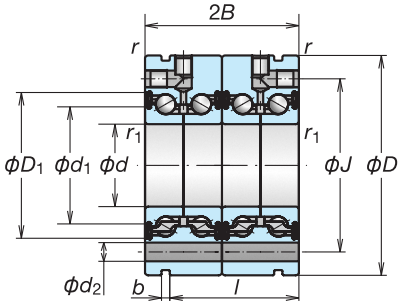



Type Ⅰ



Type Ⅱ

BSF Type Single product

Bearing Numbers	Boundary Dimensions (mm)					Basic Load Rating (kN)		Limiting[1] Axial Load (kN)	Axial Rigidity (N/μm)	Mass (kg)	Limiting speed (min⁻¹)
	d	D	B	r (min)	r1 (min)	Ca (Dynamic)	Coa (Static)				Grease
BSF1255	12	55	25	0.6	0.3	18.5	24.0	17.6	375	0.37	8 000
BSF1560	15	60	25	0.6	0.3	19.4	26.9	19.4	400	0.44	7 100
BSF1762	17	62	25	0.6	0.6	20.3	29.7	21.2	450	0.46	6 700
BSF2068	20	68	28	0.6	0.6	26.4	41.0	29.3	650	0.61	5 800
BSF2575	25	75	28	0.6	0.6	28.3	48.0	34.0	750	0.73	5 100
BSF3080	30	80	28	0.6	0.6	30.0	55.5	38.5	850	0.79	4 500
BSF30100	30	100	38	0.6	0.6	60.5	94	66.5	950	1.71	3 900
BSF3590	35	90	34	0.6	0.6	42.0	77.5	52.0	900	1.20	3 800
BSF40100	40	100	34	0.6	0.6	44.5	88.0	58.5	1 000	1.49	3 500
BSF40115	40	115	46	0.6	0.6	78.5	135	91.0	1 200	2.56	3 100
BSF50115	50	115	34	0.6	0.6	48.0	110	71.5	1 250	1.89	2 800
BSF50140	50	140	54	0.6	0.6	116	219	149	1 400	4.46	2 500
BSF60145	60	145	45	0.6	0.6	86.5	187	126	1 300	4.06	2 400

Reference Dimensions (mm)							Type	Mounting Bolts		Preload (N)	Starting torque[2] (N·m)	Recommended Clamping Force (N)
d1	D1	J	d2	l	b	t		Bolt Dia.	Number of Bolts		H	
23.7	32.7	42	6.8	17	3	3 x 120°	Ⅱ	M6	3	720	0.038	4 030
26.7	35.7	46	6.8	17	3	3 x 120°	Ⅱ	M6	3	675	0.034	4 050
28.1	37.7	48	6.8	17	3	3 x 120°	Ⅱ	M6	3	890	0.05	4 400
32.6	43	53	6.8	19	3	4 x 90°	Ⅱ	M6	4	1 885	0.13	7 600
37.6	48	58	6.8	19	3	4 x 90°	Ⅱ	M6	4	2 245	0.16	8 100
42.6	53	63	6.8	19	3	6 x 60°	Ⅱ	M6	6	2 625	0.19	8 600
49.1	64.4	80	8.8	30	3	8 x 45°	Ⅱ	M8	8	4 855	0.59	11 100
53.1	62.2	75	8.8	25	3	4 x 90°	Ⅱ	M8	4	2 630	0.21	13 500
55.1	67.2	80	8.8	25	3	4 x 90°	Ⅱ	M8	4	3 065	0.24	14 100
63.1	80.1	94	8.8	36	3	12 x 30°	Ⅱ	M8	12	7 220	1.02	18 700
70.1	82.2	94	8.8	25	3	6 x 60°	Ⅱ	M8	6	4 020	0.33	15 400
78.1	97.5	113	11	45	3	12 x 30°	Ⅱ	M10	12	7 435	1.06	19 100
83.1	99.3	120	8.8	35	3	8 x 45°	Ⅱ	M8	8	4 780	0.50	20 900

BSF Type Matched pairs

Bearing Numbers	Boundary Dimensions (mm)					Basic Load Rating (kN)		Limiting[1] Axial Load (kN)	Axial Rigidity (N/μm)	Mass (kg)	Limiting speed (min⁻¹)
	d	D	2B	r (min)	r1 (min)	Ca (Dynamic)	Coa (Static)				Grease
BSF1762-DT	17	62	50	0.6	0.6	33.0	59.5	42.5	790	0.890	6 700
BSF2068-DT	20	68	56	0.6	0.6	43.0	82.0	58.5	1 180	1.17	5 800
BSF2575-DT	25	75	56	0.6	0.6	46.0	96.0	68.0	1 370	1.46	5 100
BSF3080-DT	30	80	56	0.6	0.6	49.0	111	77.0	1 580	1.58	4 500
BSF30100-DT	30	100	76	0.6	0.6	98.0	188	133	1 800	3.41	3 900
BSF3590-DT	35	90	68	0.6	0.6	68.0	155	104	1 630	2.30	3 800
BSF40100-DT	40	100	68	0.6	0.6	72.0	176	117	1 850	2.88	3 500
BSF40115-DT	40	115	92	0.6	0.6	128	269	182	2 300	5.12	3 100
BSF50115-DT	50	115	68	0.6	0.6	78.0	220	143	2 330	3.78	2 800
BSF50140-DT	50	140	108	0.6	0.6	188	440	299	2 690	8.92	2 500

Reference Dimensions (mm)							Type	Mounting Bolts		Starting torque[2] (N·m)	Recommended Clamping Force (N)
d1	D1	J	d2	l	b	t		Bolt Dia.	Number of Bolts	H	
28.1	37.7	48	6.8	42	3	6 x 60°	Ⅰ	M6	5	0.10	4 400
32.6	43	53	6.8	47	3	8 x 45°	Ⅰ	M6	7	0.26	7 600
37.6	48	58	6.8	47	3	8 x 45°	Ⅰ	M6	7	0.32	8 100
42.6	53	63	6.8	47	3	12 x 30°	Ⅰ	M6	11	0.37	8 600
49.1	64.4	80	8.8	68	3	8 x 45°	Ⅱ	M8	8	1.17	11 100
53.1	62.2	75	8.8	59	3	8 x 45°	Ⅰ	M8	7	0.41	13 500
55.1	67.2	80	8.8	59	3	8 x 45°	Ⅰ	M8	7	0.49	14 100
63.1	80.1	94	8.8	82	3	12 x 30°	Ⅱ	M8	12	2.03	18 700
70.1	82.2	94	8.8	59	3	12 x 30°	Ⅰ	M8	11	0.66	15 400
78.1	97.5	113	11	99	3	12 x 30°	Ⅱ	M10	12	2.11	19 100

Notes: 1. Permissible axial load equals 0.7 times of limiting axial load.
The values refer to the limiting load of the bearing only, without taking the mounting bolts into account.

2. The values indicate starting torque of preloaded bearings, not including seal torque.
3. Inner rings can be separable easily. Please push or pull bearings by clamping inner ring at mounting and dismounting.

1. End Deflector Type B431
2. Tube Type B437
3. Deflector(bridge) Type B469
4. End Cap Type B483

B-3-2 Dimension Table and Reference Number of Standard Nut Ball Screws

B-3-2.1 End Deflector Type Ball Screws

This product is being applied for a patent.

1. Features

●Low and less offensive noise

The average noise level is reduced by more than 6 dB(A) compared with our existing products. At low-speed rotation, the ball screws are nearly silent, while their noise is unprecedentedly low at high-speed rotation.

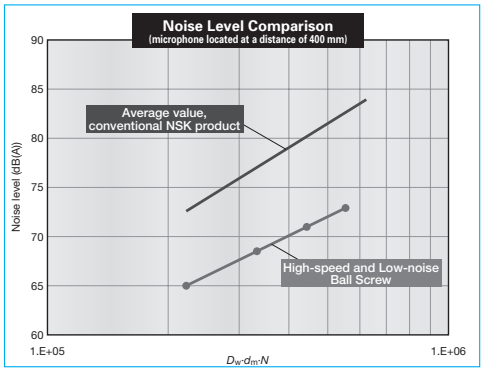


Fig. 1 Comparison of noise level

●High-speed operation

Realizes the d·n of 180 000, outstanding for ball screws and far surpassing the 100 000 d·n performance of existing return tube type products. For high-lead ball screws, high-speed operation at over 200 m/min is also possible.

●Compact

The external diameter of the ball nut is 30% smaller than our existing models. Compact configurations are possible for low-profile XY tables as well as for other devices and equipment.

●Grease fitting provided as standard equipment

The ball screws with shaft diameters equal to or less than ø25 are equipped with a grease fitting (M5 × 0.8) as a standard. Lubrication ports are provided in 2 places for ease of maintenance. The ball screws can be easily connected to an integrated lubrication system.

2. Specifications

(1) Ball recirculation system

Fig. 2 shows the structure of the end-deflector recirculation system.

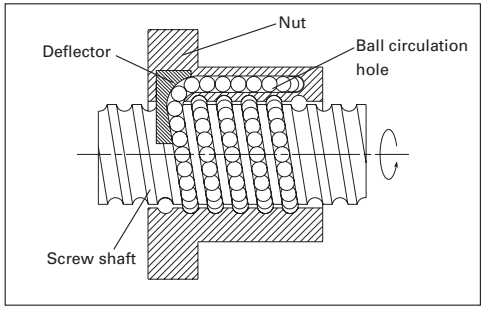


Fig. 2 Structure of end-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	C0, C1, C2, C3, C5, Ct7
Axial play	Z, 0 mm (preloaded); T, 0.005 mm or less; S, 0.020 mm or less; N, 0.050 mm or less

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d·n value : 180 000 or less

Standard of rotational speed : 5 000 min^{-1}

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Seal

A compact and thin plastic seal is used. Nut outside diameter is compact compare with the return tube recirculation system.

(5) Option

Optional NSK K1 lubrication unit, molded from resin and impregnated with lubrication oil, supplies fresh oil onto ball rolling surfaces, ensuring long-term, maintenance-free operation. Please contact NSK when using NSK K1.

3. Design precautions

When designing the shaft end of a ball screw which diameter is 25 mm or less, or 32 mm or over, and the lead is the same as its shaft diameter, one end of the screw must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.


- Cut the ball groove through to the shaft end.
- The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions"(page B83) and "Handling Precautions"(page B103).

4. Product categories

End deflector type ball screws have the model as follows.

Table 2 End-deflector type ball screw product categories

Nut model	Shape	Flang shape	Nut shape	Preload system
BSS		Circular Ⅱ, Ⅲ	Circular	Non-preload, Slight axial play P-preload (light preload)

5. Structure of model number and reference number

The following describe the structure of "Model number" and "Reference number for ball screw".

◇Model number

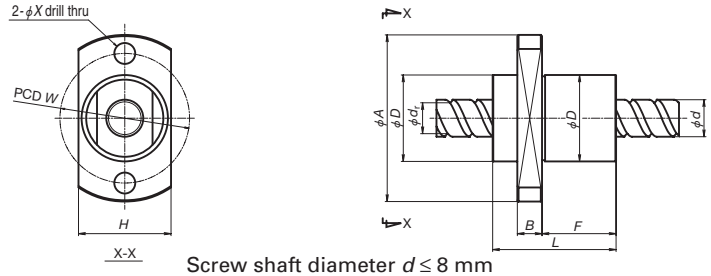
BSS 10 10 - 2E

- BSS: Nut model
- 10: Screw shaft diameter (mm)
- 10: Lead (mm)
- 2E: Effective turns of balls


◇Reference number for ball screw

W 10 01 - ** P SS - C5 Z 10

- W: Product code
- 10: Screw shaft diameter (mm)
- 01: Effective threaded length (in the unit of 100 mm)
- **: NSK design serial number
- P: Preload code: No code, non-preload; P, P-preload (page B5)
- SS: End-deflector recirculation system
- C5: Accuracy grade: C0, C1, C2, C3, C5, C7 (Ct7) (page B37 to B42)
- Z: Axial play code: Z, T, S, N (page B20)
- 10: Lead (mm)




Screw shaft diameter $d \leq 8$ mm

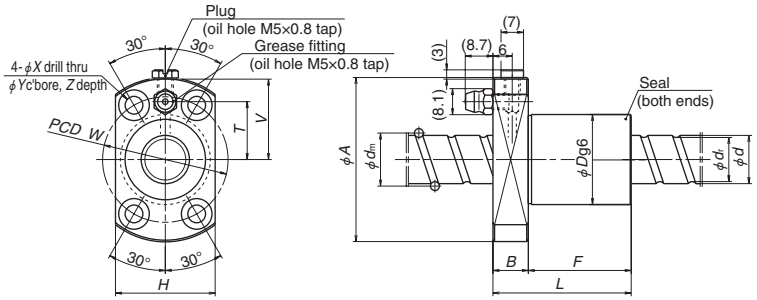

Screw shaft diameter $d \leq 20$ mm

Model No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity K (N/μm)
BSS0608-2E	6	8	1.2	6.2	4.9	2	690	805	32
BSS0608-4E		8				4	1 480	1 940	75
BSS0612-2E		12				2	665	800	29
BSS0612-4E		12				4	1 430	1 970	69
BSS0810-2E	8	10	1.588	8.3	6.6	2	1 150	1 420	43
BSS0810-4E		10				4	2 470	3 430	99
BSS0815-2E		15				2	1 130	1 430	40
BSS0815-4E		15				4	2 410	3 520	93
BSS1005-3E	10	5	2.000	10.3	8.2	3	3 420	4 840	133
BSS1010-2E		10				2	2 290	2 980	81
BSS1205-3E	12	5	2.000	12.3	10.2	3	3 750	5 810	154
BSS1210-3E		10				3	3 760	5 780	150
BSS1220-2E		20				2	2 330	3 600	86
BSS1230-2E		30				2	2 190	3 650	75
BSS1505-3E	15	5	2.778	15.5	12.6	3	6 410	10 100	193
BSS1510-3E		10	2.778		12.6	3	6 530	10 200	192
BSS1520-2E		20	3.175		12.2	2	5 660	8 700	132
BSS1530-2E		30	3.175		12.2	2	5 500	8 580	119
BSS2005-3E	20	5	3.175	20.5	17.2	3	10 400	18 500	284
BSS2010-3E		10				3	10 200	18 600	281
BSS2020-2E		20				2	6 790	11 800	175
BSS2030-2E		30				2	6 550	11 800	164
BSS2040-2E		40				2	6 380	11 600	151
BSS2060-2E		60				2	5 680	11 800	126
BSS2505-3E	25	5	3.175	25.5	22.2	3	11 500	23 500	343
BSS2510-4E		10				4	15 000	32 400	460
BSS2520-2E		20				2	7 650	14 800	214
BSS2525-2E		25				2	7 490	14 600	206
BSS2530-2E		30				2	7 490	14 600	203
BSS2550-2E		50				2	6 910	14 700	180

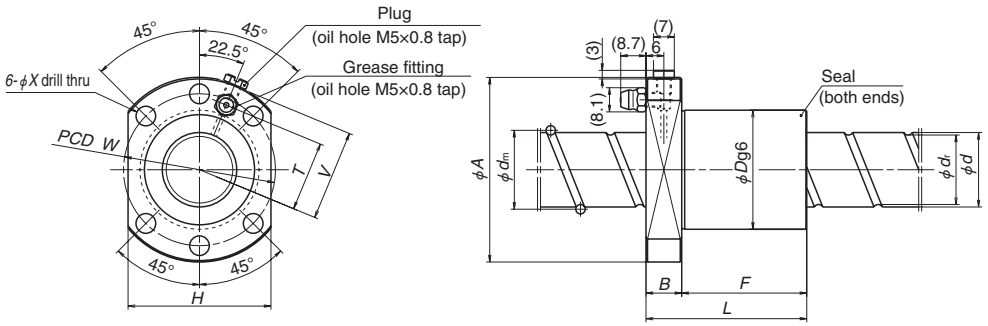Note: 1) The axial rigidity K in the table above is a theoretical value derived from elastic displacement between screw grooves and balls when axial load is applied to a ball nut for which preload is set at 3% of the basic dynamic load rating (C_a).
For ball screws with shaft diameters less than ø25, the standard Compact FA PSS type can be available.





Screw shaft diameter $d = 25$ mm

Unit: mm

Nut entire length L	Nut diameter D	Flange diameter A	Flange width B	Nut length F	Flange dimension H	Flange dimension V	Bolt hole PCD W	Bolt hole dimension X	Bolt hole dimension Y	Bolt hole dimension Z	Oil hole distance T
16	14	27	4	8	15 (10)	—	21	3.4	—	—	—
24				16							
20				12							
32				24							
18	18	31	4	10	19 (13)	—	25	3.4	—	—	—
28				20							
22				14							
37				29							
29	23	43	11	18	26	21	33	4.5	8	4.5	14
32				21							
30	24	44	11	19	27	21.5	34	4.5	8	4.5	14.5
43				32							
50				39							
70				59							
30	28	51	11	19	31	25	39	5.5	9.5	5.5	18
43	28	51		32	31	25	39				18
51	32	55		40	33	27	43				20
71	32	55		60	33	27	43				20
31	36	62	13	18	38	30.5	49	6.6	11	6.5	23.5
45				32							
54				41							
74				61							
92				79							
129				116							
32	40	62	12	20	48	30.5	51	6.6	—	—	23.5
56				44							
54				42							
63				51							
74				62							
114				102							

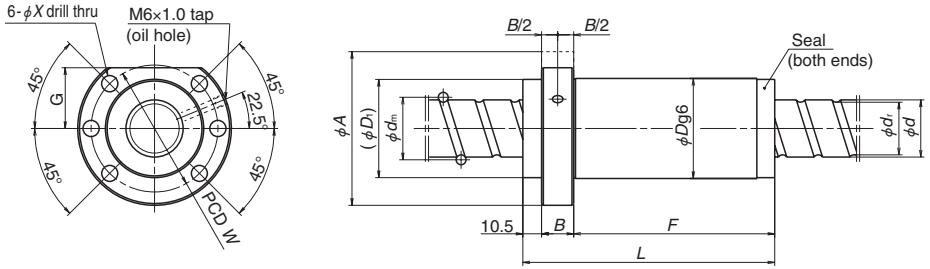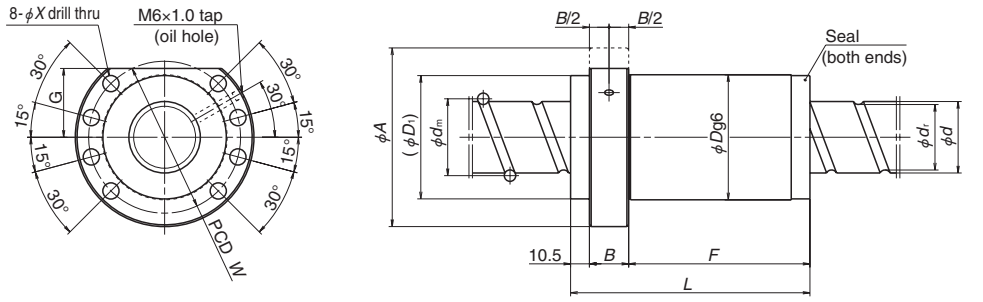2) The axial play of ϕ6mm and ϕ8mm shaft diameter is only for T=0.005mm max.
3) Dimensions in parentheses are for flat nut configurations.





Screw shaft diameter d = 32 mm

Model No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity K (N/μm)
BSS3205-4E	32	5	3.175	32.5	29.2	4	16 800	41 700	566
BSS3210-6E		10	5.556	33	27.2	6	50 900	110 000	907
BSS3212-5E		12	5.556	33	27.2	5	43 000	91 300	755
BSS3216-5E		16	5.556	33	27.2	5	44 300	90 800	756
BSS3220-5E		20	5.556	33	27.2	5	43 900	91 200	752
BSS3232-2E		32	5.556	33	27.2	2	17 700	32 900	274
BSS3264-2E		64	5.556	33	27.2	2	16 800	32 900	240
BSS3605-3E	36	5	3.175	36.5	33.2	3	13 500	34 100	459
BSS3610-6E		10	6.35	37	30.4	6	65 000	141 000	1 018
BSS3612-6E		12	6.35	37	30.4	6	64 800	141 000	1 014
BSS3616-6E		16	6.35	37	30.4	6	64 500	142 000	1 012
BSS3620-6E		20	6.35	37	30.4	6	64 000	141 000	1 001
BSS4010-5E	40	10	6.35	41	34.4	5	58 100	130 000	924
BSS4012-5E		12				5	58 000	130 000	922
BSS4016-5E		16				5	57 700	131 000	921
BSS4020-5E		20				5	57 400	130 000	913
BSS4025-4E		25				4	46 300	102 000	720
BSS4030-3E		30				3	36 100	74 800	533
BSS4040-2E		40				2	23 700	47 100	334
BSS4080-2E		80				2	22 200	46 600	289
BSS4510-5E	45	10	6.35	46	39.4	5	62 400	147 000	1 026
BSS4512-5E		12				5	62 300	147 000	1 023
BSS4516-5E		16				5	62 100	147 000	1 018
BSS4520-5E		20				5	61 800	146 000	1 011
BSS4525-5E		25				5	61 400	147 000	1 006
BSS4530-4E		30				4	49 600	115 000	790
BSS5010-4E	50	10	6.35	51	44.4	4	52 600	129 000	883
BSS5012-4E		12				4	52 500	129 000	881
BSS5016-4E		16				4	52 400	128 000	878
BSS5020-4E		20				4	52 200	129 000	879
BSS5025-4E		25				4	51 900	129 000	871
BSS5030-4E		30				4	51 500	128 000	861
BSS5050-2E		50				2	26 100	58 300	394
BSS50100-2E		100				2	24 100	58 900	343

Note: The axial rigidity K in the table above is a theoretical value derived from elastic displacement between screw grooves and balls when axial load is applied to a ball nut for which preload is set at 3% of the basic dynamic load rating (C_a).

Screw shaft diameter $d \geq 36$ mm

Unit: mm

Nut entire length L	Nut diameter D	Seal section diameter D_1	Flange diameter A	Flange width B	Nut length F	Notched flange G	Bolt hole PCD W	Bolt hole dimension X
55	56	(55)	86	12	32.5	34	71	9
104				18	75.5			
103				18	74.5			
122				18	93.5			
141				18	112.5			
94				18	65.5			
153				18	124.5			
50	65	(64)	95	12	27.5	36	80	9
109				22	76.5			
120				22	87.5			
143				22	110.5			
166				22	133.5			
99	70	(69)	100	22	66.5	38.5	85	9
108					75.5			
127					94.5			
146					113.5			
145					112.5			
134					101.5			
110					77.5			
184					151.5			
99	75	(74)	110	22	66.5	43	93	11
108					75.5			
127					94.5			
146					113.5			
170					137.5			
164					131.5			
89	82	(81)	118	22	56.5	46	100	11
96					63.5			
111					78.5			
126					93.5			
145					112.5			
164					131.5			
130					97.5			
224					191.5			

B-3-2.2 Return Tube Type Ball Screws

1. Features

Return tube type is a standard way of ball recirculation system for ball screws. It has various combinations of shaft diameter and lead.

2. Specifications

(1) Ball recirculation system

The structure of return tube recirculation system is shown below.

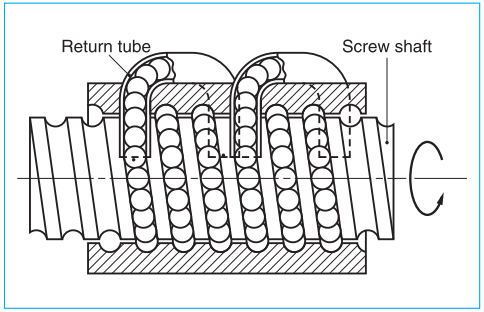


Fig.1 Structure of return tube recirculation system

Table 1 Accuracy grade and axial play

Accuracy grade	SFT, PFT, ZFT, DFT: C0, C1, C2, C3, C5, Ct7 LSFT, LPFT, LDFT: C1, C2, C3, C5, Ct7 (Ct7 is not included in DFT, LDFT)
Axial play	Z, 0 mm (preloaded); T, 0.005 mm or less; S, 0.020 mm or less; N, 0.050 mm or less

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are shown in **Table 1.** Please consult NSK for other grades.

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below. Basic measures must be taken for the high-speed ball screws respectively.

Allowable d·n value :

Standard specification ; 70 000 or less

High-speed specification; 100 000 or less

Standard of rotational speed : 3 000 min^{-1}

Note: Please also review the critical speed. Refer to "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Option

A type equipped with NSK K1 lubrication unit is also available.




(5) Other specifications

Please consult NSK for other specifications not listed in the dimension tables.

3. Product categories

There are four different preloaded systems with several models. Since the leads are in the range from 1/2 to the same length of the shaft diameter (medium-high helix lead), LSFT, LPFT, LDFT Type ball screws are suitable for high-speed operation.

Table 2 Return tube type ball screws product categories

Nut model	Shape	Flange shape	Nut shape	Preload system
SFT PFT		Flanged d=16mm or under Rectangle d=20mm or over Circular Ⅰ, Ⅱ	Circle dia.	Non-preload, Slight axial play P-preload (light preload) Spacer ball 1:1
ZFT		Flanged Circular Ⅰ, Ⅱ	Circle dia.	Z-preload (medium preload)
DFT		Flanged Circular Ⅰ, Ⅱ	Circular	D-preload (medium preload) (heavy preload)
LSFT LPFT		Flanged d=20mm or under Rectangle d=25mm or over Circular Ⅱ	d=20mm or under Circular d=25mm or over Tube- projecting type	Non-preload, Slight axial play P-preload (light preload) Spacer ball 1:1
LDFT		Flanged Circular Ⅱ	Circular	D-preload (medium preload) (heavy preload)

4. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

◇ Model number

SFT 14 05 - 2.5

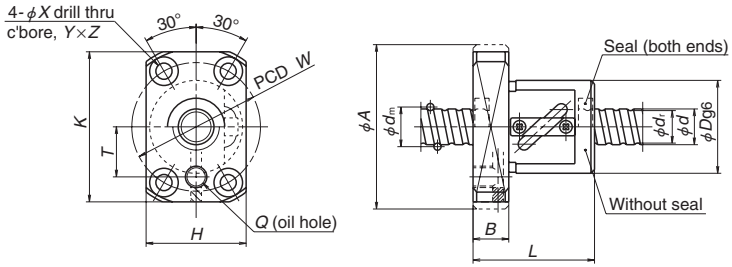
- SFT: Nut model: SFT, PFT, ZFT, DFT / LSFT, LPFT, LDFT
- 14: Screw shaft diameter (mm)
- 05: Lead (mm)
- 2.5: Effective turns of balls (Note)

Note: In case of Z-preload, the number here is twice as large as the effective turns of balls.


◇ Reference number for ball screw

W 14 01 - ** P - C3 Z 5

- W: Product code
- 14: Screw shaft diameter (mm)
- 01: Effective threaded length (in the unit of 100 mm)
- **: NSK design serial number
- P: Preload code: No code, non-preload; P, P-preload; Z, Z-preload; D, D-preload (page B5)
- C3: Accuracy grade code: C0, C1, C2, C3, C5, C7 (Ct7) (page B37 to B42)
- Z: Axial play code: Z, T, S, N (page B20)
- 5: Lead (mm)




PFT, SFT

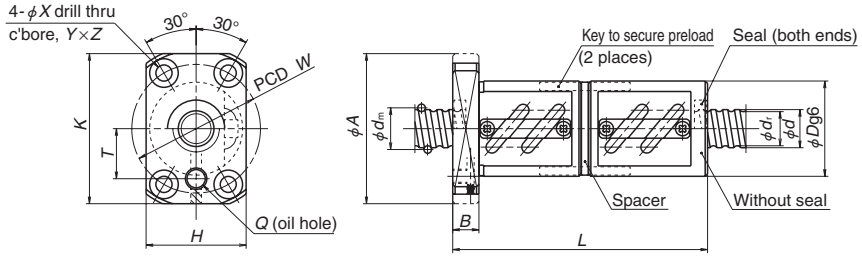


DFT

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity K (N/μm)
* **PFT 1004-2.5**	P	10	4	2.000	10.3	8.2	2.5×1	2 020	2 210	79
SFT 1004-2.5	Clearance							3 210	4 420	94
PFT 1204-2.5	P	12	4	2.381	12.3	9.8	2.5×1	2 780	3 140	93
PFT 1204-3	P						1.5×2	3 250	3 770	111
SFT 1204-2.5	Clearance						2.5×1	4 410	6 280	111
SFT 1204-3	Clearance						1.5×2	5 160	7 540	132
* **PFT 1205-2.5**	P		5	2.381	12.3	9.8	2.5×1	2 770	3 130	92
PFT 1205-3	P						1.5×2	3 240	3 760	110
SFT 1205-2.5	Clearance						2.5×1	4 390	6 260	110
SFT 1205-3	Clearance						1.5×2	5 140	7 510	131
* **LPFT 1210-2.5**	P		10	2.381	12.5	10.0	2.5×1	2 790	3 220	92
LSFT 1210-2.5	Clearance							4 430	6 430	110
* **PFT 1405-2.5**	P	14	5	3.175	14.5	11.2	2.5×1	5 020	5 970	126
SFT 1405-2.5	Clearance						2.5×1	7 970	11 900	150
PFT 1405-5	P						2.5×2	9 110	11 900	244
SFT 1405-5	Clearance						2.5×2	14 500	23 900	291
* **LPFT 1408-2.5**	P		8	3.175	14.5	11.2	2.5×1	4 960	5 920	124
LSFT 1408-2.5	Clearance							7 880	11 800	147
* **LPFT 1510-2.5**	P	15	10	3.175	15.5	12.2	2.5×1	5 130	6 420	129
LSFT 1510-2.5	Clearance							8 140	12 800	156
PFT 1604-3	P	16	4	2.381	16.3	13.8	1.5×2	3 740	5 130	141
SFT 1604-2.5	Clearance						2.5×1	5 070	8 500	140
DFT 1604-2.5	D						2.5×1	5 070	8 500	275
PFT 1604-5	P						2.5×2	5 800	8 500	226
SFT 1604-3	Clearance						1.5×2	5 930	10 300	168
DFT 1604-3	D						1.5×2	5 930	10 300	329

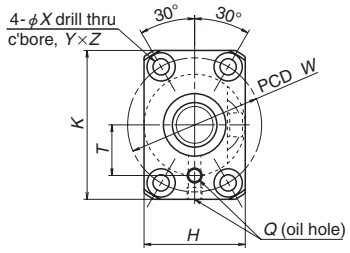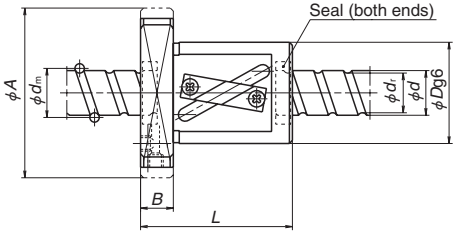Notes: 1. Nut flange for shaft diameter 16 mm or smaller comes in rectangular shape.
2. Seals are equipped as a standard for LSFT and LPFT of shaft diameter 20 mm or smaller. The outside dimensions are the same as those of without seals.
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.






LPFT, LSFT


Unit: mm


Ball nut dimensions												
Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Rectangle flanged diameter H	Rectangle flanged diameter K	Bolt hole dimension X	Bolt hole dimension Y	Bolt hole dimension Z	Bolt hole PCD W	Oil hole length T	Oil hole Q
34	26	46	10	28	42	4.5	8	4.5	36	14	M6×1
38	30	50	10	32	45	4.5	8	4.5	40	15	M6×1
44											
38											
44											
40	30	50	10	32	45	4.5	8	4.5	40	15	M6×1
48											
40											
48											
50	30	50	10	32	45	4.5	8	4.5	40	15	M6×1
40	34	57	11	34	50	5.5	9.5	5.5	45	17	M6×1
40											
55											
55											
46	34	57	11	34	50	5.5	9.5	5.5	45	17	M6×1
51	34	57	11	34	50	5.5	9.5	5.5	45	17	M6×1
45	34	57	11	34	50	5.5	9.5	5.5	45	17	M6×1
38	34			34							
70	36			36							
50	34			34							
45	34			34							
85	36			36							

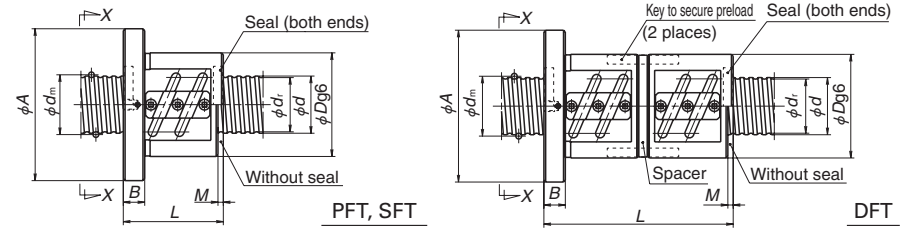
4. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
6. The models marked with * (asterisk) are available in the FA type standard ball screws with finished shaft end.
7. Preload system: P, Oversize ball preload; D, Double nut preload (See page B5.)



View *X-X*

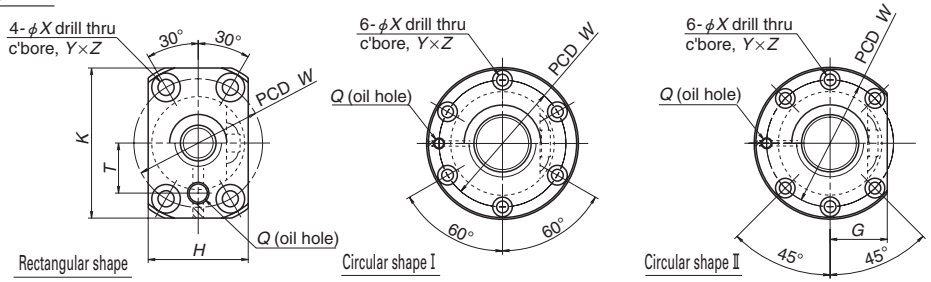

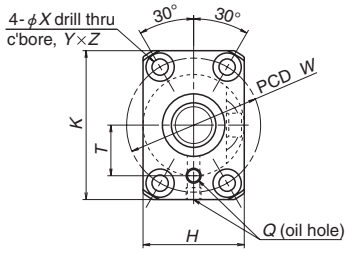

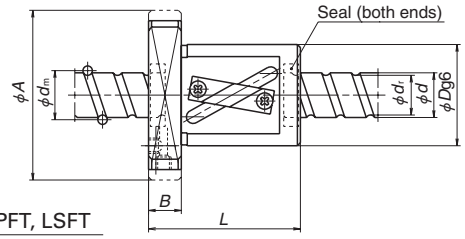


Unit: mm

	Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity *K* (N/μm)
	PFT 1605-3	P	16	5	3.175	16.5	13.2	1.5×2	6 350	8 070	166
	SFT 1605-2.5	Clearance						2.5×1	8 620	13 800	168
	DFT 1605-2.5	D						2.5×1	8 620	13 800	330
	PFT 1605-5	P						2.5×2	9 850	13 800	270
	SFT 1605-3	Clearance						1.5×2	10 100	16 100	197
	DFT 1605-3	D						1.5×2	10 100	16 100	387
	SFT 1605-5	Clearance						2.5×2	15 600	27 600	326
	DFT 1605-5	D						2.5×2	15 600	27 600	639
	PFT 1606-2.5	P		6	3.175	16.5	13.2	2.5×1	5 410	6 880	139
	SFT 1606-2.5	Clearance						2.5×1	8 590	13 800	168
	DFT 1606-2.5	D						2.5×1	8 590	13 800	329
	SFT 1606-3	Clearance						1.5×2	10 100	16 100	197
	DFT 1606-3	D						1.5×2	10 100	16 100	386
*	**LPFT 1616-1.5**	P		16	3.175	16.75	13.4	1.5×1	4 180	5 390	107
	LSFT 1616-1.5	Clearance							5 480	8 080	98
	SFT 2004-2.5	Clearance	20	4	2.381	20.3	17.8	2.5×1	5 730	10 900	171
	DFT 2004-2.5	D						2.5×1	5 730	10 900	336
*	**PFT 2004-5**	P						2.5×2	6 550	10 900	276
	SFT 2004-5	Clearance						2.5×2	10 400	21 800	332
	DFT 2004-5	D						2.5×2	10 400	21 800	651
	PFT 2005-3	P		5	3.175	20.5	17.2	1.5×2	7 140	10 300	201
	SFT 2005-2.5	Clearance						2.5×1	9 690	17 100	201
	DFT 2005-2.5	D						2.5×1	9 690	17 100	393
*	**PFT 2005-5**	P						2.5×2	11 100	17 100	327
	SFT 2005-3	Clearance						1.5×2	11 300	20 500	238
	DFT 2005-3	D						1.5×2	11 300	20 500	467
	SFT 2005-5	Clearance						2.5×2	17 600	34 200	388
	DFT 2005-5	D						2.5×2	17 600	34 200	762


Ball nut dimensions													
Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Rectangle flanged diameter *H*	Rectangle flanged diameter *K*	Seal dimension *M*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole length *T*	Oil hole *Q*
52	40	63	11	—	40	55	—	5.5	9.5	5.5	51	20	M6×1
42													
77													
57													
52													
97													
57													
107													
44	40	63	11	—	40	55	—	5.5	9.5	5.5	51	20	M6×1
44													
86													
56													
110													
56	40	63	12	—	40	55	—	5.5	9.5	5.5	51	17	M6×1
37	40	63	11	24	—	—	3	5.5	9.5	5.5	51	—	M6×1
69													
49													
49													
93													
52	44	67	11	26	—	—	3	5.5	9.5	5.5	55	—	M6×1
41													
76													
56													
52													
97													
56													
106													

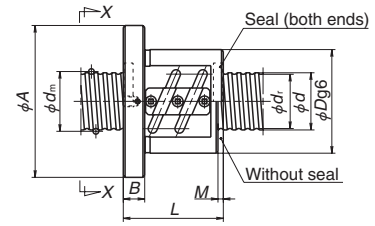Notes: 1. Nut flange for shaft diameter 16 mm or smaller comes in rectangular shape. It comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for PFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. Seals are equipped as a standard for LSFT and LPFT of shaft diameter 20 mm or smaller. The outside dimensions are the same as those of without seals.
4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
5. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
6. For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
7. The models marked with * (asterisk) are available in the FA or SA type standard ball screws with finished shaft end.
8. Preload system: P, Oversize ball preload; D, Double nut preload (See page B5.)




View X-X

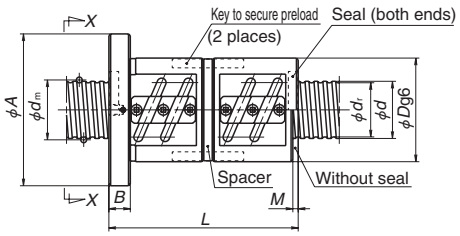
PFT, ZFT, SFT




DFT




Circular shape Ⅰ



Circular shape Ⅱ



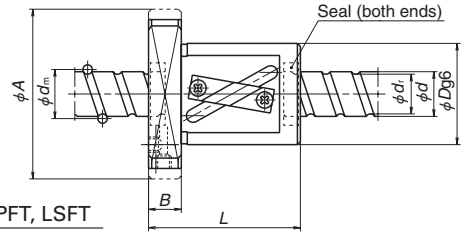

LPFT, LSFT

Unit: mm


Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity K (N/μm)
PFT 2006-2.5	P	20	6	3.969	20.5	16.4	2.5×1	8 120	10 500	172
PFT 2006-3	P						1.5×2	9 500	12 600	204
SFT 2006-2.5	Clearance						2.5×1	12 900	21 000	204
DFT 2006-2.5	D						2.5×1	12 900	21 000	401
SFT 2006-3	Clearance						1.5×2	15 100	25 200	243
DFT 2006-3	D						1.5×2	15 100	25 200	477
PFT 2008-2.5	P		8	3.969	20.5	16.4	2.5×1	8 080	10 500	170
SFT 2008-2.5	Clearance						2.5×1	12 800	20 900	203
DFT 2008-2.5	D						2.5×1	12 800	20 900	397
SFT 2008-3	Clearance						1.5×2	15 000	25 100	241
DFT 2008-3	D						1.5×2	15 000	25 100	473
✻ **LPFT 2010-2.5**	P		10	3.969	21.0	16.9	2.5×1	8 350	11 000	177
LSFT 2010-2.5	Clearance							13 300	21 900	211
LPFT 2016-2.5	P		16	3.969	21.0	16.9	2.5×1	8 170	10 800	171
LSFT 2016-2.5	Clearance							13 000	21 600	203
✻ **LPFT 2020-1.5**	P		20	3.969	21.0	16.9	1.5×1	6 250	8 760	132
LSFT 2020-1.5	Clearance							8 190	13 100	123
SFT 2504-2.5	Clearance	25	4	2.381	25.3	22.8	2.5×1	6 220	13 600	203
ZFT 2504-5	Z						2.5×1	6 220	13 600	399
✻ **PFT 2504-5**	P						2.5×2	7 110	13 600	328
SFT 2504-5	Clearance						2.5×2	11 300	27 200	394
ZFT 2504-10	Z						2.5×2	11 300	27 200	773
PFT 2505-3	P		5	3.175	25.5	22.2	1.5×2	7 940	12 800	235
SFT 2505-2.5	Clearance						2.5×1	10 800	21 800	243
ZFT 2505-5	Z						2.5×1	10 800	21 800	477
✻ **PFT 2505-5**	P						2.5×2	12 300	21 800	391
SFT 2505-3	Clearance						1.5×2	12 600	25 600	285
DFT 2505-3	D						1.5×2	12 600	25 600	558
PFT 2505-7.5	P						2.5×3	17 500	32 700	576
SFT 2505-5	Clearance						2.5×2	19 600	43 600	470
ZFT 2505-10	Z						2.5×2	19 600	43 600	923
SFT 2505-7.5	Clearance						2.5×3	27 700	65 400	692

Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for PFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. Seals are equipped as a standard for LSFT and LPFT of shaft diameter 20 mm or smaller. The outside dimensions are the same as those of without seals.
4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.


Ball nut dimensions													
Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Rectangle flanged diameter H	Rectangle flanged diameter K	Seal dimension M	Bolt hole dimension X	Bolt hole dimension Y	Bolt hole dimension Z	Bolt hole PCD W	Oil hole length T	Oil hole Q
44	48	71	11	27	—	—	3	5.5	9.5	5.5	59	—	M6×1
56													
44													
86													
56													
110													
54	48	75	13	28	—	—	5	6.6	11	6.5	61	—	M6×1
54													
102													
64													
120													
54	46	74	13	—	46	66	—	6.6	11	6.5	59	24	M6×1
72	46	74	13	—	46	66	—	6.6	11	6.5	59	24	M6×1
63	46	74	13	—	46	66	—	6.6	11	6.5	59	24	M6×1
36	46	69	11	26	—	—	3	5.5	9.5	5.5	57	—	M6×1
48													
48													
48													
72													
52	50	73	11	28	—	—	3	5.5	9.5	5.5	61	—	M6×1
40													
55													
55													
52													
102													
70													
55													
85													
70													

5. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
6. For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
7. The models marked with ✻ (asterisk) are available in the FA or SA type standard ball screws with finished shaft end.
8. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)


View *X-X*




Circular shape I



Circular shape II

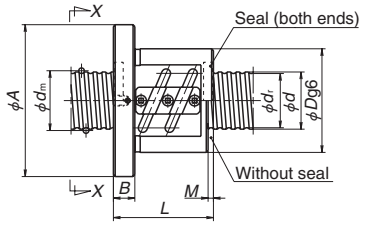

PFT, ZFT, SFT

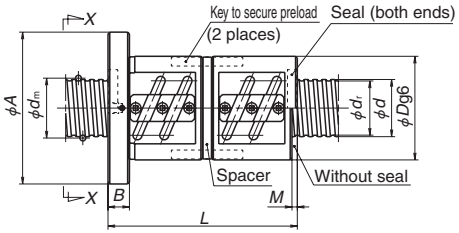


DFT

Unit: mm


Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)
PFT 2506-3	P	25	6	3.969	25.5	21.4	1.5×2	10 700	16 000	247
SFT 2506-2.5	Clearance						2.5×1	14 500	26 700	247
ZFT 2506-5	Z						2.5×1	14 500	26 700	485
* **PFT 2506-5**	P						2.5×2	16 600	26 700	402
SFT 2506-3	Clearance						1.5×2	17 000	32 000	294
DFT 2506-3	D						1.5×2	17 000	32 000	577
SFT 2506-5	Clearance						2.5×2	26 300	53 400	478
ZFT 2506-10	Z						2.5×2	26 300	53 400	938
PFT 2508-2.5	P		8	4.762	25.5	20.5	2.5×1	11 700	15 900	213
PFT 2508-3	P						1.5×2	13 700	18 900	245
SFT 2508-2.5	Clearance						2.5×1	18 500	31 800	253
ZFT 2508-5	Z						2.5×1	18 500	31 800	495
SFT 2508-3	Clearance						1.5×2	21 700	37 900	299
DFT 2508-3	D						1.5×2	21 700	37 900	587
PFT 2510-2.5	P		10	4.762	25.5	20.5	2.5×1	11 600	15 900	211
ZFT 2510-3	Z						1.5×1	11 900	18 900	301
PFT 2510-3	P						1.5×2	13 600	18 900	243
SFT 2510-2.5	Clearance						2.5×1	18 500	31 700	251
DFT 2510-2.5	D						2.5×1	18 500	31 700	493
SFT 2510-3	Clearance						1.5×2	21 600	37 800	297
DFT 2510-3	D						1.5×2	21 600	37 800	583
SFT 2510-3.5	Clearance						3.5×1	24 700	44 600	347
DFT 2510-3.5	D						3.5×1	24 700	44 600	681


Ball nut dimensions										
Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Seal dimension *M*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole *Q*
56	53	76	11	29	3	5.5	9.5	5.5	64	M6×1
44										
62										
62										
56										
110										
62										
98										
56	58	85	13	32	5	6.6	11	6.5	71	M6×1
69										
56										
80										
69										
133										
67	58	85	15	32	8	6.6	11	6.5	71	M6×1
81										
81										
67										
127										
81										
151										
77										
147										

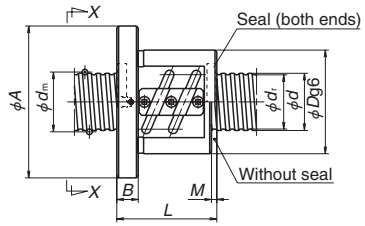Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
6. The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
7. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)




PFT, ZFT, SFT

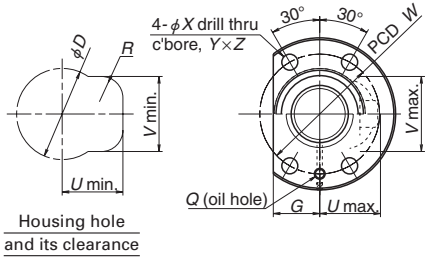

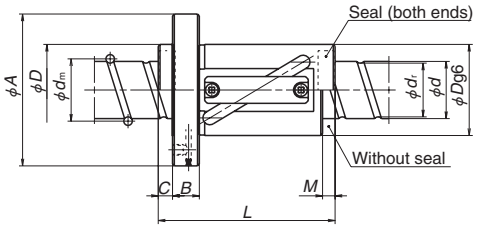


LPFT, LSFT


View *X-X*




Circular shape Ⅰ



Circular shape Ⅱ



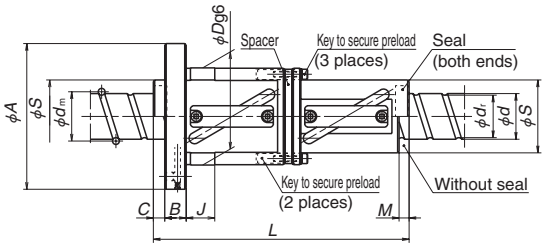

LDFT


Unit: mm

Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity *K* (N/μm)	Nut entire length *L*
LPFT 2516-2.5	P	25	16	4.762	26.25	21.3	2.5×1	11 400	16 500	213	84
LPFT 2516-3	P						1.5×2	13 400	19 500	251	100
LSFT 2516-2.5	Clearance						2.5×1	18 100	33 000	253	84
LDFT 2516-2.5	D						2.5×1	18 100	33 000	496	152
LSFT 2516-3	Clearance						1.5×2	21 200	39 000	298	100
LDFT 2516-3	D						1.5×2	21 200	39 000	584	181
✻ **LPFT 2520-2.5**	P		20	4.762	26.25	21.3	2.5×1	11 700	16 300	211	96
LPFT 2520-3	P						1.5×2	13 700	19 300	248	116
LSFT 2520-2.5	Clearance						2.5×1	18 600	32 600	251	96
LDFT 2520-2.5	D						2.5×1	18 600	32 600	492	177
LSFT 2520-3	Clearance						1.5×2	21 800	38 600	296	116
LDFT 2520-3	D						1.5×2	21 800	38 600	580	217
✻ **LPFT 2525-1.5**	P		25	4.762	26.25	21.3	1.5×1	8 970	13 100	165	90
LDFT 2525-1.5	D							11 700	19 700	297	166
LSFT 2525-1.5	Clearance							11 700	19 700	151	90
SFT 2805-2.5	Clearance	28	5	3.175	28.5	25.2	2.5×1	11 300	24 400	265	41
ZFT 2805-5	Z						2.5×1	11 300	24 400	519	56
PFT 2805-5	P						2.5×2	13 000	24 400	432	56
SFT 2805-5	Clearance						2.5×2	20 600	48 700	514	56
✻ **ZFT 2805-10**	Z						2.5×2	20 600	48 700	1 007	86


Ball nut dimensions															
Nut diameter *D*	Nut diameter *S*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Tube projecting type *U*	Tube projecting type *V*	Tube projecting type *R*	Seal dimension *M*	Seal dimension *C*	Diameter g6 *J*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole *Q*
44	—	71	12	23	31	35	12	6	8	—	6.6	—	—	57	M6×1
44	—	71		23	31	35	12			—				57	
44	—	71		23	31	35	12			—				57	
62	44	89		34	—	—	—			18				75	
44	—	71		23	31	35	12			—				57	
62	44	89		34	—	—	—			18				75	
44	—	71	12	23	31	35	12	7	8	—	6.6	—	—	57	M6×1
44	—	71		23	31	35	12			—				57	
44	—	71		23	31	35	12			—				57	
62	44	89		34	—	—	—			18				75	
44	—	71		23	31	35	12			—				57	
62	44	89		34	—	—	—			18				75	
44	—	71	12	23	32	34	12	10	10	—	6.6	—	—	57	M6×1
62	44	89		34	—	—	—			18				75	
44	—	71		23	32	34	12			—				57	
55	—	85	12	31	—	—	—	3	—	—	6.6	11	6.5	69	M6×1

Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for PFT, ZFT, and SFT, the nut length "L" is shortened by dimension "M".
3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
5. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
6. For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
7. The models marked with ✻ (asterisk) are available in the FA or SA type standard ball screws with finished shaft end.
8. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)


View *X-X*




Circular shape Ⅰ



Circular shape Ⅱ

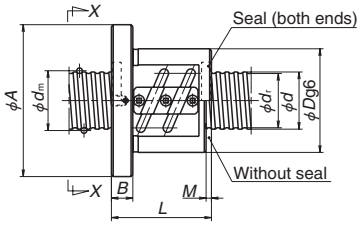

PFT, ZFT, SFT

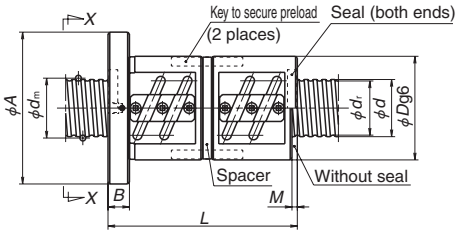

DFT


Unit: mm

Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)
PFT 2806-3	P	28	6	3.175	28.5	25.2	1.5×2	8 350	14 600	265
SFT 2806-2.5	Clearance						2.5×1	11 300	24 300	265
ZFT 2806-5	Z						2.5×1	11 300	24 300	519
✻ **PFT 2806-5**	P						2.5×2	12 900	24 300	430
SFT 2806-3	Clearance						1.5×2	13 200	29 200	315
DFT 2806-3	D						1.5×2	13 200	29 200	617
SFT 2806-5	Clearance						2.5×2	20 600	48 700	513
✻ **ZFT 2806-10**	Z						2.5×2	20 600	48 700	1 006
PFT 2810-2.5	P		10	4.762	28.5	23.5	2.5×1	12 300	17 900	229
ZFT 2810-3	Z						1.5×1	12 600	21 400	332
PFT 2810-3	P						1.5×2	14 400	21 400	275
SFT 2810-2.5	Clearance						2.5×1	19 600	35 800	277
DFT 2810-2.5	D						2.5×1	19 600	35 800	543
SFT 2810-3	Clearance						1.5×2	22 900	42 700	328
DFT 2810-3	D						1.5×2	22 900	42 700	643
SFT 3204-2.5	Clearance	32	4	2.381	32.3	29.8	2.5×1	6 850	17 500	247
ZFT 3204-5	Z						2.5×1	6 850	17 500	485
PFT 3204-5	P						2.5×2	7 840	17 500	403
SFT 3204-5	Clearance						2.5×2	12 400	35 000	479
ZFT 3204-10	Z						2.5×2	12 400	35 000	939
PFT 3205-3	P		5	3.175	32.5	29.2	1.5×2	8 850	16 800	296
SFT 3205-2.5	Clearance						2.5×1	12 000	28 000	296
ZFT 3205-5	Z						2.5×1	12 000	28 000	580
✻ **PFT 3205-5**	P						2.5×2	13 700	28 000	481
SFT 3205-3	Clearance						1.5×2	14 000	33 600	351
DFT 3205-3	D						1.5×2	14 000	33 600	689
PFT 3205-7.5	P						2.5×3	19 500	42 000	709
SFT 3205-5	Clearance						2.5×2	21 800	56 000	572
✻ **ZFT 3205-10**	Z						2.5×2	21 800	56 000	1 123
SFT 3205-7.5	Clearance						2.5×3	30 900	84 000	843
DFT 3205-7.5	D						2.5×3	30 900	84 000	1 652


Ball nut dimensions										
Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Seal dimension *M*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole *Q*
57	55	85	12	31	3	6.6	11	6.5	69	M6×1
45										
63										
63										
57										
111										
63										
99										
68	60	94	15	36	7	9	14	8.5	76	M6×1
82										
82										
68										
128										
82										
152										
37	54	81	12	31	3	6.6	11	6.5	67	M6×1
49										
49										
49										
73										
53	58	85	12	32	3	6.6	11	6.5	71	M6×1
41										
56										
56										
53										
103										
71										
56										
86										
71										
136										

Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
6. The models marked with ✻ (asterisk) are available in the SA type standard ball screws with finished shaft end.
7. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)


View *X-X*




Circular shape Ⅰ



Circular shape Ⅱ

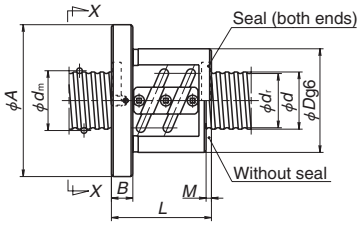

PFT, ZFT, SFT

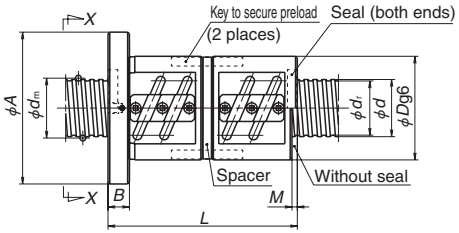


DFT

Unit: mm


Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)
PFT 3206-3	P	32	6	3.969	32.5	28.4	1.5×2	11 800	20 600	300
SFT 3206-2.5	Clearance						2.5×1	16 000	34 700	302
ZFT 3206-5	Z						2.5×1	16 000	34 700	592
PFT 3206-5	P						2.5×2	18 300	34 700	491
SFT 3206-3	Clearance						1.5×2	18 800	41 200	357
DFT 3206-3	D						1.5×2	18 800	41 200	700
SFT 3206-5	Clearance						2.5×2	29 100	69 300	585
✻ **ZFT 3206-10**	Z						2.5×2	29 100	69 300	1 146
PFT 3208-3	P		8	4.762	32.5	27.5	1.5×2	15 100	24 700	308
SFT 3208-2.5	Clearance						2.5×1	20 600	40 900	307
ZFT 3208-5	Z						2.5×1	20 600	40 900	602
PFT 3208-5	P						2.5×2	23 500	40 900	493
SFT 3208-3	Clearance						1.5×2	24 000	49 400	366
ZFT 3208-6	Z						1.5×2	24 000	49 400	718
SFT 3208-5	Clearance						2.5×2	37 300	81 800	594
DFT 3208-5	D						2.5×2	37 300	81 800	1 164
ZFT 3208-10	Z						2.5×2	37 300	81 800	1 164
PFT 3210-2.5	P		10	6.35	33.0	26.4	2.5×1	18 900	27 600	266
ZFT 3210-3	Z						1.5×1	19 300	32 300	381
PFT 3210-3	P						1.5×2	22 100	32 300	316
SFT 3210-2.5	Clearance						2.5×1	30 000	55 100	322
✻ **ZFT 3210-5**	Z						2.5×1	30 000	55 100	631
PFT 3210-5	P						2.5×2	34 300	55 100	515
SFT 3210-3	Clearance						1.5×2	35 100	64 500	376
DFT 3210-3	D						1.5×2	35 100	64 500	738
SFT 3210-3.5	Clearance						3.5×1	40 100	76 600	441
DFT 3210-3.5	D						3.5×1	40 100	76 600	865
SFT 3210-5	Clearance						2.5×2	54 500	110 000	623
✻ **DFT 3210-5**	D						2.5×2	54 500	110 000	1 222
ZFT 3210-10	Z						2.5×2	54 500	110 000	1 222
PFT 3212-2.5	P		12	6.35	33.0	26.4	2.5×1	18 800	27 500	265
ZFT 3212-3	Z						1.5×1	19 300	32 200	380
PFT 3212-3	P						1.5×2	22 000	32 200	315
SFT 3212-2.5	Clearance						2.5×1	29 900	55 000	320
DFT 3212-2.5	D						2.5×1	29 900	55 000	628
SFT 3212-3	Clearance						1.5×2	35 000	64 400	375
DFT 3212-3	D						1.5×2	35 000	64 400	735

Ball nut dimensions									
Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Seal dimension *M*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole *Q*
57	62	89	12	34	3	6.6	11	6.5	75	M6×1
45										
63										
63										
57										
111										
63										
99										
71	66	100	15	38	5	9	14	8.5	82	M6×1
58										
82										
82										
71										
111										
82										
154										
130										
70	74	108	15	41	7	9	14	8.5	90	M6×1
87										
87										
70										
100										
100										
87										
167										
80										
150										
100										
190										
160										
81	74	108	18	41	9	9	14	8.5	90	M6×1
97										
97										
81										
153										
97										
181										

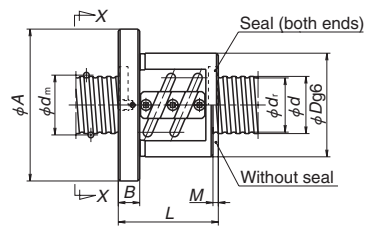Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
6. The models marked with ✻ (asterisk) are available in the SA type standard ball screws with finished shaft end.
7. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)




PFT, ZFT, SFT

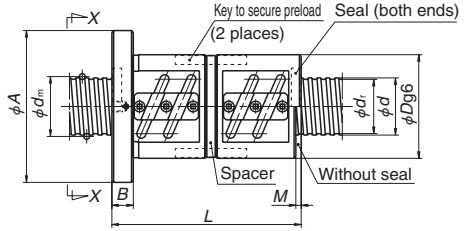


DFT


View *X-X*




Circular shape Ⅰ




Circular shape Ⅱ

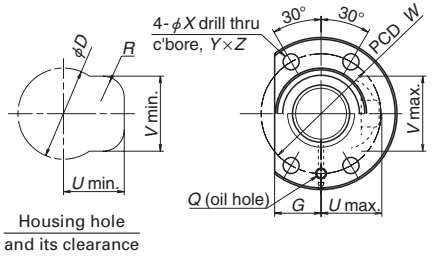


Housing hole
and its clearance

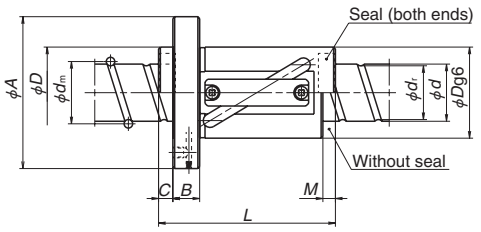

LPFT, LSFT



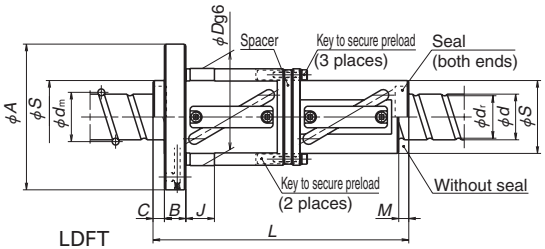

LDFT


Unit: mm

Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)	Nut entire length *L*
LPFT 3220-2.5	P	32	20	4.762	33.25	28.3	2.5×1	13 000	20 900	255	99
LPFT 3220-3	P						1.5×2	15 300	25 100	301	119
LSFT 3220-2.5	Clearance						2.5×1	20 700	41 900	307	99
LDFT 3220-2.5	D						2.5×1	20 700	41 900	603	179
LSFT 3220-3	Clearance						1.5×2	24 200	50 200	366	119
LDFT 3220-3	D						1.5×2	24 200	50 200	717	219
* **LPFT 3225-2.5**	P		25	4.762	33.25	28.3	2.5×1	12 900	21 100	256	117
LPFT 3225-3	P						1.5×2	15 100	24 900	295	142
LSFT 3225-2.5	Clearance						2.5×1	20 400	42 200	304	117
LDFT 3225-2.5	D						2.5×1	20 400	42 200	597	218
LSFT 3225-3	Clearance						1.5×2	23 900	49 700	358	142
LDFT 3225-3	D						1.5×2	23 900	49 700	702	268
* **LPFT 3232-1.5**	P		32	4.762	33.25	28.3	1.5×1	10 100	16 800	195	109
LSFT 3232-1.5	Clearance							13 300	25 200	184	109
LDFT 3232-1.5	D							13 300	25 200	361	205
ZFT 3605-5	Z	36	5	3.175	36.5	33.2	2.5×1	12 600	31 600	637	59
PFT 3605-5	P						2.5×2	14 400	31 600	529	59
PFT 3605-7.5	P						2.5×3	20 400	47 500	779	74
SFT 3605-5	Clearance						2.5×2	22 900	63 300	630	59
ZFT 3605-10	Z						2.5×2	22 900	63 300	1 235	89
SFT 3605-7.5	Clearance						2.5×3	32 400	94 900	926	74
DFT 3605-7.5	D						2.5×3	32 400	94 900	1 817	139


Ball nut dimensions: Nut diameter *D*	Nut diameter *S*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Tube projecting type *U*	Tube projecting type *V*	Tube projecting type *R*	Seal dimension *M*	Seal dimension *C*	Diameter g6 *J*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole *Q*
51	—	85	15	26	34	42	12	7	8	—	9	—	—	67	M6×1
51	—	85		26	34	42	12			—				67	
51	—	85		26	34	42	12			—				67	
68	51	102		39	—	—	—			20				84	
51	—	85		26	34	42	12			—				67	
68	51	102		39	—	—	—			20				84	
51	—	85	15	26	34	42	12	10	10	—	9	—	—	67	M6×1
51	—	85		26	34	42	12			—				67	
51	—	85		26	34	42	12			—				67	
68	51	102		39	—	—	—			20				84	
51	—	85		26	34	42	12			—				67	
68	51	102		39	—	—	—			20				84	
51	—	85	15	26	34	42	12	13	12	—	9	—	—	67	M6×1
51	—	85		26	34	42	12			—				67	
68	51	102		39	—	—	—			20				84	
65	—	100	15	38	—	—	—	3	—	—	9	14	8.5	82	M6×1

Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for PFT, ZFT, SFT, and DFT the nut length "L" is shortened by dimension "M".
3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
5. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
6. For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
7. The models marked with * (asterisk) are available in the FA type standard ball screws with finished shaft end.
8. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)


View *X-X*




Circular shape Ⅰ



Circular shape Ⅱ

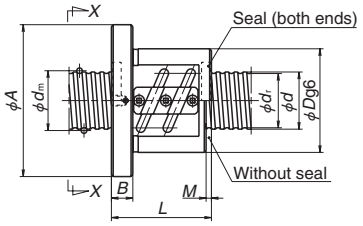

PFT, ZFT, SFT

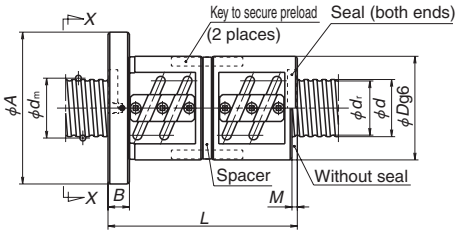


DFT

Unit: mm


Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)	Ball nut dimensions: Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Seal dimension *M*	Bolt hole dimension: *X*	Bolt hole dimension: *Y*	Bolt hole dimension: *Z*	Bolt hole PCD *W*	Oil hole *Q*
ZFT 3606-5	Z	36	6	3.969	36.5	32.4	2.5×1	17 200	39 200	656	66	65	100	15	38	3	9	14	8.5	82	M6×1
PFT 3606-5	P						2.5×2	19 700	39 200	545	66										
PFT 3606-7.5	P						2.5×3	27 900	58 800	802	84										
SFT 3606-5	Clearance						2.5×2	31 300	78 400	648	66										
ZFT 3606-10	Z						2.5×2	31 300	78 400	1 271	102										
SFT 3606-7.5	Clearance						2.5×3	44 400	118 000	954	84										
DFT 3606-7.5	D						2.5×3	44 400	118 000	1 872	162										
PFT 3610-2.5	P		10	6.35	37.0	30.4	2.5×1	20 100	30 500	290	73	75	120	18	45	7	11	17.5	11	98	M6×1
ZFT 3610-3	Z						1.5×1	20 600	36 600	422	90										
PFT 3610-3	P						1.5×2	23 600	36 600	342	90										
SFT 3610-2.5	Clearance						2.5×1	32 000	61 100	350	73										
* **ZFT 3610-5**	Z						2.5×1	32 000	61 100	687	103										
PFT 3610-5	P						2.5×2	36 600	61 100	562	103										
SFT 3610-3	Clearance						1.5×2	37 400	73 300	417	90										
DFT 3610-3	D						1.5×2	37 400	73 300	817	170										
PFT 3610-7.5	P						2.5×3	51 800	91 600	826	133										
SFT 3610-5	Clearance						2.5×2	58 000	122 000	678	103										
DFT 3610-5	D						2.5×2	58 000	122 000	1 329	193										
ZFT 3610-10	Z						2.5×2	58 000	122 000	1 329	163										
SFT 3610-7.5	Clearance						2.5×3	82 200	183 000	998	133										
PFT 4005-3	P	40	5	3.175	40.5	37.2	1.5×2	9 700	21 200	354	56	67	101	15	39	3	9	14	8.5	83	Rc1/8
SFT 4005-2.5	Clearance						2.5×1	13 200	35 300	354	44										
ZFT 4005-5	Z						2.5×1	13 200	35 300	695	59										
PFT 4005-5	P						2.5×2	15 100	35 300	577	59										
SFT 4005-3	Clearance						1.5×2	15 400	42 300	421	56										
DFT 4005-3	D						1.5×2	15 400	42 300	826	106										
PFT 4005-7.5	P						2.5×3	21 300	52 900	848	74										
SFT 4005-5	Clearance						2.5×2	23 900	70 500	685	59										
* **ZFT 4005-10**	Z						2.5×2	23 900	70 500	1 344	89										
SFT 4005-7.5	Clearance						2.5×3	33 900	106 000	1 009	74										
DFT 4005-7.5	D						2.5×3	33 900	106 000	1 979	139										
ZFT 4006-5	Z		6	3.969	40.5	36.4	2.5×1	18 000	43 800	715	66	70	104	15	40	3	9	14	8.5	86	Rc1/8
PFT 4006-5	P						2.5×2	20 500	43 800	592	66										
SFT 4006-3	Clearance						1.5×2	21 000	52 500	433	60										
DFT 4006-3	D						1.5×2	21 000	52 500	850	114										
PFT 4006-7.5	P						2.5×3	29 100	65 600	872	84										
SFT 4006-5	Clearance						2.5×2	32 600	87 500	705	66										
ZFT 4006-10	Z						2.5×2	32 600	87 500	1 383	102										
SFT 4006-7.5	Clearance						2.5×3	46 200	131 000	1 038	84										
DFT 4006-7.5	D						2.5×3	46 200	131 000	2 036	162										

Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
6. The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
7. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)


View *X-X*




Circular shape I



Circular shape II

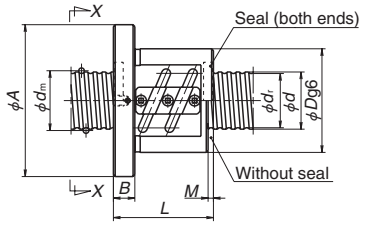

PFT, ZFT, SFT

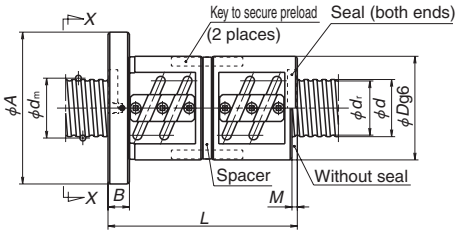


DFT

Unit: mm


Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)
PFT 4008-3	P	40	8	4.762	40.5	35.5	1.5×2	16 700	31 200	370
SFT 4008-2.5	Clearance						2.5×1	22 700	51 500	368
ZFT 4008-5	Z						2.5×1	22 700	51 500	721
PFT 4008-5	P						2.5×2	25 900	51 500	598
SFT 4008-3	Clearance						1.5×2	26 500	62 500	440
DFT 4008-3	D						1.5×2	26 500	62 500	863
SFT 4008-5	Clearance						2.5×2	41 100	103 000	711
ZFT 4008-10	Z						2.5×2	41 100	103 000	1 394
PFT 4010-2.5	P		10	6.35	41	34.4	2.5×1	21 300	34 200	322
PFT 4010-3	P						1.5×2	24 900	41 000	383
SFT 4010-2.5	Clearance						2.5×1	33 700	68 300	383
ZFT 4010-5	Z						2.5×1	33 700	68 300	751
PFT 4010-5	P						2.5×2	38 600	68 300	623
SFT 4010-3	Clearance						1.5×2	39 500	82 000	456
ZFT 4010-6	Z						1.5×2	39 500	82 000	894
ZFT 4010-7	Z						3.5×1	45 100	97 100	1 045
SFT 4010-3.5	Clearance						3.5×1	45 100	97 100	533
PFT 4010-7	P						3.5×2	51 500	97 100	859
SFT 4010-5	Clearance						2.5×2	61 200	137 000	741
* **DFT 4010-5**	D						2.5×2	61 200	137 000	1 454
ZFT 4010-10	Z						2.5×2	61 200	137 000	1 454
SFT 4010-7	Clearance						3.5×2	81 800	194 000	1 032
PFT 4012-2.5	P		12	7.144	41.5	34.1	2.5×1	24 900	38 600	323
SFT 4012-2.5	Clearance						2.5×1	39 500	77 200	390
ZFT 4012-5	Z						2.5×1	39 500	77 200	766
PFT 4012-5	P						2.5×2	45 200	77 200	626
PFT 4012-7.5	P						2.5×3	64 000	116 000	921
SFT 4012-5	Clearance						2.5×2	71 700	154 000	756
* **DFT 4012-5**	D						2.5×2	71 700	154 000	1 482
ZFT 4012-10	Z						2.5×2	71 700	154 000	1 482
SFT 4012-7.5	Clearance						2.5×3	102 000	232 000	1 114
ZFT 4016-3	Z		16	7.144	41.5	34.1	1.5×1	25 400	46 200	468
SFT 4016-2.5	Clearance						2.5×1	39 300	77 000	388
DFT 4016-2.5	D						2.5×1	39 300	77 000	760
SFT 4016-3	Clearance						1.5×2	46 000	92 400	461
DFT 4016-3	D						1.5×2	46 000	92 400	905

Ball nut dimensions: Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Seal dimension *M*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole *Q*
71	74	108	15	41	5	9	14	8.5	90	Rc1/8
58										
82										
82										
71										
135										
82										
130										
73	82	124	18	47	7	11	17.5	11	102	Rc1/8
90										
73										
103										
103										
90										
140										
123										
83										
123										
103										
193										
163										
123										
81	86	128	18	48	9	11	17.5	11	106	Rc1/8
81										
117										
117										
153										
117										
225										
189										
153										
118	86	128	22	48	14	11	17.5	11	106	Rc1/8
102										
182										
118										
214										

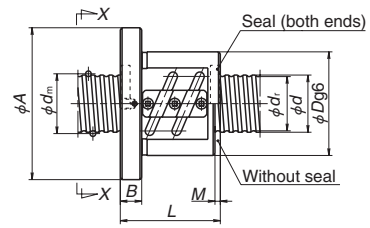Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
6. The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
7. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)




ZFT, SFT

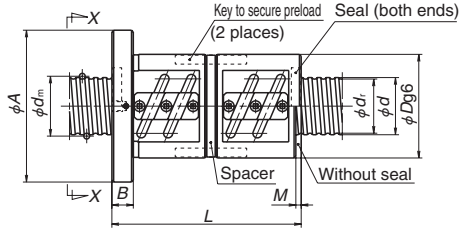


DFT

View *X-X*




Circular shape Ⅰ




Circular shape Ⅱ


Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)	Nut entire length *L*
LPFT 4025-2.5	P	40	25	6.35	41.75	35.1	2.5×1	21 500	35 100	324	123
LPFT 4025-3	P						1.5×2	25 100	41 800	375	148
LSFT 4025-2.5	Clearance						2.5×1	34 100	70 100	385	123
LDFT 4025-2.5	D						2.5×1	34 100	70 100	755	223
LSFT 4025-3	Clearance						1.5×2	39 900	83 600	456	148
LDFT 4025-3	D						1.5×2	39 900	83 600	894	273
LPFT 4032-2.5	P		32	6.35	41.75	35.1	2.5×1	21 200	35 300	316	146
LSFT 4032-2.5	Clearance							33 600	70 700	381	146
LDFT 4032-2.5	D							33 600	70 700	747	274
LPFT 4040-1.5	P		40	6.35	41.75	35.1	1.5×1	13 400	21 000	191	133
LSFT 4040-1.5	Clearance							21 200	42 000	227	133
LDFT 4040-1.5	D							21 200	42 000	446	253
ZFT 4510-5	Z	45	10	6.35	46.0	39.4	2.5×1	36 300	78 500	841	103
PFT 4510-7	P						3.5×2	55 400	109 000	947	123
PFT 4510-7.5	P						2.5×3	58 800	118 000	1 015	133
SFT 4510-5	Clearance						2.5×2	65 800	157 000	830	103
DFT 4510-5	D						2.5×2	65 800	157 000	1 627	193
SFT 4510-7	Clearance						3.5×2	87 900	218 000	1 136	123
SFT 4510-7.5	Clearance						2.5×3	93 300	235 000	1 221	133
DFT 4510-7.5	D						2.5×3	93 300	235 000	2 395	253
SFT 4512-2.5	Clearance		12	7.144	46.5	39.1	2.5×1	41 600	88 200	432	83
ZFT 4512-5	Z						2.5×1	41 600	88 200	848	119
SFT 4512-5	Clearance						2.5×2	75 600	176 000	838	119
DFT 4512-5	D						2.5×2	75 600	176 000	1 643	227

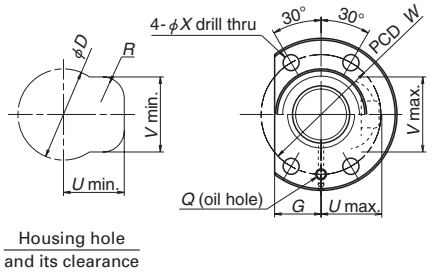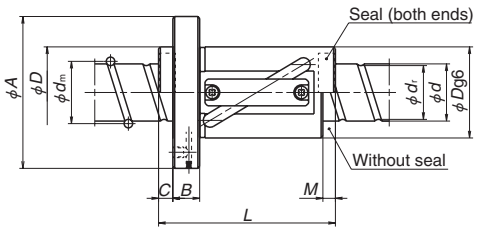
Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for ZFT, SFT, and DFT the nut length "L" is shortened by dimension "M".
3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.





LPFT, LSFT



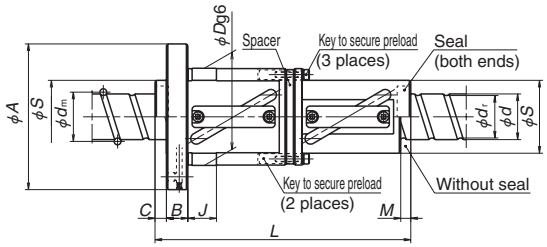


LDFT

Unit: mm


Ball nut dimensions															
Nut diameter: *D*	Nut diameter: *S*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Tube projecting type: *U*	Tube projecting type: *V*	Tube projecting type: *R*	Seal dimension: *M*	Seal dimension: *C*	Diameter g6 *J*	Bolt hole dimension: *X*	Bolt hole dimension: *Y*	Bolt hole dimension: *Z*	Bolt hole PCD *W*	Oil hole *Q*
64	—	106	18	33	42	52	15	10	10	—	11	—	—	84	Rc1/8
64	—	106		33	42	52	15			—				84	
64	—	106		33	42	52	15			—				84	
84	64	126		48	—	—	—			22				104	
64	—	106		33	42	52	15			—				84	
84	64	126		48	—	—	—			22				104	
64	—	106	18	33	42	52	15	13	12	—	11	—	—	84	Rc1/8
64	—	106		33	42	52	15			—				84	
84	64	126		48	—	—	—			22				104	
64	—	106	18	33	42	52	15	16	14	—	11	—	—	84	Rc1/8
64	—	106		33	42	52	15			—				84	
84	64	126		48	—	—	—			22				104	
88	—	132	18	50	—	—	—	7	—	—	11	17.5	11	110	Rc1/8
90	—	132	18	50	—	—	—	8	—	—	11	17.5	11	110	Rc1/8

5. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
6. For LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
7. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)


View *X-X*




Circular shape Ⅰ



Circular shape Ⅱ

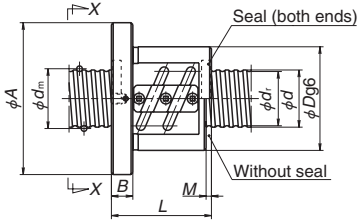

ZFT, SFT

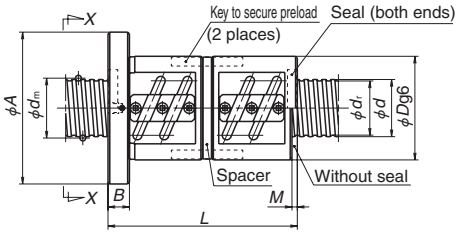


DFT

Unit: mm


Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)
SFT 5005-3	Clearance	50	5	3.175	50.5	47.2	1.5×2	16 800	52 500	499
ZFT 5005-6	Z						1.5×2	16 800	52 500	978
SFT 5005-4.5	Clearance						1.5×3	23 900	78 800	735
ZFT 5005-9	Z						1.5×3	23 900	78 800	1 442
SFT 5006-3	Clearance		6	3.969	50.5	46.4	1.5×2	23 000	66 100	519
DFT 5006-3	D						1.5×2	23 000	66 100	1 017
PFT 5006-7.5	P						2.5×3	31 900	82 700	1 045
SFT 5006-5	Clearance						2.5×2	35 700	110 000	844
ZFT 5006-10	Z						2.5×2	35 700	110 000	1 656
SFT 5006-7.5	Clearance						2.5×3	50 700	165 000	1 243
DFT 5006-7.5	D						2.5×3	50 700	165 000	2 438
SFT 5008-3	Clearance		8	4.762	50.5	45.5	1.5×2	29 500	78 900	530
DFT 5008-3	D						1.5×2	29 500	78 900	1 039
SFT 5008-5	Clearance						2.5×2	45 700	131 000	859
ZFT 5008-10	Z						2.5×2	45 700	131 000	1 685
SFT 5008-7.5	Clearance						2.5×3	64 800	196 000	1 265
DFT 5008-7.5	D						2.5×3	64 800	196 000	2 481
SFT 5010-2.5	Clearance		10	6.35	51.0	44.4	2.5×1	37 500	87 200	464
ZFT 5010-5	Z						2.5×1	37 500	87 200	909
SFT 5010-3	Clearance						1.5×2	43 900	102 000	544
DFT 5010-3	D						1.5×2	43 900	102 000	1 067
ZFT 5010-7	Z						3.5×1	50 100	122 000	1 251
PFT 5010-7.5	P						2.5×3	60 800	131 000	1 099
SFT 5010-5	Clearance						2.5×2	68 100	174 000	898
* **ZFT 5010-10**	Z						2.5×2	68 100	174 000	1 761
SFT 5010-7.5	Clearance						2.5×3	96 500	262 000	1 321
DFT 5010-7.5	D						2.5×3	96 500	262 000	2 592
SFT 5012-2.5	Clearance		12	7.938	51.5	43.2	2.5×1	50 400	109 000	478
ZFT 5012-5	Z						2.5×1	50 400	109 000	937
SFT 5012-5	Clearance						2.5×2	91 500	218 000	926
DFT 5012-5	D						2.5×2	91 500	218 000	1 815
ZFT 5012-10	Z						2.5×2	91 500	218 000	1 815
SFT 5016-2.5	Clearance		16	7.938	51.5	43.2	2.5×1	50 300	109 000	476
ZFT 5016-5	Z						2.5×1	50 300	109 000	933
PFT 5016-7.5	P						2.5×3	81 400	163 000	1 125
SFT 5016-5	Clearance						2.5×2	91 200	218 000	921
DFT 5016-5	D						2.5×2	91 200	218 000	1 807
SFT 5016-7.5	Clearance						2.5×3	129 000	326 000	1 355
ZFT 5020-3	Z		20	7.938	51.5	43.2	1.5×1	32 300	63 800	563
SFT 5020-2.5	Clearance						2.5×1	50 100	108 000	473
DFT 5020-2.5	D						2.5×1	50 100	108 000	928
SFT 5020-3	Clearance						1.5×2	58 600	128 000	556
DFT 5020-3	D						1.5×2	58 600	128 000	1 090

Ball nut dimensions									
Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Seal dimension *M*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole *Q*
58	80	114	15	43	3	9	14	8.5	96	Rc1/8
83										
68										
103										
62	84	118	15	45	3	9	14	8.5	100	Rc1/8
116										
86										
68										
104										
86										
164										
74	87	129	18	49	5	11	17.5	11	107	Rc1/8
138										
85										
133										
109										
205										
73	93	135	18	51	7	11	17.5	11	113	Rc1/8
103										
90										
170										
123										
133										
103										
163										
133										
253										
87	100	146	22	55	8	14	20	13	122	Rc1/8
123										
123										
231										
195										
104	100	146	22	55	14	14	20	13	122	Rc1/8
152										
200										
152										
280										
200										
147	100	146	28	55	17	14	20	13	122	Rc1/8
127										
227										
147										
267										

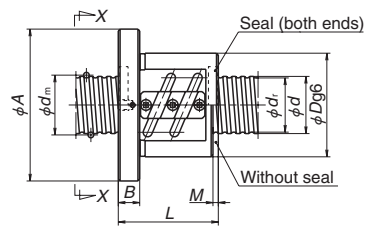Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
6. Preload system: Z, Offset preload; D, Double nut preload (See page B5.)




ZFT, SFT

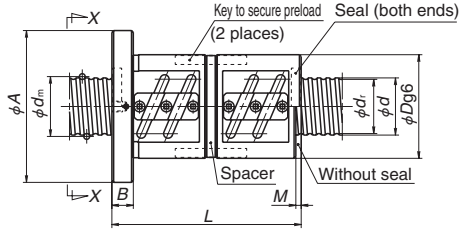


DFT

View *X-X*




Circular shape Ⅰ




Circular shape Ⅱ


Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)	Nut entire length *L*
LPFT 5025-2.5	P	50	25	7.938	52.25	44	2.5×1	32 300	55 100	403	129
LPFT 5025-3	P						1.5×2	37 800	65 700	468	154
LSFT 5025-2.5	Clearance						2.5×1	51 300	110 000	480	129
LDFT 5025-2.5	D						2.5×1	51 300	110 000	941	229
LSFT 5025-3	Clearance						1.5×2	60 100	131 000	569	154
LDFT 5025-3	D						1.5×2	60 100	131 000	1 116	279
LPFT 5032-2.5	P		32				2.5×1	32 000	54 700	397	151
LPFT 5032-3	P						1.5×2	37 500	65 300	461	183
LSFT 5032-2.5	Clearance						2.5×1	50 900	109 000	473	151
LDFT 5032-2.5	D						2.5×1	50 900	109 000	928	279
LSFT 5032-3	Clearance						1.5×2	59 500	131 000	560	183
LDFT 5032-3	D						1.5×2	59 500	131 000	1 099	343
LPFT 5040-2.5	P		40				2.5×1	31 600	55 200	389	178
LSFT 5040-2.5	Clearance							50 200	110 000	469	178
LDFT 5040-2.5	D							50 200	110 000	920	338
LPFT 5050-1.5	P		50				1.5×1	20 000	32 800	236	161
LSFT 5050-1.5	Clearance							31 700	65 700	280	161
LDFT 5050-1.5	D							31 700	65 700	549	312
ZFT 5510-5	Z	55	10	6.35	56.0	49.4	2.5×1	38 700	96 000	977	103
SFT 5510-5	Clearance						2.5×2	70 200	192 000	964	103
ZFT 5510-10	Z						2.5×2	70 200	192 000	1 891	163
DFT 5510-5	D						2.5×2	70 200	192 000	1 891	193
SFT 5510-7.5	Clearance						2.5×3	99 500	288 000	1 419	133
DFT 5510-7.5	D						2.5×3	99 500	288 000	2 783	253

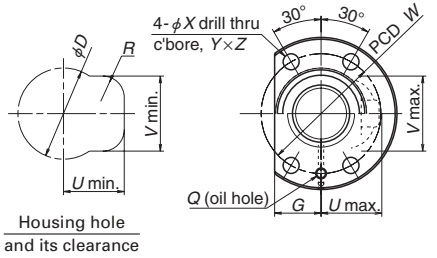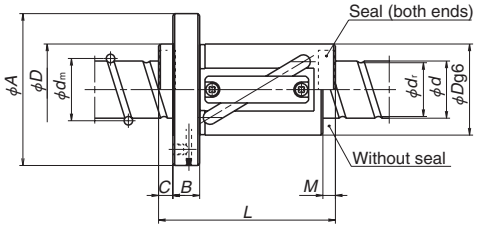
Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.





LPFT, LSFT



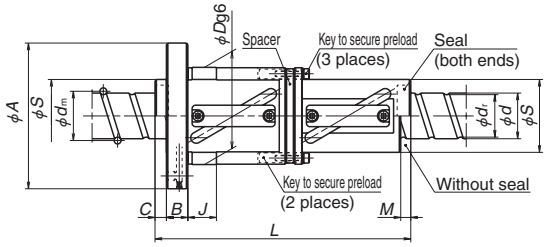


LDFT


Unit: mm

Ball nut dimensions																
Nut diameter		Flanged diameter	Flanged width	Notched flange	Tube projecting type			Seal dimension		Diameter g6	Bolt hole dimension			Bolt hole PCD	Oil hole
D	*S*	*A*	*B*	*G*	*U*	*V*	*R*	*M*	*C*	*J*	*X*	*Y*	*Z*	*W*	*Q*
80	—	126	22	41	52	64	19	11	11	—	14	—	—	102	Rc1/8
80	—	126		41	52	64	19			—				102	
80	—	126		41	52	64	19			—				102	
106	80	152		56	—	—	—			25				128	
80	—	126		41	52	64	19			—				102	
106	80	152		56	—	—	—			25				128	
80	—	126	22	41	52	64	19	14	12	—	14	—	—	102	Rc1/8
80	—	126		41	52	64	19			—				102	
80	—	126		41	52	64	19			—				102	
106	80	152		56	—	—	—			25				128	
80	—	126		41	52	64	19			—				102	
106	80	152		56	—	—	—			25				128	
80	—	126	22	41	52	64	19	17	14	—	14	—	—	102	Rc1/8
80	—	126		41	52	64	19			—				102	
106	80	152		56	—	—	—			25				128	
80	—	126	22	41	52	64	19	21	16	—	14	—	—	102	Rc1/8
80	—	126		41	52	64	19			—				102	
106	80	152		56	—	—	—			25				128	
102	—	144	18	54	—	—	—	7	—	—	11	17.5	11	122	Rc1/8

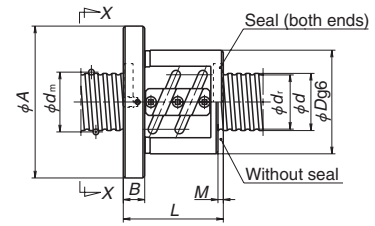5. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
6. For LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
7. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)




SFT, ZFT

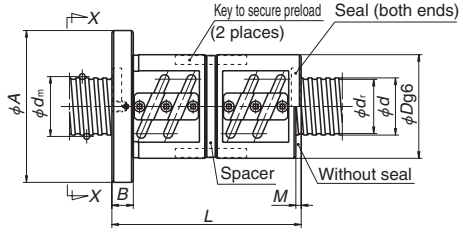


DFT

View *X-X*




Circular shape Ⅰ




Circular shape Ⅱ

Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)	Nut entire length *L*
SFT 6310-2.5	Clearance	63	10	6.35	64.0	57.4	2.5×1	41 100	111 000	557	77
ZFT 6310-5	Z						2.5×1	41 100	111 000	1 091	107
PFT 6310-7.5	P						2.5×3	66 600	166 000	1 322	137
SFT 6310-5	Clearance						2.5×2	74 600	221 000	1 078	107
ZFT 6310-10	Z						2.5×2	74 600	221 000	2 113	167
SFT 6310-7.5	Clearance						2.5×3	106 000	332 000	1 588	137
DFT 6310-7.5	D						2.5×3	106 000	332 000	3 113	257
ZFT 6312-5	Z		12	7.938	64.5	56.2	2.5×1	55 900	136 000	1 119	123
SFT 6312-2.5	Clearance						2.5×1	55 900	136 000	571	87
SFT 6312-5	Clearance						2.5×2	102 000	273 000	1 107	123
DFT 6312-5	D						2.5×2	102 000	273 000	2 171	231
SFT 6316-2.5	Clearance		16	9.525	65.0	55.2	2.5×1	93 600	227 000	746	110
DFT 6316-2.5	D						2.5×1	93 600	227 000	1 464	206
PFT 6316-5	P						2.5×2	107 000	227 000	1 200	158
SFT 6316-5	Clearance						2.5×2	170 000	454 000	1 446	158
DFT 6316-5	D						2.5×2	170 000	454 000	2 835	302
SFT 6320-2.5	Clearance		20	9.525	65.0	55.2	2.5×1	93 400	227 000	744	127
DFT 6320-2.5	D						2.5×1	93 400	227 000	1 459	227
PFT 6320-5	P						2.5×2	107 000	227 000	1 196	187
SFT 6320-5	Clearance						2.5×2	170 000	453 000	1 442	187
DFT 6320-5	D						2.5×2	170 000	453 000	2 827	347
LPFT 6340-2.5	P		40	7.938	65.25	57	2.5×1	35 300	69 200	472	178
LPFT 6340-3	P						1.5×2	41 300	83 100	557	218
LSFT 6340-2.5	Clearance						2.5×1	56 000	138 000	567	178
LDFT 6340-2.5	D						2.5×1	56 000	138 000	1 112	339
LSFT 6340-3	Clearance						1.5×2	65 500	166 000	674	218
LDFT 6340-3	D						1.5×2	65 500	166 000	1 323	419
LPFT 6350-1.5	P		50	7.938	65.25	57	1.5×1	22 400	41 100	282	161
LPFT 6350-2.5	P						2.5×1	34 800	69 600	471	211
LSFT 6350-1.5	Clearance						1.5×1	35 600	82 200	341	161
LDFT 6350-1.5	D						1.5×1	35 600	82 200	669	311
LSFT 6350-2.5	Clearance						2.5×1	55 300	139 000	561	211
LDFT 6350-2.5	D						2.5×1	55 300	139 000	1 099	411

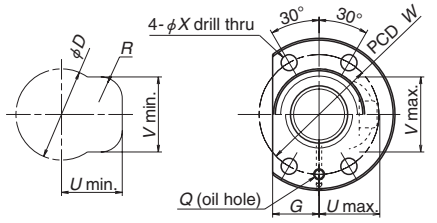
Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for ZFT, SFT, and DFT the nut length "L" is shortened by dimension "M".
3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.




Housing hole and its clearance

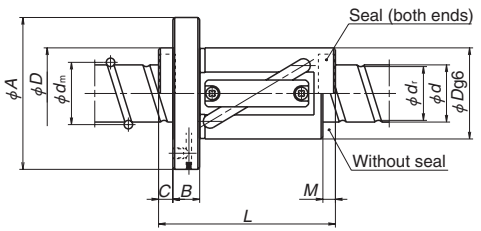

LPFT, LSFT



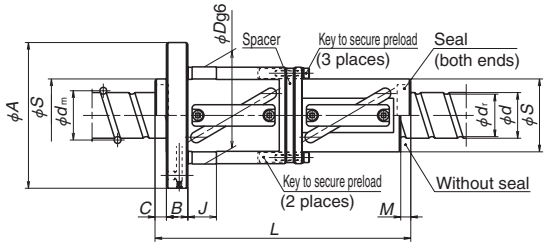


LDFT

Unit: mm


Ball nut dimensions																
Nut diameter		Flanged diameter	Flanged width	Notched flange	Tube projecting type			Seal dimension		Diameter g6	Bolt hole dimension			Bolt hole PCD	Oil hole
D	*S*	*A*	*B*	*G*	*U*	*V*	*R*	*M*	*C*	*J*	*X*	*Y*	*Z*	*W*	*Q*
108	—	154	22	58	—	—	—	7	—	—	14	20	13	130	Rc1/8
115	—	161	22	61	—	—	—	8	—	—	14	20	13	137	Rc1/8
122	—	180	28	69	—	—	—	—	—	—	18	26	17.5	150	Rc1/8
122	—	180	28	69	—	—	—	17	—	—	18	26	17.5	150	Rc1/8
97	—	144	22	49	58	77	19	15	14	—	14	—	—	120	Rc1/8
97	—	144		49	58	77	19			—				120	
97	—	144		49	58	77	19			—				120	
122	97	168		62	—	—	—			29				144	
97	—	144		49	58	77	19			—				120	
122	97	168		62	—	—	—			29				144	
97	—	144	22	49	58	77	19	19	16	—	14	—	—	120	Rc1/8
97	—	144		49	58	77	19			—				120	
97	—	144		49	58	77	19			—				120	
122	97	168		62	—	—	—			29				144	
97	—	144		49	58	77	19			—				120	
122	97	168		62	—	—	—			29				144	

5. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
6. For LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
7. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)


View *X-X*




Circular shape Ⅰ



Circular shape Ⅱ

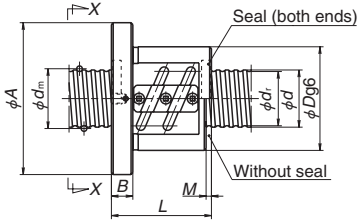

SFT

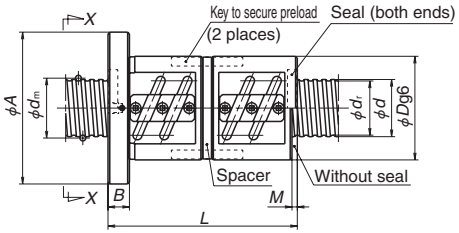

DFT

Unit: mm

Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)
SFT 8010-5	Clearance	80	10	6.35	81.0	74.4	2.5×2	83 200	282 000	1 309
DFT 8010-5	D						2.5×2	83 200	282 000	2 567
SFT 8010-7.5	Clearance						2.5×3	118 000	423 000	1 927
DFT 8010-7.5	D						2.5×3	118 000	423 000	3 779
SFT 8012-5	Clearance		12	7.938	81.5	73.2	2.5×2	113 000	350 000	1 345
DFT 8012-5	D						2.5×2	113 000	350 000	2 637
SFT 8012-7.5	Clearance						2.5×3	161 000	525 000	1 983
DFT 8012-7.5	D						2.5×3	161 000	525 000	3 889
SFT 8016-5	Clearance		16	9.525	82.0	72.2	2.5×2	192 000	581 000	1 764
DFT 8016-5	D						2.5×2	192 000	581 000	3 459
SFT 8016-7.5	Clearance						2.5×3	271 000	872 000	2 593
DFT 8016-7.5	D						2.5×3	271 000	872 000	5 085
SFT 8020-5	Clearance		20	9.525	82.0	72.2	2.5×2	191 000	581 000	1 758
DFT 8020-5	D						2.5×2	191 000	581 000	3 447
SFT 8020-7.5	Clearance						2.5×3	271 000	871 000	2 588
DFT 8020-7.5	D						2.5×3	271 000	871 000	5 075
SFT 10012-5	Clearance	100	12	7.938	101.5	93.2	2.5×2	124 000	441 000	1 611
DFT 10012-5	D						2.5×2	124 000	441 000	3 159
SFT 10012-7.5	Clearance						2.5×3	176 000	661 000	2 372
DFT 10012-7.5	D						2.5×3	176 000	661 000	4 652
SFT 10016-5	Clearance		16	9.525	102	92.2	2.5×2	208 000	736 000	2 109
DFT 10016-5	D						2.5×2	208 000	736 000	4 136
SFT 10016-7.5	Clearance						2.5×3	295 000	1 100 000	3 105
DFT 10016-7.5	D						2.5×3	295 000	1 100 000	6 089
SFT 10020-5	Clearance		20	9.525	102	92.2	2.5×2	208 000	735 000	2 106
DFT 10020-5	D						2.5×2	208 000	735 000	4 131
SFT 10020-7.5	Clearance						2.5×3	294 000	1 100 000	3 098
DFT 10020-7.5	D						2.5×3	294 000	1 100 000	6 075
SFT 12516-5	Clearance	125	16	9.525	127	117.2	2.5×2	231 000	918 000	2 520
DFT 12516-5	D						2.5×2	231 000	918 000	4 942
SFT 12516-7.5	Clearance						2.5×3	327 000	1 380 000	3 708
DFT 12516-7.5	D						2.5×3	327 000	1 380 000	7 272
SFT 12520-5	Clearance		20	9.525	127	117.2	2.5×2	230 000	917 000	2 515
DFT 12520-5	D						2.5×2	230 000	917 000	4 931
SFT 12520-7.5	Clearance						2.5×3	327 000	1 380 000	3 705
DFT 12520-7.5	D						2.5×3	327 000	1 380 000	7 266

Ball nut dimensions										
Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Seal dimension *M*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole *Q*
107	130	176	22	66	7	14	20	13	152	Rc1/8
197										
137										
257										
123	136	182	22	68	8	14	20	13	158	Rc1/8
231										
159										
303										
158	143	204	28	77	10	18	26	17.5	172	Rc1/8
302										
206										
398										
187	143	204	28	77	17	18	26	17.5	172	Rc1/8
347										
247										
467										
129	160	220	28	82	8	18	26	17.5	188	Rc1/8
237										
165										
309										
162	170	243	32	91	10	22	32	21.5	205	Rc1/8
306										
210										
402										
191	170	243	32	91	17	22	32	21.5	205	Rc1/8
351										
251										
471										
170	200	290	36	109	10	26	39	25.5	243	Rc1/8
314										
218										
410										
199	200	290	36	109	12	26	39	25.5	243	Rc1/8
379										
259										
499										

Notes: 1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. Preload system: D; Double nut preload (See page B5.)

B-3-2.3 Deflector(bridge) Type Ball Screws

1. Features

The deflector(bridge) type has the smallest ball nut compared to the other recirculation systems, and suitable for fine lead operation.

2. Specifications

(1) Ball recirculation system

It has a small ball nut outside diameter, and suits for small lead ball screws. **Fig.1** shows the structure of the deflector(bridge) recirculation system.

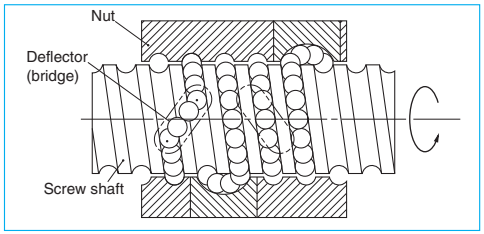


Fig. 1 Structure of deflector(bridge) recirculation system

Table 1 Accuracy grade and axial play

Accuracy grade	C0, C1, C2, C3, C5, Ct7 (Ct7 is not included in DFD)
Axial play	Z, 0 mm (preloaded); T, 0.005 mm or less S, 0.020 mm or less; N, 0.050 mm or less

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are shown in **Table 1**. Please consult NSK for other grades.

(3) Allowable d·n value and the criterion of maximum rotational speed

The allowable d·n value and criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below. Basic measure must be taken for the high speed ball screws respectively.

Allowable d·n value:

Standard specification ; 84 000 or less

High-speed specification; 100 000 or less


Standard of rotational speed : 3 000 min^{-1}

Note: Please also review the critical speed. Refer to "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Other specifications

Please consult NSK for other specifications not listed in the dimension tables.

Table 2 Deflector(bridge) type ball screw product categories

Nut model	Shape	Flange shape	Preload system
MSFD		Flanged Circular Ⅲ	Non-preload, Slight axial play
MPFD			P-preload (light preload) no spacer ball
SFD		Screw shaft diameter of 16 mm or smaller: Flanged Screw shaft diameter of 20 mm or smaller: Rectangle CircularⅠ, Ⅱ	Non-preload, Slight axial play
ZFD		Flanged Circular Ⅰ, Ⅱ	Z-preload (medium preload)
DFD		Flanged Circular Ⅰ, Ⅱ	D-preload (medium preload) (heavy preload)

3. Product categories

There are four different preload systems (Table 2). Synthetic resin that shows superb characteristics against wear is used in the recirculation deflector (bridge) for MSFD, MPFD, and has enhanced the smooth recirculation of balls.

This product is being applied for a patent.

4. Design Precautions

When designing the screw shaft end, one end of the screw must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- Cut the ball groove through to the shaft end.
- The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

◇Model number

SFD 40 08 - 4

- SFD: Nut model: SFD, ZFD, DFD, MSFD, MPFD
- 40: Screw shaft diameter (mm)
- 08: Lead (mm)
- 4: Effective turns of balls (Note)


Note: In case of ZFD, the number here is twice as large as the effective turns of balls.

◇Reference number for ball screw


W 40 08 - ** D Y - C3 Z 5

- W: Product code
- 40: Screw shaft diameter (mm)
- 08: Effective threaded length (in the unit of 100 mm)
- **: NSK design serial number
- D: Preload code: No code, non-preload; Z, Z-preload; D, D-preload; P, P-preload (page B5)
- Y: Deflector(bridge) recirculation system
- C3: Accuracy grade code: C0, C1, C2, C3, C5, C7(Ct7) (page B37 to B42)
- Z: Axial play code: Z, T, S, N (page B20)
- 5: Lead (mm)


View *X-X*



Lead l = 0.5 mm



Lead l > 1 mm

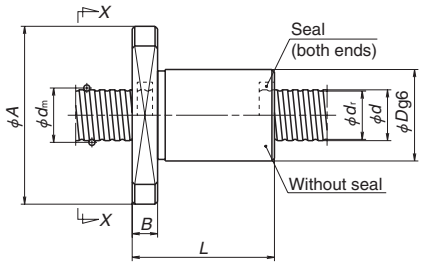


Unit: mm


Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}
MSFD 0400.5-3	Clearance	4	0.5	0.400	4.1	3.6	1×3	205	280
MPFD 0400.5-3	P								
MSFD 0401-2	Clearance		1	0.800	4.2	3.2	1×2	370	370
✻ **MPFD 0401-2**	P								
MSFD 0600.5-3	Clearance	6	0.5	0.400	6.1	5.6	1×3	240	430
MPFD 0600.5-3	P								
MSFD 0601-3	Clearance		1	0.800	6.2	5.2	1×3	680	920
✻ **MPFD 0601-3**	P								
MSFD 0602-3	Clearance		2	0.800	6.2	5.2	1×3	675	920
MPFD 0602-3	P								
MSFD 0800.5-3	Clearance	8	0.5	0.400	8.1	7.6	1×3	275	595
MPFD 0800.5-3	P								
MSFD 0801-3	Clearance		1	0.800	8.2	7.2	1×3	790	1 290
✻ **MPFD 0801-3**	P								
MSFD 0801.5-3	Clearance		1.5	1.000	8.3	7.0	1×3	1 270	1 970
✻ **MPFD 0801.5-3**	P								
MSFD 0802-3	Clearance		2	1.200	8.3	6.9	1×3	1 560	2 200
✻ **MPFD 0802-3**	P								
MSFD 1001-3	Clearance	10	1	0.800	10.2	9.2	1×3	880	1 660
MPFD 1001-3	P								
MSFD 1002-3	Clearance		2	1.200	10.3	8.9	1×3	1 800	2 970
✻ **MPFD 1002-3**	P								
MSFD 1002.5-3	Clearance		2.5	1.588	10.4	8.6	1×3	2 500	3 630
✻ **MPFD 1002.5-3**	P								
MSFD 1201-3	Clearance	12	1	0.800	12.2	11.2	1×3	940	1 980
MPFD 1201-3	P								
MSFD 1202-3	Clearance		2	1.200	12.3	10.9	1×3	1 960	3 620
✻ **MPFD 1202-3**	P								
MSFD 1202.5-3	Clearance		2.5	1.588	12.4	10.6	1×3	2 790	4 530
✻ **MPFD 1202.5-3**	P								
MSFD 1203-3	Clearance		3	2.000	12.5	10.2	1×3	3 680	5 400
MPFD 1203-3	P								
MSFD 1402-3	Clearance	14	2	1.200	14.3	12.9	1×3	2 100	4 260
MPFD 1402-3	P								
MSFD 1403-3	Clearance		3	2.000	14.5	12.2	1×3	4 010	6 480
MPFD 1403-3	P								

Axial rigidity *K* (N/μm)	Ball nut dimensions: Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Flanged dimension *H*	Bolt hole dimension *X*	Bolt hole PCD *W*
32	13	10	22	3	11	3.4	16
50							
23	12	10	20	3	14	2.9	15
36							
44	13	12	24	3	13	3.4	18
69							
51	15	12	24	3.5	16	3.4	18
80							
51	17	13	25	4	17	3.4	19
79							
57	13	14	27	3	15	3.4	21
89							
67	16	14	27	4	18	3.4	21
104							
79	22	15	28	4	19	3.4	22
123							
76	26	16	29	4	20	3.4	23
119							
81	16	16	29	4	20	3.4	23
127							
97	28	18	35	5	22	4.5	27
151							
94	32	19	36	5	23	4.5	28
147							
93	16	18	31	4	22	3.4	25
145							
114	28	20	37	5	24	4.5	29
177							
113	32	21	38	5	25	4.5	30
176							
111	36	22	39	5	26	4.5	31
174							
129	29	22	41	6	26	5.5	32
201							
129	37	24	43	6	28	5.5	34
201							

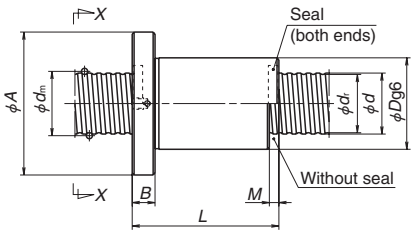
Notes: 1. If the shaft OD is less than 6 mm or the lead is less than 1 mm, a seal is not installed in the nut. (See page B68 for dust protection.)
2. Ball nuts with shaft diameters under 14 mm do not have oil holes.
3. Right turn screw is standard. Please consult NSK for left turn screw.
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. The models marked with ✻ (asterisk) are available in the MA type standard ball screw with finished shaft end.
6. Preload system: P; Oversize ball preload (See page B5.)




SFD, ZFD

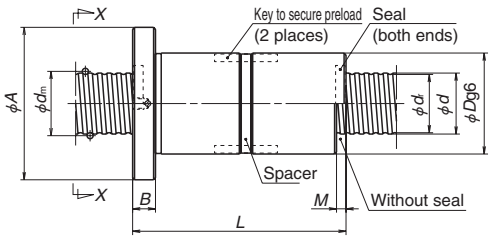


DFD

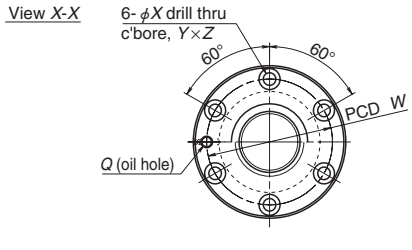


Circular shape Ⅰ



Circular shape Ⅱ



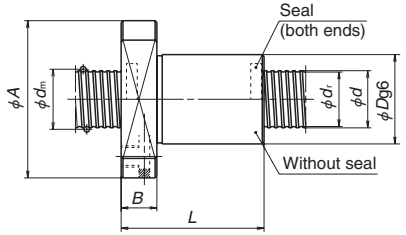

MSFD, MPFD


Unit: mm

Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity *K* (N/μm)
MSFD 1602-4	Clearance	16	2	1.588	16.4	14.6	1×4	4 150	8 450	194
* **MPFD 1602-4**	P									302
MSFD 1602.5-4	Clearance		2.5	1.588	16.4	14.6	1×4	4 150	8 440	194
* **MPFD 1602.5-4**	P									302
MSFD 2002-4	Clearance	20	2	1.588	20.4	18.6	1×4	4 620	10 900	237
MPFD 2002-4	P									369
SFD 2005-3	Clearance		5	3.175	20.75	17.4	1×3	10 100	17 400	206
ZFD 2005-6	Z						1×3	10 100	17 400	404
SFD 2005-4	Clearance						1×4	13 000	23 300	271
DFD 2005-4	D						1×4	13 000	23 300	532
SFD 2006-3	Clearance		6	3.969	21	16.9	1×3	13 100	20 500	202
ZFD 2006-6	Z						1×3	13 100	20 500	396
SFD 2006-4	Clearance						1×4	16 800	27 400	266
DFD 2006-4	D						1×4	16 800	27 400	521
MSFD 2502-4	Clearance	25	2	1.588	25.4	23.6	1×4	5 100	13 900	287
MPFD 2502-4	P									447
SFD 2505-3	Clearance		5	3.175	25.75	22.4	1×3	11 600	22 900	257
* **ZFD 2505-6**	Z						1×3	11 600	22 900	503
SFD 2505-4	Clearance						1×4	14 800	30 500	337
DFD 2505-4	D						1×4	14 800	30 500	661
SFD 2506-3	Clearance		6	3.969	26	21.9	1×3	15 200	27 300	254
ZFD 2506-6	Z						1×3	15 200	27 300	499
SFD 2506-4	Clearance						1×4	19 400	36 400	334
DFD 2506-4	D						1×4	19 400	36 400	656
ZFD 2510-4	Z		10	4.762	26.25	21.3	1×2	13 300	21 200	337
SFD 2510-3	Clearance						1×3	18 900	31 800	253
DFD 2510-3	D						1×3	18 900	31 800	497


Notes: 1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for SFD, ZFD, and DFD, the nut length "L" is shortened by dimension "M". For MSFD and MPFD, the nut length is the same as those with seal.
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw. Please consult NSK for MSFD and MPFD.

Ball nut dimensions												
Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Notched flange *H*	Seal dimension *M*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole dimension *T*	Oil hole *Q*
40	25	44	10	—	29	—	5.5	—	—	35	16	M6×1
44	25	44	10	—	29	—	5.5	—	—	35	16	M6×1
40	30	49	10	—	34	—	5.5	—	—	40	18.5	M6×1
46	35	58	11	22.5	—	5	5.5	9.5	5.5	46	—	M6×1
66	35	58		22.5						46		
51	35	58		22.5						46		
91	41	64		25						52		
52	35	58	11	22.5	—	6	5.5	9.5	5.5	46	—	M6×1
76	35	58		22.5						46		
60	35	58		22.5						46		
108	42	65		25						53		
40	36	55	10	—	40	—	5.5	—	—	46	21.5	M6×1
46	40	63	11	24	—	5	5.5	9.5	5.5	51	—	M6×1
66	40	63		24						51		
51	40	63		24						51		
91	46	69		26						57		
52	40	63	11	24	—	6	5.5	9.5	5.5	51	—	M6×1
76	40	63		24						51		
60	40	63		24						51		
108	47	70		27						58		
88	42	69	15	26	—	10	6.6	11	6.5	55	—	M6×1
80	42	69		26						55		
140	47	74		28						60		

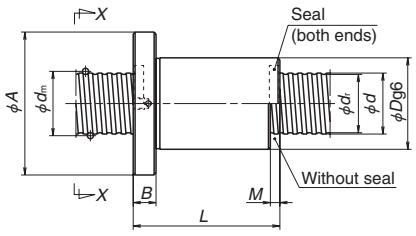
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
6. The models marked with * (asterisk) are available in the MA type standard ball screw with finished shaft end.
7. Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)




SFD, ZFD

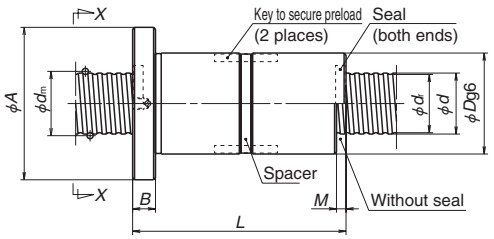


DFD

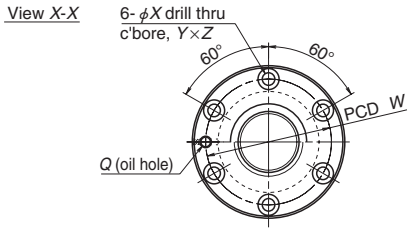


Circular shape Ⅰ



Circular shape Ⅱ



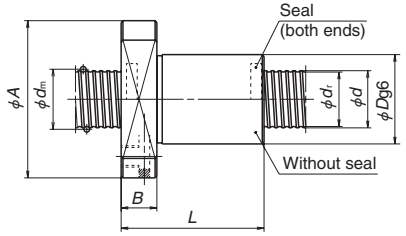

MSFD, MPFD


	Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity *K* (N/μm)
	MSFD 3202-6	Clearance	32	2	1.588	32.4	30.6	1×6	8 030	27 100	521
	MPFD 3202-6	P									811
	SFD 3205-3	Clearance		5	3.175	32.75	29.4	1×3	13 100	30 500	322
	ZFD 3205-6	Z						1×3	13 100	30 500	631
	SFD 3205-4	Clearance						1×4	16 800	40 600	424
*	**ZFD 3205-8**	Z						1×4	16 800	40 600	831
	SFD 3205-6	Clearance						1×6	23 800	60 900	623
	DFD 3205-6	D						1×6	23 800	60 900	1 222
	SFD 3206-3	Clearance		6	3.969	33	28.9	1×3	17 700	37 400	328
	ZFD 3206-6	Z						1×3	17 700	37 400	643
	SFD 3206-4	Clearance						1×4	22 600	49 900	431
	ZFD 3206-8	Z						1×4	22 600	49 900	846
	SFD 3206-6	Clearance						1×6	32 100	74 800	635
	DFD 3206-6	D						1×6	32 100	74 800	1 245
	SFD 3208-3	Clearance		8	4.762	33.25	28.3	1×3	21 600	41 700	316
	ZFD 3208-6	Z						1×3	21 600	41 700	619
	SFD 3208-4	Clearance						1×4	27 700	55 600	415
	ZFD 3208-8	Z						1×4	27 700	55 600	815
	SFD 3210-3	Clearance		10	6.35	33.75	27.1	1×3	30 500	52 500	313
*	**ZFD 3210-6**	Z						1×3	30 500	52 500	614
	SFD 3210-4	Clearance						1×4	39 000	70 000	411
	DFD 3210-4	D						1×4	39 000	70 000	807

Notes: 1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for SFD, ZFD, and DFD, the nut length "L" is shortened by dimension "M". For MSFD and MPFD, the nut length is the same as those with seal.
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw. Please consult NSK for MSFD and MPFD.


Unit: mm

Ball nut dimensions												
Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange: *G*	Notched flange: *H*	Seal dimension *M*	Bolt hole dimension: *X*	Bolt hole dimension: *Y*	Bolt hole dimension: *Z*	Bolt hole PCD *W*	Oil hole dimension *T*	Oil hole *Q*
50	42	65	10	—	46	—	6.6	—	—	54	26.5	M6×1
47	48	75	12	29	—	5	6.6	11	6.5	61	—	M6×1
67	48	75		29						61		
52	48	75		29						61		
77	48	75		29						61		
62	48	75		29						61		
112	53	80		30						66		
53	48	75	12	29	—	6	6.6	11	6.5	61	—	M6×1
77	48	75		29						61		
61	48	75		29						61		
90	48	75		29						61		
73	48	75		29						61		
133	54	81		31						67		
67	50	84	15	32	—	8	9	14	8.5	66	—	M6×1
99												
76												
116												
80	54	88	15	34	—	10	9	14	8.5	70	—	M6×1
120												
90												
160												

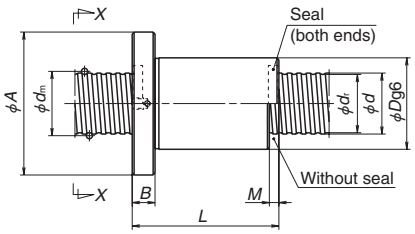
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
6. The models marked with * (asterisk) are available in the SS type standard ball screw with finished shaft end.
7. Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)




SFD, ZFD

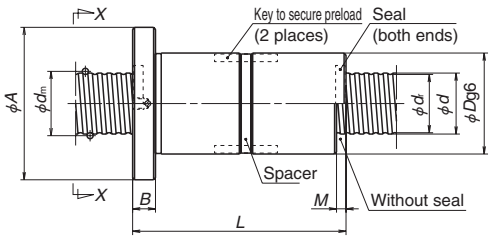


DFD

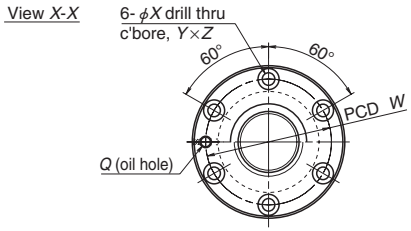


Circular shape Ⅰ



Circular shape Ⅱ



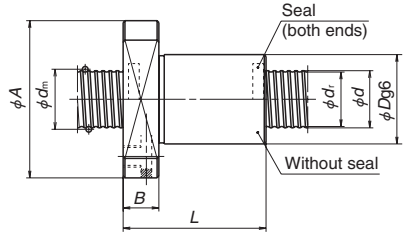

MSFD, MPFD


Unit: mm

Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity *K* (N/μm)
MSFD 4002-6	Clearance	40	2	1.588	40.4	38.6	1×6	8 720	33 900	620
MPFD 4002-6	P									966
SFD 4005-4	Clearance		5	3.175	40.75	37.4	1×4	18 700	52 200	517
ZFD 4005-8	Z						1×4	18 700	52 200	1 013
SFD 4005-6	Clearance						1×6	26 500	78 300	761
ZFD 4005-12	Z						1×6	26 500	78 300	1 492
SFD 4006-4	Clearance		6	3.969	41.0	36.9	1×4	25 100	63 500	522
ZFD 4006-8	Z						1×4	25 100	63 500	1 023
SFD 4006-6	Clearance						1×6	35 600	95 200	768
ZFD 4006-12	Z						1×6	35 600	95 200	1 506
SFD 4008-4	Clearance		8	4.762	41.25	36.3	1×4	32 000	75 000	529
ZFD 4008-8	Z						1×4	32 000	75 000	1 038
SFD 4008-6	Clearance						1×6	45 400	113 000	779
DFD 4008-6	D						1×6	45 400	113 000	1 528
SFD 4010-3	Clearance		10	6.35	41.75	35.1	1×3	35 300	69 800	394
ZFD 4010-6	Z						1×3	35 300	69 800	773
SFD 4010-4	Clearance						1×4	45 200	93 100	518
ZFD 4010-8	Z						1×4	45 200	93 100	1 016
SFD 5005-4	Clearance	50	5	3.175	50.75	47.4	1×4	20 700	66 700	627
ZFD 5005-8	Z						1×4	20 700	66 700	1 230
SFD 5005-6	Clearance						1×6	29 300	100 000	923
ZFD 5005-12	Z						1×6	29 300	100 000	1 810
SFD 5006-4	Clearance		6	3.969	51.0	46.9	1×4	27 900	81 600	636
ZFD 5006-8	Z						1×4	27 900	81 600	1 248
SFD 5006-6	Clearance						1×6	39 600	122 000	937
ZFD 5006-12	Z						1×6	39 600	122 000	1 837


Notes: 1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for SFD, ZFD, and DFD, the nut length "L" is shortened by dimension "M". For MSFD and MPFD, the nut length is the same as those with seal.
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw. Please consult NSK for MSFD and MPFD.

Ball nut dimensions												
Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Notched flange *H*	Seal dimension *M*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole dimension *T*	Oil hole *Q*
50	51	74	10	—	55	—	6.6	—	—	63	31	M6×1
55	56	90	15	34	—	5	9	14	8.5	72	—	Rc1/8
80												
65												
101												
64	56	90	15	34	—	6	9	14	8.5	72	—	Rc1/8
93												
76												
118												
76	60	94	15	36	—	8	9	14	8.5	76	—	Rc1/8
116	60	94		36						76		
93	60	94		36						76		
168	62	96		37						78		
83	62	104	18	40	—	10	11	17.5	11	82	—	Rc1/8
123												
93												
143												
55	66	100	15	38	—	5	9	14	8.5	82	—	Rc1/8
80												
65												
101												
64	66	100	15	38	—	6	9	14	8.5	82	—	Rc1/8
93												
76												
118												

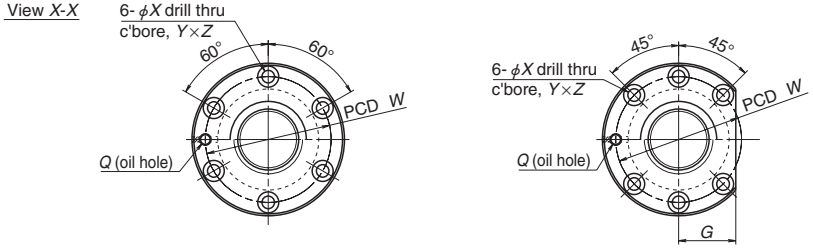4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
6. Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)



Circular shape I　　Circular shape II

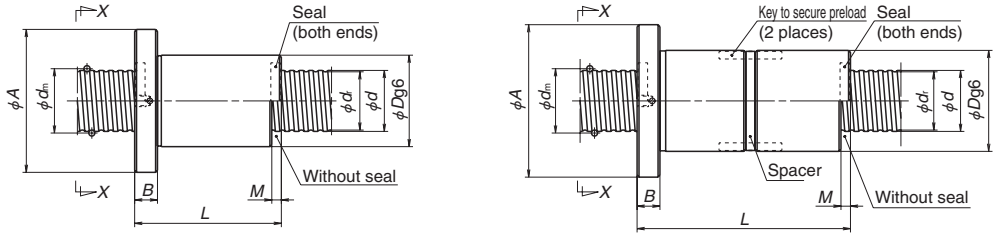


SFD, ZFD　　DFD

Unit: mm


Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity K (N/μm)
SFD 5008-4	Clearance	50	8	4.762	51.25	46.3	1×4	35 300	94 700	635
ZFD 5008-8	Z						1×4	35 300	94 700	1 246
SFD 5008-6	Clearance						1×6	50 000	142 000	935
DFD 5008-6	D						1×6	50 000	142 000	1 833
SFD 5010-3	Clearance		10	6.35	51.75	45.1	1×3	40 200	91 500	489
ZFD 5010-6	Z						1×3	40 200	91 500	960
SFD 5010-4	Clearance						1×4	51 500	122 000	644
ZFD 5010-8	Z						1×4	51 500	122 000	1 263
SFD 5010-6	Clearance						1×6	72 900	183 000	947
DFD 5010-6	D						1×6	72 900	183 000	1 858
SFD 5012-3	Clearance		12	7.938	52.25	44	1×3	52 800	109 000	485
ZFD 5012-6	Z						1×3	52 800	109 000	952
SFD 5012-4	Clearance						1×4	67 600	145 000	639
DFD 5012-4	D						1×4	67 600	145 000	1 252
SFD 5020-3	Clearance		20	7.938	52.25	44	1×3	52 400	109 000	480
DFD 5020-3	D							52 400	109 000	942
SFD 6306-4	Clearance	63	6	3.969	64.0	59.9	1×4	30 800	104 000	772
ZFD 6306-8	Z						1×4	30 800	104 000	1 513
SFD 6306-6	Clearance						1×6	43 600	156 000	1 135
ZFD 6306-12	Z						1×6	43 600	156 000	2 226
SFD 6308-4	Clearance		8	4.762	64.25	59.3	1×4	39 600	124 000	787
ZFD 6308-8	Z						1×4	39 600	124 000	1 543
SFD 6308-6	Clearance						1×6	56 200	186 000	1 159
DFD 6308-6	D						1×6	56 200	186 000	2 272
SFD 6310-4	Clearance		10	6.35	64.75	58.1	1×4	58 700	162 000	810
ZFD 6310-8	Z						1×4	58 700	162 000	1 588
SFD 6310-6	Clearance						1×6	83 200	244 000	1 192
DFD 6310-6	D						1×6	83 200	244 000	2 337
ZFD 6312-6	Z		12	7.938	65.25	57	1×3	59 900	143 000	1 181
SFD 6312-4	Clearance						1×4	76 800	191 000	793
DFD 6312-4	D						1×4	76 800	191 000	1 555
SFD 6312-6	Clearance						1×6	109 000	286 000	1 167
DFD 6312-6	D						1×6	109 000	286 000	2 289
SFD 6320-3	Clearance		20	9.525	65.75	56	1×3	98 400	231 000	766
DFD 6320-3	D									1 503

Ball nut dimensions										
Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Seal dimension M	Bolt hole dimension X	Bolt hole dimension Y	Bolt hole dimension Z	Bolt hole PCD W	Oil hole Q
79	70	112	18	43	8	11	17.5	11	90	Rc1/8
119	70	112		43					90	
96	70	112		43					90	
171	72	114		44					92	
83	72	114	18	44	10	11	17.5	11	92	Rc1/8
123										
93										
143										
114										
205										
99	75	121	22	47	12	14	20	13	97	Rc1/8
147										
111										
195										
146	75	121	28	47	20	14	20	13	97	Rc1/8
253										
67	80	122	18	47	6	11	17.5	11	100	Rc1/8
96										
79										
121										
79	82	124	18	47	8	11	17.5	11	102	Rc1/8
119	82	124		47					102	
96	82	124		47					102	
175	85	127		48					105	
97	85	131	22	50	10	14	20	13	107	Rc1/8
147										
118										
214										
147	90	136	22	52	12	14	20	13	112	Rc1/8
111										
195										
136										
248										
146	95	153	28	59	20	18	26	17.5	123	Rc1/8
253										

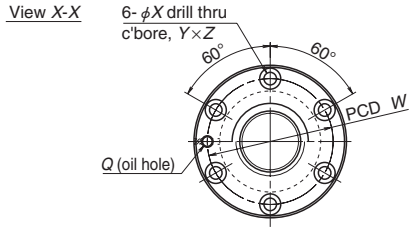
Notes: 1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal the nut length "L" is shortened by dimension "M".
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
6. Preload system: Z, Offset preload; D, Double nut preload (See page B5.)




Circular shape Ⅰ



Circular shape Ⅱ

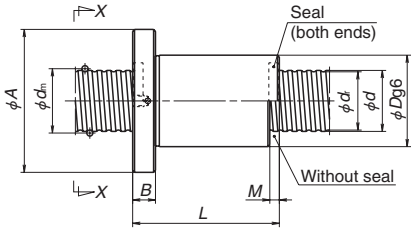

SFD

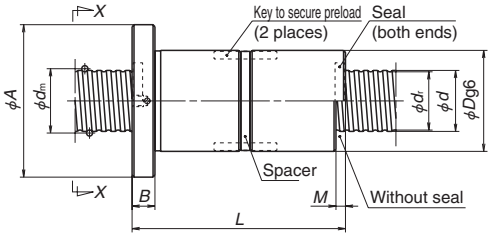

DFD

Unit: mm

Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity *K* (N/μm)
SFD 8010-4	Clearance	80	10	6.35	81.75	75.1	1×4	65 100	209 000	987
DFD 8010-4	D						1×4	65 100	209 000	1 935
SFD 8010-6	Clearance						1×6	92 200	313 000	1 452
DFD 8010-6	D						1×6	92 200	313 000	2 848
SFD 8012-4	Clearance		12	7.938	82.25	74	1×4	87 400	254 000	996
DFD 8012-4	D						1×4	87 400	254 000	1 954
SFD 8012-6	Clearance						1×6	124 000	381 000	1 467
DFD 8012-6	D						1×6	124 000	381 000	2 877
SFD 8020-3	Clearance		20	9.525	82.75	73	1×3	114 000	312 000	978
DFD 8020-3	D						1×3	114 000	312 000	1 918
SFD 8020-4	Clearance						1×4	146 000	416 000	1 287
DFD 8020-4	D						1×4	146 000	416 000	2 524
SFD 10010-6	Clearance	100	10	6.35	101.75	95.1	1×6	102 000	400 000	1 762
DFD 10010-6	D									3 456
SFD 10012-6	Clearance		12	7.938	102.25	94	1×6	138 000	490 000	1 789
DFD 10012-6	D									3 509
SFD 10020-4	Clearance		20	9.525	102.75	93	1×4	161 000	525 000	1 546
DFD 10020-4	D									3 031

Ball nut dimensions										
Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Notched flange *G*	Seal dimension *M*	Bolt hole dimension *X*	Bolt hole dimension *Y*	Bolt hole dimension *Z*	Bolt hole PCD *W*	Oil hole *Q*
97	105	151	22	57	10	14	20	13	127	Rc1/8
172										
118										
214										
111	110	156	22	59	12	14	20	13	132	Rc1/8
195										
136										
248										
146	115	173	28	66	20	18	26	17.5	143	Rc1/8
253										
168										
297										
118	125	171	22	64	10	14	20	13	147	Rc1/8
214										
142	130	188	28	71	12	18	26	17.5	158	Rc1/8
254										
172	135	205	32	79	20	22	32	21.5	169	Rc1/8
301										

Notes 1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal the nut length "L" is shortened by dimension "M".
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.
4. The axial rigidity *K* in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B56) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
6. Preload system: D; Double nut preload (See page B5.)

B-3-2.4 End Cap Type Ball Screws

1. Features

The end cap recirculation system is suitable for high-helix lead and multiple start threads.
Since the leads are 1 to 3 times larger than their screw shaft diameter, it makes them more suitable for high-speed operation.

2. Specifications

(1) Ball recirculation system

The structure of end cap recirculation system is shown in **Fig. 1**.

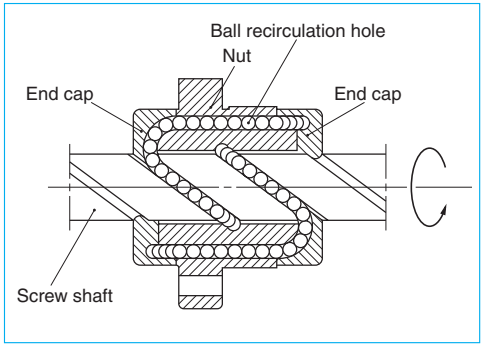


Fig. 1 Structure of end cap recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are shown in **Table 1**. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	LSFC, LPFC: C1, C2, C3, C5, Ct7 USFC, UPFC: C3, C5, Ct7 (Three times lead or over are C5, Ct7)
Axial play	Z, 0 mm (preloaded); T, 0.005 mm or less; S, 0.020 mm or less; N, 0.050 mm or less

(3) Allowable d·n value and the criterion of maximum rotational speed.

The allowable d·n value and criterion of maximum rotational speed are shown below. Please consult NSK for high-speed specification. Basic measure must be taken for the high speed ball screws respectively.

Allowable d·n value:
Standard specification ; 80 000 or less
High-speed specification; 100 000 or less
Standard of rotational speed : 3 000 min^{-1}
※Please also review the critical speed. Refer to "Technical Description: Permissible Rotational Speed" (page B47) for details.


(4) Other specifications

Please consult NSK for other specifications not listed in the dimension tables.

3. Product categories

There are two different preload systems with several models (**Table 2**).

Table 2 End cap type ball screws product categories

Nut model	Shape	Flange shape	Nut shape	Preload system
LSFC		Flanged Circular Ⅲ	Circular	Non-preload, Slight axial play
LPFC			Circular	P-preload (light preload) no spacer ball
USFC		Flanged Rectangular	Circular	Non-preload, Slight axial play
UPFC			Circular	P-preload (light preload) no spacer ball

4. Design Precautions

When designing the screw shaft end, one end of the screw must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- Cut the ball groove through to the shaft end.
- The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

Special bearings which have higher-load carrying capacity are available.
For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

5. Example of model number in dimension tables

The followings describe the structure of "Model number" and "Reference number for ball screw".

◇Model number

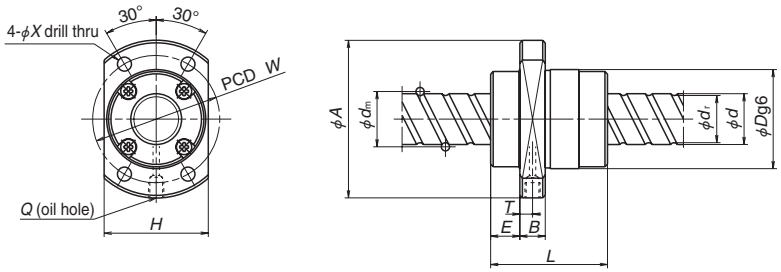
UPFC 25 25 - 3

- UPFC: Nut model: LSFC, LPFC, USFC, UPFC
- 25: Screw shaft diameter (mm)
- 25: Lead (mm)
- 3: Effective turns of balls

◇Reference number for ball screw

W 25 09 - ** P G X - C3 Z 25


- W: Product code
- 25: Screw shaft diameter (mm)
- 09: Effective threaded length (in the unit of 100 mm)
- **: NSK design serial number
- P: Preload code: No code, non-preload; P, P-preload (page B5)
- G: End cap recirculation system
- X: Appearance/specification code
- C3: Accuracy grade code: C1, C2, C3, C5, C7 (Ct7) (page B37 to B42)
- Z: Axial play code: Z, T, S, N (page B20)
- 25: Lead (mm)



LSFC, LPFC

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls: Turns × Circuits	Basic load rating (N): Dynamic C_a	Basic load rating (N): Static C_{0a}	Axial rigidity K (N/μm)
USFC 1220-1.5	Clearance	12	20	2.381	12.5	9.9	1.7×1	2 960	4 370	68
UPFC 1220-1.5	P									106
USFC 1520-1.5	Clearance	15	20	3.175	15.5	12.2	1.7×1	5 660	8 700	101
UPFC 1520-1.5	P									156
USFC 1540-1	Clearance		40	3.175	15.75	12.2	0.7×2	4 430	7 320	65
UPFC 1540-1	P						0.7×2	4 430	7 320	102
USFC 1540-2	Clearance						0.7×4	8 040	14 600	134
UPFC 1540-2	P						0.7×4	8 040	14 600	209
LSFC 1616-3	Clearance	16	16	2.778	16.65	13.7	1.7×2	7 910	13 700	185
LPFC 1616-3	P						1.7×2	7 910	13 700	288
LSFC 1616-6	Clearance						1.7×4	14 400	27 400	359
LPFC 1616-6	P						1.7×4	14 400	27 400	559
USFC 1632-1	Clearance		32	3.175	16.75	13.4	0.7×2	4 800	7 510	79
* **UPFC 1632-1**	P						0.7×2	4 800	7 510	124
USFC 1632-3	Clearance						1.7×2	10 300	18 500	187
UPFC 1632-3	P						1.7×2	10 300	18 500	230
USFC 1632-6	Clearance						1.7×4	18 700	37 000	361
UPFC 1632-6	P						1.7×4	18 700	37 000	562
USFC 1650-1	Clearance		50	3.175	16.75	13.4	0.7×2	4 410	7 840	65
UPFC 1650-1	P						0.7×2	4 410	7 840	105
USFC 1650-2	Clearance						0.7×4	8 000	15 700	130
UPFC 1650-2	P						0.7×4	8 000	15 700	203
LSFC 2020-3	Clearance	20	20	3.175	20.75	17.4	1.7×2	12 300	23 600	258
LPFC 2020-3	P						1.7×2	12 300	23 600	402
LSFC 2020-6	Clearance						1.7×4	22 400	47 200	500
LPFC 2020-6	P						1.7×4	22 400	47 200	779
USFC 2040-1	Clearance		40	3.175	20.75	17.4	0.7×2	5 410	9 360	94
* **UPFC 2040-1**	P						0.7×2	5 410	9 360	147
USFC 2040-3	Clearance						1.7×2	11 600	23 400	224
UPFC 2040-3	P						1.7×2	11 600	23 400	349
USFC 2040-6	Clearance						1.7×4	21 100	46 800	435
UPFC 2040-6	P						1.7×4	21 100	46 800	677
USFC 2060-1	Clearance		60	3.175	20.75	17.4	0.7×2	4 950	9 590	81
UPFC 2060-1	P						0.7×2	4 950	9 590	125
USFC 2060-2	Clearance						0.7×4	8 990	19 200	156
UPFC 2060-2	P						0.7×4	8 990	19 200	243

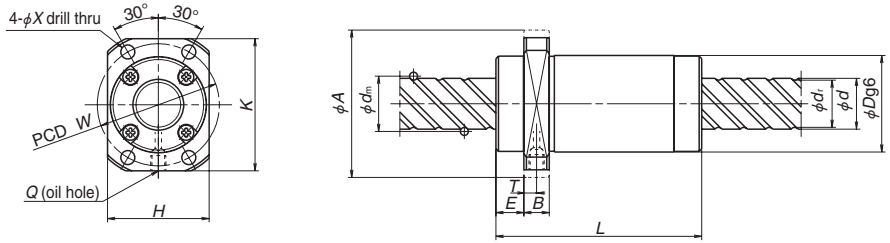Notes: 1. For the LSFC and USFC type ball screws, the axial rigidity K in the table above is the theoretical values obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a). For the LPFC and UPFC type, the rigidity is the theoretical value when the preload is 10% of the basic dynamic load rating (C_a) and an axial load is applied to it. Refer to the "Technical Description" (page B56) if the rigidity and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.




USFC, UPFC


Unit: mm

Ball nut dimensions: Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Flanged dimension H	Flanged dimension K	End cap dimension E	Bolt hole dimension X	Bolt hole PCD W	Oil hole Q	Oil hole position T
44	26	44	10	28	40	9	4.5	35	M6×1	5
45	34	55	10	36	50	11	5.5	45	M6×1	5
40	32	53	10	33	48	12	5.5	43	M6×1	5
38	32	53	10	34	—	10	4.5	42	M6×1	5
34	34	55	10	36	50	10.5	5.5	45	M6×1	5
34										
66										
66										
66										
66										
50	34	55	10	36	50	12	5.5	45	M6×1	5
46	39	62	10	41	—	11.5	5.5	50	M6×1	5
41	38	58	10	40	52	11	5.5	48	M6×1	5.5
41										
81										
81										
81										
81										
58	38	58	10	40	52	12.3	5.5	48	M6×1	5

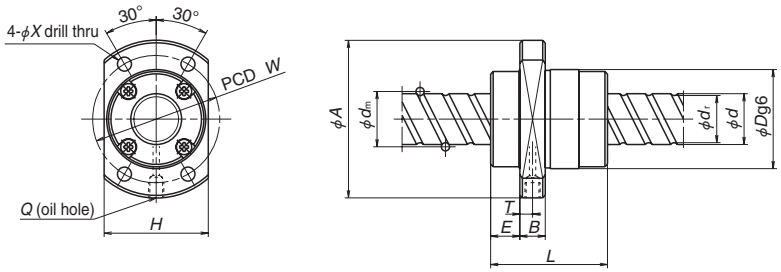2. The right turn screw is the standard. Please consult NSK for the left turn screw.
3. The models marked with * (asterisk) are available in the FA type standard ball screws with finished shaft end.
4. Preload system: P; Oversize ball preload (See page B5.)



LSFC, LPFC

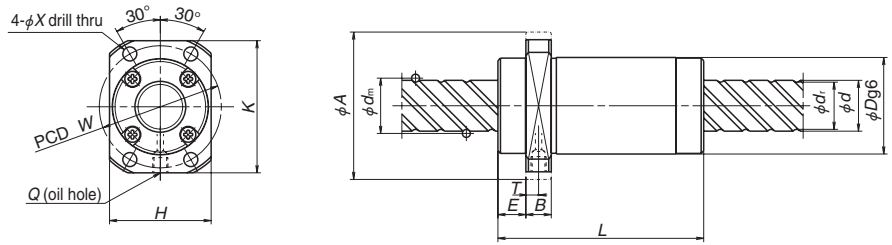

USFC, UPFC

Unit: mm

Model No.	Preload system	Shaft dia. *d*	Lead *l*	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity *K* (N/μm)
LSFC 2525-3	Clearance	25	25	3.969	26.0	21.9	1.7×2	18 400	36 900	318
LPFC 2525-3	P						1.7×2	18 400	36 900	495
LSFC 2525-6	Clearance						1.7×4	33 400	73 800	616
LPFC 2525-6	P						1.7×4	33 400	73 800	959
USFC 2550-1	Clearance		50				0.7×2	8 090	14 600	112
UPFC 2550-1	P						0.7×2	8 090	14 600	181
USFC 2550-3	Clearance						1.7×2	17 300	37 500	281
UPFC 2550-3	P						1.7×2	17 300	37 500	437
USFC 2550-6	Clearance						1.7×4	31 500	75 000	545
UPFC 2550-6	P						1.7×4	31 500	75 000	848
USFC 2580-1	Clearance		80				0.7×2	7 290	15 300	97
UPFC 2580-1	P						0.7×2	7 290	15 300	151
USFC 2580-2	Clearance						0.7×4	13 200	30 600	188
UPFC 2580-2	P						0.7×4	13 200	30 600	293
LSFC 3232-3	Clearance	32	32	4.762	33.25	28.3	1.7×2	26 800	56 300	383
LPFC 3232-3	P						1.7×2	26 800	56 300	618
LSFC 3232-6	Clearance						1.7×4	48 700	113 000	770
LPFC 3232-6	P						1.7×4	48 700	113 000	1 198
USFC 3264-1	Clearance		64				0.7×2	11 400	23 800	150
UPFC 3264-1	P						0.7×2	11 400	23 800	234
USFC 3264-3	Clearance						1.7×2	24 400	56 800	346
UPFC 3264-3	P						1.7×2	24 400	56 800	571
USFC 3264-6	Clearance						1.7×4	44 400	114 000	670
UPFC 3264-6	P						1.7×4	44 400	114 000	1 043
LSFC 4040-3	Clearance	40	40	6.350	41.75	35.2	1.7×2	42 900	94 500	494
LPFC 4040-3	P						1.7×2	42 900	94 500	769
LSFC 4040-6	Clearance						1.7×4	77 800	189 000	956
LPFC 4040-6	P						1.7×4	77 800	189 000	1 488
LSFC 5050-3	Clearance	50	50	7.938	52.25	44.1	1.7×2	64 100	148 000	608
LPFC 5050-3	P						1.7×2	64 100	148 000	1 004
LSFC 5050-6	Clearance						1.7×4	116 000	295 000	1 176
LPFC 5050-6	P						1.7×4	116 000	295 000	1 831

*	Ball nut dimensions										
	Nut entire length *L*	Nut diameter *D*	Flanged diameter *A*	Flanged width *B*	Flanged dimension *H*	Flanged dimension *K*	End cap dimension *E*	Bolt hole dimension *X*	Bolt hole PCD *W*	Oil hole *Q*	Oil hole position *T*
	55	47	74	12	49	—	13	6.6	60	M6×1	6
	50	46	70	12	48	63	13	6.6	58	M6×1	7
	50										
	100										
	100										
	100										
	100										
	75	46	70	12	48	63	14.5	6.6	58	M6×1	6
	70	58	92	12	60	—	16	9	74	M6×1	5.5
	62	58	92	12	60	82	15.5	9	74	M6×1	7.5
	62										
	126										
	126										
	126										
	126										
	85	73	114	15	75	—	19.5	11	93	M6×1	6.5
	107	90	135	20	92	—	21.5	14	112	M6×1	7








Notes: 1. For the LSFC and USFC type ball screws, the axial rigidity *K* in the table above is the theoretical values obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a). For the LPFC and UPFC type, the rigidity is the theoretical value when the preload is 10% of the basic dynamic load rating (C_a) and an axial load is applied to it. Refer to the "Technical Description" (page B56) if the rigidity and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.







2. The right turn screw is the standard. Please consult NSK for the left turn screw.
3. The models marked with * (asterisk) are available in the FA type standard ball screws with finished shaft end.
4. Preload system: P; Oversize ball preload (See page B5.)

1. HMD Type for High-Speed Machine Tools B493
2. HMS Type for High-Speed Machine Tools B497
3. HMC Type for High-Speed Machine Tools B501
4. BSL™ Type for Miniature Lathes B507
5. For High-Load Drives
   5.1 HTF-SRC Type B511
   5.2 HTF-SRD Type B515
   5.3 HTF Type B519
6. For Contaminated Environments
   6.1 VSS Type B535
   6.2 Ball Screw with X1 Seals for Contaminated Environments and Grease Retention B539
7. TW Series for Twin-Drive Systems B545
8. For High Precision Machine Tools
   8.1 Hollow Shaft Ball Screws B546
   8.2 Nut Cooling Ball Screws B551
9. ND Series for Nut-Rotatable Drives B555
10. Σ Series for Robots B563
11. Ball Screw with L1 Seal designed for Minimal Grease Splatter B575
12. Equipped with "NSK K1™" Lubrication Unit B579
13. Special Ball Screws B585

B-3-3 Dimension Table and Reference Number of Application-Oriented Ball Screws

◇Features and application examples of application-oriented ball screws

Applications		Shape	Features	Applications	Page
High-Speed Machine Tools	HMD Type		High-speed operation: 64 to 120 m/min Rigidity: 5% greater than the HMC series. High-load carrying capacity: 7% greater than the HMC type New recirculation system reduces the noise level by 5 dB(A) or more compared with the HMC type	High-speed machining centers High-speed combined machine tools Die mold processing machine	B493
	HMS Type		Fine lead: 5 to 12 mm High-speed operation: 25 to 50 m/min Easy replacement: Dimensional interchangeability with tube type ball screws New recirculation system reduces the noise level by 5 dB(A) or more compared with the Tube type.	Machining centers Die mold processing machine NC lathes Combined machine tools	B497
	HMC Type		High-speed: 40 to 120 m/min Rigidity: 30% greater than existing tube type ball screws High-Load carrying capacity: 14% greater than existing tube type ball screws Noise reduced by small-diameter balls	High-speed machining centers High-speed combined machine tools Die mold processing machines	B501
Small Lathes	BSL Type		Compact nut: 50% less ball nut volume than NSK existing products. High-dust protection by thin plastic seal Special high-load capacity ball screw support bearings are available.	Small lathes Multi-axis lathes Small machining centers	B507
High-Load Drives	HTF-SRC Type		High-load capacity High-speed operation by high-speed rotation: 930 mm/sec Even load distribution to balls in the ball nut for high-load drive Improved durability by NSK S1	Injection axis of injection molding machines Servo press machines Press brake Bending machines	B511
	HTF-SRD Type		High-load capacity High-speed operation by large screw lead: 1 600 mm/sec Improved durability by NSK S1	Clamping axis of injection molding machines Die cast machines Punch presses Lifting and lowering devices	B515
	HTF Type		High-load capacity Even load distribution to the balls in a ball nut for high-load drive Improved durability by NSK S1 Provide a wide range of screw diameter and lead combinations.	Injection molding machines Press machines Press fitting machines Lifting and lowering machines	B519
Contaminated Environments	VSS Type		High dust-resistant performance: Reduces particle penetration rate to less than 1/15 (compared with standard seal). More than four times longer service life than standard seal under contaminated environments.	Woodworking machines Laser cutting machines Graphite milling machines Tire molding machines Transfer equipment	B535

Applications		Shape	Features	Applications	Page
Contaminated Environments and Grease Retention	Ball Screw with X1 Seals		Highly dustproof: Particle penetration ratio reduced to less than 1/30 of existing standard seals. Superior grease retention: Can reduce lubricant consumption, also effective at suppressing grease splattering.	Machining centers Combined machine tools NC lathes Woodworking machines Laser cutting machines Graphite milling machines Tire molding machines	B539
Twin-Drive Systems	TW Series		Controlled screw lead accuracy and variation of preload torque for twin drive. Improved axial rigidity, expected life and controllability by the paired up two ball-screw driving systems	Machining centers Combined machine tools Large-size machine tools	B545
High-Precision Machine Tools	Hollow Shaft Ball Screws		Suppress thermal deformation by cooling the shaft center Prevent the machine base from deforming due to thermal expansion. NSK special support units and seal units are available.	High-precision die processing machines High-precision combined machine tools High-precision machining centers High-precision lathes	B546
	Nut Cooling Ball Screws		Due to the simple nut cooling setup, cooling is achieved simply by attaching piping to the thermal displacement control nut. Cooling just as effective as core cooling Insulation to prevent heat from affecting the table.	High-precision die processing machines High-precision combined machine tools High-precision machining centers High-precision lathes Large machine tools	B551
Nut-Rotatable Ball Screws	NDT and NDD Type		Angular contact support bearings are integrated into the ball nut. Two or more ball nuts can be installed in a single ball screw shaft. The NDD type ball screws can surpass the critical speed. A special vibration damper enables long-stroke-high-speed operation.	Woodworking machines Laser cutting machines Electronic component mounting devices Flat panel display manufacturing equipment Transfer equipment	B555
Robots	Σ Series		A ball screw and a ball spline are made in one shaft, combining a drive and guide system. A ball screw nut, a ball spline nut and support bearings are combined to the unit. Hollow shaft has an effect for weight saving. The hollow can be used for wiring and piping.	SCARA type robots Electronic-component mounting systems	B563
Ball Screw with L1 Seal designed for Minimal Grease Splatter			Amount of splattered grease : 1/10 or less (compared with standard seal) Reduced grease-splattering helps maintaining machines and working environment clean. It can be fitted to Compact FA Series and High Speed SS Series later.	Electronic component mounting devices Semiconductor/Flat panel display manufacturing equipment Food processing/Medical equipment Transfer equipment	B575
Equipped with "NSK K1" Lubrication Unit			Long-term, maintenance-free operation Maintains lubrication efficiency for a prolonged time in contaminated environments Does not pollute the environment Made of compatible material with the FDA regulations is also available.	Automotive manufacturing machines Woodworking machines Laser cutting machines Semiconductor/Flat panel display manufacturing equipment Food processing/Medical equipment	B579

B-3-3.1 HMD Type for High-Speed Machine Tools

This product is being applied for a patent. The newly developed ball recirculation components, the end-deflector and middle-deflector, have greatly contributed for the substantial improvements in the maximum rotational speed and noise level compared to the HMC type.

1. Features

● High speed

The permissible rotational speed (d·n value) has greatly increased to 160 000 compared with 135 000 of the HMC type.

● Low noise

Noise reduced by 5 dB(A) or more compared with the HMC type ball screws for high-speed machine tools.

● Nut mounting dimensions

The ball nut diameters are the same as those of the HMC type.

2. Specifications

(1) Recirculation system

Fig.1 shows the structure of the middle-deflector recirculation system of the HMD type.

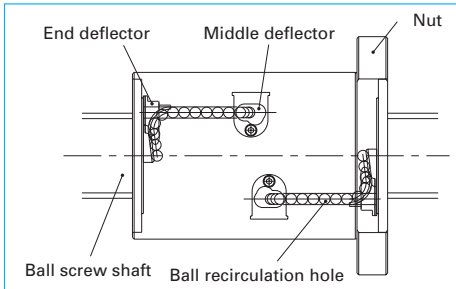


Fig. 1 Structure of middle-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	C3, C5
Axial play	0 mm (preloaded)

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d·n value: 160 000 or less

Criterion of maximum rotational speed

: 4 000 min^{-1}

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Options

● For twin-drive systems (See page B545.)

Upon request, the variations in lead accuracy and preload torque between two ball screws of a pair of the TW series are controlled for the further improvement of the reliability.

● Hollow shaft ball screw (See page B546.)

● Nut cooling ball screw (See page B551.)

The temperature rise and measures against thermal expansion of ball screw driving mechanism are the most challenging for high-speed machine tools. We recommend using core forced cooling or nut cooling for the HMD type.

(5) Seal

Compact, thin plastic seal is available. Nut outside diameter is compact compare with the return tube recirculation system.


3. Design precautions

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HMD type has a model as follows.

Table 2 HMD type product categories

Nut model	Shape	Flange shape	Nut shape	Preload system
EM		Flanged Circular Ⅱ	Circular	Z-Preload (medium preload)

5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

◇Model number

EM 40 20 - 6E

- EM — Nut model: EM
- 40 — Screw shaft diameter (mm)
- 20 — Lead (mm)
- 6E — Effective turns of balls

◇Reference number for ball screw

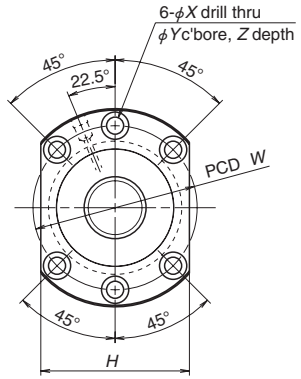
W 40 07 - ** Z M T X - C5 Z 20

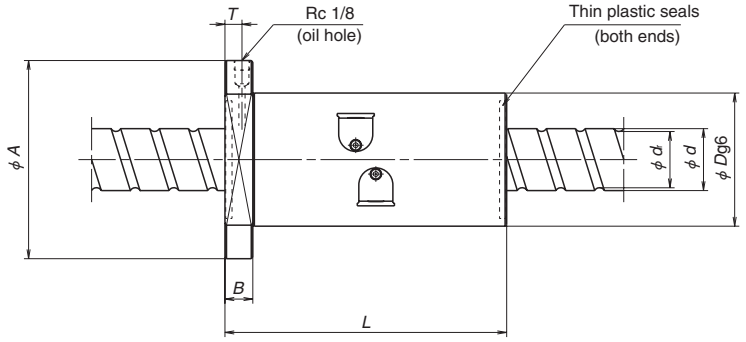
- W — Product code
- 40 — Screw shaft diameter (mm)
- 07 — Effective threaded length (in the unit of 100 mm)
- ** — NSK design serial number
- Z — Preload code: Z; Z-preload
- M — Middle-deflector recirculation system
- T — Hollow shaft specification
- X — Ball screw specification/appearance
- C5 — Accuracy grade: C3 or C5
- Z — Axial play code: Z
- 20 — Lead (mm)

6. Handling Precautions

Maximum operating temperature: 80°C

If using NSK K1, operating temperature should not exceed 50°C. Refer to "Designing Precautions" (page B83).





Unit: mm

Model No.	Shaft dia. *d*	Lead *l*	Root dia. *d₁*	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity *K* (N/μm)
EM4016-4E	40	16	34.1	66 900	131 000	1 023
EM4020-6E		20	34.4	77 900	166 000	1 415
EM4025-6E		25	34.1	91 300	191 000	1 442
EM4030-6E		30	34.1	90 400	190 000	1 419
EM4516-4E	45	16	39.1	69 900	146 000	1 121
EM4520-6E		20	39.4	83 200	187 000	1 573
EM4525-6E		25	39.1	95 700	214 000	1 589
EM5016-4E	50	16	44.1	72 700	161 000	1 216
EM5020-6E		20	44.4	85 700	205 000	1 695
EM5025-6E		25	44.1	103 000	232 000	1 731
EM5030-6E		30	44.1	102 000	235 000	1 730
EM6316-4E	63	16	55.2	131 000	338 000	1 696

Ball nut dimensions								Bolt hole PCD	Oil hole position	Max. feeding speed
Nut length *L*	Nut dia. *D*	Flange dia. *A*	Flange width *B*	Flange size *H*	Bolt hole size *X*	*Y*	*Z*	*W*	*T*	(m/min)
160	86	128	18	96	11	17.5	11	106	11	64
150										80
182										100
213										120
160	92	134	18	102	11	17.5	11	112	11	56
150										70
182										88
160	98	140	18	107	11	17.5	11	118	11	51
150										64
182										80
213										96
170	122	180	28	138	18	26	17.5	150	14	40

Notes: 1. The right turn screw is the standard. Please consult NSK for left turn screws.
2. Rigidity listed under the column K is the value when a 5% of basic dynamic load rating is applied as the preload.

B-3-3.2 HMS Type for High-Speed Machine Tools

1. Features

● High speed

The permissible rotational speed (d·n value) has greatly increased to 160 000 compared with 100 000 for tube type screws.

● Low noise

By adopting SRC recirculation system, noise reduced by 5 dB(A) or more compared with tube type screws.

● Nut mounting dimensions

The ball nut diameters are the same as those of tube type screws.

2. Specifications

(1) Recirculation system

Fig.1 shows the structure of the SRC recirculation system of the HMS type.

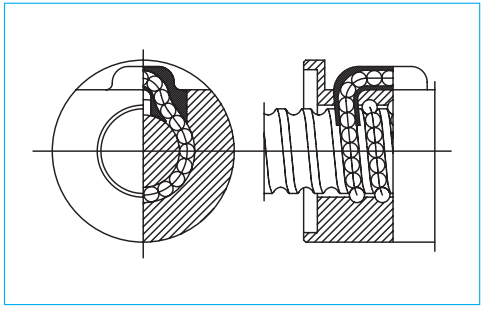


Fig. 1 Structure of SRC recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	C3, C5
Axial play	0 mm (preloaded)

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d·n value: 160 000 or less

Criterion of maximum rotational speed

: 5 000 min^{-1}

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Options

● For twin-drive systems (See page B545.)

Upon request, the variations in lead accuracy and preload torque between two ball screws of a pair of the TW series are controlled for the further improvement of the reliability.

● Hollow shaft ball screw (See page B546.)

● Nut cooling ball screw (See page B551.)

The temperature rise and measures against thermal expansion of ball screw driving mechanism are the most challenging for high-speed machine tools. We recommend using core forced cooling or nut cooling for the HMS type.


3. Design precautions

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HMS type has a model as follows.

Table 2 HMS type product categories

Nut model	Shape	Flange shape	Nut shape	Preload system
ZFRC		Flanged Circular Ⅱ	Circular	Z-Preload (medium preload)

5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

◇Model number

ZFRC 40 10 - 10

- ZFRC: Nut model: ZFRC
- 40: Screw shaft diameter (mm)
- 10: Effective turns of balls*
- 10: Lead (mm)

* In the case of Z-preload, the amount shown is twice the effective turn of balls.

◇Reference number for ball screw


W 40 07 - ** Z RC T - C5 Z 10

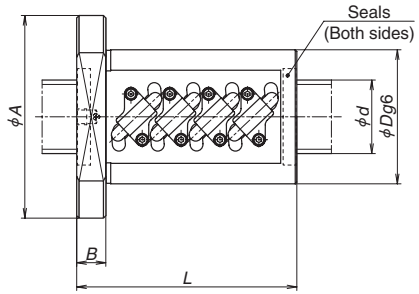
- W: Product code
- 40: Screw shaft diameter (mm)
- 07: Effective threaded length (in the unit of 100 mm)
- **: NSK design serial number
- Z: Preload code: Z; Z-preload
- RC: SRC recirculation system
- T: Hollow shaft specification
- C5: Accuracy grade: C3 or C5
- Z: Axial play code: Z
- 10: Lead (mm)

6. Handling Precautions

Maximum operating temperature: 60°C

If using NSK K1, operating temperature should not exceed 50°C. Refer to "Designing Precautions" (page B83).





Unit: mm

Model No.	Shaft dia.	Lead	Root dia.	Effective turns	Basic load rating (N)		Axial rigidity
				Turns × rows	Dynamic	Static	
	d	*l*	d_r		C_a	C_{0a}	*K* (N/μm)
ZFRC3205-10	32	5	29.2	2.5×2	21 800	56 000	891
ZFRC3210-10	32	10	26.4	2.5×2	54 500	110 000	970
ZFRC4005-10	40	5	37.2	2.5×2	23 900	70 500	1 067
ZFRC4010-10	40	10	34.4	2.5×2	61 200	137 000	1 154
ZFRC4012-10	40	12	34.1	2.5×2	71 700	154 000	1 177
ZFRC4508-10	45	8	40.5	2.5×2	44 000	118 000	1 234
ZFRC4510-10	45	10	39.4	2.5×2	65 800	157 000	1 291
ZFRC4512-10	45	12	39.1	2.5×2	75 600	176 000	1 304
ZFRC5010-10	50	10	44.4	2.5×2	68 100	174 000	1 397
ZFRC5012-10	50	12	43.2	2.5×2	91 500	218 000	1 441
ZFRC6312-14	63	12	56.2	3.5×2	136 000	385 000	2 388

Ball nut dimensions								Bolt hole PCD	Oil hole position	Max. feeding speed
Nut length	Nut dia.	Flange dia.	Flange width	Groove size	Bolt hole size					
L	*D*	*A*	*B*	*G*	*X*	*Y*	*Z*	*W*	*Q*	(m/min)
89	58	85	12	32	6.6	11	6.5	71	M6×1	25
163	74	108	15	41	9	14	8.5	90	M6×1	50
92	67	101	15	39	9	14	8.5	83	M6×1	25
166	82	124	18	47	11	17.5	11	102	Rc1/8	40
192	86	128	18	48	11	17.5	11	106	Rc1/8	48
136	82	124	18	47	11	17.5	11	102	Rc1/8	28
166	88	132	18	50	11	17.5	11	110	Rc1/8	35
192	90	132	18	50	11	17.5	11	110	Rc1/8	42
166	93	135	18	51	11	17.5	11	113	Rc1/8	32
198	100	146	22	55	14	20	13	122	Rc1/8	38
244	115	161	22	61	14	20	13	137	Rc1/8	30

Notes: 1. The right turn screw is the standard. Please consult NSK for left turn screws.
2. Rigidity listed under the column K is the value when a 5% of basic dynamic load rating is applied as the preload.

B-3-3.3 HMC Type for High-Speed Machine Tools

This product is being applied for a patent.

1. Features

● High-speed traveling

High helix leads of 16 mm to 36 mm are used. Furthermore, the ball recirculation return tube is reinforced to make a high-speed traveling of 40 to 120 m/min. possible.

● High rigidity, high load carrying capacity

Double start thread increases the number of effective turns of balls, and a smaller ball size increases the number of the balls. Together they contribute to have high rigidity and high load carrying capacity, despite the high helix lead.

● Compact nut

The size of nut diameter and length were reduced.

2. Specifications

(1) Ball recirculation system

The ball recirculation circuits and grooves are suited for high-speed operation. Structure of recirculation system is shown in **Fig. 1**.

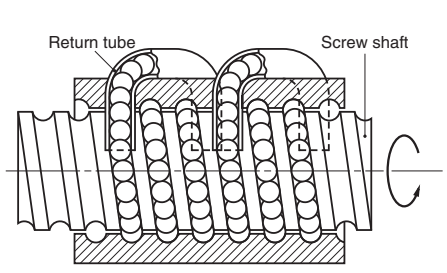


Fig. 1 Structure of return tube recirculation system

(2) Accuracy grades and axial play

Standard accuracy grades and axial play are shown in **Table 1**. Please consult NSK for other grade.

Table 1 Accuracy grades and axial play

Accuracy grade	C3, C5
Axial play	0 mm (preloaded)

(3) Options

● Equipped with NSK K1 lubrication unit

Optional NSK K1 lubrication unit, molded from resin and impregnated with lubrication oil, is available. Please consult NSK when using NSK K1.

● For twin-drive systems (See page B545.)

Upon request, the variations in lead accuracy and preload torque between two ball screws of a pair of the TW series are controlled for the further improvement of the reliability.

● Hollow shaft ball screw specifications (See page B546.)

The temperature rise and measures against thermal expansion of ball screw driving mechanism are the most challenging for high-speed machine tools. For the HMD type ball screws, we recommend to utilize the hollow for forced cooling system.

● For a vertical axis ball screw

For a vertical axis ball screw, which constantly supports the load of vertical axis system, a high load capacity ball screw is required. A high load capacity type with compact design is available for the nut models Ⅱ and Ⅲ in the dimension tables. For details, please consult NSK.

(4) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d•n value: HZC, HDC; 100 000 or less
HZF, HDF; 135 000 or less

Criterion of maximum rotational speed: 3 750 min^{-1}

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

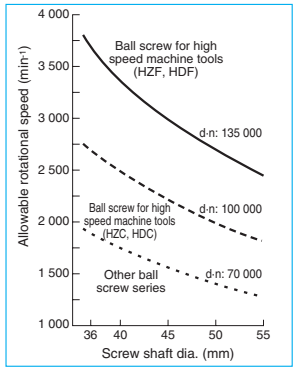


Fig. 2 Comparison of permissible rotational speed

(5) Other specifications

For other specifications not listed in the dimension tables such as high-speed, high-load capacity, and NSK K1 installed type, please consult NSK.



3. Design precautions

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

HMC type has two different preload systems with several models (**Table 2**).

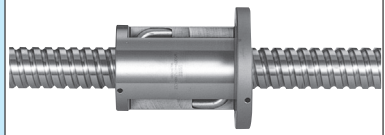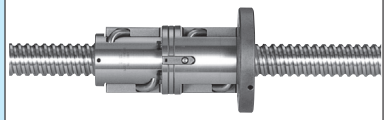Table 2 HMC type product categories

Nut model	Shape	Flange shape	Preload system
HZC HZF		Flanged Circular I	Z-preload (medium preload)
HDC HDF		Flanged Circular I	D-preload (medium preload)

5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

◇Model number

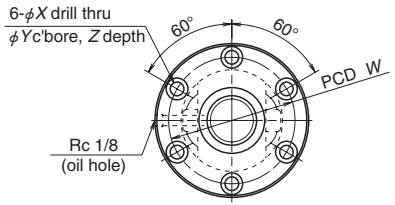
HZF 36 16 - 5

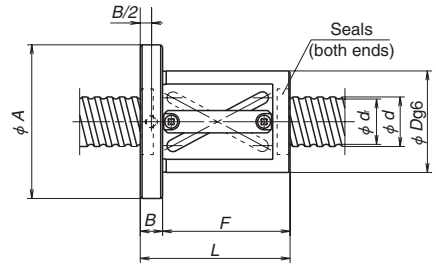
- HZF: Nut model: HZC, HZF, HDC, HDF
- 36: Screw shaft diameter (mm)
- 16: Lead (mm)
- 5: Effective turns of balls

◇Reference number for ball screw


W 36 05 - ** Z T X - C5 Z 16

- W: Product code
- 36: Screw shaft diameter (mm)
- 05: Effective threaded length (in the unit of 100 mm)
- **: Design serial number
- Z: Preload code : Z, Z-prelord; D, D-preload (page B5)
- T: Hollow shaft ball screw
- X: Appearance/specification code
- C5: Accuracy grade: C3, C5 (page B37 to B42)
- Z: Axial play code: Z (page B20)
- 16: Lead (mm)





Nut model Ⅰ (offset preload)

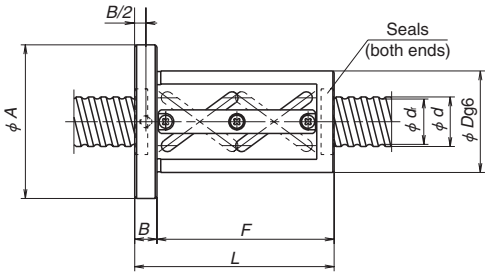


Nut model Ⅱ (offset preload)


Unit: mm

Model No.	Shaft dia. *d*	Lead *l*	Root dia. d_r	Effective turns of balls	Nut model	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity *K* (N/μm) 5% C_a	Axial rigidity *K* (N/μm) 10% C_a
HZF3616-5	36	16	31.5	5	Ⅱ	47 000	102 000	1 156	1 456
HZC3616-5									
HZF3620-3.5		20	30.4	3.5	Ⅰ	51 100	98 600	862	1 086
HZC3620-3.5									
HZF4016-5	40	16	35.5	5	Ⅱ	49 500	113 000	1 269	1 599
HZC4016-5									
HZF4020-3.5		20	34.4	3.5	Ⅰ	53 600	107 000	933	1 176
HZC4020-3.5									
HZF4020-5				5	Ⅱ	72 900	154 000	1 316	1 659
HZC4020-5									
HZF4516-5	45	16	40.5	5	Ⅱ	51 400	126 000	1 390	1 751
HZF4516-7.5				7.5		72 800	189 000	2 045	2 576
HZF4520-3.5		20	39.4	3.5	Ⅰ	57 300	121 000	1 037	1 307
HZC4520-3.5									
HZF4520-5				5	Ⅱ	77 900	172 000	1 455	1 834
HZC4520-5									
HZF4525-3.5		25	39.1	3.5	Ⅰ	65 900	137 000	1 045	1 317
HZC4525-3.5									
HZF5020-3.5	50	20	44.4	3.5	Ⅰ	59 000	132 000	1 119	1 410
HZC5020-3.5									
HZF5020-5				5	Ⅱ	80 200	189 000	1 575	1 985
HZC5020-5									
HZF5025-3.5		25	44.1	3.5	Ⅰ	70 700	152 000	1 153	1 452
HZC5025-3.5									
HZF5025-5				5	Ⅱ	96 100	217 000	1 617	2 037
HZC5025-5									
HZF5030-3.5		30	44.1	3.5	Ⅰ	70 200	152 000	1 140	1 437
HZC5030-3.5									
HZF5520-3.5	55	20	49.4	3.5	Ⅰ	62 100	146 000	1 218	1 534
HZF5520-5				5	Ⅱ	84 300	207 000	1 706	2 149
HZF5525-3.5		25	49.1	3.5	Ⅰ	73 100	165 000	1 237	1 558
HZF5525-5				5	Ⅱ	99 300	236 000	1 735	2 186
HZF5530-3.5		30	49.1	3.5	Ⅰ	72 700	167 000	1 235	1 556

Nut entire length *L*	Ball nut dimensions: Nut dia. *D*	Flange dia. *A*	Flange width *B*	Nut length *F*	Bolt hole demensions *X*	*Y*	*Z*	Bolt hole PCD *W*	Max. feeding speed (m/min)
134	78	120	18	116	11	17.5	11	98	60
	71	113						91	44
121	94	136	18	103	11	17.5	11	114	75
	78	120						98	56
134	79	121	18	116	11	17.5	11	99	54
	76	118						96	40
121	96	138	18	103	11	17.5	11	116	67
	82	124						102	50
161	96	138		143				116	67
	82	124						102	50
134	82	124	18	116	11	17.5	11	102	48
187		128	22	165	14	20	13	104	
122	98	140	18	104	11	17.5	11	118	60
	88	130						108	44
162	98	140		144				118	60
	88	130						108	44
141	101	143	18	123	11	17.5	11	121	75
	92	134						112	56
122	101	143	18	104	11	17.5	11	121	54
	95	137						115	40
162	101	143		144				121	54
	95	137						115	40
141	103	145	18	123	11	17.5	11	123	67
	98	140						118	50
191	103	145		173				123	67
	98	140						118	50
159	103	145	18	141	11	17.5	11	123	81
	98	140						118	60
122	103	145	18	104	11	17.5	11	123	49
162				144					
141	105	147	18	123	11	17.5	11	125	61
191				173					
159	105	147	18	141	11	17.5	11	125	73

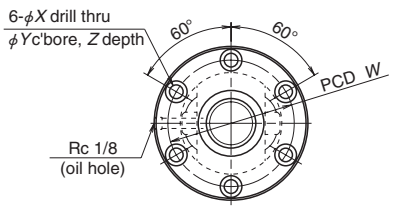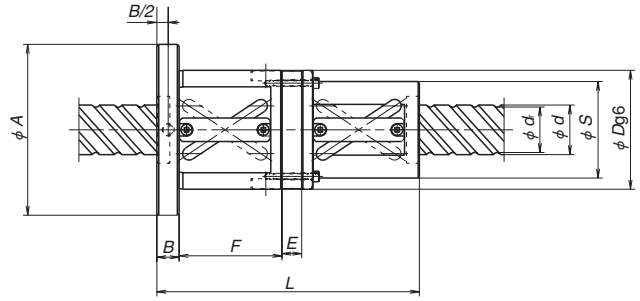Notes: 1. Ball screws of 32 or 36 mm lead have triple start threads. Others have double start threads.
2. Rigidity listed under the column 5%Ca is the value when a 5% of basic dynamic load rating is applied as the preload. Similarly, those listed under the column 10%Ca means a 10% of basic dynamic load rating is applied.





Nut model Ⅲ (double nut spacer, preload)
(the figure indicates use of double start threads)

Unit: mm

Model No.	Shaft dia. *d*	Lead *l*	Root dia. d_r	Effective turns of balls	Nut model	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity *K* (N/μm) 5% C_a	Axial rigidity *K* (N/μm) 10% C_a
HDF3620-5	36	20	30.4	5	Ⅲ	69 400	139 000	1 204	1 516
HDC3620-5									
HDF4025-5	40	25	34.1	5	Ⅲ	85 500	176 000	1 334	1 681
HDC4025-5									
HDF4030-5		30	34.1	5	Ⅲ	84 600	175 000	1 313	1 654
HDC4030-5									
HDF4032-7.5		32	34.4	7.5	Ⅲ	104 000	232 000	1 909	2 405
HDC4032-7.5									
HDF4036-4.5		36	34.4	4.5	Ⅲ	66 500	137 000	1 214	1 530
HDF4525-5	45	25	39.1	5	Ⅲ	89 600	195 000	1 460	1 840
HDC4525-5									
HDF4530-5		30	39.1	5	Ⅲ	91 800	197 000	1 476	1 860
HDC4530-5									
HDF4532-7.5		32	39.4	7.5	Ⅲ	108 000	259 000	2 100	2 646
HDC4532-7.5									
HDF4536-4.5		36	39.4	4.5	Ⅲ	69 200	15 500	1 280	1 612
HDF5030-5	50	30	44.1	5	Ⅲ	95 500	216 000	1 600	2 016
HDC5030-5									
HDF5032-7.5		32	44.4	7.5	Ⅲ	112 000	285 000	2 286	2 881
HDC5032-7.5									
HDF5530-5	55	30	49.1	5	Ⅲ	98 700	235 000	1 719	2 166
HDF5532-7.5		32	49.4	7.5	Ⅲ	118 000	312 000	2 483	3 128

Ball nut dimensions											Max. feeding speed (m/min)
Nut entire length *L*	Nut dia. *D*	Nut dia. *S*	Flange dia. *A*	Flange width *B*	Nut length *F*	Spacer dimensions *E*	Bolt hole size *X*	Bolt hole size *Y*	Bolt hole size *Z*	Bolt hele PCD *W*	
191	94	76	136	18	77	5	11	17.5	11	114	75
	78	60	120							98	56
228.5	98	80	140	18	91	13.5	11	17.5	11	118	84
	86	68	128							106	63
248	98	80	140	18	104	8	11	17.5	11	118	101
	86	68	128							106	75
265	96	78	142	22	109	11	14	20	13	118	108
	82	64	128							106	80
200	96	78	138	18	83	4	11	17.5	11	116	120
228.5	101	83	143	18	91	13.5	11	17.5	11	121	75
	92	74	134							112	56
248	101	83	143	18	104	8	11	17.5	11	121	90
	92	74	134							112	67
266	98	80	144	22	109	11	14	20	13	120	96
	88	70	134							110	71
200	98	80	140	18	83	4	11	17.5	11	118	108
249	103	85	145	18	104	8	11	17.5	11	123	81
	98	80	140							118	60
266	101	83	147	22	109	11	14	20	13	123	86
	95	77	141							117	64
249	105	87	147	18	104	8	11	17.5	11	125	73
266	103	85	149	22	109	11	14	20	13	125	78

Notes: 1. Ball screws of 32 or 36 mm lead have triple start threads. Others have double start threads.
2. Rigidity listed under the column 5%Ca is the value when a 5% of basic dynamic load rating is applied as the preload. Similarly, those listed under the column 10%Ca means a 10% of basic dynamic load rating is applied.

B-3-3.4 BSL™ Type for Miniature Lathes

1. Features

● Prompt delivery

Screw shaft configuration and ball nut shape are standardized for prompt delivery.

● High speed and low noise

Adoption of end-deflector recirculation system realized high-speed operation with low noise.

● Excellent dust resistance

Thin plastic seal and specially designed ball grooves prevent the entry of foreign matters.

2. Specifications

(1) Ball recirculation system

End-deflector recirculation system has features of high-speed, low-noise operation and compact ball nut. The structure of recirculation system is shown in **Fig.1**.

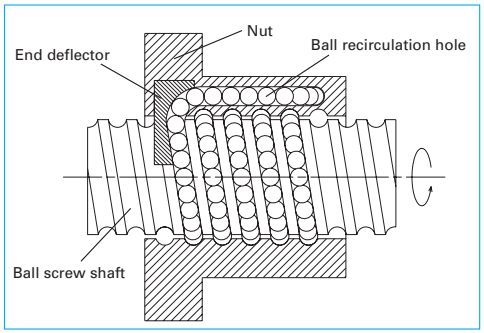


Fig. 1 Structure of end-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	C5
Axial play	0 mm (preloaded)

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d·n value: 180 000 or less

Criterion of maximum rotational speed

: 4 000 min^{-1}

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Options

Optional NSK K1 lubrication unit, molded from resin and impregnated with lubrication oil, supplies fresh oil onto ball rolling surface, ensuring long-term, maintenance-free operation. Please consult NSK when using NSK K1.

3. Design Precautions

When designing the screw shaft end, one end of the shaft must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- Cut the ball groove through to the shaft end.
- The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.


Special bearings which have higher-load carrying capacity are available.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The BSL type has a model as follows.

Table 2 BSL type product categories

Nut model	Shape	Flange shape	Preload system
BSL		Circular Ⅲ	P-Preload (Slight preload)

5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

◇Model number

BSL 20 05

- BSL — Nut model: BSL
- 20 — Screw shaft diameter (mm)
- 05 — Lead (mm)

◇Reference number for ball screw

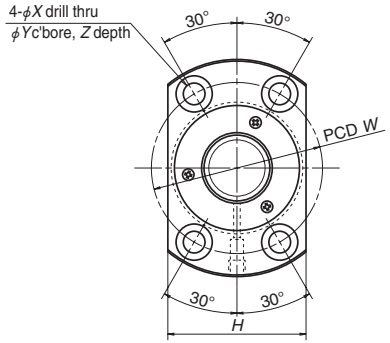
W 20 05 - ** P SS - C5 Z 5

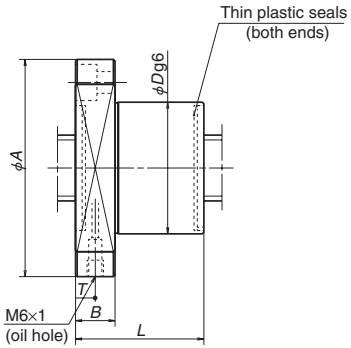
- W — Product code
- 20 — Screw shaft diameter (mm)
- 05 — Effective threaded length (in the unit of 100 mm)
- ** — NSK design serial number
- P — Preload code: P; P-preload (page B5)
- SS — End-deflector recirculation system
- C5 — Accuracy grade: C5 (page B37 to B42)
- Z — Axial play code: Z (page B20)
- 5 — Lead (mm)

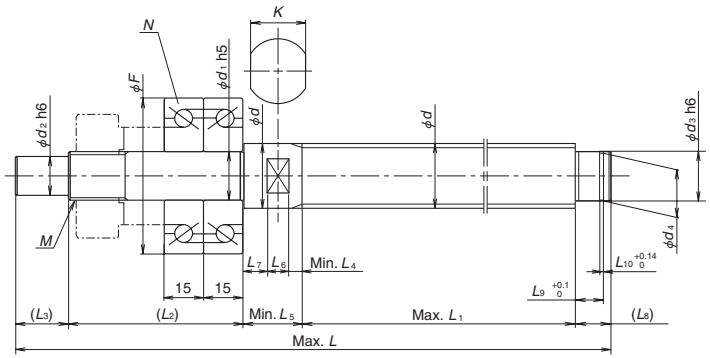
6. Handling Precautions

Maximum operating temperature: 80°C

If using NSK K1, operating temperature should not exceed 50°C. Refer to "Designing Precautions" (page B83).







Unit: mm

Model No.	Shaft dia.	Lead	Root dia.	Basic load rating (N)		Ball nut dimensions									Oil hole	
						External dimensions					Bolt hole dimensions					
	d	l	d_r	Dynamic C_a	Static C_{0a}	D	A	H	B	L	W	X	Y	Z	T	d_1
BSL2005	20	5	17.2	10 500	16 200	36	63	38	12	37	49	6.6	11	6.5	6.5	15
BSL2006		6	16.4	14 000	20 000	40	65	42		45	51				6.7	
BSL2505	25	5	22.2	11 700	20 400	40	65	42	12	38	51	6.6	11	6.5	7.1	20
BSL2506		6	21.4	15 700	25 400	43	69	45		44	55				6.3	
BSL2508		8	20.5	20 100	29 900	46	72	48		55	58				6.5	
BSL2510		10	20.5	20 000	29 800	46	72	48		65	58				6	
BSL3210	32	10	26.4	32 500	51 800	61	93	63	18	68	76	9	14	8.5	10	25
BSL3212		12		32 400	51 600					77						

Notes: 1. The right turn screw is the standard. Please consult NSK for left turn screw.
2. Shaft dimensions are for reference.

Shaft configuration and dimensions (reference)																					
Shaft dimension																		Exclusive bearing N		Basic dynamic load rating	Permissible axial load
d_2	d_3	d_4	L (max.)	L_1 (max.)	L_2	L_3	L_4 (min.)	L_5 (min.)	L_6	L_7	L_8	L_9	L_{10}	K	M	Bearing reference number	F	C_a	(N)
12	15	$14.3^{0}_{-0.11}$	500	500	66	20	3	20	8	9	14	10.15	1.15	17	M15×1.0	15TAC47C	47	21 900	26 600
							4	21											
15	20	$19^{0}_{-0.21}$	700	700	71	27	3	27	10	14	19	15.35	1.35	22	M20×1.0	20TAC62C	62	28 500	40 500
							4	28											
							5	29											
							5	29											
20	25	$23.9^{0}_{-0.21}$	1 000	800	71	33	6	33	12	15	20	16.35	1.35	27	M25×1.5	25TAC62C	62	28 500	40 500
							7	34											

3. Shaft length L_1 and shaft entire length L are the maximum length.
When L becomes the same length as the L_1, the thread is all screw specification.

B-3-3.5.1 HTF-SRC Type for High-Load Drives

1. Features

● High-speed operation and low noise

The SRC recirculation system contributes to more than twice the feed speed (d·n value: 140 000 and 160 000) and the noise level of less than 8 to 10dB(A) (half to 1/3 of noise) compared with the HTF type.

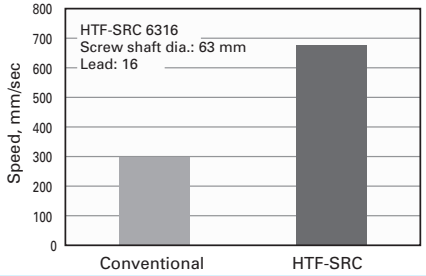


Fig. 1 Feed speed comparison

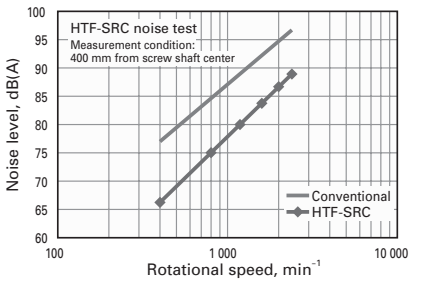


Fig. 2 Noise level comparison

2. Specifications

(1) Ball recirculation system

The SRC recirculation system picks up balls in the direction they are moving, and thus contributed to high-speed, low-noise operation. Structure of the recirculation system is as follows.

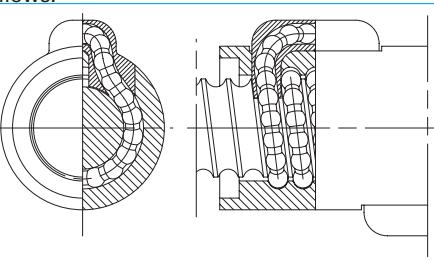


Fig. 3 Structure of SRC recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	Ct7
Axial play	S,0.020 mm or less; N,0.050 mm or less

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Table 2 Allowable d·n value and the criterion of maximum rotational speed

Lead	14, 16 mm	20, 25 mm☆
Allowable d·n value	160 000 or less	140 000 or less
Criterion of maximum rotational speed	3 225 min^{-1}	

d·n value: shaft dia. d [mm] × rotational speed n [min^{-1}]

☆ Allowable d · n value for HTF-SRC5020: 160 000

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Ball retaining piece NSK S1™

The NSK S1, resin retainers between the balls, significantly extend ball screw durability to the moment load.

(5) Other

Please consult NSK for special requests, such as the addition of a recirculation circuit to increase the load capacity, or the arrangement of all recirculation circuits on the same phase of ball nut circumference.

3. Design Precautions

The HTF-SRC type is designed to distribute the load uniformly to the load balls for high-load drive mechanism. We recommend installing the ball screws in the way shown below for the full use of this characteristic.

In addition, we will make full analysis when you use the HTF-SRC type under extreme conditions such as application of extremely high load or operating in short stroke. Contact NSK about operating conditions (See page B533).

When designing the screw shaft end, one end of the screw shaft must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- Cut the ball groove through to the shaft end.
- The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

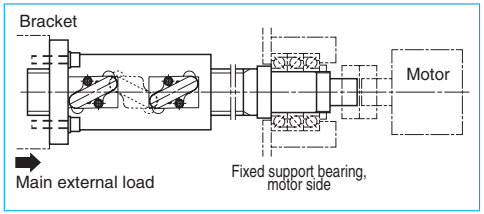



Fig. 4 Recommended installing direction of high-load drive ball screw

4. Product categories

The HTF-SRC type has a model as follows.

Table 3 HTF-SRC type product categories

Nut model	Shape	Flange shape	Preload system
HTF-SRC		Flanged Circular I	Non-preload Slight axial play

5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

◇Model number

HTF-SRC 63 20 - 7.5

- HTF-SRC: Nut model: HTF-SRC
- 63: Screw shaft diameter (mm)
- 20: Lead (mm)
- 7.5: Effective turns of balls

◇Reference number for ball screw

W 63 04 - ** RC SP - C7 S 20

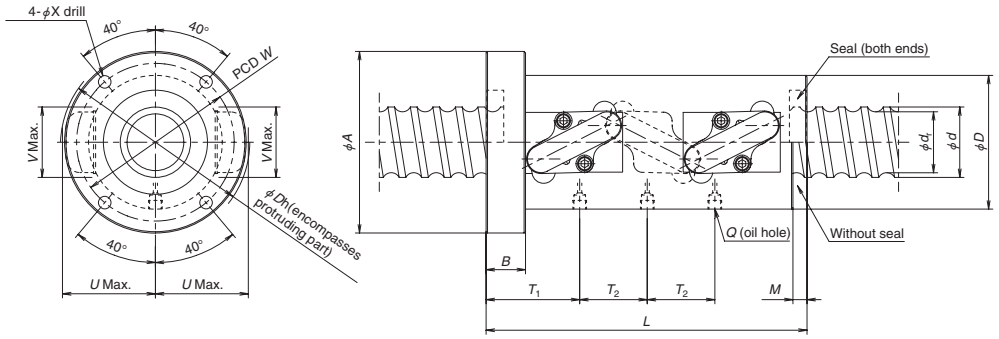
- W: Product code
- 63: Screw shaft diameter (mm)
- 04: Effective threaded length (in the unit of 100 mm)
- **: NSK design serial number
- RC: SRC recirculation system
- SP: Ball retaining pieces NSK S1 specification
- C7: Accuracy grade: C7 (Ct7) (page B37 to B42)
- S: Axial play code: S, N (page B20)
- 20: Lead (mm)

6. Handling Precautions


Maximum operating temperature: 70°C (at outside diameter of ball nut)

The lubricant deteriorates, operating temperature is recommended 60°C and under.

Please consult NSK in the case of a short stroke operation less than or equal to four times the length of the ball screw lead.



Nut model Ⅰ

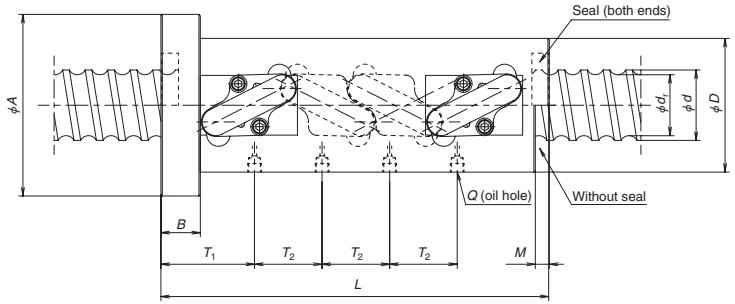


Nut model Ⅱ

Unit: mm

Model No.	Lead	Shaft dia.	Root dia.	Effective ball turns Turns × Circuits	Nut model	Basic load rating (kN)		Ball nut dimensions									Allowable axial load (kN) Mounting	Allowable axial load (kN) *See below
						Dynamic	Static										[A] Recommended	[B]
	l	*d*	*d*r			*C*a	*C*0a	*D*	*A*	*B*	*L*	*M*	*W*	*X*	*U*	*V*	*D*h	*Q*	*T*1	*T*2		
HTF-SRC5014-7.5	14	50	41.6	2.5×3	Ⅰ	264	623	80	114	28	202	10	97	9	54.5	46	111	M6×1	69	42	98.5	75.7
HTF-SRC5016-7.5	16	50	39	2.5×3	Ⅰ	383	818	95	129	28	228	10	112	9	66	50	134	Rc1/8	74.5	48	124.8	106.2
HTF-SRC6316-7.5	16	63	52	2.5×3	Ⅰ	429	1 050	105	139	28	228	10	122	9	72.5	50	148	Rc1/8	74.5	48	174.2	139.9
HTF-SRC6316-10	16	63	52	2.5×4	Ⅱ	549	1 410	105	139	28	276	10	122	9	72.5	50	148	Rc1/8	74.5	48	202.3	152.4
HTF-SRC6316-10.5	16	63	52	3.5×3	Ⅰ	562	1 450	105	139	28	276	10	122	9	72.5	50	148	Rc1/8	74.5	64	210.6	157.9
HTF-SRC6316-14	16	63	52	3.5×4	Ⅱ	720	1 930	105	139	28	340	10	122	9	72.5	50	148	Rc1/8	74.5	64	233.8	165.5
HTF-SRC8016-10.5	16	80	69	3.5×3	Ⅰ	627	1 870	120	154	32	278	10	137	9	80	60	165	Rc1/8	78.5	64	305.7	209.4
HTF-SRC8016-14	16	80	69	3.5×4	Ⅱ	802	2 490	120	154	32	342	10	137	9	80	60	165	Rc1/8	78.5	64	351.2	220.9
HTF-SRC5020-7.5	20	50	39	2.5×3	Ⅰ	383	818	95	129	28	268	10	112	9	66	50	135	Rc1/8	83.5	60	117.7	98.5
HTF-SRC6320-7.5	20	63	49	2.5×3	Ⅰ	572	1 280	117	157	32	279	12	137	11	80	62	163	Rc1/8	90	60	202.2	170
HTF-SRC6320-10	20	63	49	2.5×4	Ⅱ	732	1 710	117	157	32	339	12	137	11	80	62	163	Rc1/8	90	60	227.7	183.2
HTF-SRC8020-10.5	20	80	66	3.5×3	Ⅰ	838	2 300	130	170	32	339	12	150	11	88	64	180	Rc1/8	90	80	350	255.5
HTF-SRC10020-10.5	20	100	86	3.5×3	Ⅰ	936	2 910	145	185	32	339	12	165	11	97	78	199	Rc1/8	90	80	497.1	325.6
HTF-SRC10020-14	20	100	86	3.5×4	Ⅱ	1 200	3 890	145	185	32	419	12	165	11	97	78	199	Rc1/8	90	80	572.1	341.8
HTF-SRC12020-7.5	20	120	106	2.5×3	Ⅰ	776	2 550	173	213	40	287	12	193	11	109.5	88	229	Rc1/8	98	60	481.6	365
HTF-SRC12020-10	20	120	106	2.5×4	Ⅱ	994	3 400	173	213	40	347	12	193	11	109.5	88	229	Rc1/8	98	60	589.3	404.8
HTF-SRC6325-10.5	25	63	49	3.5×3	Ⅰ	750	1 770	117	157	32	405	12	137	11	81.5	61	167	Rc1/8	101.75	100	220.4	174.1
HTF-SRC8025-7.5	25	80	63	2.5×3	Ⅰ	790	1 960	145	185	40	347	17	165	11	99.5	73	202	Rc1/8	111.75	75	319.3	268.3
HTF-SRC10025-10.5	25	100	83	3.5×3	Ⅰ	1 200	3 430	159	199	40	422	17	179	11	108	79	220	Rc1/8	111.75	100	539.8	384.5
HTF-SRC10025-14	25	100	83	3.5×4	Ⅱ	1 540	4 580	159	199	40	522	17	179	11	108	79	220	Rc1/8	111.75	100	603.3	402.2
HTF-SRC12025-10.5	25	120	103	3.5×3	Ⅰ	1 300	4 200	173	213	40	421	17	193	11	116	92	238	Rc1/8	111.25	100	713.4	466.6
HTF-SRC12025-14	25	120	103	3.5×4	Ⅱ	1 660	5 600	173	213	40	521	17	193	11	116	92	238	Rc1/8	111.25	100	815.4	488.3

Remarks: 1. The ball nut length with no seals is shorter by M than that of a ball nut with seals.
2. Please consult NSK if load exceeds the allowable axial load (Fa max.).
3. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
4. The allowable axial load is a value in the case of S clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.



B-3-3.5.2 HTF-SRD Type for High-Load Drives

This product is being applied for a patent.

1. Features

● High-speed operation and low noise

Used with end deflectors, HTF-SRD type ball screws achieve the maximum feed speed of 1 600 mm/s. The ball nut body surface is completely round, thus enabling well balanced ball nut rotation.

Double start thread structure which has more recirculation circuits, and large diameter balls contribute to have high load carrying capacity.

● Low noise and compact design

End deflector system using a ball scooping mechanism in the direction of screw spiral offers smoother ball recirculation system, thus contributing to less than half the noise level compared with existing ball screws equipped with a return tube.

Compact, high-performance seal is available. Nut outside diameter is compact compare with the return tube recirculation system.

Also, compact, thin plastic seal is available. Nut outside diameter is compact compare with the return tube recirculation system.

2. Specifications

(1) Ball recirculation system

End-deflector recirculation system has features of high-speed, low-noise operation, and compact ball nut. The structure of recirculation parts are as follows.

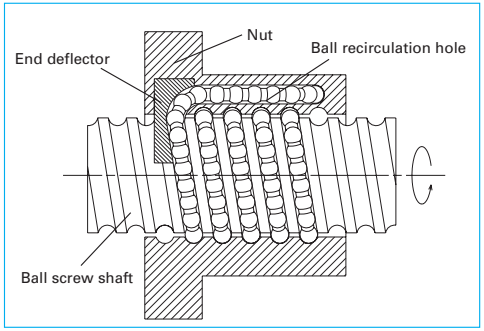


Fig. 1 Structure of End-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	Ct7
Axial play	S, 0.020 mm or less; N, 0.050 mm or less

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Table 2 Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value	120 000 or less
Criterion of maximum rotational speed	2 400 min^{-1}

d·n value: shaft dia. d [mm] × rotational speed n [min^{-1}]

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Ball retaining piece NSK S1™

The NSK S1, resin retainers between the balls, significantly extend ball screw durability to the moment load.

3. Design Precautions

The HTF-SRD type is designed to distribute the load uniformly to the load balls for high-load drive mechanism. We recommend installing the ball screws in the way shown below for the full use of this characteristic.

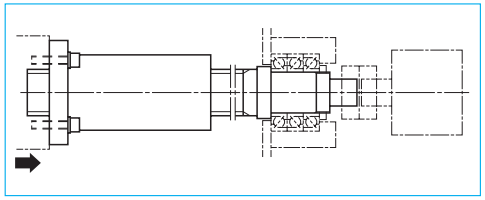


Fig. 2 Recommended installing direction of high-load drives ball screw

In addition, we will make full analysis when you use the HTF-SRD type under extreme conditions such as application of extremely high load or operating in short stroke. Contact NSK about operating conditions (see page B533).

When designing the screw shaft end, one end of the screw shaft must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.


- Cut the ball groove through to the shaft end.
- The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HTF-SRD type has a model as follows.

Table 3 HTF-SRD type product categories

Nut model	Shape	Flange shape	Preload system
HTF-SRD		Circular Ⅲ	Non-preload Slight axial play

5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

◇Model number

HTF-SRD 50 40 - 6E

- HTF-SRD: Nut model: HTF-SRD
- 50: Screw shaft diameter (mm)
- 40: Lead (mm)
- 6E: Effective turns of balls

◇Reference number for ball screw

W 50 18 - ** SS SP X - C7 N 40

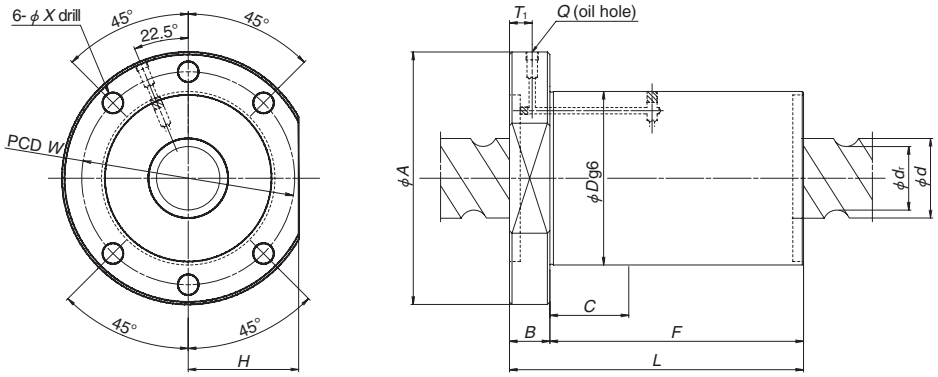
- W: Product code
- 50: Screw shaft diameter (mm)
- 18: Effective threaded length (in the unit of 100 mm)
- **: NSK design serial number
- SS: End-deflector recirculation system
- SP: Ball retaining pieces NSK S1 specification
- X: Ball screw specification/appearance
- C7: Accuracy grade: C7 (Ct7) (page B37 to B42)
- N: Axial play code: S, N (page B20)
- 40: Lead (mm)

6. Handling Precautions


Maximum operating temperature: 70°C
(at outside diameter of ball nut)

The lubricant deteriorates, operating temperature is recommended 60°C and under.

Please consult NSK in the case of a short stroke operation less than or equal to four times the length of the ball screw lead.



Nut model Ⅰ

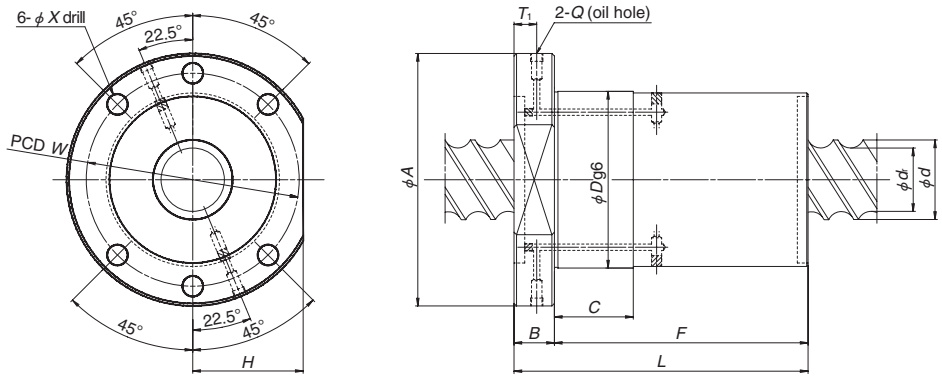


Nut model Ⅱ

Unit: mm

Model No.	Lead	Shaft dia.	Root dia.	Nut model	Basic load rating (kN)		Ball nut dimensions			Allowable axial load (kN) Mounting *See below	
					Dynamic	Static				[A] Recommended	[B]
	l	*d*	*dr*		*Ca*	*C0a*	*D*	*A*	*B*		
HTF-SRD6332-4E	32	63	49	Ⅰ	292	590	140	190	32		
HTF-SRD5040-6E	40	50	39	Ⅱ	243	491	115	165	28		
HTF-SRD5040-8E	40	50	39	Ⅱ	319	679	115	165	28		
HTF-SRD6340-6E	40	63	49	Ⅱ	363	768	140	200	32		
HTF-SRD6340-8E	40	63	49	Ⅱ	476	1 060	140	200	32		
HTF-SRD5050-6E	50	50	39	Ⅱ	243	491	115	165	28		
HTF-SRD5050-8E	50	50	39	Ⅱ	319	679	115	165	28		
HTF-SRD8050-6E	50	80	63	Ⅱ	502	1 180	175	250	40		
HTF-SRD8050-8E	50	80	63	Ⅱ	658	1 630	175	250	40		
HTF-SRD6360-6E	60	63	49	Ⅱ	363	768	140	200	32		
HTF-SRD6360-8E	60	63	49	Ⅱ	476	1 060	140	200	32		
HTF-SRD10060-6E	60	100	83	Ⅱ	583	1 490	195	270	40		
HTF-SRD10060-8E	60	100	83	Ⅱ	765	2 060	195	270	40		
HTF-SRD12070-6E	70	120	103	Ⅱ	630	1 810	210	285	50		
HTF-SRD12070-8E	70	120	103	Ⅱ	826	2 520	210	285	50		
HTF-SRD8080-6E	80	80	63	Ⅱ	502	1 180	175	250	40		
HTF-SRD8080-8E	80	80	63	Ⅱ	658	1 630	175	250	40		
HTF-SRD100100-6E	100	100	83	Ⅱ	583	1 490	195	270	40		
HTF-SRD100100-8E	100	100	83	Ⅱ	765	2 060	195	270	40		
HTF-SRD80120-4E	120	80	63	Ⅱ	337	751	175	250	40		
HTF-SRD120120-6E	120	120	103	Ⅱ	630	1 810	210	285	50		
HTF-SRD120120-8E	120	120	103	Ⅱ	826	2 520	210	285	50		

F	*C*	*L*	*H*	*W*	*X*	*Q*	*T*1	[A] Recommended	[B]
144	—	176	85	165	14	Rc1/8	22	109.7	105.9
131	131	159	72.5	140	14	Rc1/8	18	101	94.9
171	171	199	72.5	140	14	Rc1/8	18	119.7	109.6
131	131	163	90	170	18	Rc1/8	22	170	160.3
171	171	203	90	170	18	Rc1/8	22	205.2	188.2
159	159	187	72.5	140	14	Rc1/8	18	98.1	91.5
209	209	237	72.5	140	14	Rc1/8	18	113.6	103.1
154	154	194	110	210	22	Rc1/8	30	265.3	249.7
204	204	244	110	210	22	Rc1/8	30	322.3	294.5
188	188	220	90	170	18	Rc1/8	22	159.9	148.3
248	248	280	90	170	18	Rc1/8	22	186	167.5
185	185	225	122	235	22	Rc1/8	30	339.7	313.2
245	245	285	122	235	22	Rc1/8	30	415.8	368.3
210	210	260	130	250	22	Rc1/8	40	416.5	373
280	280	330	130	250	22	Rc1/8	40	519.4	440
244	244	284	110	210	22	Rc1/8	30	245.6	226.6
324	100	364	110	210	22	Rc1/8	30	286.5	256.1
301	100	341	122	235	22	Rc1/8	30	318.2	284.5
401	100	441	122	235	22	Rc1/8	30	371.8	318.4
243	243	283	110	210	22	Rc1/8	30	171.7	162.5
356	100	406	130	250	22	Rc1/8	40	389	333.4
476	100	526	130	250	22	Rc1/8	40	463.4	373.9

Remarks: 1. Please consult NSK if load exceeds the allowable axial load (Fa max.).
2. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
3. The allowable axial load is a value in the case of S clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.
4. When F and C dimensions are the same, the diameter of whole area of F dimension is ϕ Dg6



B-3-3.5.3 HTF Type for High-Load Drives

This product is being applied for a patent.

1. Features

● High load carrying capacity

Has an ideal design to bear heavy load. It significantly enhances load rating as well as maximum permissible load.

● Respond to various shaft end configuration

Additional ball screw shaft machining is not required. HTF type responds to various shaft ends that convey high torque.

HTF type can be used with: involute spline (JIS B 1603), straight sided spline (JIS B 1601), key seat, etc.

2. Specifications

(1) Ball recirculation system

Structure of recirculation system is shown in **Fig. 1**.

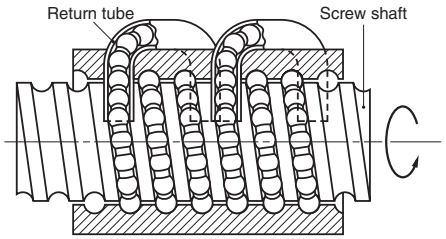


Fig. 1 Structure of return tube recirculation system

(2) Accuracy grade and axial play

The allowable standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	Ct7
Axial play	S, 0.020 mm or under; N, 0.050 mm or under

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below. For higher-speed operation, HTF-SRC type is recommend (See page B511).

Table 2 Allowable d•n value and the criterion of maximum rotational speed

Lead		– 20 mm	25 mm	30 – 32 mm
Allowable d·n value	Standard specification	70 000 or less	70 000 or less	50 000 or less
	High-speed specification	10 0000 or less	–	–
Criterion of maximum rotational speed		3 125 min^{-1}		

d•n value: shaft dia. d [mm] × rotational speed n [min^{-1}]

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Ball retaining piece NSK S1™

The NSK S1, resin retainers between the balls, significantly extend ball screw durability to the moment load.

(5) Other

Please consult NSK for special requests, such as the addition of a recirculation circuit to increase the load capacity, or the arrangement of all recirculation circuits on the same phase of ball nut circumference.

3. Design precautions

For designing shaft end configuration, you should take into account that the HTF type ball screws are dedicated to high-load drives.

The HTF type is designed to distribute the load uniformly to the load balls for high load drive mechanism.

We recommend installing the ball screws in the way shown in **Fig. 2** for the full use of this characteristic. In addition, we will make full analysis when you use the HTF type under extreme conditions such as application of extremely high load or operating in short stroke. Contact NSK about operating conditions (See page B533).

When designing the screw shaft end, the one end shall be cut-through and shaft end dimension must be less than the root diameter of ball groove. If not, the nut cannot be assembled.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HTF type has a model as follows.

Table 3 HTF type product categories

Nut model	Shape	Flange shape	Preload system
HTF		Flanged Circular I	Non-preloaded Slight axial play

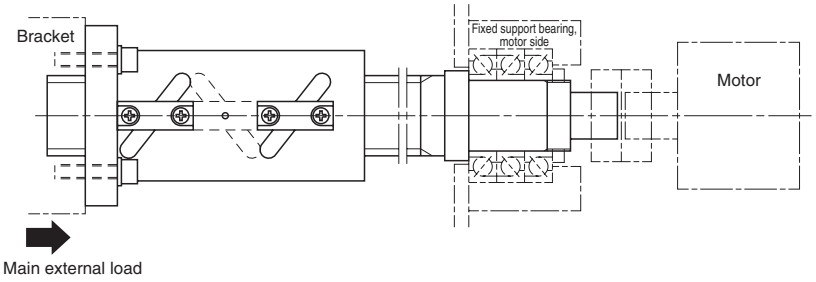


Fig. 2 Recommended installing direction of ball screws for high-load drives

5. Structure of model number and reference number

A structure of "Model number" and "Reference number for ball screw" are as follows.

◇Model number

HTF 63 20 - 7.5

- HTF: Nut model: HTF
- 63: Screw shaft diameter (mm)
- 20: Lead (mm)
- 7.5: Effective turns of balls

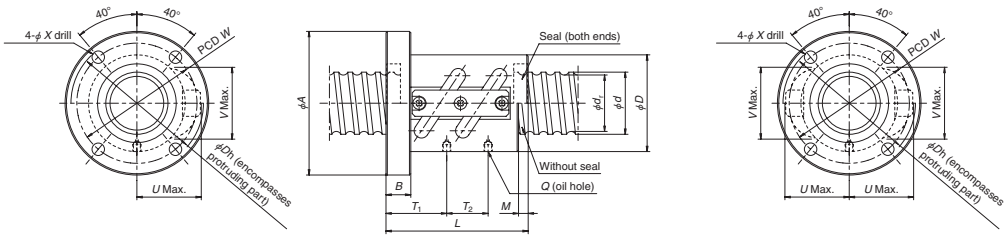
◇Reference number for ball screw

W 63 18 - ** **SP - C7 N 20**


- W: Product code
- 63: Screw shaft diameter (mm)
- 18: Effective threaded length (in the unit of 100 mm)
- **: Design serial number
- SP: Ball retaining pieces NSK S1 specification
- C7: Accuracy grade: C7 (Ct7) (page B37 to B42)
- N: Axial play code: S, N (page B20)
- 20: Lead (mm)

6. Handling precautions


Maximum operating temperature : 70°C
(at outside diameter of all nut)
The lubricant deteriorates, operating temperature is recommended 60°C and under.
Please consult NSK in the case of a short stroke operation less than or equal to four times the length of the ball screw lead.



Nut model Ⅰ

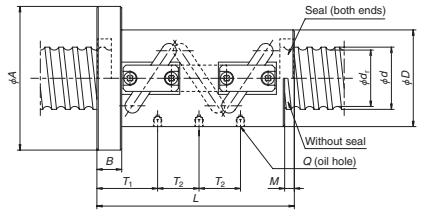

Nut model Ⅱ

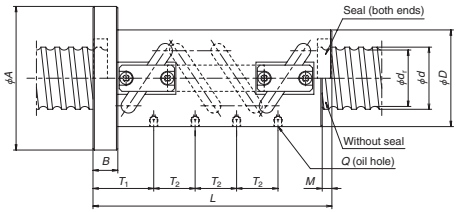



Nut model Ⅲ


Unit: mm

Model No.	Lead	Shaft dia.	Root dia.	Effective ball turns Turns × Circuits	Nut model	Basic load rating (kN)		Ball nut dimensions								Allowable axial load (kN)	
						Dynamic	Static									Mounting	*See below
	l	*d*	*d*r			*C*a	*C*0a	*D*	*A*	*B*	*L*	*M*	*W*	*X*	*U*	*V*	Dh	*Q*	*T*1	*T*2	[A] Recommended	[B]
HTF3210-5	10	32	25.6	2.5×2	Ⅰ	88.7	169	58	92	18	103	7	75	9	40.5	42	82	M6×1	36.5	30	30.9	28.3
HTF3610-5	10	36	29.6	2.5×2	Ⅰ	96.1	191	62	96	18	103	7	79	9	43	45	87	M6×1	36.5	30	34.9	31.8
HTF4010-7.5	10	40	33.6	2.5×3	Ⅱ	149	344	66	100	18	143	7	83	9	45	48	91	M6×1	46.5	30	56.2	45.3
HTF4510-7.5	10	45	38.6	2.5×3	Ⅱ	158	386	70	104	18	143	7	87	9	47	52	95	M6×1	46.5	30	65.7	51.3
HTF4510-10	10	45	38.6	2.5×4	Ⅲ	203	514	70	104	18	173	7	87	9	47	52	95	M6×1	46.5	30	78.2	56.4
HTF5010-7.5	10	50	43.6	2.5×3	Ⅱ	166	435	75	109	18	143	7	92	9	49	57	99	M6×1	46.5	30	76.2	58.4
HTF5010-10	10	50	43.6	2.5×4	Ⅲ	213	580	75	109	18	173	7	92	9	49	57	99	M6×1	46.5	30	91.9	64.4
HTF5510-7.5	10	55	48.6	2.5×3	Ⅱ	173	477	80	114	18	143	7	97	9	51.5	62	104	M6×1	46.5	30	85.7	64.7
HTF5510-10	10	55	48.6	2.5×4	Ⅲ	222	636	80	114	18	173	7	97	9	51.5	62	104	M6×1	46.5	30	104.7	71.6
HTF3612-5	12	36	29	2.5×2	Ⅰ	112	228	66	100	22	123	8	83	9	46.5	46	94	M6×1	44	36	40.1	36.7
HTF4012-7.5	12	40	33	2.5×3	Ⅱ	184	422	70	104	22	171	8	87	9	47.5	50	96	M6×1	56	36	58.9	49.1
HTF4512-7.5	12	45	38	2.5×3	Ⅱ	195	473	72	106	22	171	8	89	9	49.5	54	100	M6×1	56	36	71.7	55.7
HTF5012-7.5	12	50	43	2.5×3	Ⅱ	205	525	77	111	22	171	8	94	9	52	59	105	M6×1	56	36	82.9	63.2
HTF5012-10	12	50	43	2.5×4	Ⅲ	263	700	77	111	22	207	8	94	9	52	59	105	M6×1	56	36	98.3	68.9
HTF5512-7.5	12	55	48	2.5×3	Ⅱ	214	586	82	116	22	171	8	99	9	54.5	63	110	M6×1	56	36	94.4	70.6
HTF5512-10	12	55	48	2.5×4	Ⅲ	274	781	82	116	22	207	8	99	9	54.5	63	110	M6×1	56	36	113.3	77.3
HTF6312-7.5	12	63	56	2.5×3	Ⅱ	227	668	92	126	22	171	8	109	9	58.5	70	118	M6×1	56	36	111.5	83.9
HTF6312-10	12	63	56	2.5×4	Ⅲ	290	891	92	126	22	207	8	109	9	58.5	70	118	M6×1	56	36	135.8	92.6

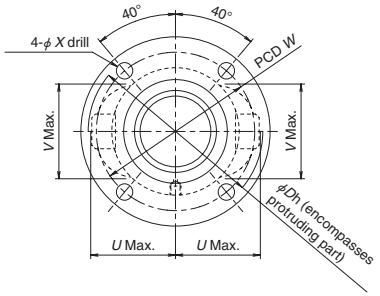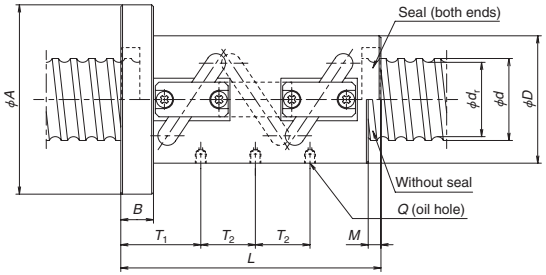
Remarks: 1. The ball nut length with no seals is shorter by M than that of a ball nut with seals.
2. Please consult NSK if load exceeds the allowable axial load (Fa max.).
3. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
4. The allowable axial load is a value in the case of S clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.







Nut model Ⅱ

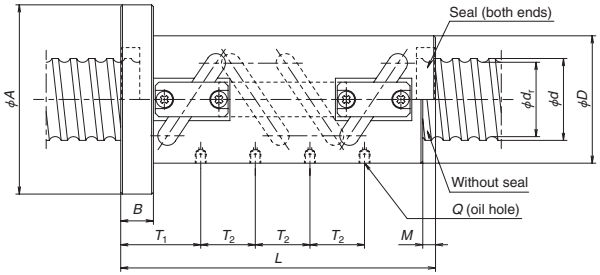


Nut model Ⅲ


Unit: mm


Model No.	Lead	Shaft dia.	Root dia.	Effective ball turns Turns × Circuits	Nut model	Basic load rating (kN)		D	A	B
						Dynamic	Static			
	l	*d*	d_r			C_a	C_{0a}			
HTF5014-7.5	14	50	41.7	2.5×3	Ⅱ	264	623	80	114	28
HTF5514-7.5	14	55	46.7	2.5×3	Ⅱ	270	696	85	119	28
HTF6314-7.5	14	63	54.7	2.5×3	Ⅱ	291	800	94	128	28
HTF6314-10	14	63	54.7	2.5×4	Ⅲ	373	1 070	94	128	28
HTF8014-7.5	14	80	71.7	2.5×3	Ⅱ	327	1 020	116	150	28
HTF8014-10	14	80	71.7	2.5×4	Ⅲ	418	1 360	116	150	28
HTF5016-7.5	16	50	39	2.5×3	Ⅱ	383	818	95	129	28
HTF5516-7.5	16	55	44	2.5×3	Ⅱ	399	922	99	133	28
HTF6316-7.5	16	63	52	2.5×3	Ⅱ	429	1 050	105	139	28
HTF6316-10	16	63	52	2.5×4	Ⅲ	549	1 410	105	139	28
HTF6316-10.5	16	63	52	3.5×3	Ⅱ	562	1 450	105	139	28
HTF6316-14	16	63	52	3.5×4	Ⅲ	720	1 930	105	139	28
HTF8016-7.5	16	80	69	2.5×3	Ⅱ	478	1 340	120	154	32
HTF8016-10	16	80	69	2.5×4	Ⅲ	612	1 790	120	154	32
HTF8016-10.5	16	80	69	3.5×3	Ⅱ	627	1 870	120	154	32
HTF8016-14	16	80	69	3.5×4	Ⅲ	802	2 490	120	154	32
HTF10016-7.5	16	100	89	2.5×3	Ⅱ	529	1 710	145	185	32
HTF10016-10	16	100	89	2.5×4	Ⅲ	677	2 280	145	185	32
HTF12016-7.5	16	120	109	2.5×3	Ⅱ	572	2 050	173	213	32
HTF12016-10	16	120	109	2.5×4	Ⅲ	732	2 730	173	213	32

Ball nut dimensions										Allowable axial load (kN)	
										Mounting	*See below
L	*M*	*W*	*X*	*U*	*V*	*Dh*	*Q*	T_1	T_2	[A] Recommended	[B]
200	10	97	9	55.5	61	112	M6×1	66.5	42	98.6	75.8
200	10	102	9	57.5	65	116	M6×1	66.5	42	112.4	84.7
200	10	111	9	61.5	72	124	M6×1	66.5	42	135.3	100.5
242	10	111	9	61.5	72	124	M6×1	66.5	42	162	109.7
200	10	133	9	72	87	146	M6×1	66.5	42	180	136.2
242	10	133	9	72	87	146	M6×1	66.5	42	220.6	151.1
223	10	112	9	68	66	137	Rc1/8	73	48	124.8	106.2
223	10	116	9	70	70	141	Rc1/8	73	48	143.1	119.2
223	10	122	9	72.5	76	146	Rc1/8	73	48	174.2	139.9
271	10	122	9	72.5	76	146	Rc1/8	73	48	202.3	152.4
271	10	122	9	72.5	76	146	Rc1/8	73	64	210.6	157.9
335	10	122	9	72.5	76	146	Rc1/8	73	64	233.8	165.5
227	10	137	9	80	92	161	Rc1/8	77	48	240.6	182.3
275	10	137	9	80	92	161	Rc1/8	77	48	289.6	200.3
275	10	137	9	80	92	161	Rc1/8	77	64	305.7	209.4
339	10	137	9	80	92	161	Rc1/8	77	64	351.2	220.9
227	10	165	11	91	109	184	Rc1/8	77	48	318.1	242.8
275	10	165	11	91	109	184	Rc1/8	77	48	391.3	270.5
227	10	193	11	104	126	210	Rc1/8	77	48	387.4	305.8
275	10	193	11	104	126	210	Rc1/8	77	48	482.6	346.1

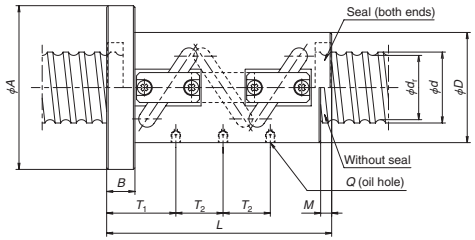
Remarks: 1. The ball nut length with no seals is shorter by M than that of a ball nut with seals.
2. Please consult NSK if load exceeds the allowable axial load (Fa max.).
3. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
4. The allowable axial load is a value in the case of S clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.







Nut model Ⅱ

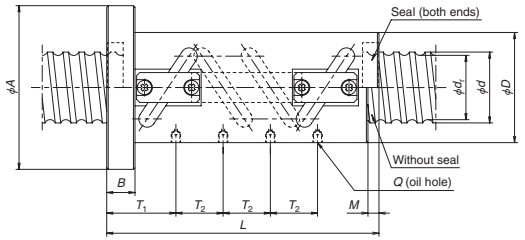


Nut model Ⅲ


Unit: mm


Model No.	Lead	Shaft dia.	Root dia.	Effective ball turns Turns × Circuits	Nut model	Basic load rating (kN)		Ball nut dimensions		
						Dynamic	Static			
	l	*d*	*d*1			*Ca*	*C0a*	*D*	*A*	*B*
HTF6320-7.5	20	63	49	2.5×3	Ⅱ	572	1 320	117	157	32
HTF6320-10	20	63	49	2.5×4	Ⅲ	732	1 760	117	157	32
HTF6320-10.5	20	63	49	3.5×3	Ⅱ	749	1 810	117	157	32
HTF8020-7.5	20	80	66	2.5×3	Ⅱ	639	1 690	130	170	32
HTF8020-10	20	80	66	2.5×4	Ⅲ	818	2 250	130	170	32
HTF8020-10.5	20	80	66	3.5×3	Ⅱ	838	2 300	130	170	32
HTF10020-7.5	20	100	86	2.5×3	Ⅱ	713	2 140	145	185	32
HTF10020-10	20	100	86	2.5×4	Ⅲ	914	2 850	145	185	32
HTF10020-10.5	20	100	86	3.5×3	Ⅱ	935	2 920	145	185	32
HTF10020-14	20	100	86	3.5×4	Ⅲ	1 200	3 890	145	185	32
HTF12020-7.5	20	120	106	2.5×3	Ⅱ	775	2 550	173	213	40
HTF12020-10	20	120	106	2.5×4	Ⅲ	993	3 400	173	213	40
HTF12020-10.5	20	120	106	3.5×3	Ⅱ	1 020	3 530	173	213	40
HTF12020-14	20	120	106	3.5×4	Ⅲ	1 300	4 710	173	213	40
HTF14020-7.5	20	140	126	2.5×3	Ⅱ	829	3 000	204	250	40
HTF14020-10	20	140	126	2.5×4	Ⅲ	1 060	4 000	204	250	40
HTF6325-10.5	25	63	49	3.5×3	Ⅱ	749	1 810	117	157	32
HTF8025-7.5	25	80	64	2.5×3	Ⅱ	829	2 020	145	185	40
HTF10025-7.5	25	100	84	*2.5×3*	Ⅱ	917	2 550	159	199	40
HTF10025-10	25	100	84	2.5×4	Ⅲ	1 170	3 400	159	199	40
HTF10025-10.5	25	100	84	3.5×3	Ⅱ	1 200	3 490	159	199	40
HTF10025-14	25	100	84	3.5×4	Ⅲ	1 540	4 650	159	199	40
HTF12025-7.5	25	120	104	2.5×3	Ⅱ	990	3 080	173	213	40
HTF12025-10	25	120	104	2.5×4	Ⅲ	1 270	4 110	173	213	40
HTF12025-10.5	25	120	104	3.5×3	Ⅱ	1 300	4 200	173	213	40
HTF12025-14	25	120	104	3.5×4	Ⅲ	1 660	5 600	173	213	40
HTF14025-7.5	25	140	124	2.5×3	Ⅱ	1 050	3 610	204	250	40
HTF14025-10	25	140	124	2.5×4	Ⅲ	1 350	4 810	204	250	40
HTF14025-10.5	25	140	124	3.5×3	Ⅱ	1 380	4 910	204	250	40
HTF14025-14	25	140	124	3.5×4	Ⅲ	1 770	6 540	204	250	40
HTF16025-7.5	25	160	144	2.5×3	Ⅱ	1 140	4 140	234	280	40
HTF16025-10	25	160	144	2.5×4	Ⅲ	1 450	5 520	234	280	40

Ball nut dimensions										Allowable axial load (kN)	
										Mounting	*See below
L	*M*	*W*	*X*	*U*	*V*	*D*h	*Q*	*T*1	*T*2	[A] Recommended	[B]
273	12	137	11	83.5	81	168	Rc1/8	88	60	203.6	170.6
333	12	137	11	83.5	81	168	Rc1/8	88	60	229.6	184
333	12	137	11	83.5	81	168	Rc1/8	88	80	239.4	191.1
273	12	150	11	89.5	96	181	Rc1/8	88	60	291.6	228.2
333	12	150	11	89.5	96	181	Rc1/8	88	60	340.2	248.1
333	12	150	11	89.5	96	181	Rc1/8	88	80	352.5	255.9
273	12	165	11	97.5	114	196	Rc1/8	88	60	394.9	289
333	12	165	11	97.5	114	196	Rc1/8	88	60	474.9	315.3
333	12	165	11	97.5	114	196	Rc1/8	90	80	493.5	325.4
413	12	165	11	97.5	114	196	Rc1/8	90	80	566.8	341.6
281	12	193	11	111	130	223	Rc1/8	96	60	479.9	364.9
341	12	193	11	111	130	223	Rc1/8	96	60	586.3	404.7
341	12	193	11	111	131	223	Rc1/8	96	80	618.5	422.6
421	12	193	11	111	131	223	Rc1/8	96	80	722.4	448.8
281	12	226	14	122.5	148	248	Rc1/8	96	60	575	451
341	12	226	14	122.5	148	248	Rc1/8	96	60	712.4	508
398	12	137	11	83.5	83	169	Rc1/8	98.75	100	225.7	177.1
338	17	165	11	102	100	206	Rc1/8	109.25	75	322.7	266.4
338	17	179	11	108.5	118	219	Rc1/8	109.25	75	454.4	347.2
413	17	179	11	108.5	118	219	Rc1/8	109.25	75	532.4	376.6
413	17	179	11	108.5	118	219	Rc1/8	109.25	100	553.2	389.3
513	17	179	11	108.5	118	219	Rc1/8	109.25	100	619.4	406.9
338	17	193	11	116	135	223	Rc1/8	109.25	75	568.3	415.7
413	17	193	11	116	135	223	Rc1/8	109.25	75	678.1	451.5
413	17	193	11	116	134	233	Rc1/8	109.25	100	704.2	465.9
513	17	193	11	116	134	233	Rc1/8	109.25	100	802.1	487.6
338	17	226	14	127.5	153	258	Rc1/8	109.25	75	690.7	516.4
413	17	226	14	127.5	153	258	Rc1/8	109.25	75	842.6	570
413	17	226	14	127.5	153	258	Rc1/8	109.25	100	883.6	592.4
513	17	226	14	127.5	153	258	Rc1/8	109.25	100	1 030.5	627.2
338	17	256	14	138	173	279	Rc1/8	109.25	75	798.7	616.6
413	17	256	14	138	173	279	Rc1/8	109.25	75	984	689.4

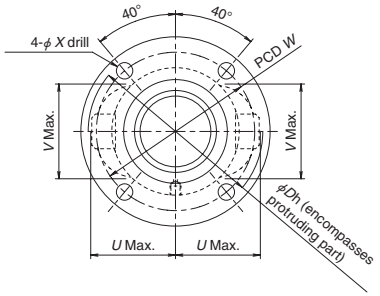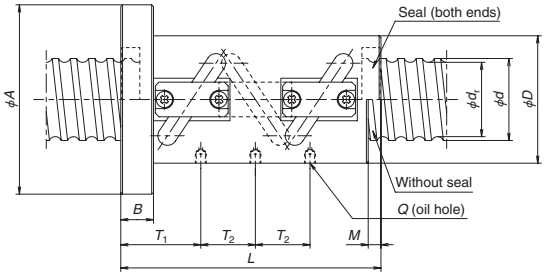
Remarks: 1. The ball nut length with no seals is shorter by M than that of a ball nut with seals.
2. Please consult NSK if load exceeds the allowable axial load (Fa max.).
3. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
4. The allowable axial load is a value in the case of S clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.







Nut model Ⅱ

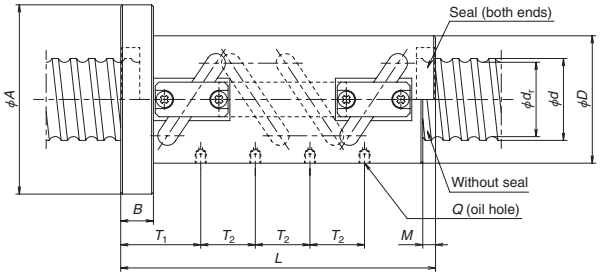


Nut model Ⅲ

Unit: mm

Model No.	Lead	Shaft dia.	Root dia.	Effective ball turns Turns × Circuits	Nut model	Basic load rating (kN)		Ball nut dimensions		
						Dynamic	Static			
	l	*d*	d_r			C_a	C_{0a}	*D*	*A*	*B*
HTF14030-7.5	30	140	121	2.5×3	Ⅱ	1 310	4 110	222	282	50
HTF14030-10	30	140	121	2.5×4	Ⅲ	1 670	5 490	222	282	50
HTF14030-10.5	30	140	121	3.5×3	Ⅱ	1 710	5 710	222	282	50
HTF16030-7.5	30	160	141	2.5×3	Ⅱ	1 400	4 760	234	294	50
HTF16030-10	30	160	141	2.5×4	Ⅲ	1 790	6 340	234	294	50
HTF16030-10.5	30	160	141	3.5×3	Ⅱ	1 830	6 520	234	294	50
HTF20030-7.5	30	200	181	2.5×3	Ⅱ	1 550	5 960	290	350	50
HTF20030-10	30	200	181	2.5×4	Ⅲ	1 980	7 950	290	350	50
HTF14032-7.5	32	140	118	2.5×3	Ⅱ	1 590	4 740	222	296	70
HTF14032-10	32	140	118	2.5×4	Ⅲ	2 040	6 320	222	296	70
HTF14032-10.5	32	140	118	3.5×3	Ⅱ	2 080	6 420	222	296	70
HTF16032-7.5	32	160	138	2.5×3	Ⅱ	1 660	5 370	234	308	70
HTF16032-10	32	160	138	2.5×4	Ⅲ	2 130	7 160	234	308	70
HTF16032-10.5	32	160	138	3.5×3	Ⅱ	2 180	7 460	234	308	70
HTF20032-7.5	32	200	178	2.5×3	Ⅱ	1 840	6 840	290	364	70
HTF20032-10	32	200	178	2.5×4	Ⅲ	2 360	9 120	290	364	70

Ball nut dimensions										Allowable axial load (kN)	
										Mounting	*See below
L	*M*	*W*	*X*	*U*	*V*	*Dh*	*Q*	T_1	T_2	[A] Recommended	[B]
411	22	252	18	139	160	281	Rc1/8	134.5	90	753.5	596.1
501	22	252	18	139	160	281	Rc1/8	134.5	90	894.7	656.4
501	22	252	18	139	160	281	Rc1/8	134.5	120	942.8	686.3
411	22	264	18	148	177	299	Rc1/8	134.5	90	928.4	689.5
501	22	264	18	148	177	299	Rc1/8	134.5	90	1 128.2	758.4
501	22	264	18	148	177	299	Rc1/8	134.5	120	1 175.8	784.5
411	22	320	18	178	212	359	Rc1/8	134.5	90	1 190.1	920.7
501	22	320	18	178	212	359	Rc1/8	134.5	90	1 470.4	1 031.7
465	22	259	22	148	163	299	Rc1/8	166.5	96	856.9	669.1
561	22	259	22	148	163	299	Rc1/8	166.5	96	1 009.6	731.3
561	22	259	22	148	163	299	Rc1/8	166.5	128	1 057.3	760.7
465	22	271	22	152	181	307	Rc1/8	166.5	96	1 043.7	762.9
561	22	271	22	152	181	307	Rc1/8	166.5	96	1 261.7	834.1
561	22	271	22	152	181	307	Rc1/8	166.5	128	1 332.3	871.7
465	22	327	22	182	215	367	Rc1/8	166.5	96	1 359.2	1 034.9
561	22	327	22	182	215	367	Rc1/8	166.5	96	1 670.5	1 151.7

Remarks: 1. The ball nut length with no seals is shorter by M than that of a ball nut with seals.
2. Please consult NSK if load exceeds the allowable axial load (Fa max.).
3. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
4. The allowable axial load is a value in the case of S clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.



NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

Custom-made ball screw

Company name:	Date:
Section:	Person in charge:
Address:	

NSK sales office

Name of machine*1 : *Electric injection molding machine; 200-ton capacity* Application*2 : *Injection axis*


Drawing/rough sketch attached?: ☑ Yes ☐ No

*1 Please specify capacity of the machine in case of injection molding machine or press.
*2 If the application is injection molding machine, please indicate the axis. (Examples: injection axis and clamping axis)

1. Use conditions

Operating conditions	☑ Shaft rotation — Moving nut ☐ Shaft rotation — Moving shaft ☐ Nut rotation — Moving nut ☐ Nut rotation — Moving shaft ☑ Normal operation ☐ Back drive operation ☐ Oscillation	Degree of vibration/impact	☐ Smooth operation without impact ☑ Normal operation ☐ Operation associated with impact or vibration
Direction of load*3	☑ C-C ☐ T-T ☐ T-C ☐ C-T ☐ Other (Refer to figures below.) *See attachment*	Mounting orientation	☑ Horizontal ☐ Vertical (Indicate the direction of gravity.)
Lubricant	☑ Grease ☐ Oil (Brand name: *High-load grease with an extreme pressure additive* Maker:)	How to replenish lubricant	☐ Grease gun ☑ Automatic (cm³/ cycles)
Request for oil hole	☑ NSK recommended ☐ Your request		
Necessity of seals	☑ Yes ☐ No	NSK S1 necessary?	☑ NSK recommended ☐ Not necessary
Environment	Temperature (*40* deg)	Particles / ☐ Yes (Size of particle : a) -0.1, b) over 0.1-0.3, c) over 0.3- , d) Ingredient:) ☑ No particle.	
Surface treatment	☑ Not required ☐ Low-temperature chrome plating ☐ Fluoride low-temperature chrome plating ☐ Other		
Quantity in mass-production	/Month /Year /Lot	Quantity used per machine	*1* pcs./machine

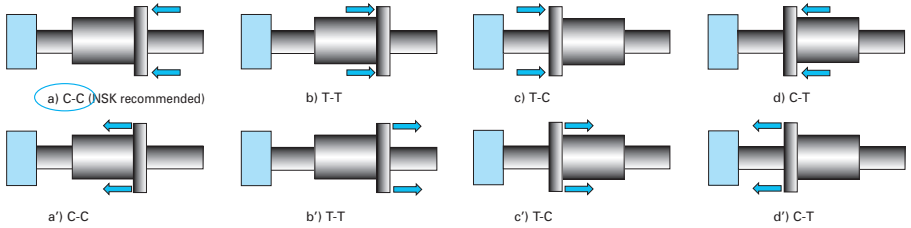*3 Please specify loading direction code on the figures below. (Shaft fixed: , Main load:)




2. Specifications

Shaft diameter	ϕ *63* mm	Lead	*16* mm	Accuracy grade	*Ct7*	Axial play	*0.050 or less* mm max.
Nut model No.	*HTF-SRC 6316-7.5-S1*	Effective turns of balls	*2.5 x 3*	Direction of turn	*right*	Thread length/ Overall shaft length	*800* / *1200*

Special note / Requests

NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

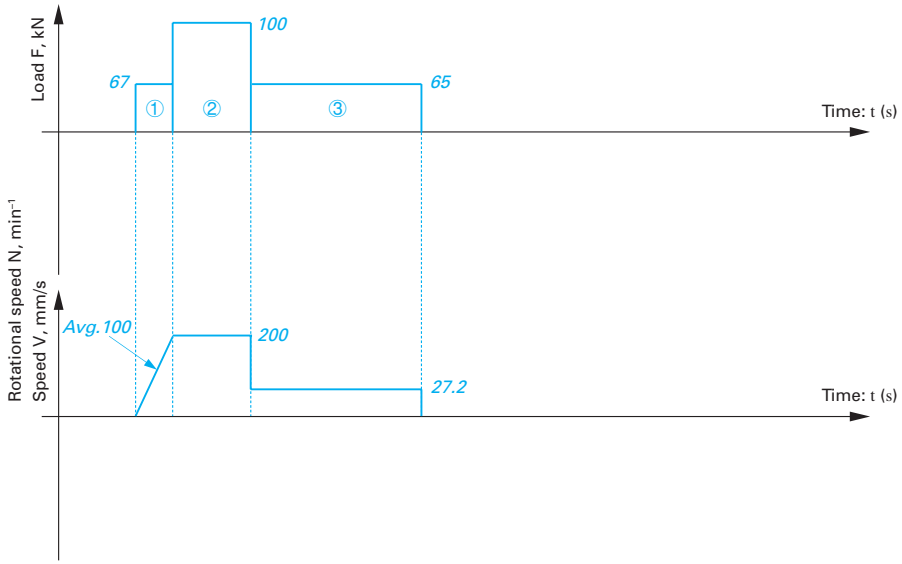3. Load chart (If using multiple ball screws in an axis, fill out the axial load per ball screw.)



	Axial load* F (kN)	Rotational speed or Average speed N (min⁻¹)	Rotational speed or Average speed V (mm/s)	Time t (s)	Stroke St (mm)	Remarks
①	*67*		*100*	*0.1*	*10*	
②	*100*		*200*	*0.5*	*100*	
③	*65*		*27.2*	*7*	*190*	
④	*0*		*0*	*10.4*	*0*	
⑤				*Total: 18*	*Total: 300*	
⑥						
⑦						
⑧						
⑨						
⑩						

Dynamic axial load (Max.)*: *100* (kN) Static axial load (Max.)*(at 0 mm/s): (kN)
Stroke in normal use: *300* (mm) Maximum stroke: *500* (mm)
Cycle time: *18* (s) Required life: *40000* (☑ h or ☐ cycles)
*If using multiple ball screws in an axis, fill out the axial load per ball screw.

4. Plan to conduct the endurance test of the ball screw?

Actual data on the machine → ☐ Yes
→ ☑ N/A → Planning to check endurance (Date: *From the middle of March 20XX*)
→ No (Reason:)

Endurance of the ball screw

(1) Mounting accuracy, load conditions, and lubricating conditions are the main factors affecting the ball screw fatigue life. Therefore, we recommend evaluating the influence of those factors on actual use of your machines.
(2) A temperature rise caused by operational and environmental conditions may reduce the effectiveness of lubricant.

NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

Custom-made ball screw

Company name:	Date:
Section:	Person in charge:
Address:	

NSK sales office

Name of machine*1 : _____ Application*2 : _____


Drawing/rough sketch attached?: ☐ Yes ☐ No

*1 Please specify capacity of the machine in case of injection molding machine or press.
*2 If the application is injection molding machine, please indicate the axis. (Examples: injection axis and clamping axis)

1. Use conditions

Operating conditions	☐ Shaft rotation — Moving nut ☐ Shaft rotation — Moving shaft ☐ Nut rotation — Moving nut ☐ Nut rotation — Moving shaft ☐ Normal operation ☐ Back drive operation ☐ Oscillation	Degree of vibration/impact	☐ Smooth operation without impact ☐ Normal operation ☐ Operation associated with impact or vibration
Direction of load*3	☐ C-C ☐ T-T ☐ T-C ☐ C-T ☐ Other (Refer to figures below.)	Mounting orientation	☐ Horizontal ☐ Vertical (Indicate the direction of gravity.)
Lubricant	☐ Grease ☐ Oil (Brand name: Maker:)	How to replenish lubricant	☐ Grease gun ☐ Automatic (cm³/ cycles)
Request for oil hole	☐ NSK recommended ☐ Your request		
Necessity of seals	☐ Yes ☐ No	NSK S1 necessary?	☐ NSK recommended ☐ Not necessary
Environment	Temperature (deg)	Particles / ☐ Yes (Size of particle : a) -0.1, b) over 0.1-0.3, c) over 0.3- , d) Ingredient:) ☐ No particle.	
Surface treatment	☐ Not required ☐ Low-temperature chrome plating ☐ Fluoride low-temperature chrome plating ☐ Other		
Quantity in mass-production	/Month /Year /Lot	Quantity used per machine	pcs./machine

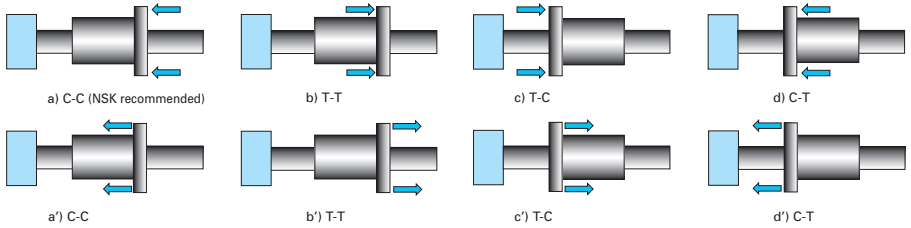*3 Please specify loading direction code on the figures below. (Shaft fixed: , Main load:)




2. Specifications

Shaft diameter	ϕ mm	Lead	mm	Accuracy grade		Axial play	mm max.
Nut model No.		Effective turns of balls		Direction of turn		Thread length/ Overall shaft length	/

Special note / Requests

NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

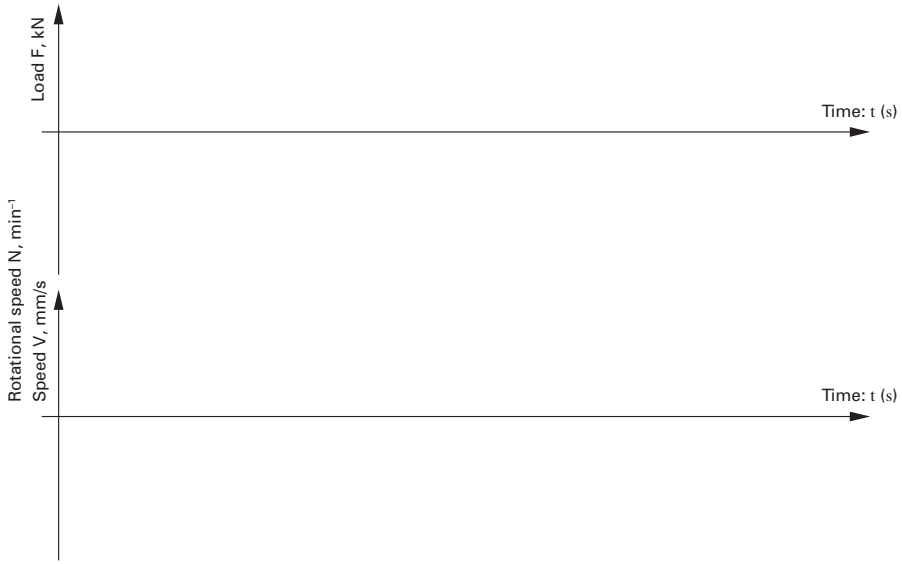3. Load chart (If using multiple ball screws in an axis, fill out the axial load per ball screw.)



	Axial load* F (kN)	Rotational speed or Average speed N (min⁻¹)	V (mm/s)	Time t (s)	Stroke St (mm)	Remarks
①						
②						
③						
④						
⑤						
⑥						
⑦						
⑧						
⑨						
⑩						

Dynamic axial load (Max.)*: (kN) Static axial load (Max.)*(at 0 mm/s): (kN)
Stroke in normal use: (mm) Maximum stroke: (mm)
Cycle time: (s) Required life: (☐ h or ☐ cycles)
*If using multiple ball screws in an axis, fill out the axial load per ball screw.

4. Plan to conduct the endurance test of the ball screw?

Actual data on the machine → ☐ Yes
→ ☐ N/A → Planning to check endurance (Date:)
→ No (Reason:)

Endurance of the ball screw

(1) Mounting accuracy, load conditions, and lubricating conditions are the main factors affecting the ball screw fatigue life. Therefore, we recommend evaluating the influence of those factors on actual use of your machines.
(2) A temperature rise caused by operational and environmental conditions may reduce the effectiveness of lubricant.

B-3-3.6.1 VSS Type for Contaminated Environments

1. Features

● High dust-resistance

Specially profiled screw shaft grooves and high performance seals prevent the entry of fine contaminants. Reduces particle penetration rate to less than 1/15 of existing standard products.

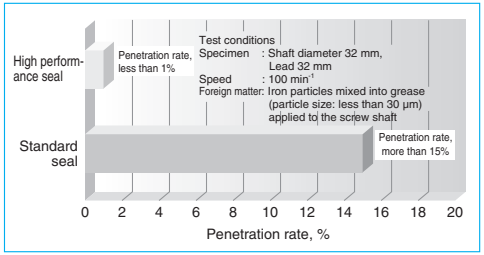


Fig. 1 Particle penetration rate

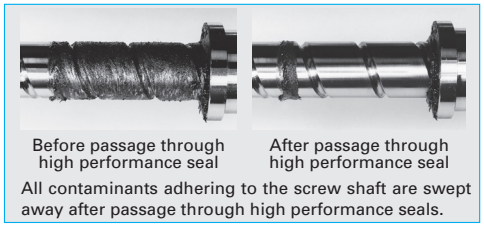


Fig. 2 Contamination before and after particle penetration test

● Long life

High performance seals extend ball screw durability under severely contaminated environments with iron powder.

Extreme durability tests under contaminated environments show the durability of the VSS type extends more than four times longer than our existing type with a standard seal.

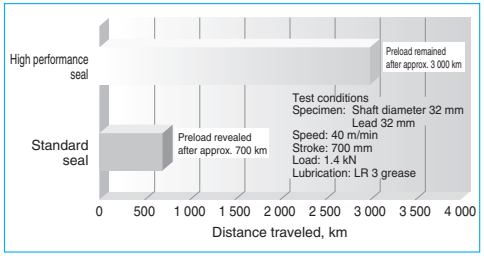


Fig. 3 Extreme durability test results using iron particles

● High speed

For ultimate smoothness of ball recirculation, the internal ball recirculation system enables high-speed operation at a maximum of d·n 150 000. Large lead specifications allow high-speeds of 150 m/min.

● Low-noise

Reduces noise level by more than 6 dB(A) compared with our conventional tube-type ball screws, thereby providing low-noise and good noise tone features.

● Compact size

Ball nut external diameter is up to 25% smaller than our conventional models.

2. Specifications

(1) Ball recirculation system

End-deflector recirculation system has features of high-speed operation with low-noise, and compact ball nut. The structure of recirculation system is shown in **Fig. 4**.

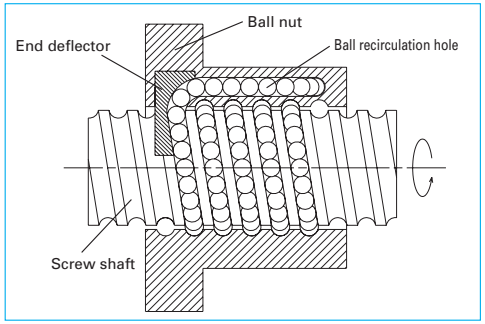


Fig. 4 Structure of end deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	C5
Axial play	Z, 0 mm (preloaded)
	T, 0.005 mm or less; S, 0.020 mm or less

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d·n value: 150 000 or less

Criterion of maximum rotational speed: 3 000 min^{-1}

Note: Please also review critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) High performance seal

High performance seal (Japanese patents: 3646452, 3692203) with special lip that contacts screw shaft cross-section and prevents entry of fine contaminants.

(5) Lubrication unit

Incorporates NSK K1 lubrication unit to sufficiently lubricate the high performance seal lip, reduce friction, and improve durability.

(6) optional

Non-contact metal protector that traces the ball screw grooves and safeguards the seal against high-temperature foreign matter.

3. Design precaution

When designing the screw shaft end, one end of the screw must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- Cut the ball groove through to the shaft end.
- The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

High performance seals may increase torque, which may in turn increase temperature. Please inform NSK about your service conditions using the technical data sheet on page B544.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

◇Model number

VSS 32 10 - 6E

- VSS — Nut model: VSS
- 32 — Screw shaft diameter (mm)
- 10 — Lead (mm)
- 6E — Effective turns of balls

◇Reference number for ball screw

W 36 12 - ** P SS V1 - C5 Z 10

- W — Product code
- 36 — Screw shaft diameter (mm)
- 12 — Effective threaded length (in the unit of 100 mm)
- ** — Design serial number
- P — Preload code: P; P-Preload (page B5)
- SS — End-deflector recirculation system
- V1 — High performance seal V1
- C5 — Accuracy grade: C5 (page B37 to B42)
- Z — Axial play: Z, T, S (page B20)
- 10 — Lead (mm)

5. Handling Precautions

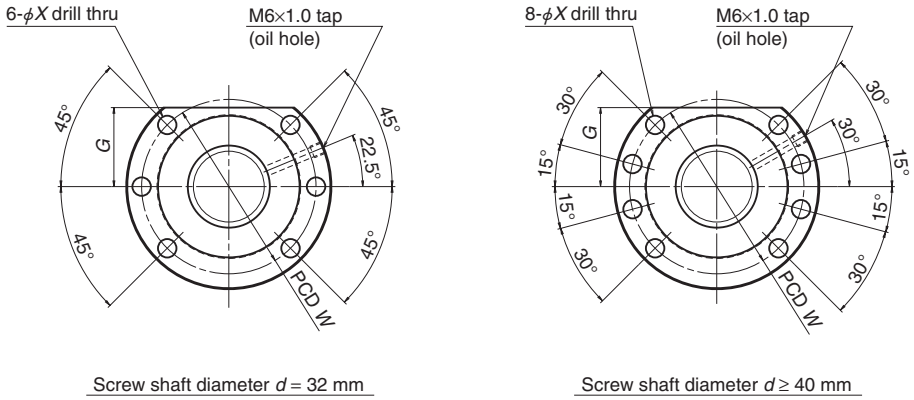
Maximum operating temperature: 50˚C

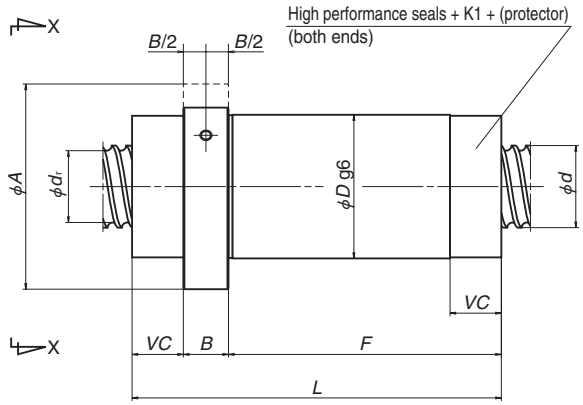
Maximum momentary operating temperature: 80˚C

Chemical precautions: Never expose the ball screw to grease-removing organic solvents such as hexane or thinner. Never immerse the ball screw in kerosene or rust preventive oils which contain kerosene.

The data shown in the catalog are the results of our tests, and no warranty is given to sealing performance on actual usage on machinery. Sealing performance is affected by usage environment and lubrication conditions. Dust covers and other measures to keep machinery free of dust are recommended.

View *X*-*X*





Unit: mm

Model No.	Shaft dia. *d*	Lead *l*	Root dia. d_r	Effective turns of balls	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Axial rigidity *K* (N/μm)
VSS3210-6E	32	10	27.2	6	50 900	110 000	720
VSS3216-5E		16		5	44 300	90 800	600
VSS3220-5E		20		5	43 900	91 200	596
VSS3232-4E		32		4	32 100	65 800	421
VSS4040-4E	40	40	34.4	4	42 900	94 300	513
VSS5050-4E	50	50	44.4	4	47 400	117 000	606

Ball nut dimensions									Maximum shaft length
Nut entire length *L*	Nut outside diameter *D*	Flange outside diameter *A*	Flange width *B*	Nut length *F*	Notch size *G*	Seal installation dimensions *VC*	Bolt hole PCD *W*	Bolt hole dimensions *X*	
132	56	86	18	89.5	34	24.5	71	9	2 800
150				107.5					
169				126.5					
122				79.5					
144	70	100	22	94.5	38.5	27.5	85	9	3 800
164	82	118	22	114.5	46	27.5	100	11	5 000

Notes: 1. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
2. Rigidity in the table is theoretical value obtained from the elastic deformation between screw groove and ball when the preload is 1.5% of the basic dynamic load rating, and axial load is applied to it. Refer to "Technical Description" (page B37) if axial load and preload differs from the conditions above, or when considering change in the deformation of the ball nut itself.
3. Products with axial play may have a partially negative play (preloaded condition) depending on screw length. Refer to "Manufacturing range of effective screw length in combination of accuracy grade and axial play" (page B20).

B-3-3.6.2 Ball Screw with X1 Seals for Contaminated Environments and Grease Retention

1. Features

● Highly dustproof

Particle penetration ratio reduced to less than 1/30 of existing standard seals, thus contributing to longer service life for machine tools.

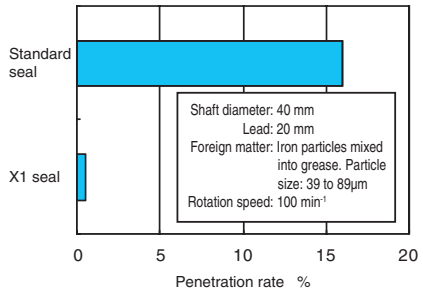


Fig. 1 Results of particle penetration rate test

● Superior grease retention

Automatically adding grease makes it possible to reduce the amount used and keep it from spattering.

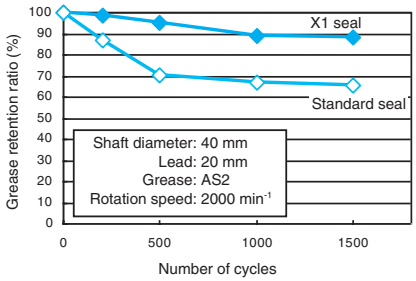


Fig. 2 Results of grease leakage test

● Contact seal with low torque

Optimizing the seal shape reduces torque and enhances seal performance.

2. Specifications

(1) Structure

The ball screw with X1 seals has a double seal structure combining a dustproof seal and a grease-retaining seal.




Fig. 3 Seal structure

(2) Scope of application in NSK Ball Screw series

This series is standard for the following four types.

Ball screws for high-speed machine tools	HMS type	Nut model: ZFRC
	HMD type	Nut model: EM
	BSS type	Nut model: BSS
	Deflector (bridge) type	Nut model: ZFD

For specifications other than the above, please consult NSK. Table 1 shows the minimum nut outer diameter on which X1 seals can be mounted.

Table 1 The minimum nut outer diameter on which X1 seals can be mounted

Shaft diameter: 32 mm	56 mm
Shaft diameter: 40 mm	70 mm (68 mm)
Shaft diameter: 45 mm	75 mm (73 mm)
Shaft diameter: 50 mm	82 mm (78 mm)

Values in parentheses are applicable to the deflector (bridge) type

(3) Accuracy grade / axial play

Table 2 shows standard tolerance classes and axial clearances. Please consult NSK for tolerance classes other than those in the table.

Table 2 Accuracy grade and axial play

Accuracy grade	C3, C5
Axial play	0 mm (preloaded)

(4) Design-related precautions

When designing the screw shaft end, assume that the end of the screw shaft is cut.


The temperature will increase somewhat when torque is applied if an X1 seal is attached. Please inform NSK about your service conditions using the technical data sheet on page B544.


Maximum overall shaft length is 2900 mm.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

The right hand screw is the standard. For specifications on left hand screws, contact NSK.



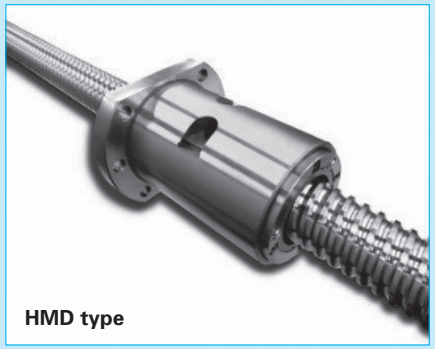

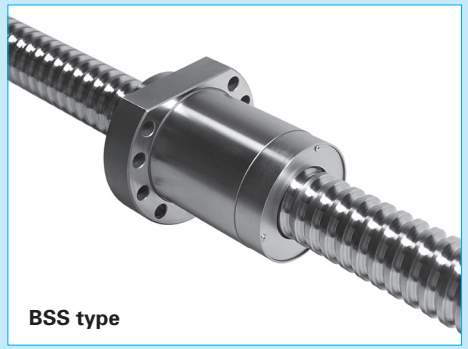

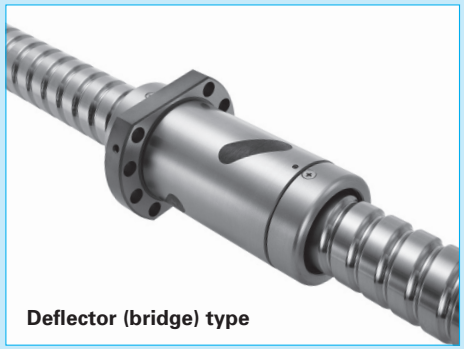


Fig. 4 External appearance

3. Example of reference number

A structure of "Reference number for ball screw" is as follows.

Note: "X1" is added at the end of "nut model code" and "Specifications number".

◇Reference number for ball screw

W4010-＊＊ZMX1-C5Z16

X1 seal equipped type ball screw code

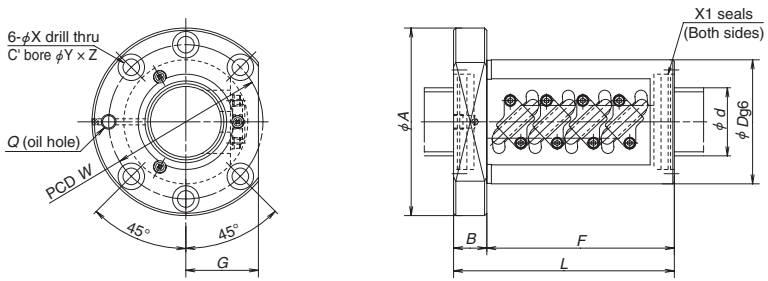
4. Precautions for use

Temperature range for use: Maximum temperature: 60˚C (at outside diameter of ball nut)

Chemicals that should not come to contact:

Do not leave ball screw in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust preventive oil which contains white kerosene.

The data shown in the catalog are the results of our tests, and no warranty is given to sealing performance on actual usage on machinery. Sealing performance is affected by usage environment and lubrication conditions. Dust covers and other measures to keep machinery free of dust are recommended.




HMS type (Nut model : ZFRC)

Applicable dimensions for HMS type

Unit: mm

Model No.	Shaft dia.	Lead	Basic load rating (N)		Nut dimensions										Oil hole
			Dynamic	Static							Bolt holes				
	d	l	C_a	C_{0a}	L	F	B	D	A	G	X	Y	Z	W	Q
ZFRC3205-10	32	5	21 800	56 000	107	87	20	58	85	32	6.6	11	6.5	71	M6×1
ZFRC4010-10	40	10	61 200	137 000	173	151	22	82	124	47	11	17.5	11	102	Rc1/8
ZFRC4012-10		12	71 700	154 000	197	175		86	128	48				106	Rc1/8
ZFRC4508-10	45	8	44 000	118 000	146	124	22	82	124	47	11	17.5	11	102	Rc1/8
ZFRC5010-10	50	10	68 100	174 000	174	151	23	93	135	51	11	17.5	11	113	Rc1/8
ZFRC5012-10		12	91 500	218 000	200	177		100	146	55	14	20	13	122	Rc1/8

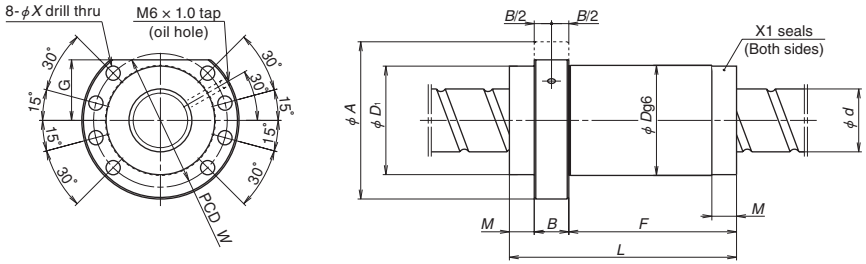


End deflector type (Nut model : BSS)

Applicable dimensions for End deflector type

Unit: mm

Model No.	Shaft dia.	Lead	Basic load rating (N)		Nut dimensions								Bolt holes	
			Dynamic	Static										
	d	l	C_a	C_{0a}	L	F	M	B	D	D_1	A	G	X	W
BSS3205-4E	32	5	16 800	41 700	72	41	19	12	56	55	86	34	9	71
BSS3210-6E		10	50 900	110 000	114	80.5	15.5	18		55.5				
BSS4010-5E	40	10	58 100	130 000	112	73	17	22	70	69	100	38.5	9	85
BSS4020-5E		20	57 400	130 000	159	120	17							
BSS5010-4E	50	10	52 600	129 000	102	63	17	22	82	81	118	46	11	100

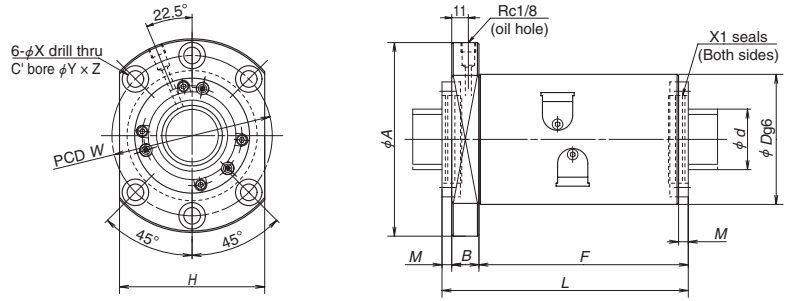


HMD type (Nut model: EM)

Applicable dimensions for HMD type

Unit: mm

Model No.	Shaft dia.	Lead	Basic load rating (N)		Nut dimensions										
			Dynamic	Static									Bolt holes		
	d	l	C_a	C_{0a}	L	F	M	B	D	A	H	X	Y	Z	W
EM4016-4E	40	16	66 900	131 000	172	148	6	18	86	128	96	11	17.5	11	106
EM4020-6E		20	77 900	166 000	164	139	7								
EM4516-4E	45	16	69 900	146 000	173	148.5	6.5	18	92	134	102	11	17.5	11	112
EM4520-6E		20	83 200	187 000	164	139	7								
EM5016-4E	50	16	72 700	161 000	173	148.5	6.5	18	98	140	107	11	17.5	11	118
EM5020-6E		20	85 700	205 000	164	139	7								
EM5030-6E		30	102 000	235 000	227	202	7								

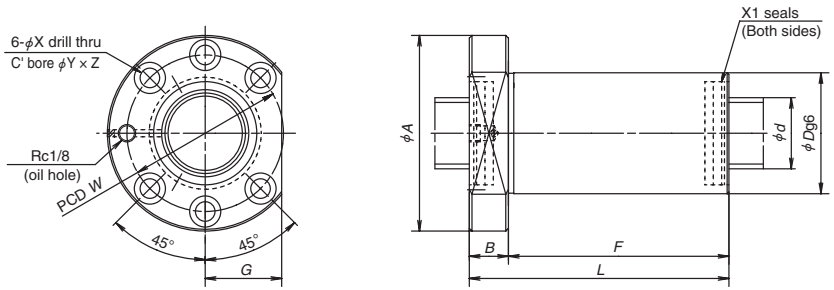

Deflector (bridge) type (Nut model: ZFD)

Applicable dimensions for Deflector (bridge) type

Unit: mm

Model No.	Shaft dia.	Lead	Basic load rating (N)		Nut dimensions						Bolt holes			
			Dynamic	Static										
	d	l	C_a	C_{0a}	L	F	B	D	A	G	X	Y	Z	W
ZFD4005-12	40	5	26 500	78 300	119	97	22	68	102	40	9	14	8.5	84
ZFD4006-12		6	35 600	95 200	135	113								
ZFD4008-8		8	32 000	75 000	131	109								
ZFD4010-8		10	45 200	93 100	153	131	22	68	110	43	11	17.5	11	88
ZFD5010-8	50	10	51 500	122 000	154	131	23	78	120	47	11	17.5	11	98
ZFD5020-6		20	52 400	109 000	199	176								

NSK Data Sheet for Ball Screws in Contaminated Environments

[Example] (Please copy) 1／1

Model: Washing machine Location: Workpiece transfer axis

1. Operating Conditions

Operating Conditions	a) Shaft rotation – nut moving b) Shaft rotation – shaft moving c) Nut rotation – nut moving d) Nut rotation – shaft moving	Stroke in Normal Use	400 [mm] (Please indicate operating pattern)
		Mounting Orientation	a) Vertical b) Horizontal
Lubricant	a) Grease (Brand: AS2) b) Oil (Brand:)	Lubricating Method	a) Automatic b) Grease gun (cm³/ min)
Operating Duration	years 6 months	Axial play: 0.1 mm	Seal: standard /

2. Ball Screw Environment (Accessories & Contamination)

Contaminant	Iron particles and washing solution	Contaminant Size	Particle size 30 μm max. -
Cause of Contamination	Does not fall directly on it, but there is a possibility that it could happen. (Please reference with photographs)		
Countermeasures (For already assembled parts, complete after inspection)	a) Telescopic cover ~~b) Bellow~~ ~~c) Dust collector~~ ~~d) Dust-resistant lubricant~~ e) Other ( ) (Please supply drawings to demonstrate dust countermeasures)		

3. Ball Screw Dimensions

Screw Shaft Diameter	Φ 32	Lead	5 mm	Accuracy Grade	C5	Axial Play	Z
Nut Model	ZFRC	Effective Turns of Balls	2.5×2	Direction of Turn	Right	Screw/Overall Length	510 / 750

Remarks

Request X1 seal

4. Durability Test

Durability test → Scheduled — Scheduled to perform functional evaluation for about 2 months.

→ Not scheduled (Reason:)

Ball Screw Use in Contaminated Environments

※Please read the below and tick the relevant boxes

- ☐ An evaluation test result of the special dust-resistant seal which NSK carried out is one case by a particular examination condition (alien substance environment and operating conditions). I accept that the special dust-resistant seal is unable to completely prevent contamination in such an environment and that life may be affected.
- ☐ In order to improve wear life in contaminated environments, NSK require **dust-proof accessories (covers, lubricating oil, dust collectors, etc)** in addition to the recommended seal exchange.
- ☐ Ball screw wear life is greatly impacted by contamination entering the nut, offset load from misalignment, as well as lubricating condition. **The final durability comes to need the evaluation confirmation with the actual machine.**

Company Name:	Date:	NSK Ltd. Sales Representative	NSK Ltd. Sales Manager
Department:	Name:		
Address:	Tel: Fax:	Sign	Sign

NSK Ltd.

NSK Data Sheet for Ball Screws in Contaminated Environments

(Please copy) 1／1

Model: Location:

1. Operating Conditions

Operating Conditions	a) Shaft rotation – nut moving b) Shaft rotation – shaft moving c) Nut rotation – nut moving d) Nut rotation – shaft moving	Stroke in Normal Use	[mm] (Please indicate operating pattern)
		Mounting Orientation	a) Vertical b) Horizontal
Lubricant	a) Grease (Brand:) b) Oil (Brand:)	Lubricating Method	a) Automatic b) Grease gun (cm³/ min)
Operating Duration	years months	Axial play: mm	Seal: standard /

2. Ball Screw Environment (Accessories & Contamination)

Contaminant		Contaminant Size	Particle size -
Cause of Contamination	(Please reference with photographs)		
Countermeasures (For already assembled parts, complete after inspection)	a) Telescopic cover b) Bellow c) Dust collector d) Dust-resistant lubricant e) Other ( ) (Please supply drawings to demonstrate dust countermeasures)		

3. Ball Screw Dimensions

Screw Shaft Diameter	φ	Lead	mm	Accuracy Grade		Axial Play	
Nut Model		Effective Turns of Balls		Direction of Turn		Screw/Overall Length	/

Remarks

4. Durability Test

Durability test → Scheduled

→ Not scheduled (Reason:)

Ball Screw Use in Contaminated Environments

※Please read the below and tick the relevant boxes

- ☐ An evaluation test result of the special dust-resistant seal which NSK carried out is one case by a particular examination condition (alien substance environment and operating conditions). I accept that the special dust-resistant seal is unable to completely prevent contamination in such an environment and that life may be affected.
- ☐ In order to improve wear life in contaminated environments, NSK require **dust-proof accessories (covers, lubricating oil, dust collectors, etc)** in addition to the recommended seal exchange.
- ☐ Ball screw wear life is greatly impacted by contamination entering the nut, offset load from misalignment, as well as lubricating condition. **The final durability comes to need the evaluation confirmation with the actual machine.**

Company Name:	Date:	NSK Ltd. Sales Representative	NSK Ltd. Sales Manager
Department:	Name:		
Address:	Tel: Fax:	Sign	Sign

NSK Ltd.

B-3-3.7 TW Series for Twin-Drive Systems

(1) Features

Variations in the lead accuracy and preload torque between two ball screws, which consist of a unit of TW Series, are controlled, resulting improved travel accuracy and ball screw operating lifetime.
Fig. 1 shows measured variation in lead accuracy while **Fig. 2** displays an example of variation in thermal expansion between the two ball screws. **Fig. 3** is a schematic diagram comparing the travel accuracy between the TW Series and conventional model.

● High rigidity and long lifetime

Twin-drive systems are superior to single-drive systems in system rigidity, supporting the design of long-life feeding mechanism even if they make the shaft diameter one size smaller.

● High responsiveness to positioning commands

Twin-drive systems permit the use of screw shaft diameters that are one size smaller, thereby reducing screw shaft inertia by up to 50%, offering high responsiveness to positioning commands.

● Improved high-speed capability and noise level

Twin-drive systems allow the use of smaller screw diameters, resulting in no increase in the level of noise. The end-deflector recirculation system significantly improves high-speed capability and noise level compared with the existing return tube recirculation system, offering high-speed feeding of up to 1 200 mm/min (shaft dia. 40 mm, lead 30 mm, rotational speed 4 000 min^{-1}).

(2) Specifications

Table 1 Specifications of twin-drive systems

Recirculation systems	End-deflector recirculation system, Return tube system, Deflector(bridge type) system
Shaft dia.	32 – 63 mm
Lead	10 – 30 mm
Accuracy grade	C5
Screw shaft length	3 m or less

(3) Optional specifications

- Hollow shaft ball screw and nut cooling ball screw
- Provides high accuracy through the use of forced cooling. Please refer to ball screws for high precision machine tools (page B546 to B554) for more details.

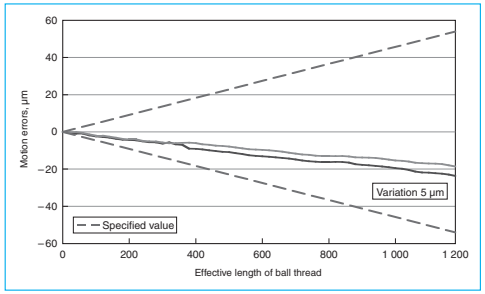


Fig. 1 Example of measured variation in lead accuracy

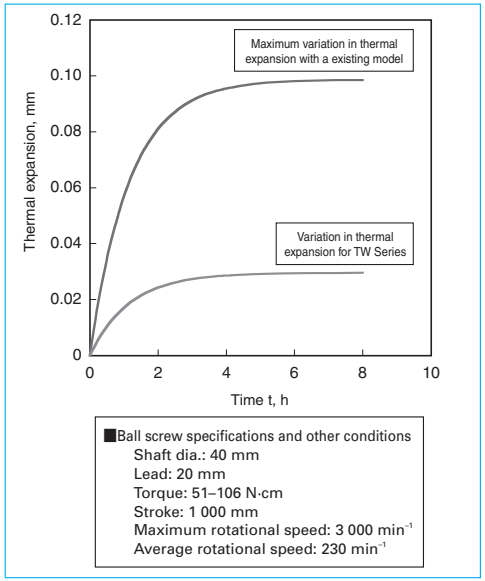


Fig. 2 Calculation example of the variation of thermal expansion

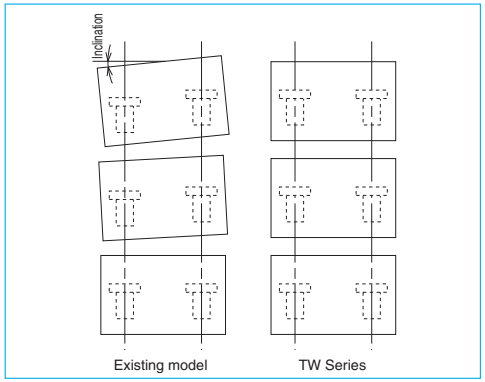


Fig. 3 Schematic diagram of travel accuracy

B-3-3.8.1 Hollow Shaft Ball Screw for High Precision Machine Tools

The increase in speed of the feeding mechanism for highly accurate positioning may require some measures against thermal expansion of the ball screw (forced cooling using hollow ball screw). NSK standardized hollowed screw shafts and shaft ends configuration (sealing section and support bearing seat). NSK recommends this as the most effective measure against thermal expansion.

1. Features

●Stable positioning accuracy

Suppresses expansion of the ball screw shaft by rising temperature, and provides stable, precise positioning.

● Prevents displacement of various sections

Minimizes deformation of the ball screw support bearings as well as of the machine base which is caused by thermal expansion of ball screw. Forced cooling keeps the heat from spreading to other sections, and prevents the processing table from deforming due to heat.

● Reduces warm-up time

Temperature does not rise high, therefore cuts machine warm-up period.

● Maintains lubricant's effect

Removes heat from the ball screw, deterring lubricant deterioration.

● Easy designing for installation

Use support bearing unit exclusive for NSK ball screws (high speed and high load capacity for machine tools, see page B405) and seal unit (page B549) to standardized shaft end. This makes designing of mounting ball screw easy.

NSK also provides nut cooling ball screws. The level of temperature rise for nut cooling ball screw is equal to the hollow shaft ball screw thanks to the optimized nut internal design for cooling. Please refer to nut cooling ball screws (page B551) for more details.

2. Design precautions

Refer to HMC type, end-deflector recirculation system, return tube recirculation system, and deflector(bridge type) recirculation system for ball screw specifications. If the overall ball screw length exceeds 3 000 mm, contact NSK. For general precautions regarding ball screw, refer to "Design Precautions" (page B83) and "Handling precautions" (page B103).

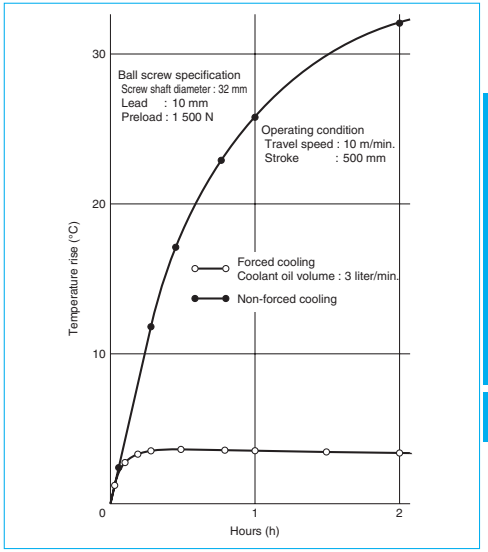


Fig. 1 Effect of forced cooling by hollow shaft ball screw

3. Model example of dimension table

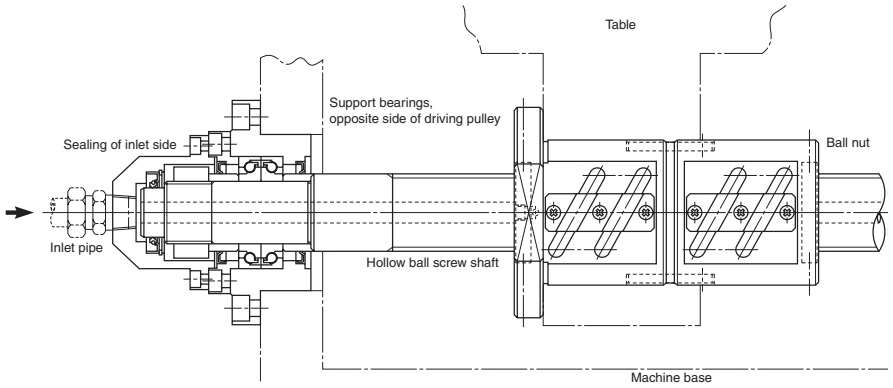
A model number that indicates specification factors is structured as shown below.

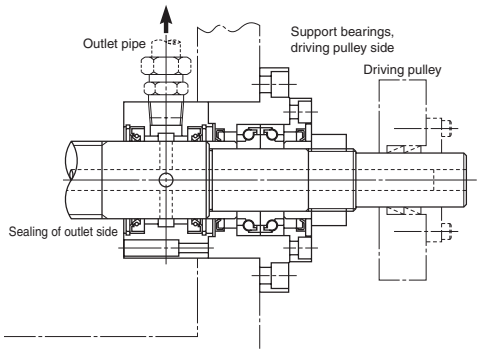
◇Example of model

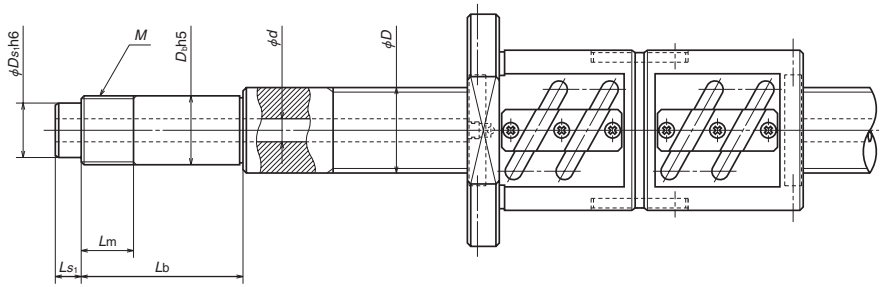
H 32 - 10

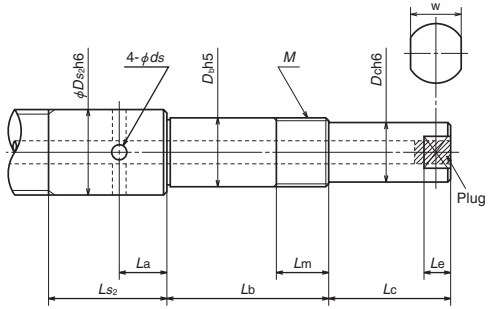
- H: Screw shaft model H
- 32: Screw shaft diameter (mm)
- 10: Hollow bore (mm)

4. Installation example and standard dimensions









Unit: mm

Model No.	Screw shaft		Bearing seat				Sealing					
	Diameter	Hollow	Diameter	Lock nut			Inlet		Outlet			
	D	*d*	*D*b	*M*	*L*m	*L*b	*Ds*$_1$	*Ls*$_1$	*Ds*$_2$	*Ls*$_2$	*L*a	*d*s
H32-10	32	10	25	M25×1.5	26	89 104 119	20	15	32	60	25	6
H40-12	40	12	30	M30×1.5	26	89 104 119	25	15	40	60	25	7
H50-15	50	15	40	M40×1.5	30	92 107 122	32	15	50	65	27	8


Drive side		Spanner flats		Applicable support unit	Used bearing	Equipped seal unit	
						Shaft end	Shaft outer surface
*D*c	*L*c	*w*	*L*e				
20	40	17	8	WBK25DF-31H WBK25DFD-31H	25TAC62CSUHPN7C DF combination 25TAC62CSUHPN7C DFD combination (25TAC62CSUHPN7C DFF combination)	WSK20A-01	WSK32B-01
25	50	22	10	WBK30DF-31H WBK30DFD-31H	30TAC62CSUHPN7C DF combination 30TAC62CSUHPN7C DFD combination (30TAC62CSUHPN7C DFF combination)	WSK25A-01	WSK40B-01
35	70	30	13	WBK40DF-31H WBK40DFD-31H WBK40DFF-31H	40TAC72CSUHPN7C DF combination 40TAC72CSUHPN7C DFD combination 40TAC72CSUHPN7C DFF combination	WSK32A-01	WSK50B-01

Notes: 1. Please consult NSK for other models.
2. See B416 for bearing combination symbols.

5. Seal units for hollow ball screw shaft (available by order)

This is an exclusive joint for coolant of the hollow ball screw shaft.

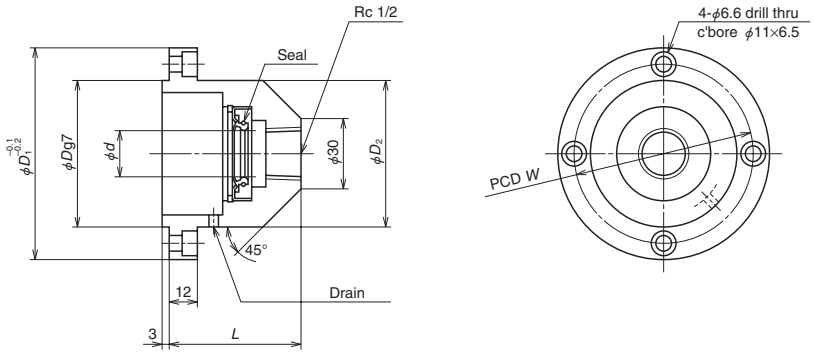
A Type
(for shaft end)



Unit: mm

Reference No.	*d*	*D*	D_1	D_2	*L*	*W*	Fixing bolt
WSK20A-01	20	57	85	57	56	70	M6
WSK25A-01	25	57	85	57	56	70	M6
WSK32A-01	32	69	95	67	61	80	M6

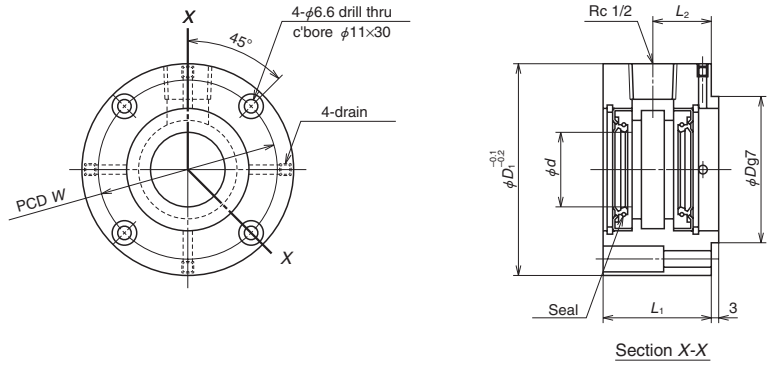B Type
(for shaft outer surface)



Unit: mm

Reference No.	*d*	*D*	D_1	L_1	L_2	*W*	Fixing bolt
WSK32B-01	32	57	85	46	25	70	M6
WSK40B-01	40	57	85	46	25	70	M6
WSK50B-01	50	69	95	49	27	80	M6

◇ **Handling precautions**

- Use NSK support unit (high speed and high load capacity for machine tools on page B405) for installation in order to maintain the eccentricity between screw shaft and seal unit.
- Apply grease to the lip section for protection at the time of installation to the ball screw.
- Make certain that the drain holes (one for A Type, four for B Type) of the seal unit directly face downward when the unit is installed.

B-3-3.8.2 Nut Cooling Ball Screws for High Precision Machine Tools

Nut cooling ball screws are easily cooled with a ball nut cooling system and are ideal for use in high-speed and high-precision machine tools that have nut cooling systems.

Using nut cooling ball screws makes it possible to cool long ball screws that are difficult to cool with hollow-core cooling, and they accommodate the broad high-precision needs of machine tools both small and large.

1. Features

● Cooling effects

By optimizing the cooling structure inside the nut, cooling capacity equivalent to hollow shaft cooling has been achieved. The nut in contact with the table is cooled, so that heat conduction from the table to the ball screw is blocked. Moreover, by cooling hollow shaft in parallel, the screw shaft and ball nut can be cooled at the same time for even more precise temperature control.

● Internal design in consideration of preload torque change

The nut cooling ball screw has double contact-point preload in the tensile direction. This prevents an increase in preload torque when the nut is cooled, enabling effective cooling of the ball screw.

● Cooling structure

The cooling fluid goes in a balanced way through the nut. Double nuts have separate coolant routes for each nut for efficient cooling. Cooling fluid does not go through the inside of spacers, so coolant fluid does not leak even when preload drops and airtightness is maintained.

● Improved handling

Ball screws can be cooled by simply attaching piping to the exterior flange part.* Sliding seals and rotary joints that are required for hollow shaft cooling are not needed. Dimensions for mounting area (without nut cooling) are the same as conventional products, so the nut cooling can be implemented without changing machine designs.

*When cooling double nuts, piping is required on the nut end face on the other side of the flange.

● Long ball screws can be cooled at a low cost

Since these products are suitable for long ball screws for which hollow hole processing is difficult, improved precision of large machine tools can be achieved at a low cost.

2. Cautions regarding design

If heat impact from the bearing is too great, separate cooling for bearing and surrounding areas is recommended. For details, please contact NSK.

◇Reference number for nut cooling ball screw

W4012-＊＊ZMNC-C5Z20

Nut cooling ball screw code


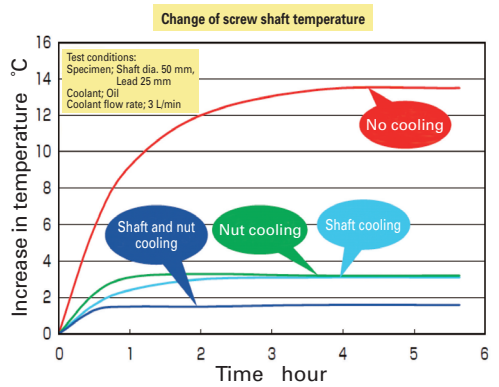



Fig. 1 Effect of forced cooling by nut cooling ball screw

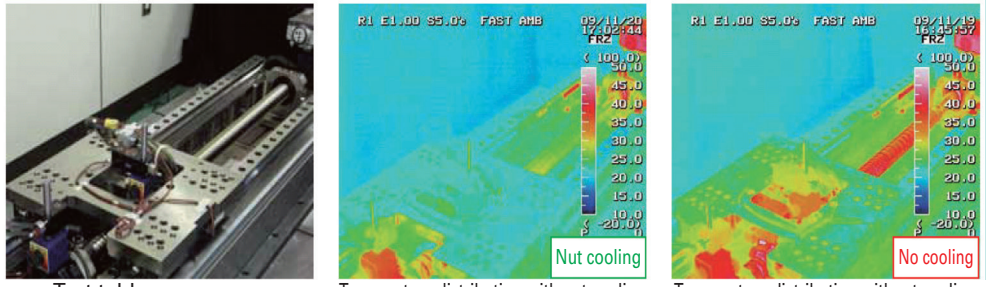

Test table appearance | Temperature distribution with nut cooling | Temperature distribution without cooling

Fig. 2 Effect of forced cooling by nut cooling ball screw

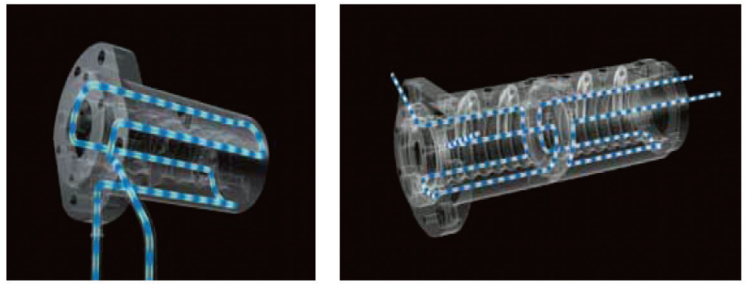Cooling structure




Single nut | Double nut


Fig. 3 Cooling structure of a nut cooling ball screw

Nut cooling ball screws: dimension chart

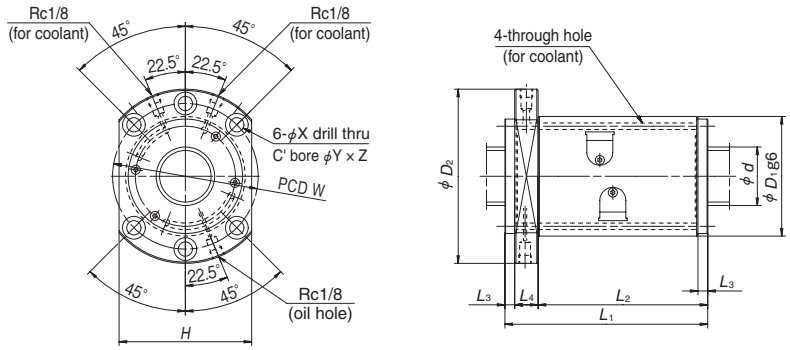● Single nut cooling ball screws (for HMD type, nut type: EM)



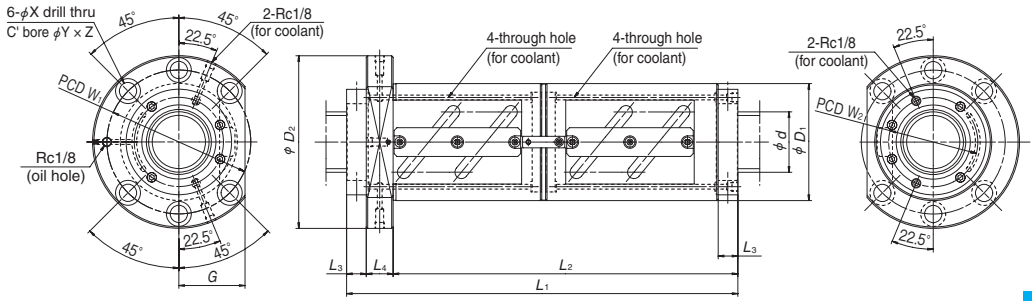● Double nut cooling ball screws (tube-type, nut type: DFT)



Applicable dimensions for HMD type

Unit: mm

Model No.	Shaft dia. d	Lead l	Nut dimensions D_1	D_2	H	L_1	L_2	L_3	L_4	W	X	Y	Z
EM4016-4E	40	16	86	128	96	166	140.5	7.5	18	106	11	17.5	11
EM4020-6E		20				156	130.5						
EM4025-6E		25				188	162.5						
EM4030-6E		30				219	193.5						
EM4516-4E	45	16	92	134	102	166	140.5	7.5	18	112	11	17.5	11
EM4520-6E		20				156	130.5						
EM4525-6E		25				188	162.5						
EM5016-4E	50	16	98	140	107	166	140.5	7.5	18	118	11	17.5	11
EM5020-6E		20				156	130.5						
EM5025-6E		25				188	162.5						
EM5030-6E		30				219	193.5						
EM6316-4E	63	16	122	180	138	176	139	9	28	150	18	26	17.5

Dimensions for tube type

Unit: mm

Model No.	Shaft dia. d	Lead l	Nut dimensions D_1	D_2	L_1	L_2	L_3	L_4	G	W_1	X	Y	Z	W_2
DFT5010-7.5	50	10	93	135	303	275	10	18	51	113	11	17.5	11	73
DFT5012-5		12	100	146	279	245	12	22	55	122	14	20	13	78
DFT5016-5		16	100	146	344	306	16	22						
DFT5020-3		20	100	146	327	279	20	28						
DFT5510-5	55	10	102	144	243	215	10	18	54	122	11	17.5	11	80
DFT6310-7.5	63	10	108	154	307	275	10	22	58	130	14	20	13	88
DFT6312-5		12	115	161	279	245	12	22	61	137	14	20	13	91
DFT6316-5		16	122	180	350	306	16	28	69	150	18	26	17.5	93
DFT6320-5		20	122	180	407	359	20	28						
DFT8010-5	80	10	130	176	247	215	10	22	66	152	14	20	13	108
DFT8012-5		12	136	182	279	245	12	22	68	158	14	20	13	110
DFT8016-5		16	143	204	350	306	16	28	77	172	18	26	17.5	112
DFT8020-5		20	143	204	407	359	20	28						
DFT10012-5	100	12	160	220	285	245	12	28	82	188	18	26	17.5	134
DFT10016-5		16	170	243	354	306	16	32	91	205	22	32	21.5	136
DFT10020-5		20	170	243	411	359	20	32						

B-3-3.9 ND Series for Nut-Rotatable Drives

• This product is patented by NSK.

A nut rotatable ball screw is developed as a unit into which angular contact support ball bearings are integrated. It is best suited for an application that requires rotation of the ball nut while the screw shaft is fixed.

NDT model

1. Structure

Balls are installed between the assembly housing and the ball nut. The outer bearing rings are integrated into the assembly housing and thus, compact design are attained.
A timing pulley (prepared by the user) is directly secured to the end face of the nut.

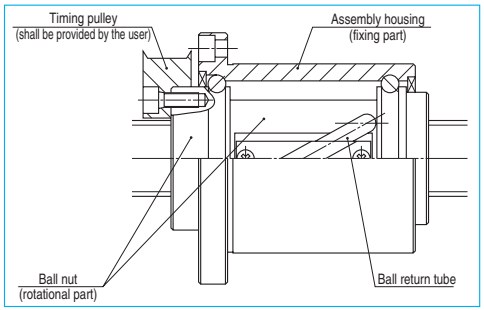


Fig. 1 Ball nut structure

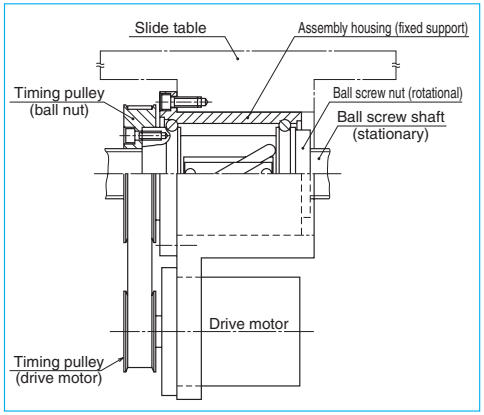


Fig. 2 Example of installation to the table

2. Features

● Multi-nut drive
Two or more nut units can be installed in a single ball screw shaft. They can be operated by respective motors.

● High operation speed
High feeding speed operation, but yet low rotational speed, is feasible by means of medium to high-helix lead ball screws.

● Easy installation
Merely install a mount housing to the table of the machine to take advantage of this multi-nut rotation system.

● Simple shaft end configuration
Shaft end configuration is simple because this unit does not need support bearings.

● Shaft diameter/lead combination
There are 10 types of "shaft diameter/lead" combinations.
Selections are: Shaft diameters -- 32, 40, 50 mm; Leads -- 20, 25, 32, 40, 50 mm.

● Low inertia
Compared to the NSK current product (end cap ball recirculation system), rotational inertia was reduced by 16% at most.

3. Specifications

(1) Ball recirculation system
The structure of return tube recirculation system is shown below.

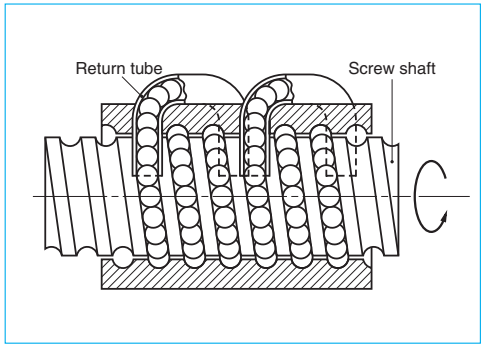


Fig. 3 Structure of ball return tube recirculation system

(2) Accuracy grade and axial play
The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Axial play

Axial play code	Z	T	S
Axial play	0	0.005 mm or less	0.020 mm or less

Table 2 Combination of accuracy grades and axial play

Accuracy grade	C3	C5	Ct7
Axial play code	Z, T, S	Z, T, S	S

4. Allowable d•n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.
Note: The basic concept is the same as that of general ball screws. Refer to "Technical Description: Permissible Rotational Speed" (page B47).

Table 3 Allowable d•n value and the criterion of maximum rotational speed

Allowable d·n value	Standard specification	70 000 or less
	High-speed specification	100 000 or less
Criterion of maximum rotational speed	3 000 min^{-1}	

d·n value: shaft dia. d [mm] × rotational speed n [min^{-1}]

● Critical speed n_c
As shown **Fig. 4**, calculate unsupported length (mm) of L_1, L_2, and L_3 (assumed that the nut section is a fixed support.) **Table 4** shows the coefficients "f" of each shaft end mounting condition.

$$n_c = f \bullet \frac{d_r}{L_i^2} \times 10^7 \ (min^{-1}) \qquad (Ⅲ\text{-}1)$$

d_r: Screw shaft root diameter (See the dimension table.)
L_i: Unsupported length (mm) (See **Fig. 4**)
f : Factor determined by the ball screw shaft end mounting condition

Table 4

Shaft end mounting condition	f
Fixed – Fixed support	21.9
Fixed – Simple support	15.1
Fixed – Free support	3.4

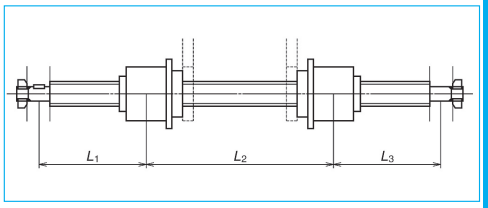


Fig. 4 Installation example

5. Design precautions

One end of the screw thread should be cut-through to the end. Also, if the nut must be removed from the screw shaft, the user should have an arbor to prevent the balls from falling out during this process. (NSK manufactures arbors on request.)
For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

NDD Type: (Incorporating vibration damper)

An increase in stroke length may restrict required rotational speed of a ball screw due to the issue of critical speed even if there is no problem on d·n limitation.

In such a case, we recommend using NDD Type nut rotatable ball screws equipped with vibration damper.

It will make it possible to operate a ball screw exceeding the critical speed, which is conventionally considered being impossible.

Notes: 1) However, NDD Type cannot be used exceeding the d·n limitation. Please consult with NSK in such a case.

2) You cannot rotate the screw shaft of NDD Series.

1. Structure

Hollow ball screw shaft has a mechanism to absorb vibration energy (vibration damper). This increases dynamic rigidity of the screw shaft and lowers vibration when exceeding the critical speed.

Construction of the ball nuts are the same as those of NDT Type.

2. Features

● No need for measures against critical speed.

Conventionally, an increase in screw shaft diameter or use of intermediate support is the measure against the issue of critical speed. NDD Type ball screw will make these measures needless.

● Dimensional interchageability with NDT Type ball screws

The vibration damper is set inside a ball screw shaft, and therefore, there is no difference with existing series in regards to external dimensions. The ball nuts of NDD Type are interchangeable with those of NDT Type.

● Others

Benefits in multiple ball nut on a screw shaft, high feeding speed for long stroke, easy in installation, and low inertia of the ball nuts are the same as NDT Type.

3. Specification

Recirculation system, accuracy grade, axial play and preload system are the same as NDT Type.

4. Design precautions

They are the same as NDT Type.

5. Permissible rotational speed

The d•n value is the same as NDT Type.

You don't need to consider the critical speed.



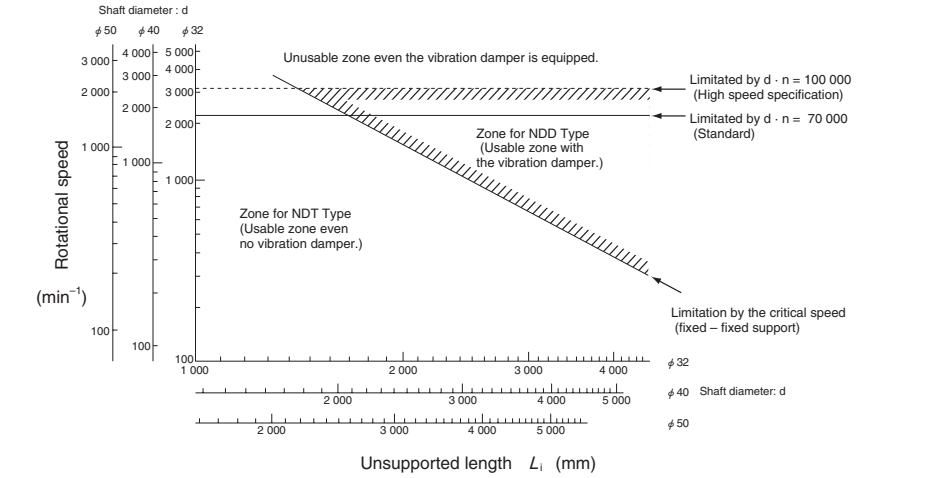


Fig. 5 Compartmentalization between NDT and NDD types to rotational speed and unsupported length

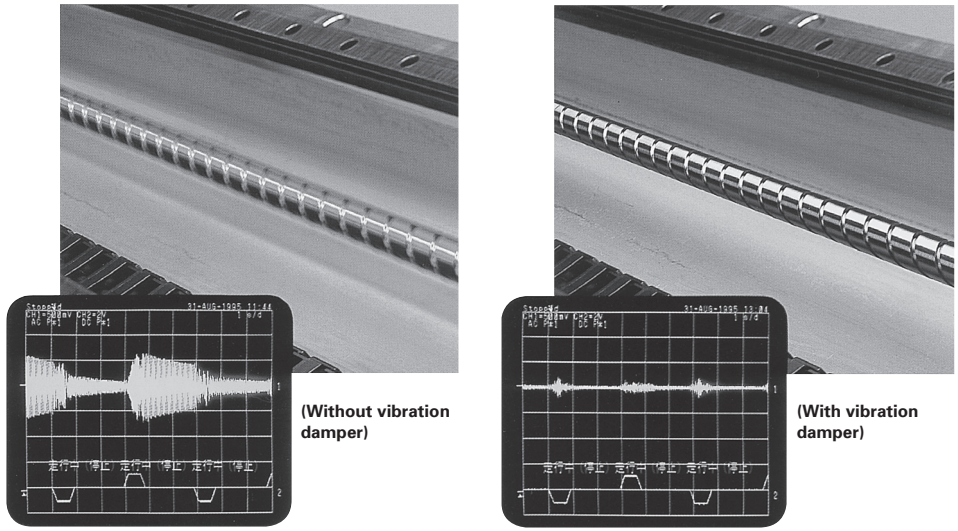

(Without vibration damper) (With vibration damper)

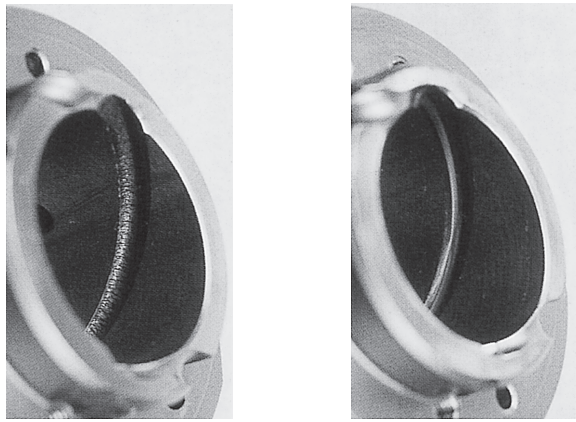Fig. 6 Vibration of screw shaft when nut is rotating



(Without vibration damper) (With vibration damper)

Fig. 7 Effect of vibration damper (results of endurance test)

Calculation example of permissible rotational speed

[Calculation example]
Assume a system which moves two nuts on a shaft as shown below.
Does this system operate appropriately if: both ends of the ball screw (shaft diameter 40 mm/ lead 40 mm) are fixed, and the travel speed is at 60 m/min?

[Answer]
The rotational speed n (min^{-1}) when the lead of the ball screw is 40 mm, and the travel speed is at 60 m/min is:

$$n = \frac{60 \times 10^3}{40} = 1\,500\ (min^{-1})$$

● Calculate d • n value
As the d • n value of standard specification is 7 000, therefore, the permissible rotational speed is;

$$n \leq \frac{70\,000}{40} = 1\,750\ (min^{-1})$$

● Calculate critical speed
The maximum unsupported length comes between Nut A and B.

L_2 = 3 300 (mm)
f = 21.9 (Fixed-Fixed)
Root diameter: d_r = 35.1 (mm)

Therefore, the permissible rotational speed is;

$$n \leq \frac{21.9 \times 35.1}{3\,300^2} \times 10^7 = 706\ (min^{-1})$$

The calculation indicates that the d • n value is at the safe level. But the critical speed exceeds the limitation. However, with a vibration damper, the system can be operated at 1 500 min^{-1}.

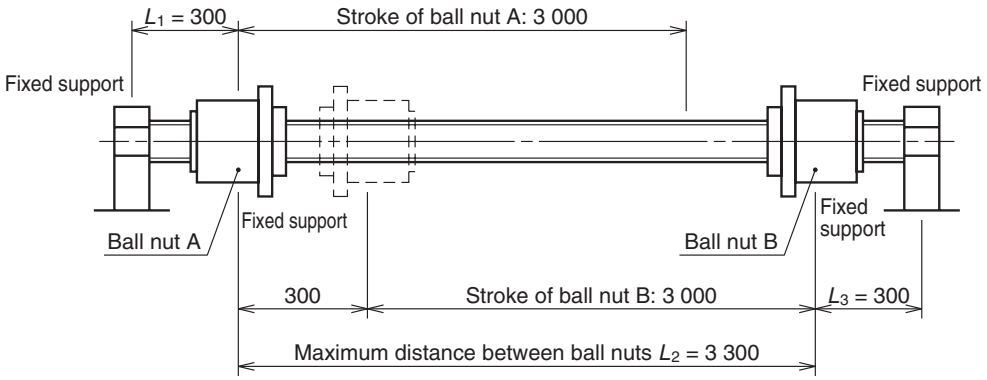



Fig. 8 Calculation example of permissible rotational speed


Structure of reference number
The followings describe the structure of "Reference number for ball screw".

◇Reference number for ball screw

W 40 15 - ** P XU - C5 Z 40

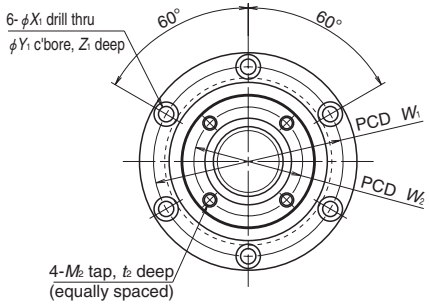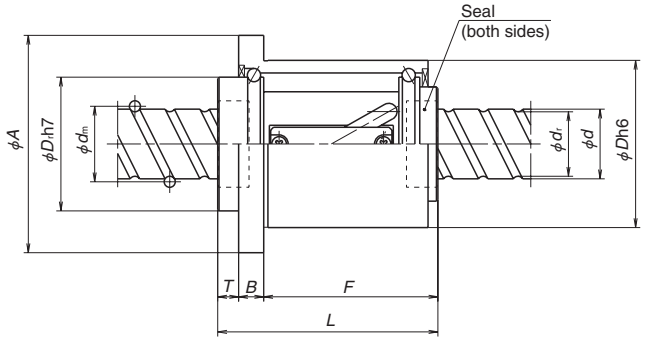- W: Product code
- 40: Screw shaft diameter (mm)
- 15: Effective threaded length (in the unit of 100 mm)
- **: Design serial number
- P: Preload code: No code, Non-preload; P, P-preload (page B5)
- XU: Appearance/specification code ("T" is added for NDD Type.)
- C5: Accuracy grade: C3, C5, C7 (Ct7) (page B37 to B42)
- Z: Axial play code: Z, T, S (page B20)
- 40: Lead (mm)





Unit: mm

Model No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls Turns × Circuits	Basic load rating (N) Dynamic C_a	Basic load rating (N) Static C_{0a}	Moment of inertia, ball nut J (kg·cm²)	Ball nut mass W (kg)
NDT NDD 3220-2.5	32	20	4.762	33.25	28.3	2.5×1	20 700	41 900	6.2	2.9
NDT NDD 3225-2.5		25	4.762	33.25	28.3	2.5×1	20 400	42 200	6.7	3.2
NDT NDD 3232-1.5		32	4.762	33.25	28.3	1.5×1	13 300	25 200	6.2	2.9
NDT NDD 3232-3						1.5×2	24 100	50 400		
NDT NDD 4025-2.5	40	25	6.35	41.75	35.1	2.5×1	34 100	70 100	19.3	6.0
NDT NDD 4032-1.5		32	6.35	41.75	35.1	1.5×1	21 600	41 300	18.0	5.5
NDT NDD 4032-3						1.5×2	39 300	82 700		
NDT NDD 4040-1.5		40	6.35	41.75	35.1	1.5×1	21 200	42 000	19.2	6.0
NDT NDD 4040-3						1.5×2	38 500	84 000		
NDT NDD 5025-2.5	50	25	7.938	52.25	44.0	2.5×1	51 300	110 000	45.7	8.5
NDT NDD 5032-2.5		32	7.938	52.25	44.0	2.5×1	50 900	109 000	48.9	9.4
NDT NDD 5040-1.5		40	7.938	52.25	44.0	1.5×1	32 300	64 600	45.5	8.5
NDT NDD 5040-3						1.5×2	58 700	129 000		
NDT NDD 5050-1.5		50	7.938	52.25	44.0	1.5×1	31 700	65 700	48.7	9.4
NDT NDD 5050-3						1.5×2	57 500	131 000		

Ball nut dimensions													Tap hole PCD
Nut entire length L	Nut outside diameter D	Flange outside diameter A	Flange width B	Nut length F	Projection tube dimensions D_r	Projection tube dimensions T	Bolt hole dimensions X_1	Bolt hole dimensions Y_1	Bolt hole dimensions Z_1	Bolt hole PCD W_1	Tap hole dimensions M_2	Tap hole dimensions t_2	W_2
107	78	105	12	83	60	12	6.6	11	6.5	91	M6	12	50
120	78	105	12	96	60	12	6.6	11	6.5	91	M6	12	50
107	78	105	12	83	60	12	6.6	11	6.5	91	M6	12	50
136	100	133	15	106	76	15	9	14	8.5	116	M8	16	62
122	100	133	15	92	76	15	9	14	8.5	116	M8	16	62
136	100	133	15	106	76	15	9	14	8.5	116	M8	16	62
140	120	156	18	107	96	15	11	17.5	11	136	M10	18	78
158	120	156	18	125	96	15	11	17.5	11	136	M10	18	78
140	120	156	18	107	96	15	11	17.5	11	136	M10	18	78
158	120	156	18	125	96	15	11	17.5	11	136	M10	18	78

Notes: 1. The right hand screw is the standard. Consult NSK for the left hand screws.
2. Seals are standard equipment.

B-3-3.10 ∑ Series for Robots

1. Features

∑ Series (NSK's Robotte) is a ball screw with a high-performance spline. It is ideal for various actuators such as the vertical axis of SCARA type robot.

A ball screw groove and a ball spline groove are made in one shaft, combining the ball screw and the ball spline.

Mount housing, nuts, and support bearings are combined into a single unit.

Timing pulley (prepared by the user) is directly secured at the end face of the nut.

● High functions

A single shaft has both feeding mechanism and guide functions. This allows the shaft ends to move back and forth (linear motion), as well as to rotate.

● Compact and lightweight

A ball screw nut and a spline nut are placed on one shaft, and a support bearings are also combined to the unit. This allows compact and high-precision design. Hollow shaft is standard to reduce weight. The hollow can be used for wiring and piping. Other components are also designed to be light in weight.

● Low inertia

Because of return tube type ball nut of which outside diameter is decreased, low inertia design is enabled.

It reduces the inertia by 19% of conventional products.

2. Functions

As shown in **Fig. 1**, the ball screw nut and a spline nut are rotated independently to control rotation value. Thereby the shaft can move in any direction -- linear and rotational. **Table 1** shows the relationship between power input and output.

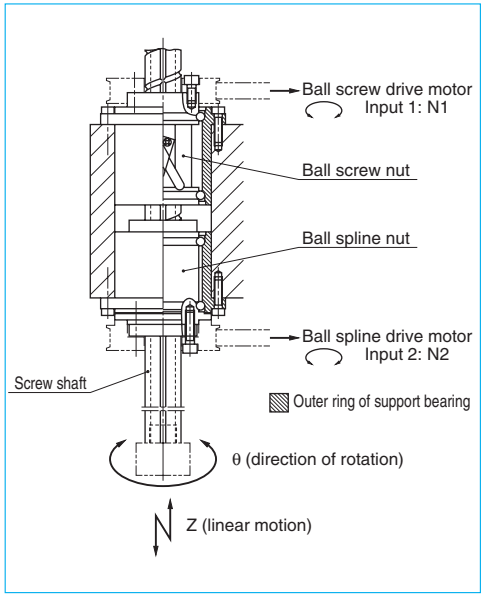


Fig. 1 Example structure of Z axis plus θ axis actuator

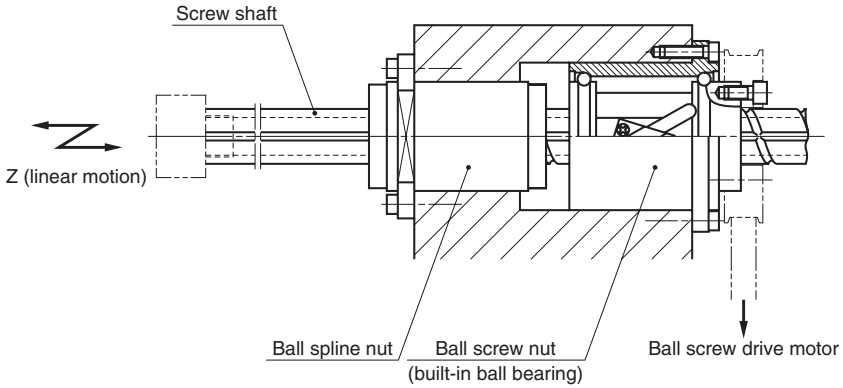


Fig. 2 Example structure of single Z axis unit

Table 1 Power input and output of Σ Series

Shaft movement (output)		Input		
Z (up-down movement) (mm/min)	θ (rotational movement) (min^{-1})	① Ball screw (min^{-1})	② Spline (min^{-1})	Notes
Up, down $N1 \times l$	Stop 0	Rotate N1	Stop 0	–
Stop 0	Rotate N2	Rotate N1	Rotate N2	N1 = N2
Up, down $N2 \times l$	Rotate N2	Stop 0	Rotate N2	–
Up, down $\lvert N1-N2 \rvert \times l$	Rotate N2	Rotate N1	Rotate N2	N1≠N2

3. Specifications

(1) Ball recirculation system

A structure of return tube recirculation system is shown below.

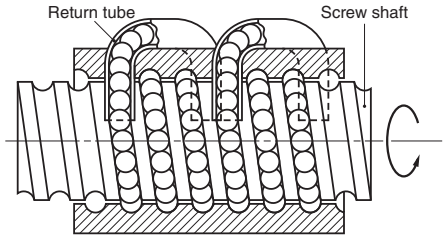


Fig. 3 Structure of return tube recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play for ball screw are as follows. The axial play for spline is 0 mm (preloaded product). Please consult NSK for other grades.

Table 2 Accuracy grade and axial play

Accuracy grade	C3, C5, Ct7
Axial play	Z, 0 mm (preloaded)
	T, 0.005 mm or less; S, 0.020 mm or less

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Permissible d•n value: 70 000 or less

Criterion of maximum rotational speed: 3 000 min^{-1}

Note: Please also review the critical speed.

For details, see "Technical Description: Permissible Rotational Speed" (page B47).

(4) Application

SCARA type and Cartesian type industrial robots, semiconductor manufacturing machines, machines for automobile production facilities, material handling systems, other Z (vertical) axis and Z axis plus θ (rotation) axis actuators.

4. Design precautions

The overall length L can be extended to 25 times of the shaft diameter.

To remove the spline nut from the shaft for assembling, use an arbor as shown in **Fig. 4.** (page B545). Avoid removing ball screw nut as much as possible. Refer to root diameter in the dimension table for arbor diameter. (NSK manufactures the arbors on request.)

For general precautions regarding ball screws, refer to "Precautions in Designing" (page B83) and "Precautions in Handling" (page B103).

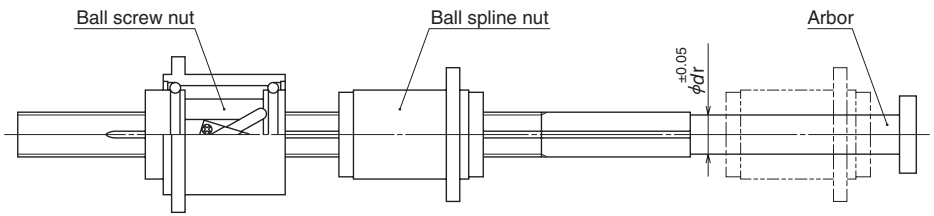
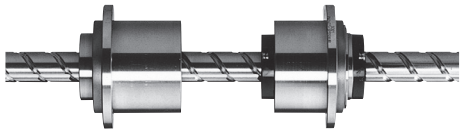
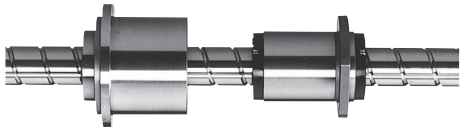
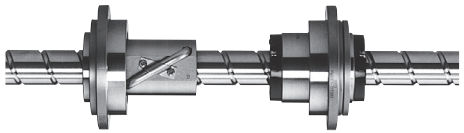
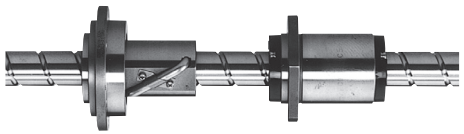


Fig. 4 Removing spline nut

5. Product categories

Σ Series (NSK's Robotte) is four models with different moving functions and performances are available. Select a standard model if rigidity is important. A compact system is recommended for reducing the weight of machine.

Table 3 Σ Series product categories

Model	Appearance	Size	Structure (Movement)
Σ		Standard	Z+θ Unit
ΣZ		Standard	Z Unit
ΣC		Compact	Z+θ Unit
ΣCZ		Compact	Z Unit

6. Load rating and life

The relationship between load rating of the ball spline section and life is the same as in other NSK linear motion products. However, various loads that apply to Robotte must be taken into account. For example, the following factors must be considered in calculating life when the product is used as shown in **Fig. 5**.

Fa : Load that is generated when the shaft moves in up-down direction. (Load is applied to the ball screw nut.)

T : Torque that is generated to the shaft by Fa.

Fr : Load that is generated by moment of inertia of the shaft and the work attached to Robotte as well as by centrifugal force when the arm rotates.

θ : Direction of Fr load that changes by shaft rotation.

NSK has life calculation programs which take these factors into account. Please ask NSK for more details.

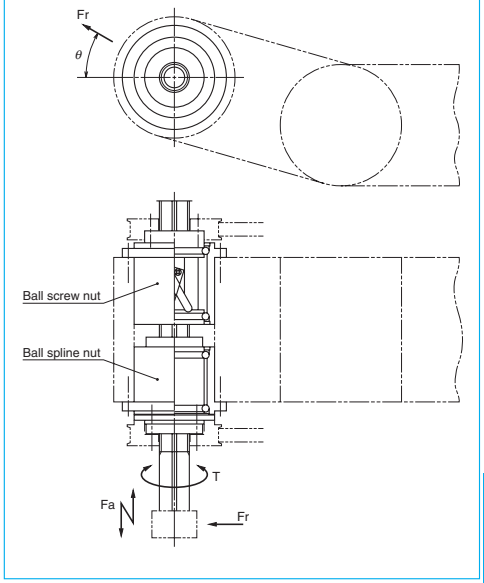


Fig. 5 Example structure of Z axis plus θ axis actuator

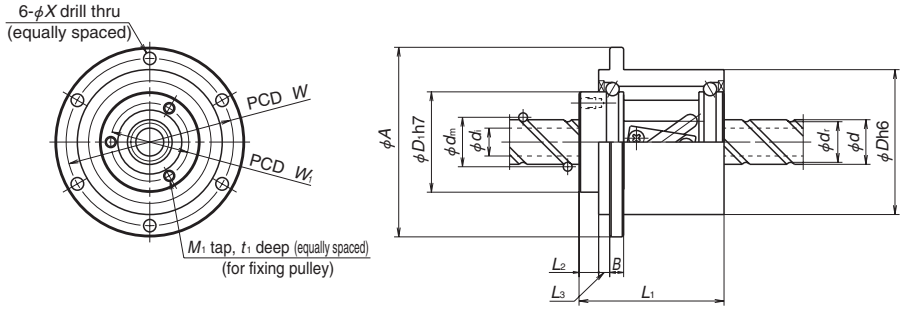
7. Structure of reference number

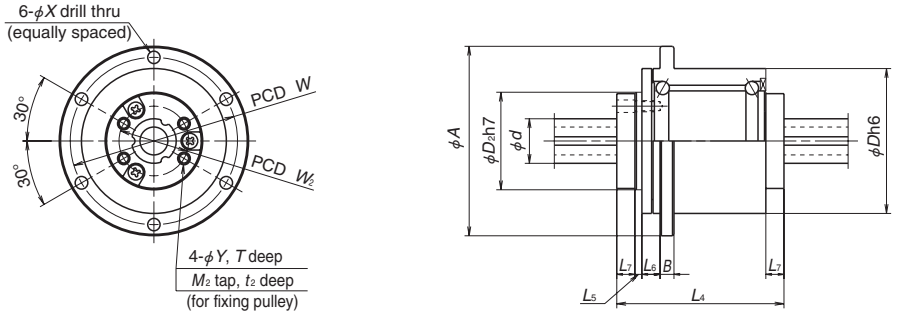
The following describes the structure of "Reference number for ball screw".

◇Reference number for ball screw

PW 25 02 - ** P T U - C5 Z 20

- Product code
- Screw shaft diameter (mm)
- Effective threaded length (in the unit of 100 mm)
- Design serial number
- Preload code: No code, Non-preload; P, P-preload (page B5)
- Hollow shaft ball screw specification
- Use support unit
- Accuracy grade: C3, C5, C7 (Ct7) (page B37 to B42)
- Axial play code: Z, T, S (page B20)
- Lead (mm)







Unit: mm

Model No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Screw shaft hollow d_i	Ball screw nut: Basic load rating (N) Dynamic C_a	Static C_{0a}	D	A	B	L_1	L_2	L_3	M_1	t_1	W_1	D_1	W	X	Moment of inertia (kg·cm²)	Mass (kg)
∑1610	16	10	3.175	16.75	13.4	(8)	5 610	8 300	48	64	5	47	7	4	3-M4	6	28	35	56	4.5	0.41	0.63
∑1632		32					3 600	5 200				52									0.44	
∑2010	20	10	3.175	20.75	17.4	(14)	9 560	17 300	54	70	6	57	8	4	3-M4	6	32	40	62	4.5	0.64	0.87
∑2020		20					6 100	10 500				63									0.65	
∑2040		40					4 050	7 020				57									0.64	
∑2510	25	10	3.175	25.75	22.4	(18)	10 700	22 000	58	74	6	57	8	4	3-M4	6	38	45	66	4.5	1.10	1.03
∑2520		20					6 860	13 100				63									1.18	
∑2525		25					6 720	13 300				72									1.30	
∑2550		50					4 490	8 270				64									1.20	
∑3220	32	20	3.175	32.75	29.4	(25)	7 710	16 900	70	95	8	70	10	6	3-M5	10	44	53	82	6.6	2.60	1.62
∑3232		32					7 590	16 700				91									3.15	
∑4020	40	20	3.969	41.0	36.9	(30)	11 600	26 500	85	110	8	73	10	6	4-M5	10	58	67	96	6.6	5.96	2.38
∑4040		40					11 300	26 200				107									7.85	
∑4520	45	20	3.969	46.0	41.9	(35)	12 000	30 000	90	115	8	73	10	6	4-M5	10	63	72	101	6.6	7.73	2.56
∑4540		40					11 800	29 700				107									10.3	

Mass (kg)	Ball spline nut: Basic load rating (N) Dynamic C_r	Static C_{0r}	Basic torque (N·m) Dynamic C_t	Static C_{0t}	D	A	B	L_4	L_5	L_6	L_7	Y	T	M_2	t_2	W_2	D_2	W	X	Moment of inertia (kg·cm²)	Mass (kg)
0.50	5 530	7 270	61.5	91.3	48	64	5	60	2.5	6.5	6.5	4.5	6.5	M4	7	25	35	56	4.5	0.71	0.63
0.55	5 890	8 000	65.5	100																	
0.74	6 260	8 720	86.3	135	54	70	6	65	2.5	6.5	6.5	5.5	6.5	M5	8	30.5	40	62	4.5	1.15	0.87
0.81	6 610	9 450	91.1	145																	
0.74	6 610	9 450	91.1	145																	
0.81	6 630	9 450	115	185	58	74	6	70	2.5	6.5	6.5	5.5	6.5	M5	8	35.5	45	66	4.5	1.88	1.03
0.88	7 290	10 900	125	210																	
1.00	7 290	10 900	125	210																	
0.91	7 290	10 900	125	210																	
1.46	7 630	11 600	165	285	70	95	8	75	2.5	7.5	6.5	5.5	6.5	M5	8	42	50	82	6.6	3.80	1.62
1.83	7 950	12 400	175	305																	
2.02	10 600	14 800	290	455	85	110	8	80	4	7.5	8	5.5	8	M5	8	55	65	96	6.6	9.74	2.38
2.85	11 200	15 900	305	490																	
2.17	11 200	15 900	340	550	90	115	8	85	4	7.5	8	5.5	8	M5	8	60	70	101	6.6	12.5	2.56
3.06	11 700	17 000	360	590																	

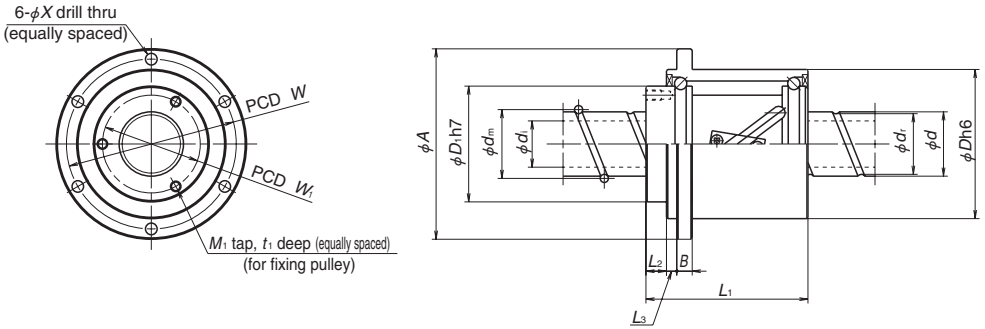


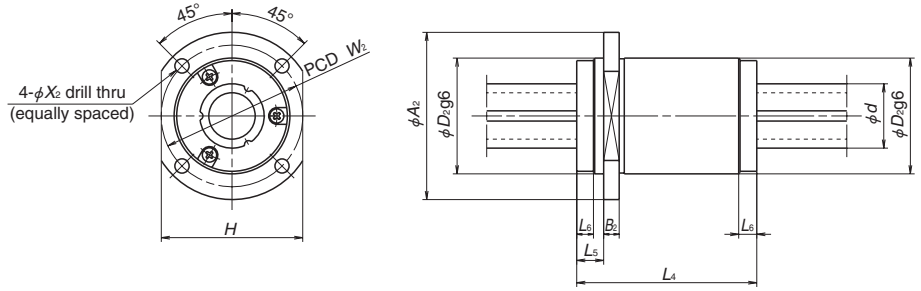



Unit: mm

Model No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Screw shaft hollow d_i	Ball screw nut: Basic load rating (N) Dynamic C_a	Ball screw nut: Basic load rating (N) Static C_{0a}	Dimensions D	A	B	L_1	L_2	L_3	M_1	t_1	W_1	D_1	W	X
∑Z1610	16	10	3.175	16.75	13.4	(8)	5 610	8 300	48	64	5	47	7	4	3-M4	6	28	35	56	4.5
∑Z1632		32					3 600	5 200				52								
∑Z2010	20	10	3.175	20.75	17.4	(14)	9 560	17 300	54	70	6	57	8	4	3-M4	6	32	40	62	4.5
∑Z2020		20					6 100	10 500				63								
∑Z2040		40					4 050	7 020				57								
∑Z2510	25	10	3.175	25.75	22.4	(18)	10 700	22 000	58	74	6	57	8	4	3-M4	6	38	45	66	4.5
∑Z2520		20					6 860	13 100				63								
∑Z2525		25					6 720	13 300				72								
∑Z2550		50					4 490	8 270				64								
∑Z3220	32	20	3.175	32.75	29.4	(25)	7 710	16 900	70	95	8	70	10	6	3-M5	10	44	53	82	6.6
∑Z3232		32					7 590	16 700				91								
∑Z4020	40	20	3.969	41.0	36.9	(30)	11 600	26 500	85	110	8	73	10	6	4-M5	10	58	67	96	6.6
∑Z4040		40					11 300	26 200				107								
∑Z4520	45	20	3.969	46.0	41.9	(35)	12 000	30 000	90	115	8	73	10	6	4-M5	10	63	72	101	6.6
∑Z4540		40					11 800	29 700				107								

Moment of inertia (kg·cm²)	Mass (kg)	Ball spline nut: Basic load rating (N) Dynamic C_r	Basic load rating (N) Static C_{0r}	Basic torque (N·m) Dynamic C_t	Basic torque (N·m) Static C_{0t}	Dimensions D_2	A_2	B_2	L_4	L_5	L_6	H	W_2	X_2	Mass (kg)
0.41	0.50	5 530	7 270	61.5	91.3	35	55	6	60	10.5	6.5	45	4.5	4.5	0.35
0.44	0.55	5 890	8 000	65.5	100										
0.64	0.74	6 260	8 720	86.5	135	40	60	6	65	10.5	6.5	50	50	5.5	0.46
0.65	0.81	6 610	9 450	91.1	145										
0.64	0.74	6 610	9 450	91.1	145										
1.10	0.81	6 630	9 450	115	185	45	65	6	70	10.5	6.5	55	55	5.5	0.57
1.18	0.88	7 290	10 900	125	210										
1.30	1.00	7 290	10 900	125	210										
1.20	0.91	7 290	10 900	125	210										
2.60	1.46	7 630	11 600	165	285	50	70	6	75	10.5	6.5	60	60	5.5	0.64
3.15	1.83	7 950	12 400	175	305										
5.96	2.02	10 600	14 800	290	455	65	88	8	80	12	8	76	76	6.6	1.20
7.85	2.85	11 200	15 900	305	490										
7.73	2.17	11 200	15 900	340	550	70	93	8	85	12	8	81	81	6.6	1.39
10.3	3.06	11 700	17 000	360	590										

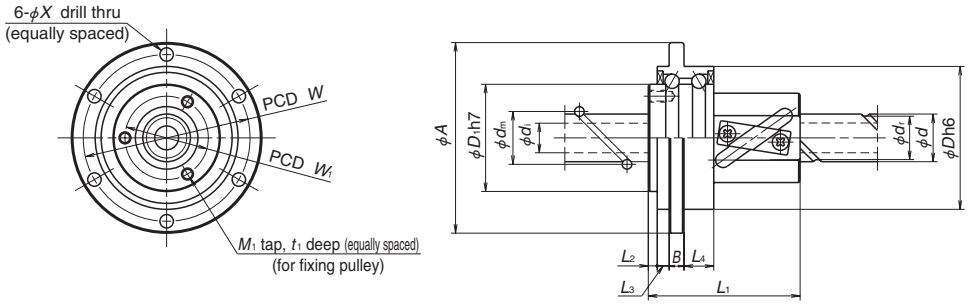


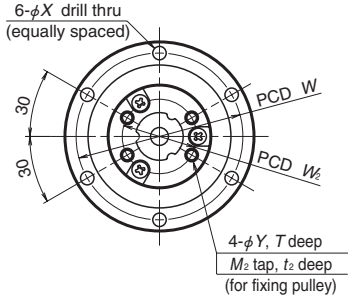


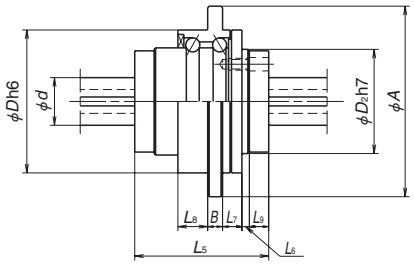

Unit: mm

Model No.	Shaft dia.	Lead	Ball dia.	Ball circle dia.	Root dia.	Screw shaft hollow	Ball screw nut															Moment of inertia	Ball spline nut																		Moment of inertia	Mass
							Basic load rating(N)		Dimensions														Mass	Basic load rating(N)		Basic torque(N·m)		Dimensions																	
	d	l	D_w	d_m	d_r	d_i	Dynamic C_a	Static C_{0a}	D	A	B	L_1	L_2	L_3	L_4	M_1	t_1	W_1	D_1	W	X	(kg·cm²)	(kg)	Dynamic C_r	Static C_{0r}	Dynamic C_t	Static C_{0t}	D	A	B	L_5	L_6	L_7	L_8	L_9	Y	T	M_2	t_2	W_2	D_2	W	X	(kg·cm²)	(kg)
∑C1610	16	10	3.175	16.75	13.4	(8)	5 670	8 300	48	64	5	46	3	4	10	3-M4	6	28	35	56	4.5	0.40	0.41	4 300	5 090	47.9	63.9	48	64	5	45	2.5	6.5	10	6.5	4.5	6.5	M4	7	25	35	56	4.5	0.52	0.42
∑C1632		32					3 600	5 200				51										0.43	0.43																						
∑C2010	20	10	3.175	20.75	17.4	(14)	9 560	17 300	54	70	6	56	4	4	10	3-M4	6	32	40	62	4.5	0.63	0.53	4 730	5 820	65.1	90.5	54	70	6	50	2.5	6.5	10	6.5	5.5	6.5	M5	8	30.5	40	62	4.5	0.86	0.56
∑C2020		20					6 100	10 500				63										0.65	0.56	5 110	6 540	70.5	100																		
∑C2040		40					4 050	7 020				56										0.63	0.53	5 110	6 540	70.5	100																		
∑C2510	25	10	3.175	25.75	22.4	(18)	10 700	22 000	58	74	6	56	4	4	10	3-M4	6	38	45	66	4.5	1.04	0.60	5 130	6 540	87.8	125	58	74	6	55	2.5	6.5	10	6.5	5.5	6.5	M5	8	35.5	45	66	4.5	1.44	0.67
∑C2520		20					6 860	13 100				63										1.13	0.64	5 870	8 000	100	155																		
∑C2525		25					6 720	13 300				71										1.24	0.69	5 870	8 000	100	155																		
∑C2550		50					4 490	8 270				63										1.13	0.64	5 870	8 000	100	155																		

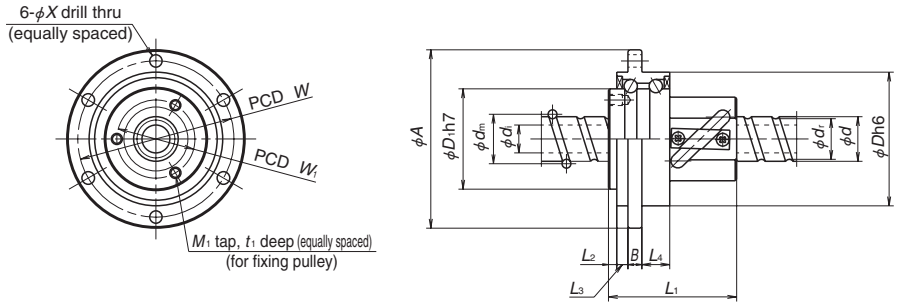

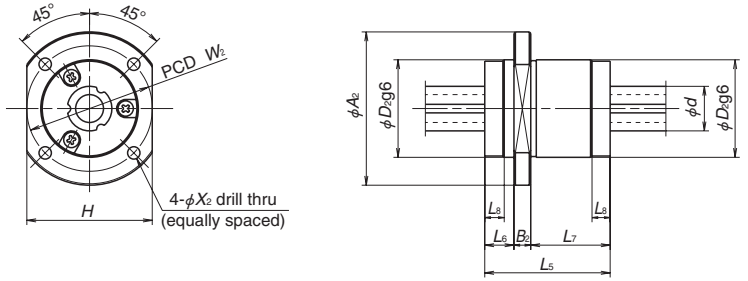

Unit: mm

Model No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Screw shaft hollow d_i	Ball screw nut: Basic load rating(N) Dynamic C_a	Ball screw nut: Basic load rating(N) Static C_{0a}	Dimensions D	A	B	L_1	L_2	L_3	L_4	M_1	t_1	W_1	D_1	W	X
∑CZ1610	16	10	3.175	16.75	13.4	(8)	5 670	8 300	48	64	5	46	3	4	10	3-M4	6	28	35	56	4.5
∑CZ1632		32					3 600	5 200				51									
∑CZ2010	20	10	3.175	20.75	17.4	(14)	9 560	17 300	54	70	6	56	4	4	10	3-M4	6	32	40	62	4.5
∑CZ2020		20					6 100	10 500				63									
∑CZ2040		40					4 050	7 020				56									
∑CZ2510	25	10	3.175	25.75	22.4	(18)	10 700	22 000	58	74	6	56	4	4	10	3-M4	6	38	45	66	4.5
∑CZ2520		20					6 860	13 100				63									
∑CZ2525		25					6 720	13 300				71									
∑CZ2550		50					4 490	8 270				63									

Moment of inertia (kg·cm²)	Mass (kg)	Ball spline nut: Basic load rating(N) Dynamic C_r	Basic load rating(N) Static C_{0r}	Basic torque(N·m) Dynamic C_t	Basic torque(N·m) Static C_{0t}	Dimensions D_2	A_2	B_2	L_5	L_6	L_7	L_8	H	W_2	X_2	Mass (kg)
0.40	0.41	4 300	5 090	47.9	63.9	35	55	6	45	10.5	28.5	6.5	45	45	4.5	0.26
0.43	0.43															
0.63	0.53	4 730	5 820	65.1	90.5	40	60	6	50	10.5	33.5	6.5	50	50	5.5	0.35
0.65	0.56	5 110	6 540	70.5	100											
0.63	0.53	5 110	6 540	70.5	100											
1.04	0.60	5 130	6 540	87.8	125	45	65	6	55	10.5	38.5	6.5	55	55	5.5	0.44
1.13	0.64	5 870	8 000	100	155											
1.24	0.69	5 870	8 000	100	155											
1.13	0.64	5 870	8 000	100	155											

B-3-3.11 Ball Screw with L1 Seal designed for Minimal Grease Splatter [Patent application submitted]

1. Features

● Substantial reduction in grease splatter

The amount of grease splatter for the L1 seal is reduced to 1/10 compared to NSK standard seal to contribute to maintain equipment and working environment clean.

● Adoption of non-contact type seal

Seal torque is avoided by optimizing the seal shape. The current seals with relatively small splatter are all contact type seals, but the L1 seal is the first non-contact type seal to achieve low grease spatter.

● Seal cover is equipped as standard.

To prevent grease from dripping, a seal cover is equipped as standard.

● Later fitting to NSK standard ball screws is available.

NSK ensures quick delivery because later fitting to "Compact FA Series" and "High Speed SS Series" is possible.

2. Specifications

(1) Applicable ball screw

Shaft diameter : 15 to 23 mm
Lead : 5 mm min.
Lubricant : NSK standard grease, NSK clean grease, grease for general food
Environment : Ambient temperature
Short lead time: Can be fitted to NSK standard stock ball screws.
Compact FA series (dia.15 to 25 mm)
High speed SS series (dia.32 mm)

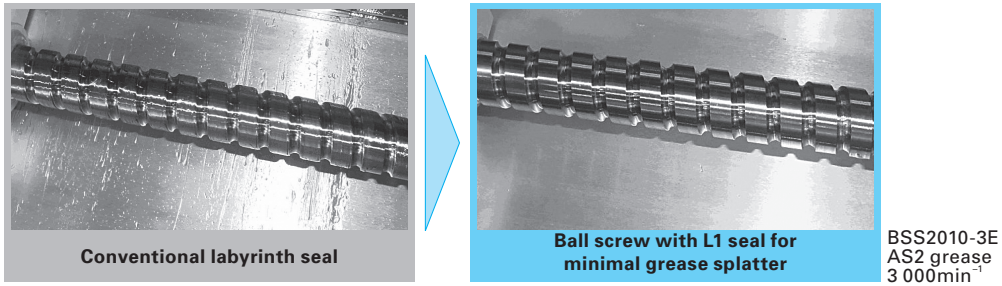


Fig. 1 Comparison of grease splatter from the shaft

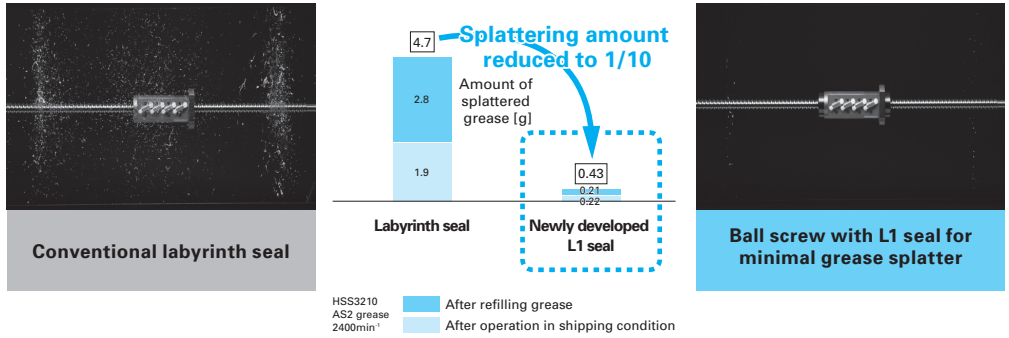


Fig. 2 Results of grease splattering test

(2) Design-related precautions

When designing the screw shaft end, the one end shall be cut-through. For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

Table 1 Combinations of shaft diameter and lead

Shaft dia. \ Lead	5	10	20	25	Applicable series
15	○	○	○		Compact FA
20	○	○	○		
25	○	○	○	○	
32	○	○			High speed SS

Please contact NSK except for the above types.



Compact FA series (dia.15 to 25 mm)



High Speed SS series (dia.32 mm)

Fig. 3 Appearance

3. Example of reference number

A structure of "Reference number for ball screw" is as follows.
*"L1" is added at the end of "nut model code" and "Specifications number".

◇Reference number for ball screw

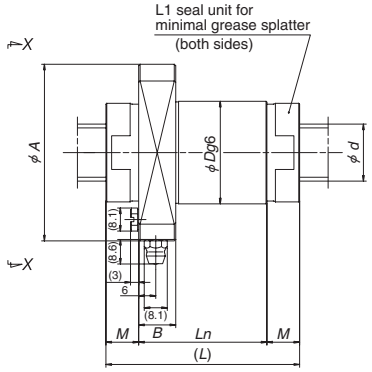
W2005 -**L1 - C5Z10**

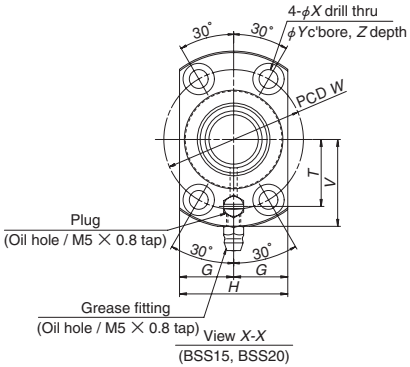
NSK L1 equipped type ball screw code

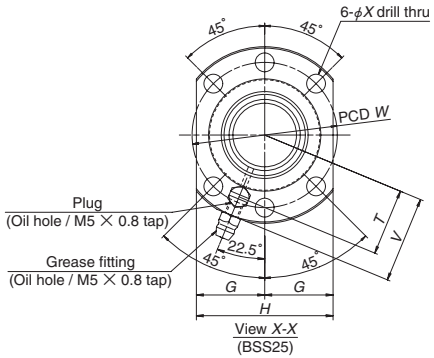
4. Precautions for use

- Maximum temperatures are as follows.
  Compact FA series with L1 seal: 80 °C (at outside diameter of ball nut)
  High Speed SS series with L1 seal: 60 °C (at outside diameter of ball nut)
- Do not use the product in environments where foreign matter is present.
- Please note that L1 seal reduces grease splatter but cannot reduce it to zero.

The data shown in the catalog are the results of our tests, and no warranty is given to sealing performance on actual usage on machinery.
The amount of grease splatter is affected by usage conditions (rotational speed, temperature, greases, grease filling amount). Dust covers and other measures to keep machinery free of dust are recommended.









Model No.	Shaft dia.	Lead	Basic load rating (N)		Ball nut dimensions												Seal dimensions	Total length with nut & seal	Internal spatial volume of nut	Standard volume of grease replenishing
			Dynamic	Static	Dia.	Flange				Nut length	Bolt holes				Oil hole position					
	d	l	C_a	C_{0a}	D	A	G	H	B	L_n	W	X	Y	Z	T	V	M	L	(cm³)	(cm³)
BSS1505-3E	15	5	6 410	10 100	28	51	15.5	31	11	30	39	5.5	9.5	5.5	18	25	10	50	2.0	1.0
BSS1510-3E		10	6 530	10 200						43								63		
BSS1520-2E		20	5 660	8 700	32	55	16.5	33		51	43				20	27	15	81	2.8	1.4
BSS2005-3E	20	5	10 400	18 500	36	62	19	38	13	31	49	6.6	11	6.5	23.5	30.5	12	55	3.4	1.7
BSS2010-3E		10	10 200	18 600						45								69	3.2	1.6
BSS2020-2E		20	6 790	11 800						54							18	90		
BSS2505-3E	25	5	11 500	23 500	40	62	24	48	12	32	51	6.6	–	–	23.5	30.5	12	56	4.4	2.2
BSS2510-4E		10	15 000	32 400						56								80	4.7	2.4
BSS2520-2E		20	7 650	14 800						54							20	94	3.9	2.0
BSS2525-2E		25	7 490	14 600						63								103	4.3	2.2

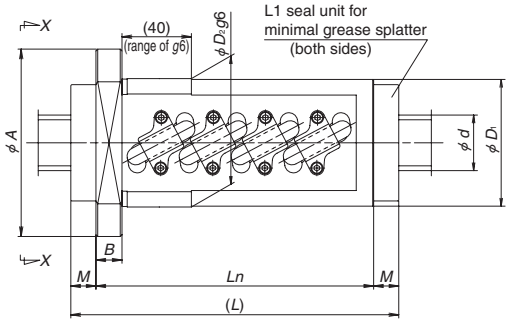Notes: 1. Maximum operating temperature: 80°C (at outside diameter of ball nut)
2. Grease fitting attachment is done only on the outer side of the flange (see diagram).





Model No.	Shaft dia.	Lead	Basic load rating (N)		Ball nut dimensions													Seal dimensions	Total length with nut & seal	Internal spatial volume of nut	Standard volume of grease replenishing
			Dynamic	Static	Dia.		Flange				Nut length	Bolt holes				Oil hole position					
	d	l	C_a	C_{0a}	D_1	D_2	A	G	H	B	L_n	W	X	Y	Z	T		M	L	(cm³)	(cm³)
HSS3205	32	5	21 800	56 000	57	58	85	32	42	13	89	71	6.6	11	6.5	33		9.5	108	10	5
HSS3210	32	10	54 500	110 000	73	74	108	41	53.5	15	160	90	9	14	8.5	45		14.5	189	43	22

Notes: 1. Maximum operating temperature: 60°C (at outside diameter of ball nut)

B-3-3.12 Equipped with "NSK K1™" Lubrication Unit

This product is being applied for a patent.

1. Features

NSK K1 is a new, efficient lubrication unit. Equipped with NSK K1, the ball screws demonstrate a superb performance as shown below.

● Long-term, maintenance-free usage

In mechanical environments where lubrication is difficult to apply, long-term running efficiency is maintained by using the NSK K1 in combination with grease.

[ex.] For automotive component processing lines, etc.

● Does not pollute the environment

A very small volume of grease combined with NSK K1 can provide sufficient lubrication in the environment where grease is undesirable as well as in the environment where high cleanliness is required.

[ex.] Food processing equipment, medical equipment, flat panel display/ semiconductor manufacturing equipment, etc.

● Good for environments where lubricant is washed away

When used with grease, life of the machine is prolonged even when the machine is washed entirely by water, or in an environment where the machine is exposed to rain or wind.

[ex.] Food processing equipment, housing/ construction machines, etc.

● Maintains efficiency in dusty environment

In environment where oil- and grease-absorbing dust is produced, long-term efficiency in lubrication and prevention from foreign inclusions are maintained by using the NSK K1 in combination with grease.

[ex.] Woodworking machines, etc.

● Comparative duration test of samples with and without NSK K1

Sample, testing conditions and test result are shown in **Table 1** and **Fig. 1**.

Without lubricant, operation became impossible after running 8.6 km. With NSK K1 alone, it was possible to continue running exceeding 10 000 km.

NSK conducts various tests under different conditions. Please consult NSK.

Table 1 Sample and testing conditions

Ball screw	Shaft dia. 20 mm, lead 20 mm
Lubrication	Comparison with only NSK K1 against no lubrication
Speed	4 000 min^{-1} (80 m/min)
Stroke	600 mm

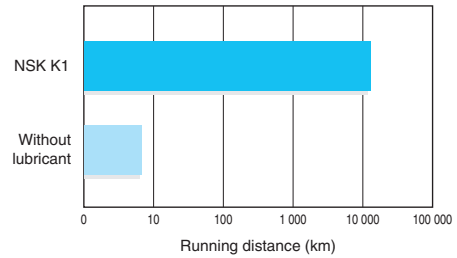


Fig. 1 Duration test results on ball screws without lubricant

2. Specifications

(1) Structure

The structure makes it possible to have a stable contact between the NSK K1 and outside of a ball screw with moderate force by a garter spring which fits onto outside of the NSK K1.

NSK K1 is installed between the ball screw nut and the labyrinth seal. The overall nut length is slightly longer than that of the standard ball screw.

Combination of NSK standard grease (factory-packed in the nut) and NSK K1 are standard specifications.




Fig. 2 NSK K1

(2) Accuracy grade and axial play

Accuracy grades, clearance and preload specifications remain unchanged from the existing products. There is a slight increase in torque due to the equipped NSK K1.

(3) Overall nut length after equipped with NSK K1™

The nut length becomes longer than that of standard ball screws after equipped with NSK K1. The nut length after equipped with K1 is shown in pages B581 to B584 for each type of ball recirculation. NSK K1 can be installed on other types not listed in the dimension table. Please consult with NSK if you require the K1 for a special ball nut.

(4) Application examples

Ball screws equipped with NSK K1 are maintenance-free for a long period of time. Its application is expanding in various industries.

- Semiconductor/flat panel display manufacturing equipment
- Industrial robot
- Wood working machines
- Machine tools
- Automobile manufacturing machines

3. Precautions for use

Temperature range for use: Maximum temperature: 50˚C
Momentary maximum temperature: 80˚C

Chemicals that should not come to contact with K1:
Do not leave NSK K1 in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust preventive oil which contains white kerosene.

Note: Water-type cutting oil, oil-type cutting oil, grease such as mineral-type AS2 and ester-type PS2 do not damage K1 Seal.

Note: NSK K1 is not applicable to the Compact FA series.

4. Example of reference number

A structure of "Reference number for ball screw" is as follows.

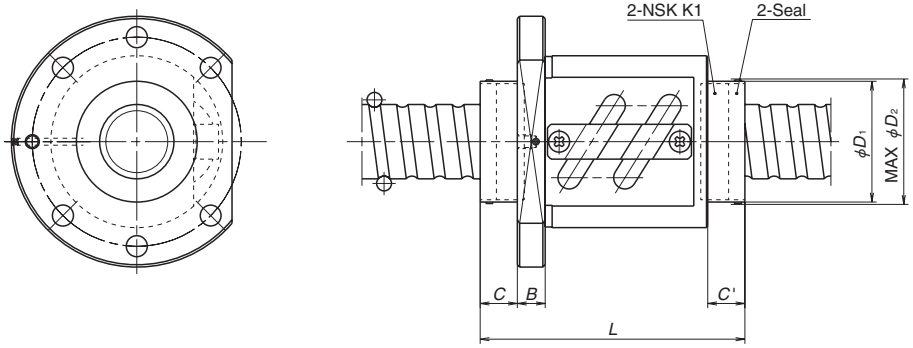
Note: "K1" is added at the end of "nut model code" and "Specifications number".

◇Reference number for ball screw equipped with NSK K1

W1401 - ** P K1 - C3 Z10**

NSK K1 equipped type ball screw code

(1) Tube type




Tube type

Model No.	Screw shaft dia. d	Lead l	K1 installing dimension C	K1 installing dimension C'	Frange width B	Overall length when equipped K1 L	K1 cap dimension Cap dia. φD1	K1 cap dimension Protruding dimension φD2
PFT1004-2.5	10	4	14	15	10	61.5	φ22	MAX φ24
PFT1205-2.5	12	5	14	15	10	66	φ26.5	MAX φ29
LPFT1210-2.5		10		17		79		
PFT1405-2.5	14	5	14	15	10	65	φ30	MAX φ32
LPFT1510-2.5	15	10	14	15	10	76	φ30	MAX φ32
PFT1605-2.5	16	5	14	15	10	67	φ32	MAX φ34
PFT2005-5	20	5	14	14	10	81	φ38	MAX φ40
LPFT2010-2.5		10				78		
LPFT2020-1.5		20				84		
ZFT2505-10	25	5	16	17	10	115	φ44	MAX φ46
PFT2506-5		6	16	17	12	93	φ44	MAX φ46
PFT2510-2.5		10	16	17	12	89	φ44	MAX φ46
ZFT2510-3						103		
LPFT2520-2.5		20	12	12	12	109	φ38	MAX φ40
LPFT2525-1.5		25	12	12	12	98	φ38	MAX φ40
DFT2805-5	28	5	16	17	12	137	φ48	MAX φ50
PFT2810-2.5		10				90		
DFT2810-3						174		
PFT3206-5	32	6	16	17	12	93	φ52	MAX φ54
ZFT3206-10						129		
PFT3210-5		10	16	17		122	φ52	MAX φ54
ZFT3210-5				17		122		
DFT3210-5				16		212		
PFT3212-3		12	16	17		114	φ52	MAX φ54
DFT3212-3				16		198		
LPFT3225-2.5		25	12	12		122	φ46	MAX φ48
LPFT3232-1.5		32	12	12		109	φ46	MAX φ48

Notes: 1. NSK K1 can be installed in other types not listed in the table. Please consult NSK.
2. C,C' and L are the dimensions when one NSK K1 is equipped to both ends of the nut.


Model No.	Screw shaft dia. d	Lead l	K1 installing dimension C	K1 installing dimension C'	Frange width B	Overall length when equipped K1 L	K1 cap dimension Cap dia. φD1	K1 cap dimension Protruding dimension φD2
PFT3610-5	36	10	19	20	15	131	φ56	MAX φ58
DFT3610-5				19		221		
HZF3616-5		16		19		163		
HZF3620-3.5		20		19		146		
PFT4008-5	40	8	19	20	16	117	φ62	MAX φ64
ZFT4008-10						165		
ZFT4010-7		10	19	20		152	φ62	MAX φ64
DFT4010-5				19		222	φ61	
PFT4012-5		12	19	20		144	φ62	MAX φ64
DFT4012-5				19		252	φ61	
HZF4016-5		16	19	19		164	φ61	MAX φ64
HZF4020-5		20	19	19		189	φ61	MAX φ64
LPFT4032-2.5		32	14	14		151	φ54	MAX φ56
LPFT4040-1.5		40	14	14		133	φ54	MAX φ56
DFT4510-5	45	10	19	19	16	222	φ72	MAX φ75
DFT4512-5		12			16	254		
HZF4520-5		20			18	190		
ZFT5010-10	50	10	19	20	18	194	φ73	MAX φ76
DFT5012-5		12		19		256		
ZFT5016-5		16		20		172		
DFT5016-5				19		300		
HZF5020-5		20		19		192		
HZF5025-5		25		19		221		
DFT5516-5	55	16	22	22	18	178	φ81	MAX φ87
HZF5520-5		20				198		MAX φ81
HZF5525-5		25				227		MAX φ81
DFT6316-5	63	16	22	22	18	322	φ89	MAX φ95
DFT6320-5		20				362		

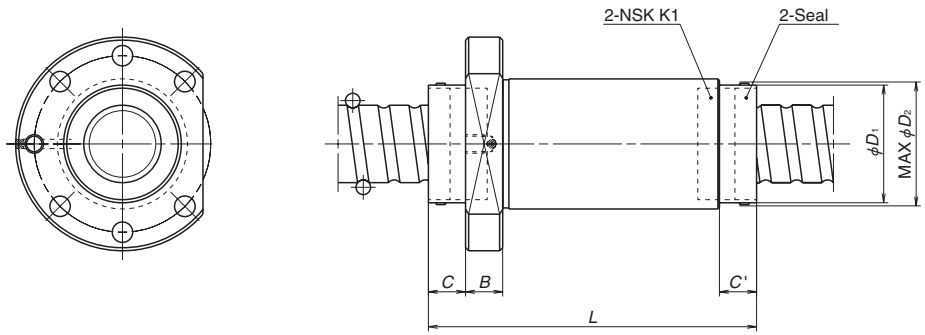(2) Deflector(bridge) type



Deflector(bridge) type

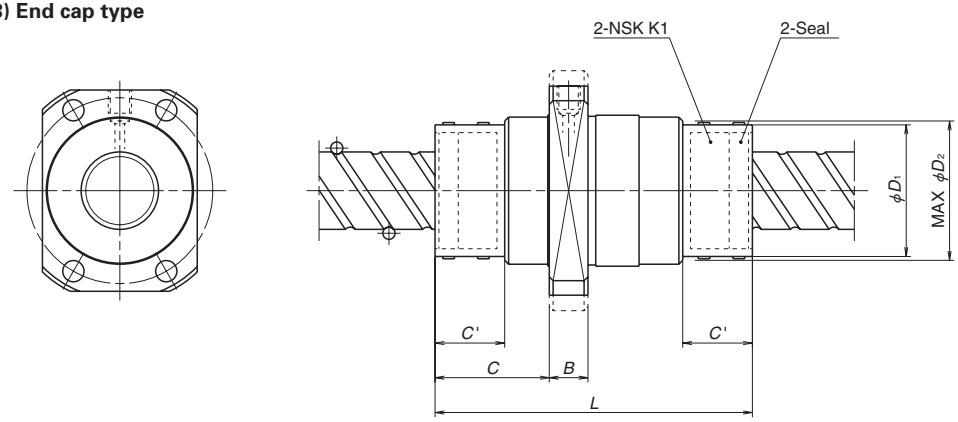(3) End cap type



End cap type

Model No.	Screw shaft dia.	Lead	K1 installing dimension		Frange width	Overall length when equipped K1	K1 cap dimension	
	d	*l*	*C*	*C'*	*B*	*L*	Cap dia. φ D_1	Protruding dimension φ D_2
ZFD2005-6	20	5	9	9	12	87	φ32	MAX φ34
ZFD2506-6	25	6	12	–	12	102	φ38	MAX φ40
ZFD2510-4		10		12		106		
ZFD3208-8	32	8	12	12	12	136	φ46	MAX φ48
ZFD3210-6		10				138		
ZFD3212-6		12				153		
ZFD4010-8	40	10	14	14	16	167	φ54	MAX φ57
ZFD4012-8		12				189		
ZFD5010-8	50	10	14	14	18	169	φ64	MAX φ67
ZFD5012-6		12				167		

Notes: 1. NSK K1 can be installed in other types not listed in the table. Please consult NSK.
2. C,C' and L are the dimensions when one NSK K1 is equipped to both ends of the nut.


Model No.	Screw shaft dia.	Lead	K1 installing dimension		Frange width	Overall length when equipped K1	K1 cap dimension	
	d	*l*	*C*	*C'*	*B*	*L*	Cap dia. φ D_1	Protruding dimension φ D_2
UPFC1520-1.5	15	20	29	18	10	81	φ30	MAX φ32
LPFC1616-3	16	16	28	18	10	74	φ28	MAX φ30
LPFC2020-3	20	20	29.5	18	10	82	φ34	MAX φ36
UPFC2040-1		40	29			77	φ32	MAX φ34
LPFC2525-3	25	25	34	21	12	97	φ44	MAX φ46
UPFC2550-1		50				92		
LPFC3232-3	32	32	37	21	12	112	φ52	MAX φ54
UPFC3264-1		64	36.5			104		
LPFC4040-3	40	40	43.5	24	15	133	φ62	MAX φ65
LPFC5050-3	50	50	45.5	24	20	155	φ74	MAX φ77

Notes: 1. NSK K1 can be installed in other types not listed in the table. Please consult NSK.
2. C,C' and L are the dimensions when one NSK K1 is equipped to both ends of the nut.


B-3-3.13 Special Ball Screws

In addition to the standard ball screws, NSK manufactures various types of ball screws in special shapes as shown below.

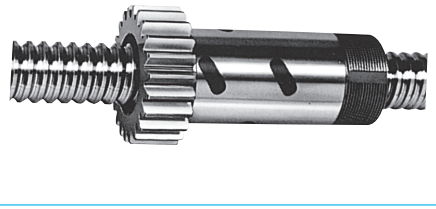
Thoroughly discuss with NSK the specifications before determining specifications and ordering ball screws in special shapes.




Nut with gear

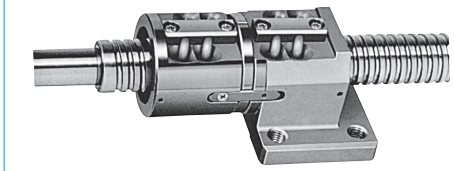


Double nut with flat mounting surface

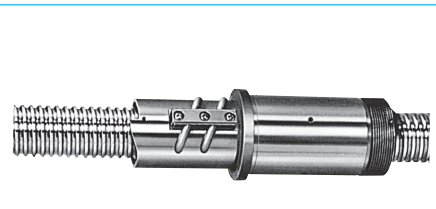

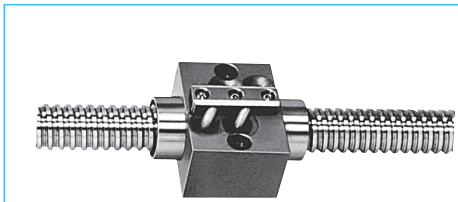
Lightly preloaded single nut with bearing seat



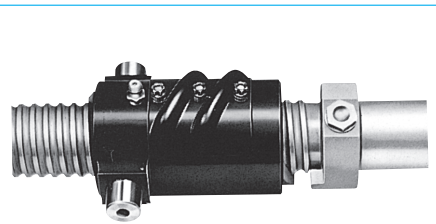
Lightly preloaded single nut with flat mounting surface




Nut with trunion

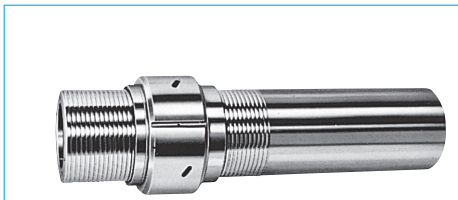

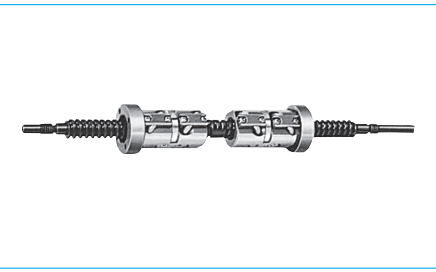Hollow shaft, lightly preloaded single nut, with large shaft diameter and fine lead



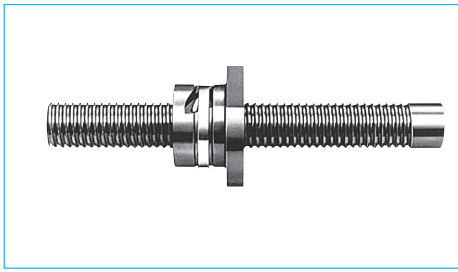
Double nut with right and left turn thread on each side of screw shaft




Ceramic ball screw



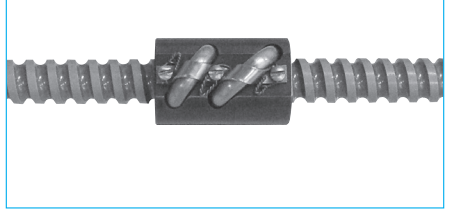
Flanged to flanged ball nut




Ball screw for aircraft

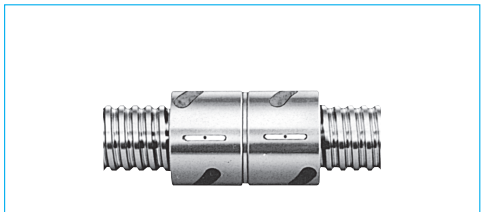


Cylindrical double nut

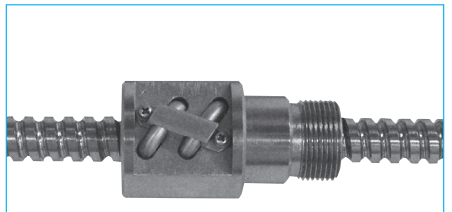

Ball screw for nuclear power plant

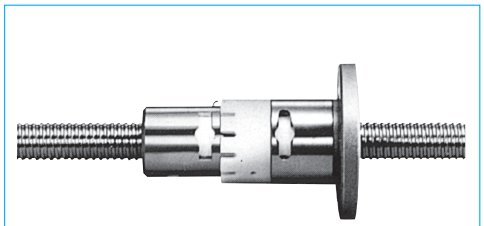

Spring preloaded ball screw

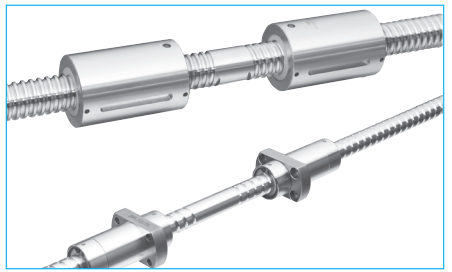

Right and left hand thread on each side of screw

C-1 Monocarrier™

1. Features ····· C5
2. Classification and Series ····· C7
3. Accessories ····· C9
4. Selection of Monocarrier ····· C10
   4.1. Procedures for Selecting Monocarrier ·· C10
   4.2. Rigidity ····· C10
   4.3. Maximum Speed ····· C11
   4.4. Accuracy Grade ····· C15
   4.5. Stroke and Ball Screw Lead ··· C15
   4.6. Basic Load Rating ····· C17
   4.7. Estimation of Life Expectancy ··· C19
   4.8. Example of Life Estimation ·· C21
5. MCM Series ····· C25
   5.1. MCM Series Reference Number Coding ··· C27
   5.2. MCM Series Dimension Table of Standard Products ····· C28
   5.3. MCM Series Accessories ··· C49
6. MCH Series ····· C73
   6.1 MCH Series Reference Number Coding ··· C75
   6.2 MCH Series Dimension Table of Standard Products ····· C76
   6.3 MCH Series Accessories ····· C83

C-2 Toughcarrier™

1. Features ····· C95
2. Classification and Series ····· C95
3. Accessories ····· C97
4. Selection of Toughcarrier ····· C98
   4.1 Selection Procedures ····· C98
   4.2 Stroke and Lead ····· C99
   4.3 Reference Number Coding and Accuracy Grade ····· C100
   4.4 Maximum Speed ····· C101
   4.5 Rigidity ····· C103
   4.6 Basic Load Rating ····· C104
   4.7 Estimation of Life Expectancy ·· C105
   4.8 Example of Life Estimation ·· C107
5. TCH Series Dimension Table for Standard Products ····· C111
   5.1 TCH06 Series ····· C111
   5.2 TCH09 Series ····· C113
   5.3 TCH10 Series ····· C115
6. Accessories ····· C117
   6.1 Sensor Unit ····· C117
   6.2 Cover Unit ····· C118
   6.3 Motor Bracket ····· C121
7. Motor Bracket Compatibility Table ·· C130
8. Sensor Rail and Top Cover Unit Combination Table ····· C131
9. Toughcarrier High-Thrust Series ·· C134

C-3 Technical Materials

1. Sensor Specification ····· C137
   1.1 Proximity Switch ····· C137
   1.2 Photo Sensor ····· C138
2. Characteristics and Evaluation Method ····· C139
   2.1 Positioning Accuracy ····· C139
   2.2 Repeatability ····· C139
   2.3 Running Parallelism ····· C139
3. Special Specifications ····· C140
4. Maintenance ····· C141
   4.1 Maintenance Method ····· C141
   4.2 NSK K1™ Lubricant Unit ···· C141
5. NSK Clean Grease LG2 Specification ·· C142

C BLOCK

Monocarrier™ Toughcarrier™

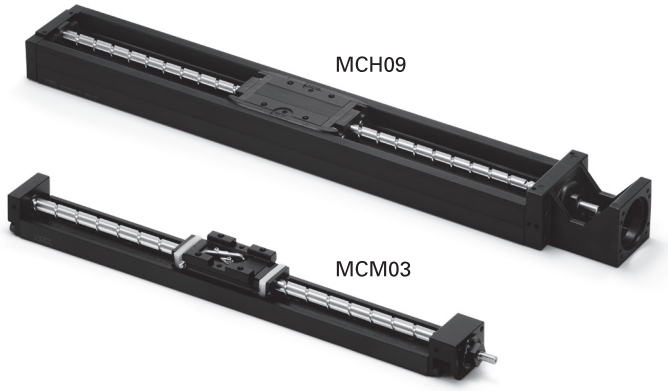
C3-C92
C93 -C134
C135 -C142

Monocarrier™, Toughcarrier™


All-in-one structure (ball screw, linear guide and base integrated) results in a light and compact actuator without extra work for design or adjustment when installing. Design and assembly loads can be reduced by unit type. Also, the many variations make it possible to deal with many different uses.

Monocarrier™ and Toughcarrier™ Classifications

●Monocarrier™




Rolling elements: Balls




Ball



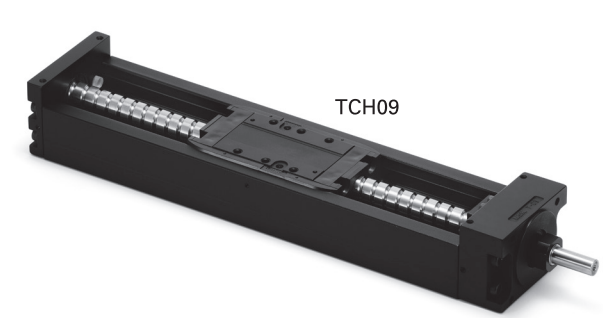●Toughcarrier™: High load capacity




Rolling elements: Rollers




Roller



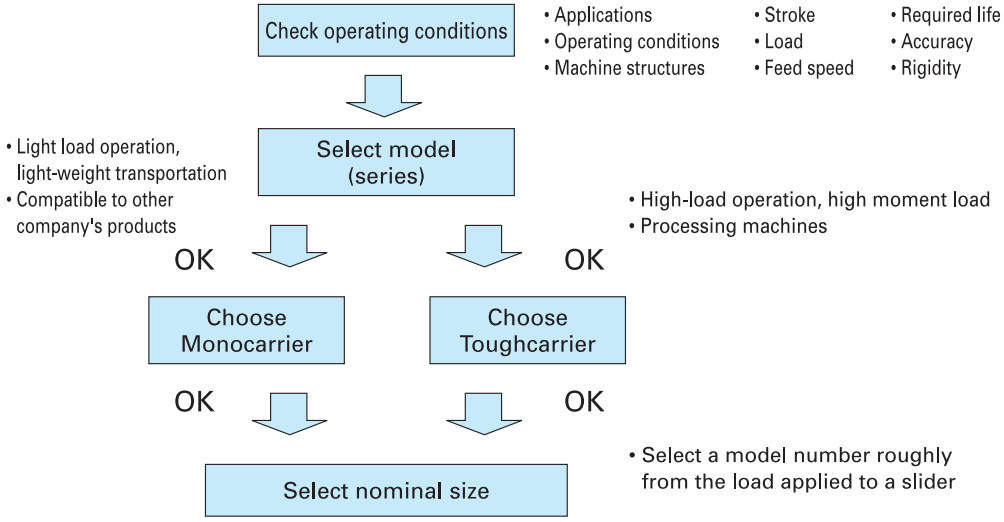Procedure for Selecting Monocarrier™ and Toughcarrier™ models



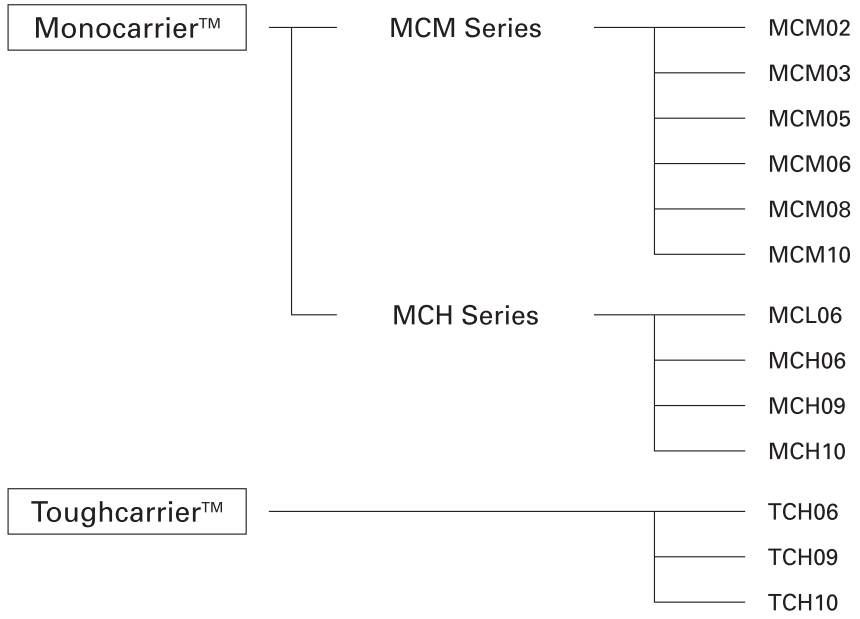Monocarrier™ and Toughcarrier™ Composition



C-1 Monocarrier™

1 Features C5
2 Classification and Series C7
3 Accessories C9
4 Selection of Monocarrier C10
4.1 Procedures for Selecting Monocarrier C10
4.2 Rigidity C10
4.3 Maximum Speed C11
4.4 Accuracy Grade C15
4.5 Stroke and Ball Screw Lead C15
4.6 Basic Load Rating C17
4.7 Estimation of Life Expectancy C19
4.8 Example of Life Estimation C21
5 MCM Series C25
5.1 MCM Series Reference Number Coding C27
5.2 MCM Series Dimension Table of Standard Products C28
5.3 MCM Series Accessories C49
6 MCH Series C73
6.1 MCH Series Reference Number Coding C75
6.2 MCH Series Dimension Table of Standard Products C76
6.3 MCH Series Accessories C83

C-1 Monocarrier™

C-1 Monocarrier™

C-1-1 Features

NSK's Monocarrier is the culmination of technology and innovation in linear motion. This lightweight, compact single axis linear actuator integrates quality NSK ball screw, linear guide and support bearings into one unit.

1 Light weight, compact design

◯Available in two different shapes of cross-section, depending on application.
Light weight type: MCM Series
Rigid type: MCH Series

2 All -in-one structure

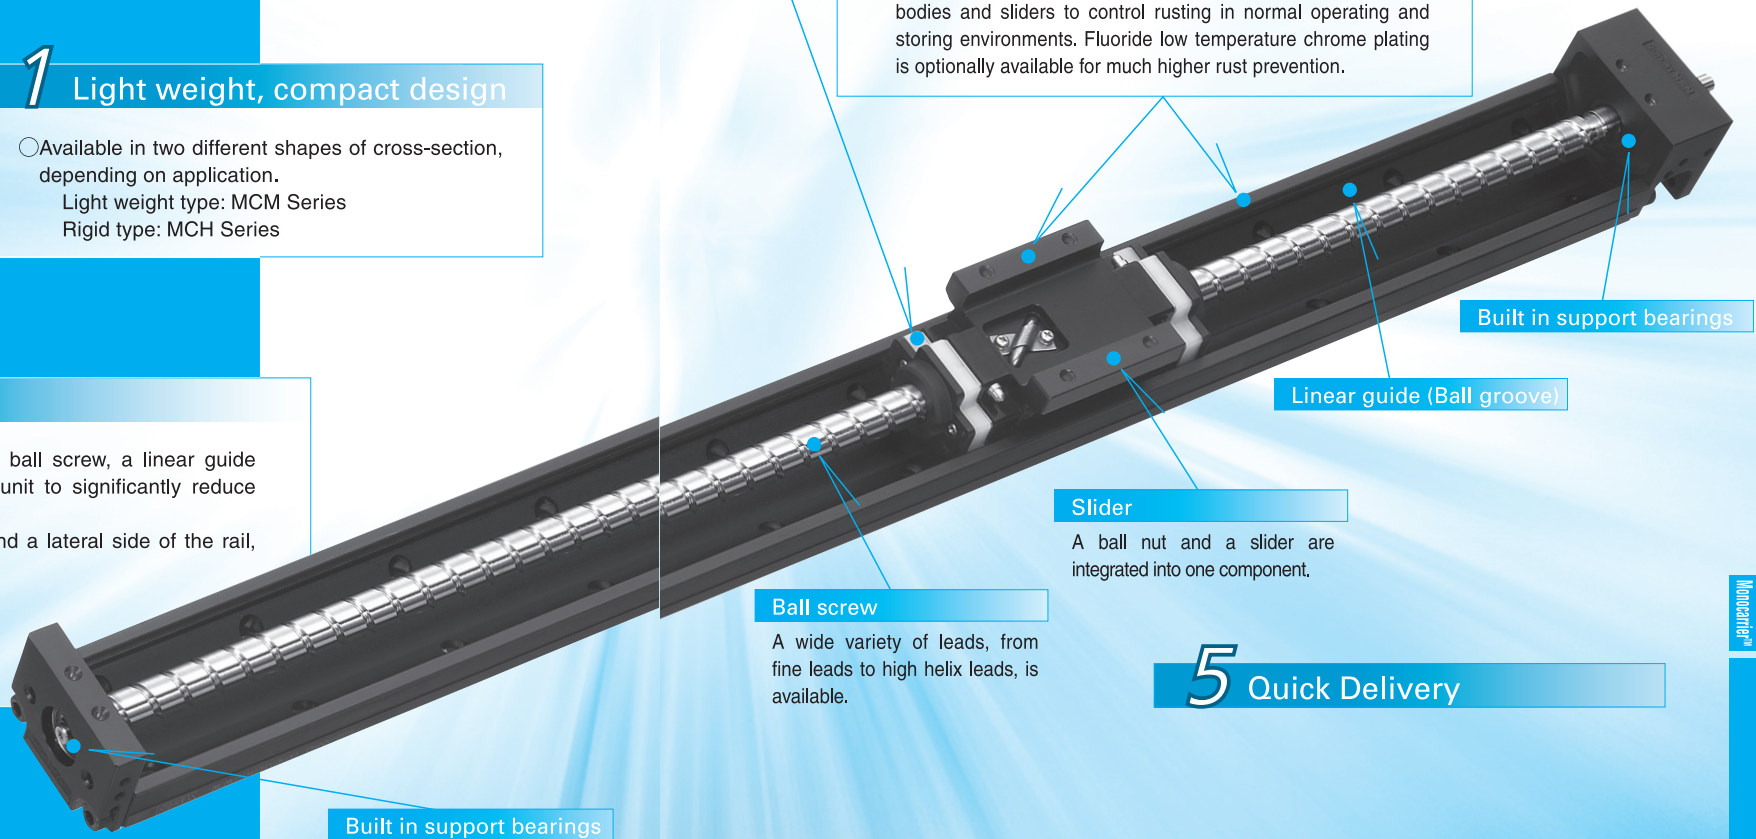
◯The all-in-one structure integrates a ball screw, a linear guide and support bearings into a single unit to significantly reduce design and installation time.
◯Multiple datum planes, the bottom and a lateral side of the rail, facilitate highly accurate installation.
◯Immediate operation after installation and run-in is possible.
◯A wide selection of fine to high helix leads are available.

3 Superb antirust capability

◯Low temperature chrome plating is a standard feature for the bodies and sliders to control rusting in normal operating and storing environments. Fluoride low temperature chrome plating is optionally available for much higher rust prevention.

4 Long term maintenance free

◯Use of NSK K1 Lubrication Units and grease maintains a smooth lubricating performance for long periods in mechanical environments where lubrication is difficult to apply, where use of oil is not permitted because of hygienic issues, or where the mechanical equipment is subjected to frequent wash downs.
◯NSK K1 lubrication unit is available for food processing machines and medical equipment.
◯Grease for clean environments and for general machinery is available.



5 Quick Delivery

MONOCARRIER™

C-1-2 Classification and Series


Table 2.1

	Light Weight	Beam Rigidity	Moment Rigidity	Accuracy	Long Stroke	Size Variation
MCM Series	◎	○	○	◎	○	◎
MCH Series	○	◎	○	◎	◎	○

◎: Excellent ○: Suitable in use


【MCM Series Cross-sections】

MCM02




MCM03

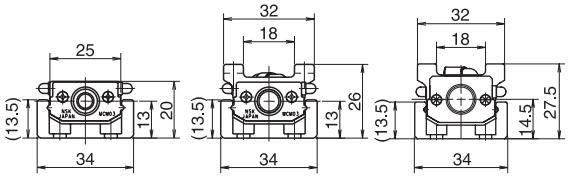
(Lead 1 and 2 mm) (Lead 5,10 and 12 mm) (Lead 15 mm)




MCM05



MCM06



MCM08



MCM10


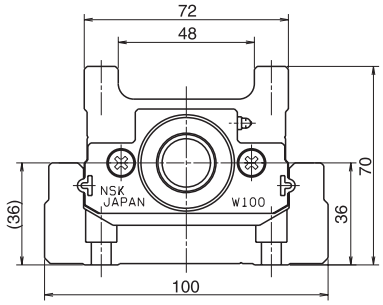



Fig. 2.1

【MCH Series Cross-sections】

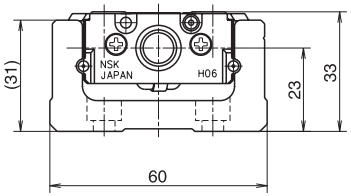
MCH06



MCH09

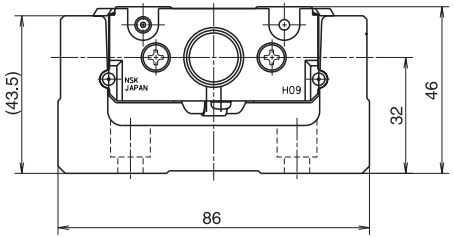

MCL06

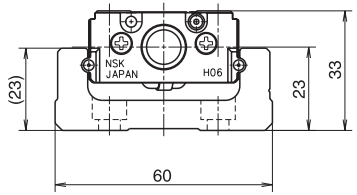

MCH10

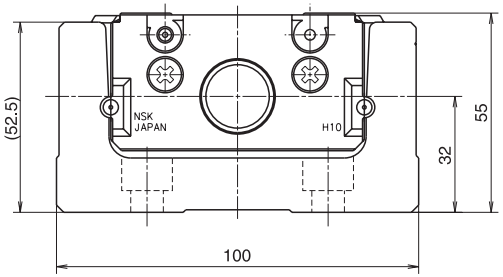


Fig. 2.2

C-1-3 Accessories

MCM Series

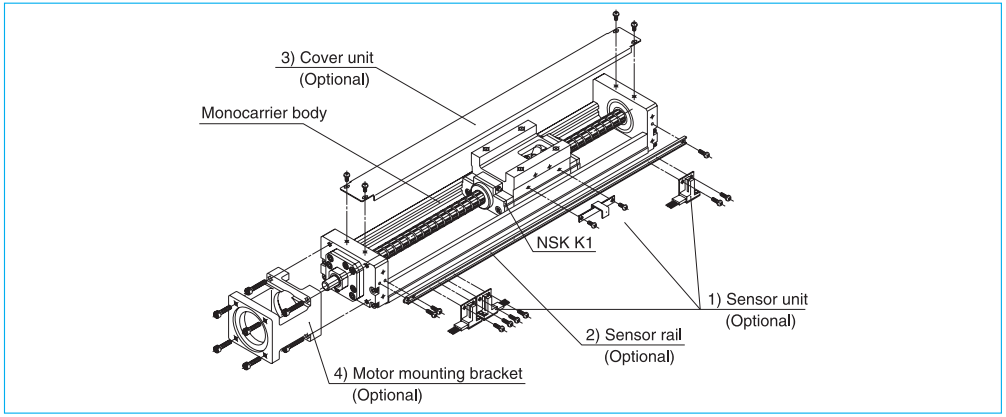


Fig. 3.1 Assembly: Accessories for MCM10 (example)

1) Sensor unit: Sensors, sensor mounting parts and a sensor dog are available in a set.
* When a sensor unit is used, the full cover unit cannot be used.
2) Sensor rail: Rail for sensor mounting is available.
3) Cover unit: Top cover or full cover (included top cover and side cover) is available.
4) Motor bracket for motor mounting: Available for a variety of models.
Note: We assemble accessories upon request.

MCH Series

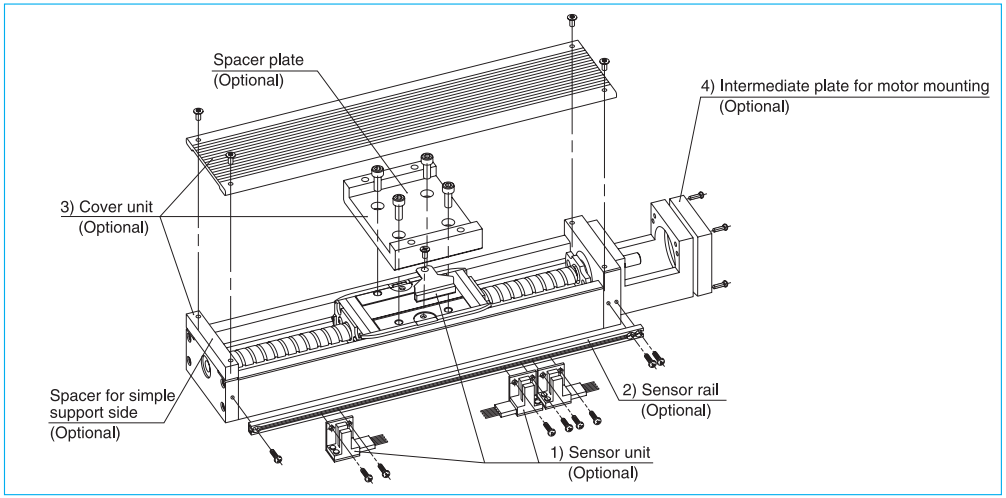


Fig. 3.2 Assembly: Accessories for MCH10 (example)

1) Sensor unit: Sensors, sensor mounting parts and a sensor dog are available in a set.
2) Sensor rail: Rail for sensor mounting is available.
3) Cover unit: Top cover (included spacer plate and spacer for simple support side) is available.
4) Intermediate plate for motor mounting: Available for a variety of models.
Note: We assemble accessories upon request.

C-1-4 Selection of Monocarrier

C-1-4. 1 Procedures for Selecting Monocarrier

Select a model number of Monocarrier based on stroke and rigidity (refer to **Figs. 4.2**, and **4.3**).

↓

Select a ball screw lead referring to "**C-1-4.3 Maximum Speed**" so that the rotational speed does not exceed the limit.

↓

Study the loads to be applied to the linear guide and obtain the equivalent load (*Fe*) substituting them for equation 1) or 2) on page C19. Obtain the mean effective load (*Fm*) substituting them for equation 3) on page C20, then calculate the life.

↓

Study the loads to be applied to the ball screw and support unit. Obtain the mean effective load (*Fm*) substituting them for equation 3) on page C20, then calculate the life.

C-1-4. 2 Rigidity

Rigidity of rail

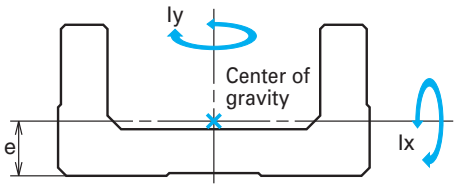


Fig. 4.1

Table 4.1 Rigidity of rail

Model No.	Geometrical moment of inertia ×10⁴ (mm⁴)		Center of gravity (mm)	Mass (kg/ 100 mm)
	Ix	Iy	e	w
MCM02	0.097	1.32	3.3	0.11
MCM03	0.30	3.3	4.5	0.18
MCM05	0.78	11.4	6.0	0.31
MCM06	2.14	26.1	7.0	0.57
MCM08	5.90	81.0	9.2	0.88
MCM10	15.6	219	12.2	1.52
MCL06	2.58	29.6	7.8	0.56
MCH06	6.5	38.2	10.8	0.67
MCH09	28.7	172	15.5	1.48
MCH10	54.0	307	18	1.93

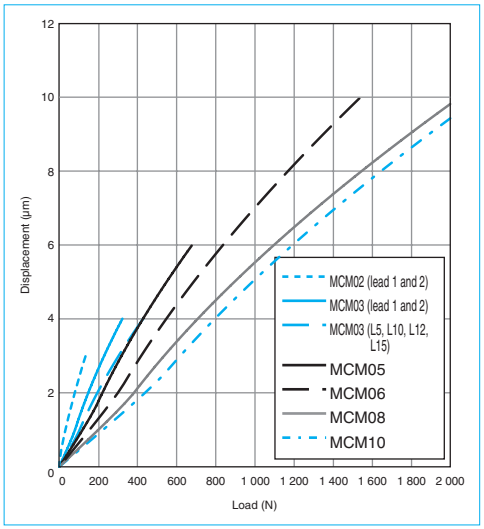


Fig. 4.2 MCM Series rigidity in radial direction

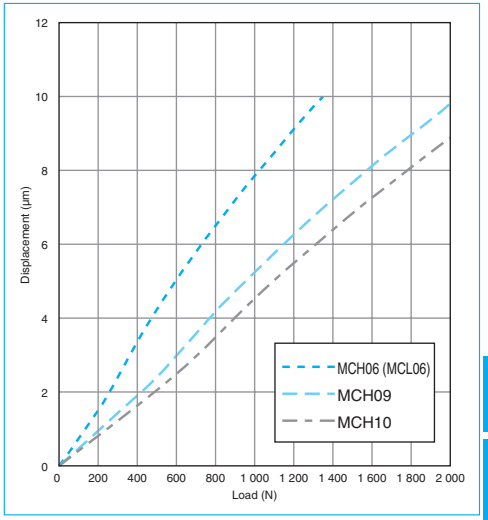


Fig. 4.3 MCH Series rigidity in radial direction

C-1-4. 3 Maximum Speed

(1) Maximum Speed of MCM Series

Maximum speed of Monocarrier is determined by critical speed of ball screw shaft and d • n value.

Do not exceed maximum speeds on the table below.

Table 4.2

	Ball screw lead	Stroke (mm)	Rail length L_2 (mm)	Maximum speed (mm/s)
MCM02 Single slider	1	50	100	50
		100	150	
		150	200	
	2	50	100	100
		100	150	
		150	200	
MCM03 Single slider	1	50	115	50
		100	190	
		150	240	
	2	50	115	100
		100	190	
		150	240	
	5	50 to 250	140 to 340	410
	10	50 to 250	140 to 340	830
	12	50 to 250	140 to 340	1 000
	15	50 to 250	140 to 340	1 250
MCM05 Single slider	5	50 to 400	180 to 530	410
		500	630	370
		600	730	270
	10	50 to 400	180 to 530	830
		500	630	750
		600	730	540
	20	50 to 400	180 to 530	1 660
		500	630	1 470
		600	730	1 070
	30	50 to 400	180 to 530	2 500
		500	630	2 160
		600	730	1 570
MCM05 Double slider	10	60 to 410	280 to 630	830
		510	730	710
	20	60 to 410	280 to 630	1 660
		510	730	1 460
MCM06 Single slider	5	50 to 500	190 to 640	410
		600	740	330
		700	840	250
		800	940	190
	10	50 to 500	190 to 640	830
		600	740	650
		700	840	500
		800	940	390
	20	50 to 500	190 to 640	1 660
		600	740	1 300
		700	840	990
		800	940	780
MCM06 Double slider	5	110 to 410	340 to 640	410
	10	110 to 510	190 to 640	830
		610	740	660
		710	840	500
	20	210 to 510	440 to 640	1 660
		610	740	1 310
		710	940	1 000
MCM08 Single slider	5	50 to 500	220 to 670	410
		600	770	320
		700	870	250
		800	970	190
	10	50 to 500	220 to 670	830
		600	770	640
		700	870	490
		800	970	380
	20	50 to 500	220 to 670	1 660
		600	770	1 280
		700	870	980
		800	970	770
	30	400	570	2 500
		500	670	2 480
		600	770	1 830
		700	870	1 400
MCM08 Double slider	10	80 to 380	370 to 670	830
		480	770	810
		580	870	630
		680	970	500
	20	180 to 380	470 to 670	1 660
		480	770	1 640
		580	870	1 270
		680	970	1 010
MCM10 Single slider	10	50 to 600	280 to 780	830
		700	880	660
		800	980	520
		900	1 080	420
		1 000	1 180	340
	20	50 to 600	280 to 780	1 660
		700	880	1 310
		800	980	1 030
		900	1 080	840
		1 000	1 180	690
	30	500	680	2 500
		600	780	2 430
		700	880	1 870
		800	980	1 480
MCM10 Double slider	10	70 to 570	380 to 880	830
		670	980	660
		870	1 180	450
	20	170 to 570	480 to 880	1 660
		670	980	1 340
		870	1 180	910

Notes: 1) Please consult NSK before operating Monocarrier near maximum speed.
2) Maximum rotational speed is (5000 min^{-1}). (For lead 5,10,12,15,20,30)
3) Refer to the above table for maximum speed for each stroke.

Notes: 1) Please consult NSK before operating Monocarrier near maximum speed.
2) Maximum rotational speed is (5000 min^{-1}). (For lead 5,10,12,15,20,30)
3) Refer to the above table for maximum speed for each stroke.

(2) Maximum Speed of MCH Series

Maximum speed of Monocarrier is determined by critical speed of ball screw shaft and d • n value.
Do not exceed maximum speeds on the table below.

Table 4.3

	Ball screw lead	Stroke (mm)	Rail length L_2 (mm)	Maximum speed (mm/s)
MCH06 MCL06 Single slider	5	50 to 500	150 to 600	410
	10	50 to 500	150 to 600	830
	20	50 to 400	150 to 500	1 660
		500	600	1 610
MCH06 Double slider	5	100 to 300	300 to 500	410
	10	100 to 400	300 to 600	830
	20	400	600	1 660
MCH09 Single slider	5	100 to 500	240 to 640	410
		600	740	360
		700	840	270
		800	940	210
	10	100 to 500	240 to 640	830
		600	740	710
		700	840	530
		800	940	410
	20	100 to 500	240 to 640	1 660
		600	740	1 410
		700	840	1 060
		800	940	830
MCH09 Double slider	5	150 to 350	440 to 640	410
	10	150 to 450	440 to 740	830
		650	940	530
	20	450	740	1 660
		650	940	1 080

	Ball screw lead	Stroke (mm)	Rail length L_2 (mm)	Maximum speed (mm/s)
MCH10 Single slider	10	50 to 600	280 to 780	830
		700	880	670
		800	980	530
		900	1 080	420
		1 000	1 180	350
		1 100	1 280	290
		1 200	1 380	250
	20	50 to 600	280 to 780	1 660
		700	880	1 330
		800	980	1 050
		900	1 080	840
		1 000	1 180	700
		1 100	1 280	580
		1 200	1 380	490
MCH10 Double slider	10	250 to 550	580 to 880	830
		650	980	660
	20	250 to 550	580 to 880	1 660
		650	980	1 340
		750	1 080	1 100
		850	1 180	910
		950	1 280	760
		1 050	1 380	630

Notes: 1) Please consult NSK before operating Monocarrier near maximum speed.
2) Maximum rotational speed is (5000 min^{-1}). (For lead 5,10,12,15,20,30)
3) Refer to the above table for maximum speed for each stroke.

C-1-4. 4 Accuracy Grade

The accuracy grade of Monocarrier standard series is high grade (H), except for lead 1 and 2 mm of MCM02, and MCM03.

When you require strokes longer than 1 200 mm, please consult NSK about the accuracy grade.

Table 4.4

Unit : μm

Accuracy	High grade (H)			Precision (P)			
Stroke (mm)	Repeatability	Running Parallelism (vertical)	Backlash	Repeatability	Positioning accuracy	Running Parallelism (vertical)	Backlash
to 200	±10	14	20 or less	±3	20	8	3 or less
to 400		16			25	10	
to 600		20			30	12	
to 700		23			30	15	
to 1 000		23			35	15	
to 1 200		30			40	20	

C-1-4. 5 Stroke and Ball Screw Lead

(1) MCM Series Standard Combinations of Stroke and Ball Screw Lead

Table 4.5 Single slider

Unit : mm

Model No.	MCM02		MCM03						MCM05				MCM06				MCM08				MCM10		
Lead / Stroke	1	2	1	2	5	10	12	15	5	10	20	30	5	10	20	30	5	10	20	30	10	20	30
50	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓						
100	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓			✓	✓	
150	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓			✓	✓	
200					✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓			✓	✓	
250					✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓			✓	✓	
300									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	
400									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	
500									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
600									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
700													✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
800													✓	✓	✓	✓	✓	✓			✓	✓	✓
900																					✓	✓	
1 000																					✓	✓	

Table 4.6 Double slider

Unit : mm

Model No.	MCM05		MCM06			MCM08		MCM10	
Lead / Stroke	10	20	5	10	20	10	20	10	20
60	✓								
70								✓	
80						✓			
110	✓		✓	✓					
160	✓								
170								✓	✓
180						✓	✓		
210	✓	✓	✓	✓	✓				
270								✓	✓
280						✓	✓		
310	✓	✓	✓	✓	✓				
370								✓	✓
380						✓	✓		
410	✓	✓	✓	✓	✓				
470								✓	✓
480						✓	✓		
510	✓	✓		✓	✓				
570								✓	✓
580						✓	✓		
610				✓	✓				
670								✓	✓
680						✓	✓		
710				✓	✓				
870								✓	✓

Note: Please consult NSK about double slider of MCM02 and MCM03.

(2) MCH Series Standard Combinations of Stroke and Ball Screw Lead

Table 4.7 Single slider

Unit : mm

Model No.	MCH06			MCH09			MCH10	
Lead / Stroke	5	10	20	5	10	20	10	20
50	✓	✓	✓					
100	✓	✓	✓	✓	✓	✓	✓	✓
200	✓	✓	✓	✓	✓	✓	✓	✓
300	✓	✓	✓	✓	✓	✓	✓	✓
400	✓	✓	✓	✓	✓	✓	✓	✓
500	✓	✓	✓	✓	✓	✓	✓	✓
600				✓	✓	✓	✓	✓
700				✓	✓	✓	✓	✓
800				✓	✓	✓	✓	✓
900							✓	✓
1 000							✓	✓
1 100							✓	✓
1 200							✓	✓

Table 4.8 Double slider

Unit : mm

Model No.	MCH06			MCH09			MCH10	
Lead / Stroke	5	10	20	5	10	20	10	20
100	✓	✓						
150				✓	✓			
200	✓	✓						
250				✓	✓		✓	✓
300	✓	✓						
350				✓	✓		✓	✓
400		✓	✓					
450					✓	✓	✓	✓
550							✓	✓
650					✓	✓	✓	✓
750								✓
850								✓
950								✓
1 050								✓

Table 4.9 Limitations

	Model No.	Lead (mm)	Slider	Stroke (mm)
MCM series	MCM02	1,2	Single	150
	MCM03	1,2	Single	150
		5,10,12,15	Single	350
	MCM05	5,10,20,30*	Single	900
			Double	810
	MCM06	5,10,20	Single	1 000
			Double	910
	MCM08	5,10,20,30*	Single	1 000
			Double	880
	MCM10	10,20,30*	Single	1 750
			Double	1 600
MCH series	MCH06	5,10,20	Single	600
			Double	500
	MCH09	5,10,20	Single	1 000
			Double	850
	MCH10	10,20	Single	1 750
			Double	1 600
	MCL06	5,10,20	Single	500

*) Applicable only to single slider

C-1-4. 6 Basic Load Rating

(1) MCM Series Basic Load Rating

Table 4.10 Basic Load Rating


Model No.	Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guide C	Support unit C_a	Rated running distance L_a(km)	Basic static load rating (N) Ball screw C_{0a}	Linear guide C_0	Support unit Limit load (N)
MCM02	1	ϕ 6	405(High grade) 480(Precision)	4 910	615	1	555(High grade) 615(Precision)	2 120	490
	2		400(High grade) 475(Precision)	3 900		2	555(High grade) 610(Precision)		
MCM03	1	ϕ 6	870	10 900	2 670	1	1 230	4 900	1 040
	2		865	8 650		2	1 220		
	5	ϕ 8	2 090	7 850		5	2 830	6 620	
	10		1 310	6 250		10	1 710		
	12		1 320	5 880		12	1 730		
	15	ϕ 10	2 000	5 440		15	2 740		
MCM05	5	ϕ 12	4 390	15 600	4 400	5	6 260	10 900	1 450
	10		2 740	12 400		10	3 820		
	20		2 660	9 850		20	3 800		
	30		3 300	8 600	6 550	30	5 390		2 730
MCM06	5	ϕ 15	8 300	25 200	6 550	5	12 700	17 000	2 730
	10		8 140	20 000		10	12 800		
	20		5 080	15 900		20	7 460		
MCM08	5	ϕ 15	8 300	30 800	7 100	5	12 700	22 800	3 040
	10		8 140	24 400		10	12 800		
	20		5 080	19 400		20	7 460		
	30		5 500	16 930		30	8 580		
MCM10	10	ϕ 20	12 800	33 500	7 600	10	21 400	29 400	3 380
	20		8 190	26 600		20	12 600		
	30		13 200	23 200		30	22 900		

Notes: ●Basic dynamic and static load ratings indicate values for one slider. ●Basic load rating of linear guide is load of perpendicular direction to the axis that allows 90% of a group of the same Monocarriers to operate "Rated running distance" in table, that is equivalent to 1 million revolutions of ball screw and support unit under the same conditions without causing flaking by rolling contact fatigue. ●Basic dynamic load rating of ball screw is load in the axial direction that allows 90% of ball screws of a group of the same Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue. ●Basic dynamic load rating of support unit is constant load in the axial direction that allows 90% of support units of the same group of Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue. ●Basic static load rating is load that results in combined permanent deformations at contact points of balls and ball grooves of respective parts at a diameter of 0.01%.

Table 4.11 Basic static moment load of linear guide

Model No.	Lead (mm)	Slider	Basic static moment (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
MCM02	1, 2	Single	24	8	8
MCM03	1, 2		68	28	28
	5, 10, 12 ,15		92	51	51
MCM05	5, 10, 20, 30*	Single	229	89	89
		Double	455	765	765
MCM06	5, 10, 20	Single	415	174	174
		Double	825	1 220	1 220
MCM08	5, 10, 20, 30*	Single	770	300	300
		Double	1 540	2 050	2 050
MCM10	10, 20, 30*	Single	1 170	425	425
		Double	2 340	2 940	2 940

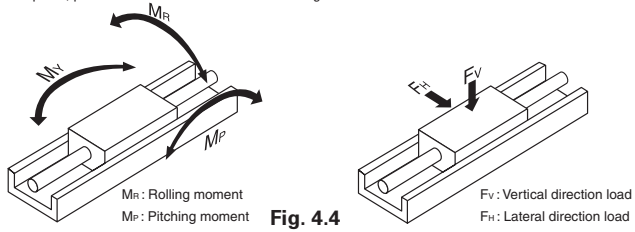Notes: ● Basic static moment of double slider is value when two sliders equipped with NSK K1 are butted against each other.
● Basic static moment is value when rolling contact pressure of balls exceeds 4 000 N/mm².
● If extremely heavy load is required, please consult NSK for estimation of fatigue life.
*) Applicable only to single slider



M_R : Rolling moment
M_P : Pitching moment
M_Y : Yawing moment

F_V : Vertical direction load
F_H : Lateral direction load

Fig. 4.4

(2) MCH Series Basic Load Rating

Table 4.12 Basic Load Rating


Model No.	Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guide C	Support unit C_a	Rated running distance L_a(km)	Basic static load rating (N) Ball screw C_{0a}	Linear guide C_0	Support unit Limit load (N)
MCH06 (MCL06)	5	ϕ 12	4 390	22 800	4 400	5	6 260	16 300	1 450
	10		2 740	18 100		10	3 820		
	20		2 660	14 400		20	3 800		
MCH09	5	ϕ 15	8 300	40 600	7 100	5	12 700	30 500	3 040
	10		8 140	32 200		10	12 800		
	20		5 080	25 500		20	7 460		
MCH10	10	ϕ 20	12 800	44 600	7 600	10	21 400	42 000	3 380
	20		8 190	35 400		20	12 600		

Notes: ●Basic dynamic and static load ratings indicate values for one slider. ●Basic load rating of linear guide is load of perpendicular direction to the axis that allows 90% of a group of the same Monocarriers to operate "Rated running distance" in table, that is equivalent to 1 million revolutions of ball screw and support unit under the same conditions without causing flaking by rolling contact fatigue. ●Basic dynamic load rating of ball screw is load in the axial direction that allows 90% of ball screws of a group of the same Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue. ●Basic dynamic load rating of support unit is constant load in the axial direction that allows 90% of support units of the same group of Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue. ●Basic static load rating is load that results in combined permanent deformations at contact points of balls and ball grooves of respective parts at a diameter of 0.01%.

Table 4.13 Basic static moment load of linear guide

Model No.	Slider	Basic static moment (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
MCH06 (MCL06)	Single	335	133	133
	Double	770	730	730
MCH09	Single	890	385	385
	Double	1 780	2 070	2 070
MCH10	Single	1 460	610	610
	Double	2 920	3 430	3 430

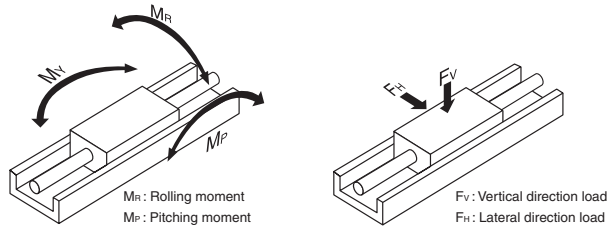Notes: ● Basic static moment of double slider is value when two sliders equipped with NSK K1 are butted against each other.
● Basic static moment is value when rolling contact pressure of balls exceeds 4 000 N/mm².
● If extremely heavy load is required, please consult NSK for estimation of fatigue life.
*) Applicable only to single slider



M_R : Rolling moment
M_P : Pitching moment
M_Y : Yawing moment

F_V : Vertical direction load
F_H : Lateral direction load

Fig. 4.5

C-1-4. 7 Estimation of Life Expectancy

(1) Life of Linear Guide

Study the load to be applied to the linear guide of Monocarrier (**Fig. 4.6**). The equivalent load (F_e) is determined by substituting the load for equation 1) (Eq. 2): in case of the tightly coupled double slider type).

● In case of the single slider

$$F_e = Y_H F_H + Y_V F_V + Y_R \varepsilon_R M_R + Y_P \varepsilon_P M_P + Y_Y \varepsilon_Y M_Y \quad \cdots\cdots 1)$$

● In case of the double slider

$$F_e = \frac{Y_H F_H}{2} + \frac{Y_V F_V}{2} + Y_R \varepsilon_{Rd} M_R + Y_P \varepsilon_{Pd} M_P + Y_Y \varepsilon_{Yd} M_Y \quad \cdots\cdots 2)$$

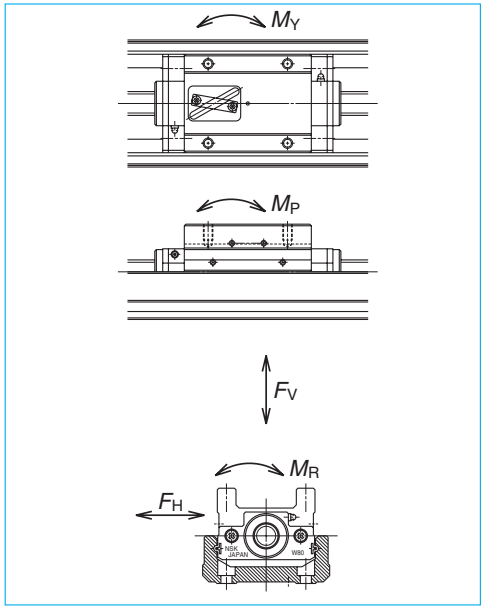


Fig. 4.6 Direction of load

F_H : Lateral direction load acting on the slider (N)
F_V : Vertical direction load acting on the slider (N)
M_R : Rolling moment acting on the slider (N · m)
M_P : Pitching moment acting on the slider (N · m)
M_Y : Yawing moment acting on the slider (N · m)
ε_R, ε_{Rd}
: Dynamic equivalent coefficient to rolling moment
ε_P, ε_{Pd}
: Dynamic equivalent coefficient to pitching moment
ε_Y, ε_{Yd}
: Dynamic equivalent coefficient to yawing moment
Refer to **Table 4.14** about Dynamic equivalent coefficient.
Y_H, Y_V, Y_R, Y_P, Y_Y
: 1.0 or 0.5

At equations 1) and 2) for obtaining equivalent load *Fe*, among F_H, F_V, $\varepsilon_P M_P$, $\varepsilon_R M_R$, $\varepsilon_Y M_Y$, the maximum load is assumed to be 1.0, and others are to be 0.5.

Table 4.14 Dynamic equivalent coefficient

Model No.	MCM02	MCM03 Lead 1, 2	MCM03 Lead 5, 10, 12, 15	MCM05	MCM06	MCM08	MCM10	MCH06 MCL06	MCH09	MCH10
ε_R	95.2	79.4	79.4	52.6	45.5	32.5	27.8	48.3	34.5	28.6
ε_P	174	113.9	84.2	81.3	65.1	48.8	45.2	75.1	47.9	41.0
ε_Y	174	113.9	84.2	81.3	65.1	48.8	45.2	75.1	47.9	41.0
ε_{Rd}	–	–	–	26.3	22.7	16.3	13.9	24.2	17.2	14.3
ε_{Pd}	–	–	–	10.4 (12.2)	9.7 (11.5)	7.6 (8.6)	7.1 (8.0)	11.4 (13.2)	8.11 (9.10)	6.98 (7.82)
ε_{Yd}	–	–	–	10.4 (12.2)	9.7 (11.5)	7.6 (8.6)	7.1 (8.0)	11.4 (13.2)	8.11 (9.10)	6.98 (7.82)

Note: Parenthesized figures are dynamic equivalent coefficient in case of the Monocarrier without NSK K1.

In case when the load acting on the slider may fluctuate (In general, M_P, M_Y may fluctuate with the acceleration/deceleration of slider), the mean effective load is determined by Eq. 3).




Fig. 4.7 Stepwise Fluctuating Load

Travelling distance under the equivalent load F_{e1} : L_1
Travelling distance under the equivalent load F_{e2} : L_2
. . . . . .
Travelling distance under the equivalent load F_{en} : L_n

$$F_m = \sqrt[3]{\frac{1}{L}\left(F_{e1}^3 L_1 + F_{e2}^3 L_2 + \cdots F_{en}^3 L_n\right)} \quad \cdots 3)$$

F_m : Mean effective load of fluctuating loads
L : Total travelling distance

The life of linear guide is calculated by Eq. 4).

$$L = L_a \times \left(\frac{C}{f_W \cdot F_m}\right)^3 \quad \cdots\cdots 4)$$

L : Life of linear guide (km)
F_m : Mean effective load acting on the linear guide (N)
C : Basic dynamic load rating of the linear guide (N)
L_a : Travelling distance (km)
f_W : Load factor (refer to **Table 4.15**)

When the estimated life does not clear the required life, the life of the linear guide is to be calculated again after the following measures are taken:

1. Change from the single slider type to double slider type.
2. Use a larger size Monocarrier.

(2) Life of Ball Screw (Support unit)

The mean effective load is determined from the axial loads.

For calculation of the mean effective load, use Eq. 3.

The life of ball screw is calculated by Eq. 5).

$$L = \ell \times \left(\frac{C_a}{f_W \cdot F_m}\right)^3 \times 10^6 \quad \cdots\cdots 5)$$

ℓ : Lead of ball screw (mm)
L : Life of ball screw (mm)
C_a : Basic dynamic load rating of the ball screw (N)
F_m : Mean effective load acting on the ball screw (N)
f_W : Load factor (refer to **Table 4.15**)

The life of a support unit is calculated by Eq. 5).

If the life of ball screw/support unit does not clear the required life, use a larger size Monocarrier.

After applying the calculations mentioned above, selection of the Monocarrier is completed.

Table 4.15 Values of load factor f_W

Operating conditions	Load factor f_W
At smooth operation with no mechanical shock	1.0 – 1.2
At normal operation	1.2 – 1.5
At operation with mechanical shock and vibrations	1.5 – 3.0

C-1-4. 8 Example of Life Estimation

This section offers an example how to estimate the life of Monocarrier based on the life of each component.

<<Example of calculation-1>>

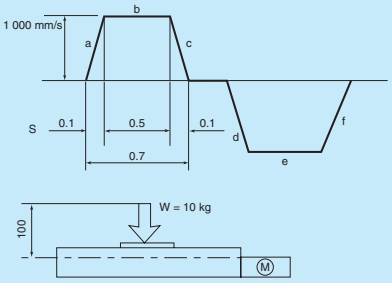


Fig. 4.8

1. Use condition

Stroke	: 600 mm
Maximum speed	: 1000 mm/s
Load mass	: W = 10 kg
Acceleration	: g = 9.80 m/s²
Setting position	: Horizontal
Operating profile	: See above figure

2. Selection of Model number (Interim Selection)
Firstly, select a greater ball screw lead as the maximum speed is 1000 mm/s. The interim selection is MCM06060H20K00, a single slider specification MCM06 that has 600 mm stroke, as the stroke is 600 mm.

3. Calculation
3-1. Linear guide
3-1-1. Fatigue life:
Multiply the result of the Eq. 1) by the dynamic equivalent coefficient (**Table 4.14** single slider) to convert the load volume. From above operation profile,

i) Constant speed $F_{e1} = Y_V \cdot F_V = Y_V \cdot W \cdot g$
$= 1 \cdot 10 \cdot 9.8 = 98$ N

ii) Accelerating $F_{e2} = Y_V \cdot F_V + Y_P \cdot \varepsilon_P \cdot M_P$
$= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 65.1 \cdot 0.1 \cdot 100$
$= 700$ N

iii) Decelerating $F_{e3} = Y_V \cdot F_V + Y_P \cdot \varepsilon_P \cdot M_P$
$= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 65.1 \cdot 0.1 \cdot 100$
$= 700$ N

Mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L}\left(F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3\right)}$$
$$= \sqrt[3]{\frac{1}{600}\left(98^3 \cdot 500 + 700^3 \cdot 50 + 700^3 \cdot 50\right)}$$
$$= 387 \text{ N}$$

$$L = \left(\frac{C}{f_w \cdot F_m}\right)^3 \times L_a$$
$$= \left(\frac{15\,900}{1.2 \cdot 387}\right)^3 \times 20$$
$$= 8.02 \times 10^5 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_S = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{17\,000}{700} = 24.2$$

3-2. Ball screw
3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, then calculate the mean load.
By the process above,

i) Constant speed
$F_{e1} = \mu \cdot W \cdot g = 0.01 \cdot 10 \cdot 9.8 = 0.98$

ii) Accelerating
$F_{e2} = F_{e1} + W \cdot \alpha = 101$ N

iii) Decelerating
$F_{e3} = F_{e1} - W \cdot \alpha = 99$ N

Axial mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L}\left(F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3\right)}$$
$$= \sqrt[3]{\frac{1}{600}\left(0.98^3 \cdot 500 + 101^3 \cdot 50 + 99^3 \cdot 50\right)}$$
$$= 55 \text{ N}$$

$$L = \left(\frac{C_a}{f_w \cdot F_m}\right)^3 \times \ell \times 10^6$$
$$= \left(\frac{5\,080}{1.2 \cdot 55}\right)^3 \times 20 \times 10^6 \text{ (mm)}$$
$$= 9.1 \times 10^6 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_S = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{7\,460}{101} = 73.8$$

3-2-3. Maximum rotational speed: According to the table of maximum speed on page C11, MCM06 with 20 mm lead and 600 mm stroke, is possible to operate under the maximum speed of 1 300 mm/s.

3-3. Support unit
3-3-1. Fatigue life: Use the axial load F_m = 55 N, that is the result of above calculation 3-2-1.

$$L = \left(\frac{C_a}{f_w \cdot F_m}\right)^3 \times \ell \times 10^6 = \left(\frac{6\,550}{1.2 \times 55}\right)^3 \times 20 \times 10^6 \text{ (mm)}$$
$$= 1.95 \times 10^7 \text{ km}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.

$$F_S = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{2\,730}{101} = 27.0$$

3-4. Result

MCM06060H20K00	Linear guide	Ball screw	Support unit
Fatigue life	8.02×10^5 km	9.1×10^6 km	1.95×10^7 km
Static safety factor	24.2	73.8	27.0

In this case, the linear guide has the shortest fatigue life of the components. Therefore, the linear guide fatigue life is used as the life of the Monocarrier. The interim selection of MCM06060H20K00, that is chosen based on the use conditions, satisfies the required life.

<<Example of calculation-2>>

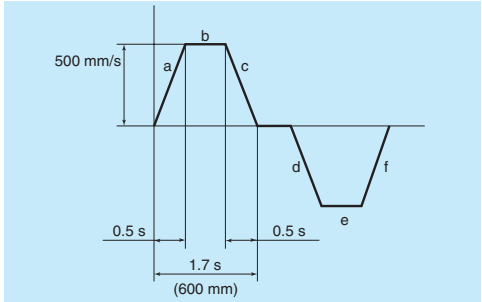


Fig. 4.9

1. Use condition

Stroke	: 600 mm
Maximum speed	: 500 mm/s
Load mass	: W = 20 kg
Acceleration	: 9.8 m/s²
Setting position	: Horizontal
Operating profile	: See above figure




Fig. 4.10

2. Selection of Model number (Interim Selection)
Select a 10 mm lead ball screw as the maximum speed is 500 mm/s.
The interim selection is MCM08068H10D00 as a double slider specification of MCM08 has 680 mm stroke, and the setting position is vertical.

3. Calculation
3-1. Linear guide
3-1-1. Fatigue life: Multiply the result of the Eq. 2) by the dynamic equivalent coefficient (**Table 4.14.** double slider) to convert the load volume. From operation profile (**Fig. 4.9**), the acceleration is 1 m/s².

i) Constant speed $F_{e1} = Y_P \cdot \varepsilon_{Pd} \cdot M_P + Y_Y \cdot \varepsilon_{Yd} \cdot M_Y$
$= 1 \cdot 7.6 \cdot 20 \cdot 9.8 \cdot 0.15 + 0.5 \cdot 7.6 \cdot 20 \cdot 9.8 \cdot 0.1$
$= 298$ N

ii) Accelerating $F_{e2} = Y_P \cdot \varepsilon_{Pd} \cdot M_P + Y_Y \cdot \varepsilon_{Yd} \cdot M_Y$
$= 1 \cdot 7.6 \cdot 20 \cdot (9.8 + 1.0) \cdot 0.15 + 0.5 \cdot 7.6 \cdot 20 \cdot (9.8 + 1.0) \cdot 0.1 = 329$ N

iii) Decelerating $F_{e3} = Y_P \cdot \varepsilon_{Pd} \cdot M_P + Y_Y \cdot \varepsilon_{Yd} \cdot M_Y$
$= 1 \cdot 7.6 \cdot 20 \cdot (9.8 - 1.0) \cdot 0.15 + 0.5 \cdot 7.6 \cdot 20 \cdot (9.8 - 1.0) \cdot 0.1 = 268$ N

Mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L}\left(F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3\right)}$$
$$= \sqrt[3]{\frac{1}{600}\left(298^3 \cdot 350 + 329^3 \cdot 125 + 268^3 \cdot 125\right)}$$
$$= 300 \text{ N}$$

$$L = L_a \times \left(\frac{C}{f_w \cdot F_m}\right)^3$$
$$= 10 \times \left(\frac{24\,400}{1.2 \cdot 300}\right)^3$$
$$= 3.11 \times 10^6 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_S = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{22\,800}{329} = 69.3$$

3-2. Ball screw
3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, then calculate the mean load.

i) Constant speed
$F_{e1} = W \cdot g = 20 \cdot 9.8 = 196$ N

ii) Accelerating
$F_{e2} = F_{e1} + W \cdot \alpha = 196 + 20 \cdot 1 = 216$ N

iii) Decelerating
$F_{e3} = F_{e1} - W \cdot \alpha = 196 - 20 \cdot 1 = 176$ N

Axial mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L}\left(F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3\right)}$$

$$= \sqrt[3]{\frac{1}{600}\left(196^3 \cdot 350 + 216^3 \cdot 125 + 176^3 \cdot 125\right)}$$

$$= 197 \text{ N}$$

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m}\right)^3 \times 10^6$$

$$= 10 \times \left(\frac{8\,140}{1.2 \cdot 197}\right)^3 \times 10^6 \text{ (mm)}$$

$$= 4.08 \times 10^5 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_S = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{12\,800}{216} = 59.2$$

3-3. Support unit

3-3-1. Fatigue life: Use the axial load F_m = 197 N, that is the result of above calculation 3-2-1.

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m}\right)^3 \times 10^6 = 10 \times \left(\frac{7\,100}{1.2 \times 197}\right)^3 \times 10^6 \text{ (mm)}$$

$$= 2.70 \times 10^5 \text{ km}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.

$$F_S = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{3\,040}{216} = 14.0$$

3-4. Result

MCM08068H10D00	Linear guide	Ball screw	Support unit
Fatigue life	3.11 × 10^6 km	4.08 × 10^5 km	2.70 × 10^5 km
Static safety factor	69.3	59.2	14.0



C-1-5 MCM Series
1 MCM Series Reference Number Coding C27
2 MCM Series Dimension Table of Standard Products
MCM02 C28
MCM03 C29
MCM05 C33
MCM06 C37
MCM08 C41
MCM10 C45
3 MCM Series Accessories
3. 1 Sensor Unit C49
3. 2 Cover Unit C53
3. 3 Motor Bracket C55

MCM Series

C-1-5 MCM Series

C-1-5.1 MCM Series Reference Number Coding

[Body]

Example: MC M 08 040 H 10 K 0 0 *1

- MC: Monocarrier
- M: M type: MCM Series
- 08: Nominal size (rail width, Unit: 10 mm)
- 040: Stroke (Unit: 10 mm)
- H: Accuracy grade (H, high grade; P, precision grade)
- 10: Ball screw lead (mm)
- K: Slider specification K: Single slider, D: Double slider (See page C15.)
- 0: Standard grease specification: O (AS2), Clean grease specification: B (LG2)
- 0: NSK management number (0 or 2)

Note: *1. 14th digit is control No. of NSK. Customers cannot specify a number. See the pages of each nominal number for details.

[With Accessories]

Example: MC E 08 040 H 10 K 0 0 K 0 0 0

- E: With MCM Accessories
- K: NSK management number
- 0: Sensor unit
- 0: Cover unit
- 0: Motor bracket

Note: Accessories are available separately.

Table 1 Sensor unit (See page C49.)

Reference No. code	Specification	Reference No.
0	N/A	—
1	Proximity switch (normally close contact 3 pieces)	MC – SRxx – 10
2	Proximity switch (normally open contact 3 pieces)	MC – SRxx – 11
3	Proximity switch (normally open contact 1 piece, normally close contact 2 pieces)	MC – SRxx – 12
4	Photo sensor 3 pieces	MC – SRxx – 13

Note 1) xx: Reference number
2) Sensor rail is not included in sensor unit. If you require the rail, please request separately. (See page C50 to C52.)

Table 2 Cover unit (See pages C53 to C54.)

Reference No. code	Specification	Reference No.
0	N/A	—
1	With top cover	MC – CVxxxxx – 01 (02) *
—	Full cover	MC – CVxxxxx – 00

Note 1) xxxxx: Reference number and stroke number 2)*: "-02" is only used for Monocarrier MCM03.
3) When a sensor unit is used, full cover unit cannot be used.


Table 3 Motor bracket (See pages C55 to C71.)

Reference No. code	Reference No.				
	MCM03	MCM05	MCM06	MCM08	MCM10
0	N/A	N/A	N/A	N/A	N/A
1	**MC-BK03-146-00**	**MC-BK05-145-00**	**MC-BK06-145-00**	**MC-BK08-145-00**	**MC-BK10-170-00**
2	**MC-BK03-148-01**	**MC-BK05-146-00**	**MC-BK06-146-00**	**MC-BK08-146-00**	**MC-BK10-170-01**
3	**MC-BK03-231-00**	**MC-BK05-148-00**	**MC-BK06-148-00**	**MC-BK08-160-00**	**MC-BK10-190-00**
4	—	**MC-BK05-160-00**	**MC-BK06-160-00**	**MC-BK08-170-00**	**MC-BK10-270-00**
5	—	**MC-BK05-250-00**	**MC-BK06-170-00**	**MC-BK08-170-01**	—
6	—	—	**MC-BK06-170-01**	**MC-BK08-190-00**	—
7	—	—	**MC-BK06-250-00**	**MC-BK08-250-00**	—
8	—	—	—	**MC-BK08-270-00**	—

N/A: Not applicable

C-1-5.2 MCM Series Dimension Table of Standard Products

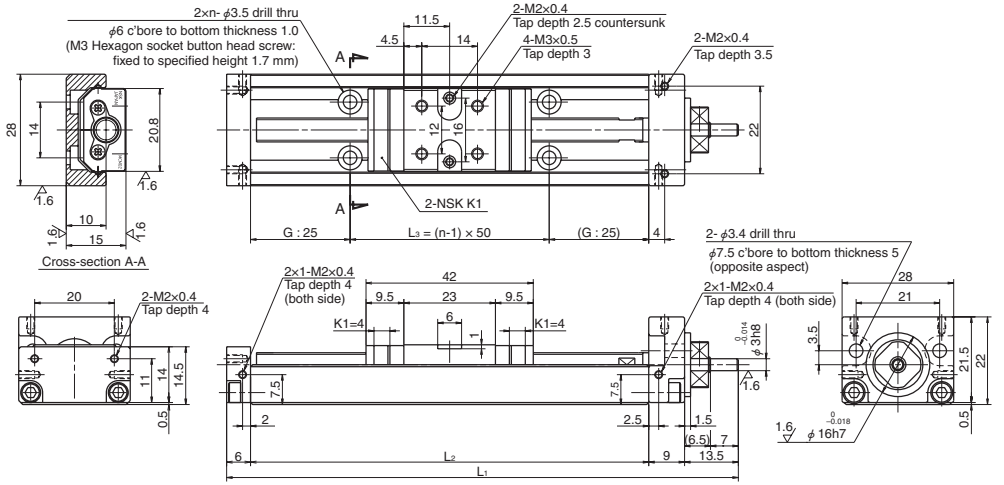MCM02



Dimension of MCM02 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	Body length (mm) L_2	Body length (mm) L_3	No. of mounting hole n	Inertia $\times 10^{-7}$ (kg · m^2)	Mass (kg)
MCM02005H01K	50	58	1	128.5	100	50	2	0.93	0.26
MCM02005P01K									
MCM02005H02K			2						
MCM02005P02K									
MCM02010H01K	100	108	1	178.5	150	100	3	1.36	0.32
MCM02010P01K									
MCM02010H02K			2						
MCM02010P02K									
MCM02015H01K	150	158	1	228.5	200	150	4	1.81	0.39
MCM02015P01K									
MCM02015H02K			2						
MCM02015P02K									

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	High grade	Precision
1	0.1 – 1.3	0.2 – 1.6
2		

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.
4. There is no LG2 specification for MCM02.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
1	φ6	405 (High grade) 480 (Precision)	4 910	615	1	555 (High grade) 615 (Precision)	2 120	490
2		400 (High grade) 475 (Precision)	3 900		2	555 (High grade) 610 (Precision)		


Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	24	8	8

MCM03

Accuracy grade: Precision (P)

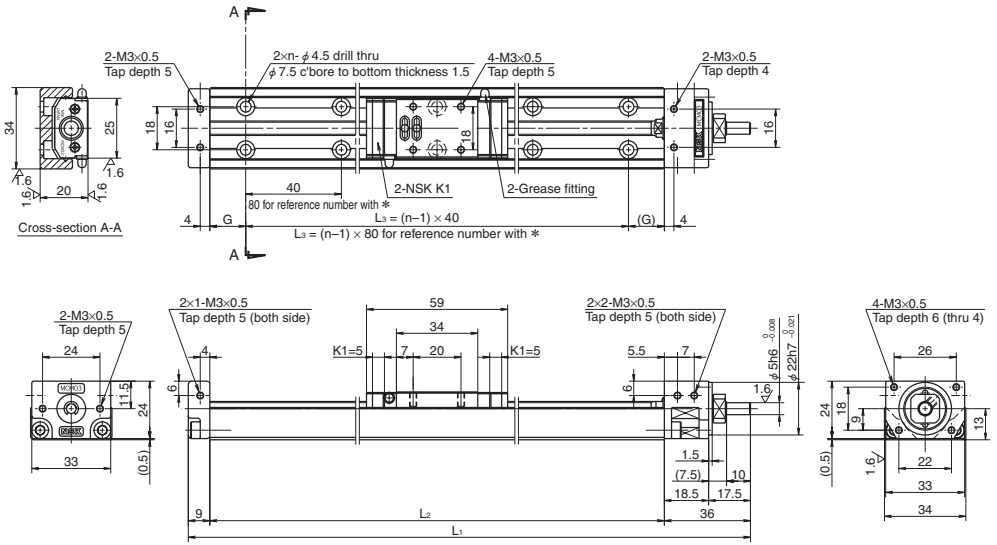Ball screw lead 1 and 2



Dimension of MCM03 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	G	L_3	No. of mounting hole n	Inertia $\times 10^{-5}$ (kg · m²)	Mass (kg)
✻MCM03005P01K00	50	56	1	160	115	17.5	80	2	0.015	0.6
✻MCM03005P02K00		(66)	2						0.016	
MCM03010P01K00	100	131	1	235	190	15	160	5	0.021	0.7
MCM03010P02K00		(141)	2						0.022	
MCM03015P01K00	150	181	1	285	240	20	200	6	0.025	0.8
MCM03015P02K00		(191)	2						0.026	

Note: Bolt hole pitch L_3 on items marked with ✻ is 80 mm.

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	1	0.2 – 1.7
	2	

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.
4. A spacer plate is required when using a cover unit or sensor unit for MCM03 with the lead of 1 or 2 mm. (See page C53.)

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
1	ϕ6	870	10 900	2 670	1	1 230	4 900	1 040
2		865	8 650		2	1 220		


Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	68	28	28

MCM03

Accuracy grade: High grade (H)

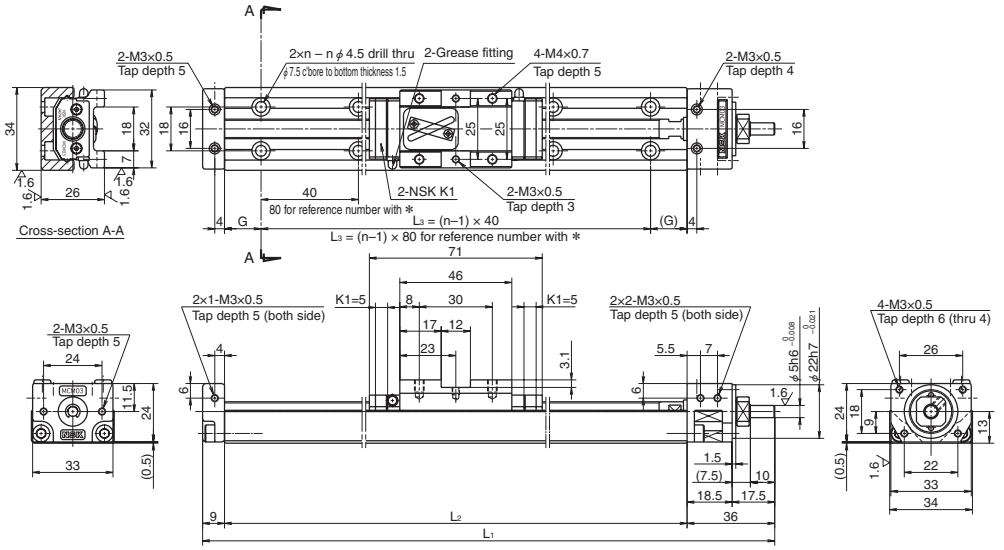Ball screw lead 5, 10 and 12



Dimension of MCM03 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	G	L_3	No. of mounting hole n	Inertia $\times 10^{-5}$ (kg · m²)	Mass (kg)
✻MCM03005H05K00	50	69 (79)	5	185	140	30	80	2	0.057	0.6
✻MCM03005H10K00			10						0.080	
✻MCM03005H12K00			12						0.097	
MCM03010H05K00	100	119 (129)	5	235	190	15	160	5	0.073	0.7
MCM03010H10K00			10						0.092	
MCM03010H12K00			12						0.109	
MCM03015H05K00	150	169 (179)	5	285	240	20	200	6	0.089	0.8
MCM03015H10K00			10						0.105	
MCM03015H12K00			12						0.122	
MCM03020H05K00	200	219 (229)	5	335	290	25	240	7	0.104	0.9
MCM03020H10K00			10						0.118	
MCM03020H12K00			12						0.135	
MCM03025H05K00	250	269 (279)	5	385	340	30	280	8	0.120	1.0
MCM03025H10K00			10						0.131	
MCM03025H12K00			12						0.147	

Note: Bolt hole pitch L_3 on items marked with ✻ is 80 mm.

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead(mm)	Accuracy grade High grade	Precision
5	0.2 – 2.5	0.6 – 4.4
10	0.3 – 3.0	0.7 – 4.9
12		

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	ϕ8	2 090	7 850	2 670	5	2 830	6 620	1 040
10		1 310	6 250		10	1 710		
12		1 320	5 880		12	1 730		


Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	92	51	51

MCM03

Accuracy grade: High grade (H)

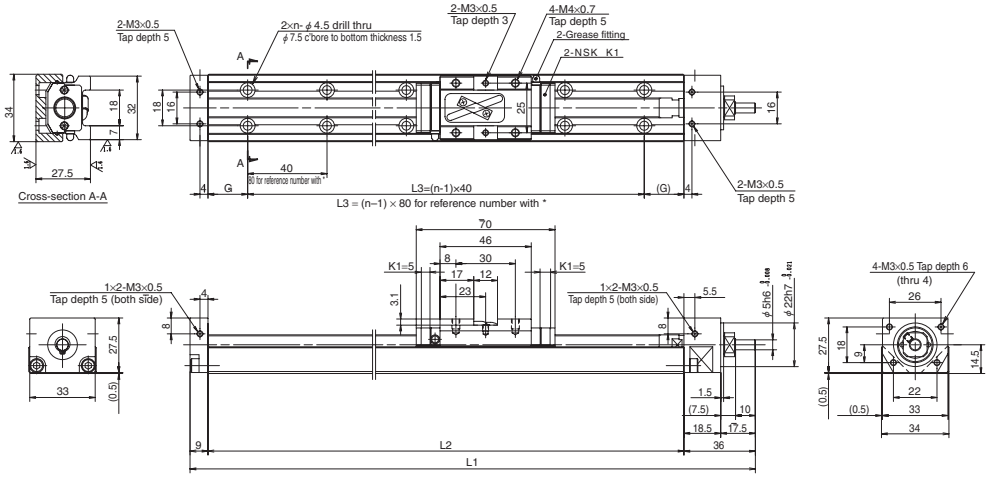Ball screw lead 15



Dimension of MCM03 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (without K1)	Ball screw lead (mm)	Ball screw diameter (mm)	Body length (mm) L_1	L_2	G	L_3	No. of mounting hole n	Inertia ×10⁻⁴ (kg·m²)	Mass (kg)
✻ **MCM03005H15K00**	50	70 (80)	15	ϕ10	185	140	30	80	2	0.183	0.67
MCM03010H15K00	100	120(130)			235	190	15	160	5	0.222	0.77
MCM03015H15K00	150	170(180)			285	240	20	200	6	0.260	0.87
MCM03020H15K00	200	220(230)			335	290	25	240	7	0.298	0.97
MCM03025H15K00	250	270(280)			385	340	30	280	8	0.336	1.07

Note: Bolt hole pitch L_3 on items marked with ✻ is 80 mm.

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	15	0.3 – 5.6

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.
4. When a cover unit is added, an optional spacer plate is required. (See page C53.)
5. There is no P grade (precision grade) for Lead 15.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guide C_0	Support unit load limit (N)
15	ϕ10	2 000	5 440	2 670	15	2 740	6 620	1 040


Basic static load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	92	51	51

MCM05

Accuracy grade: High grade (H)

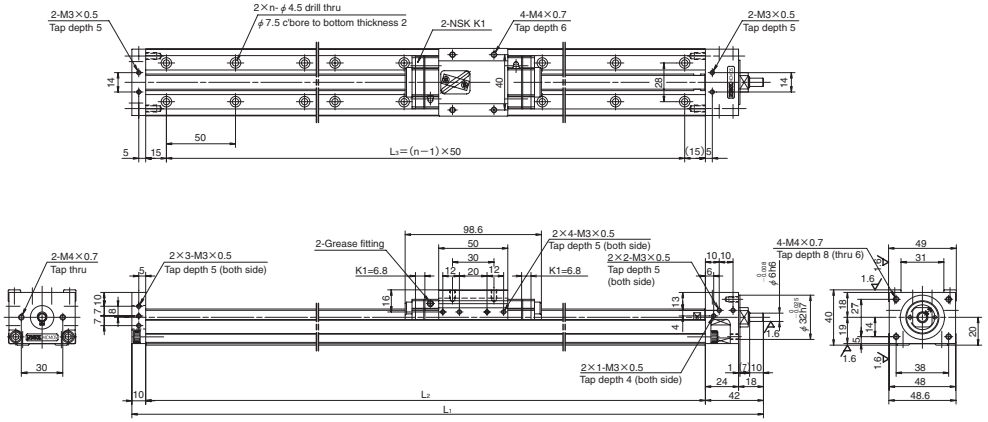Ball screw lead 5, 10 and 20



Dimension of MCM05 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m²)	Mass (kg)
MCM05005H05K00	50	81 (95)	5	232	180	150	4	0.025	1.4
MCM05005H10K00			10					0.035	
MCM05005H20K00			20					0.073	
MCM05010H05K00	100	131 (145)	5	282	230	200	5	0.031	1.6
MCM05010H10K00			10					0.040	
MCM05010H20K00			20					0.078	
MCM05015H05K00	150	181 (195)	5	332	280	250	6	0.036	1.8
MCM05015H10K00			10					0.046	
MCM05015H20K00			20					0.084	
MCM05020H05K00	200	231 (245)	5	382	330	300	7	0.042	2.0
MCM05020H10K00			10					0.051	
MCM05020H20K00			20					0.089	
MCM05025H05K00	250	281 (295)	5	432	380	350	8	0.047	2.2
MCM05025H10K00			10					0.057	
MCM05025H20K00			20					0.095	

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.0 – 4.8	1.9 – 7.7
10	1.1 – 5.8	2.1 – 8.7
20	1.6 – 7.9	2.5 – 10.7
30	1.8 – 13.1	—

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	ϕ12	4 390	15 600	4 400	5	6 260	10 900	1 450
10		2 740	12 400		10	3 820		
20		2 660	9 850		20	3 800		
30		3 300	8 600	6 550	30	5 390		2 730


Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	229	89	89

MCM05

Accuracy grade: High grade (H)

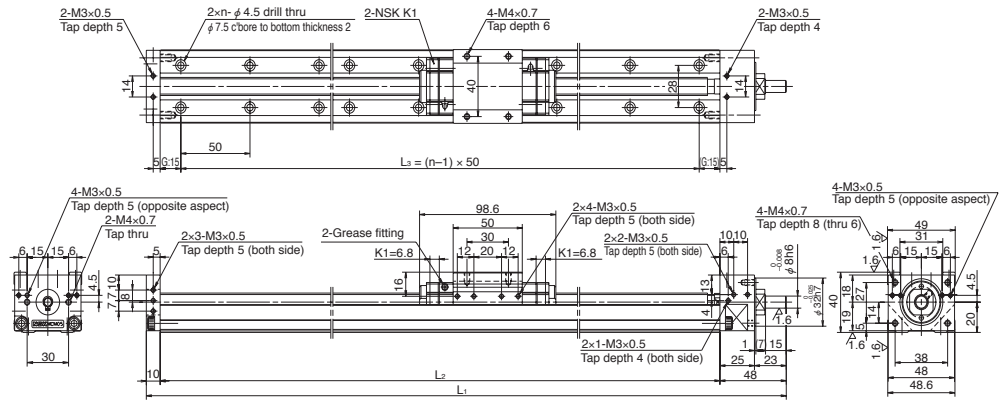Ball screw lead 30



Dimension of MCM05 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m²)	Mass (kg)
MCM05030H05K00	300	331 (345)	5	482	430	400	9	0.053	2.3
MCM05030H10K00			10					0.063	
MCM05030H20K00			20					0.101	
MCM05030H30K00			30	488				0.164	
MCM05040H05K00	400	431 (445)	5	582	530	500	11	0.064	2.7
MCM05040H10K00			10					0.074	
MCM05040H20K00			20					0.112	
MCM05040H30K00			30	588				0.175	2.8
MCM05050H05K00	500	531 (545)	5	682	630	600	13	0.076	3.1
MCM05050H10K00			10					0.085	
MCM05050H20K00			20					0.123	
MCM05050H30K00			30	688				0.186	3.2
MCM05060H05K00	600	631 (645)	5	782	730	700	15	0.087	3.5
MCM05060H10K00			10					0.096	
MCM05060H20K00			20					0.134	
MCM05060H30K00			30	788				0.198	3.6

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.0 – 4.8	1.9 – 7.7
10	1.1 – 5.8	2.1 – 8.7
20	1.6 – 7.9	2.5 – 10.7
30	1.8 – 13.1	—

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	ϕ12	4 390	15 600	4 400	5	6 260	10 900	1 450
10		2 740	12 400		10	3 820		
20		2 660	9 850		20	3 800		
30		3 300	8 600	6 550	30	5 390		2 730


Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	229	89	89

MCM05 (Double slider)

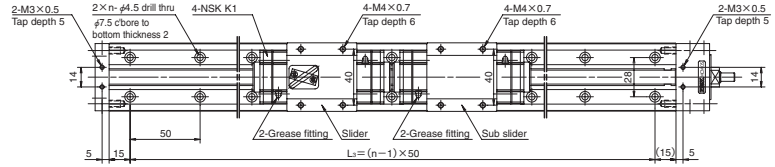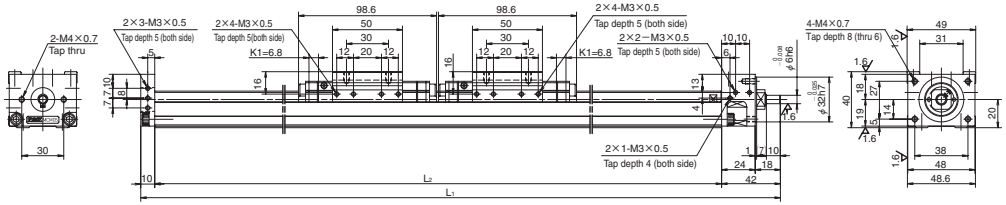Accuracy grade: High grade (H)





Dimension of MCM05 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m^2)	Mass (kg)
MCM05006H10D00	60	82 (110)	10	332	280	250	6	0.058	2.3
MCM05011H10D00	110	132 (160)	10	382	330	300	7	0.064	2.5
MCM05016H10D00	160	182 (210)	10	432	380	350	8	0.070	2.7
MCM05021H10D00	210	232 (260)	10	482	430	400	9	0.075	2.8
MCM05021H20D00			20					0.151	

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	1.5 – 7.6	2.4 – 10.6
20	2.3 – 11.8	3.2 – 14.8

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	ϕ12	4 390	15 600	4 400	5	6 260	10 900	1 450
10		2 740	12 400		10	3 820		
20		2 660	9 850		20	3 800		


Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	455	765	765

MCM05 (Double slider)

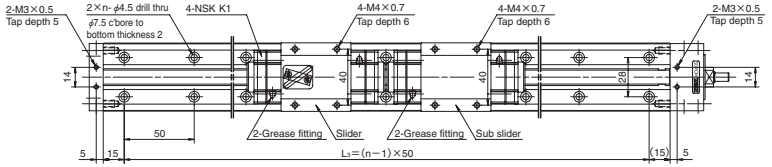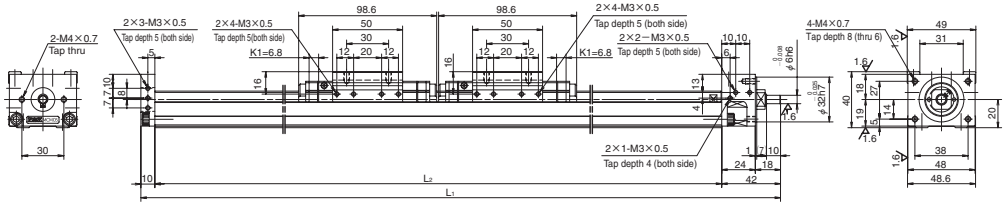Accuracy grade: High grade (H)





Dimension of MCM05 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m^2)	Mass (kg)
MCM05031H10D00	310	332 (360)	10	582	530	500	11	0.086	3.2
MCM05031H20D00			20					0.162	
MCM05041H10D00	410	432 (460)	10	682	630	600	13	0.098	3.6
MCM05041H20D00			20					0.174	
MCM05051H10D00	510	532 (560)	10	782	730	700	15	0.109	4.2
MCM05051H20D00			20					0.185	

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	1.5 – 7.6	2.4 – 10.6
20	2.3 – 11.8	3.2 – 14.8

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	ϕ12	4 390	15 600	4 400	5	6 260	10 900	1 450
10		2 740	12 400		10	3 820		
20		2 660	9 850		20	3 800		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	455	765	765

MCM06

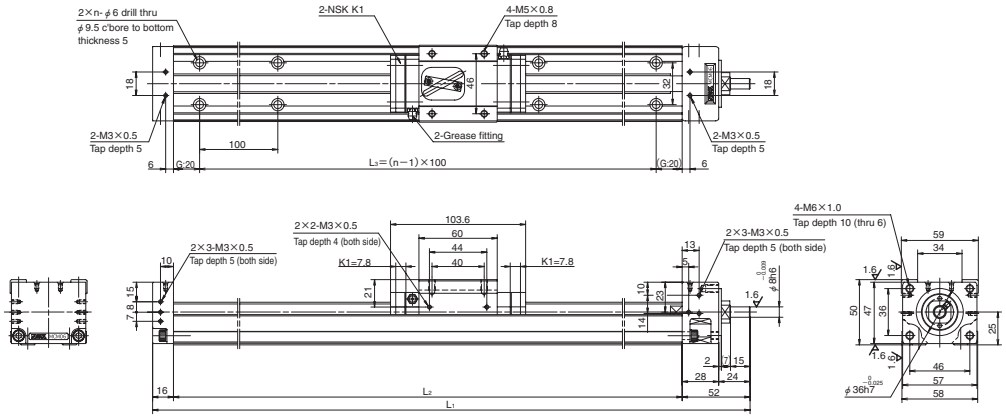Accuracy grade: High grade (H)



Dimension of MCM06 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m²)	Mass (kg)
◇MCM06005H05K02	50	86 (102)	5	258	190	100	2	0.066	2.7
◇MCM06005H10K00			10					0.077	
◇MCM06005H20K00			20					0.122	
MCM06010H05K02	100	136 (152)	5	308	240	200	3	0.080	3.0
MCM06010H10K00			10					0.092	
MCM06010H20K00			20					0.137	
◇MCM06015H05K02	150	186 (202)	5	358	290	200	3	0.095	3.5
◇MCM06015H10K00			10					0.106	
◇MCM06015H20K00			20					0.152	
MCM06020H05K02	200	236 (252)	5	408	340	300	4	0.110	3.8
MCM06020H10K00			10					0.121	
MCM06020H20K00			20					0.167	
◇MCM06025H05K02	250	286 (302)	5	458	390	300	4	0.125	4.2
◇MCM06025H10K00			10					0.136	
◇MCM06025H20K00			20					0.181	
MCM06030H05K02	300	336 (352)	5	508	440	400	5	0.139	4.5
MCM06030H10K00			10					0.150	
MCM06030H20K00			20					0.196	

Notes: 1. Dimension G is 45 for items marked with ◇.
2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.9 – 7.4	3.4 – 12.3
10	2.2 – 8.6	3.6 – 14.0
20	2.8 – 11.0	4.2 – 16.5

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	φ15	8 300	25 200	6 550	5	12 700	17 000	2 730
10		8 140	20 000		10	12 800		
20		5 080	15 900		20	7 460		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	415	174	174

MCM06

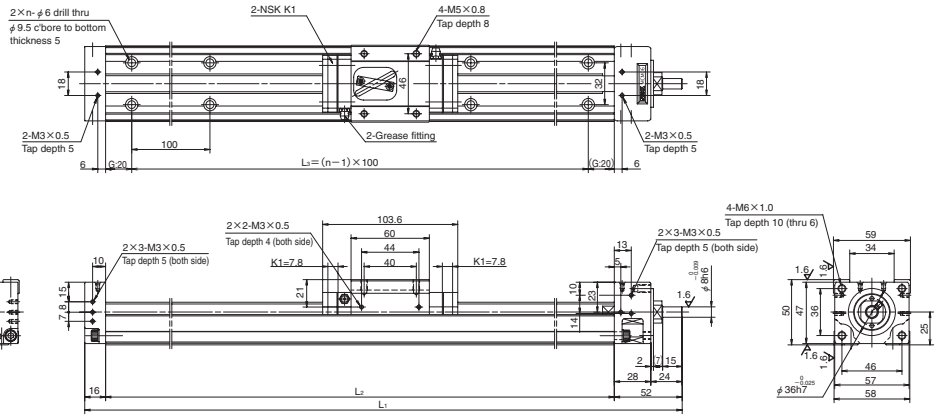Accuracy grade: High grade (H)



Dimension of MCM06 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m²)	Mass (kg)
MCM06040H05K02	400	436 (452)	5	608	540	500	6	0.169	5.2
MCM06040H10K00			10					0.180	
MCM06040H20K00			20					0.225	
MCM06050H05K02	500	536 (552)	5	708	640	600	7	0.198	6.0
MCM06050H10K00			10					0.209	
MCM06050H20K00			20					0.255	
MCM06060H05K02	600	636 (652)	5	808	740	700	8	0.228	6.7
MCM06060H10K00			10					0.239	
MCM06060H20K00			20					0.284	
MCM06070H05K02	700	736 (752)	5	908	840	800	9	0.257	7.4
MCM06070H10K00			10					0.268	
MCM06070H20K00			20					0.314	
MCM06080H05K02	800	836 (852)	5	1 008	940	900	10	0.286	8.1
MCM06080H10K00			10					0.298	
MCM06080H20K00			20					0.343	

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.9 – 7.4	3.4 – 12.3
10	2.2 – 8.6	3.6 – 14.0
20	2.8 – 11.0	4.2 – 16.5

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	φ15	8 300	25 200	6 550	5	12 700	17 000	2 730
10		8 140	20 000		10	12 800		
20		5 080	15 900		20	7 460		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	415	174	174

MCM06 (Double slider)

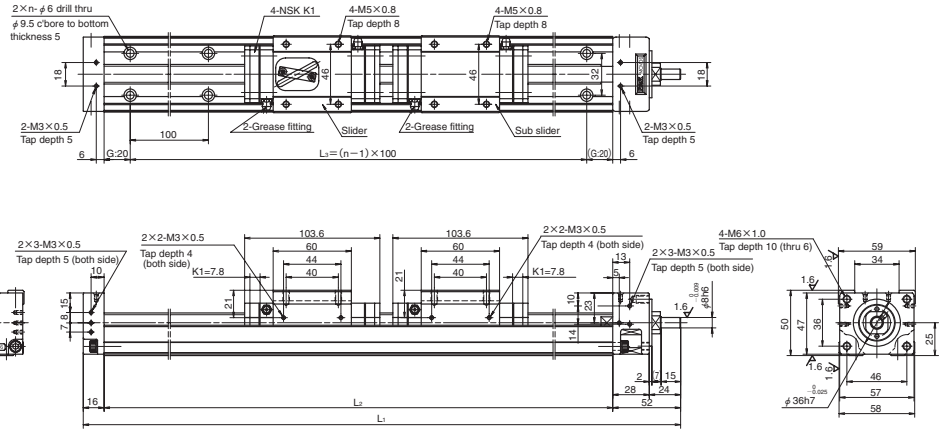Accuracy grade: High grade (H)



Dimension of MCM06 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m²)	Mass (kg)
MCM06011H05D02	110	132 (164)	5	408	340	300	4	0.114	4.4
MCM06011H10D00			10					0.136	
MCM06021H05D02	210	232 (264)	5	508	440	400	5	0.143	5.1
MCM06021H10D00			10					0.166	
MCM06021H20D00			20					0.257	
MCM06031H05D02	310	332 (364)	5	608	540	500	6	0.173	5.8
MCM06031H10D00			10					0.195	
MCM06031H20D00			20					0.286	

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	2.3 – 8.5	3.7 – 13.5
10	2.7 – 10.9	4.2 – 16.4
20	4.0 – 15.9	5.5 – 21.3

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	ϕ15	8 300	25 200	6 550	5	12 700	17 000	2 730
10		8 140	20 000		10	12 800		
20		5 080	15 900		20	7 460		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	825	1 220	1 220

MCM06 (Double slider)

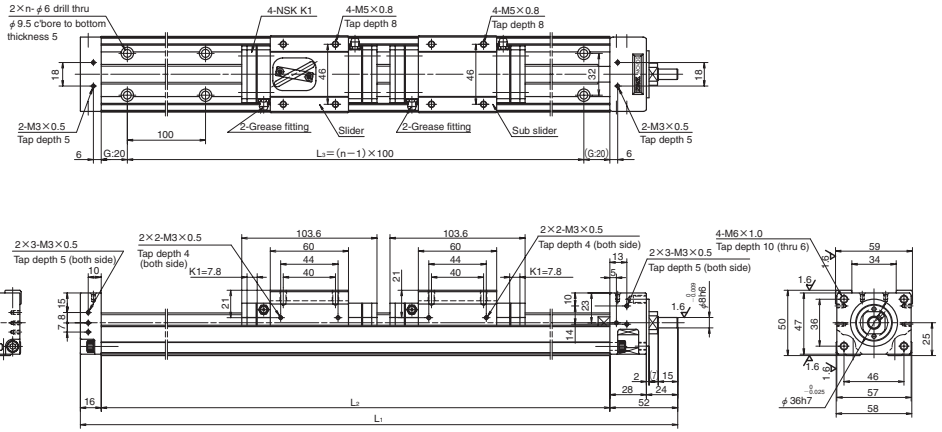Accuracy grade: High grade (H)



Dimension of MCM06 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m²)	Mass (kg)
MCM06041H05D02	410	432 (464)	5	708	640	600	7	0.202	6.6
MCM06041H10D00			10					0.224	
MCM06041H20D00			20					0.316	
MCM06051H10D02	510	532 (564)	10	808	740	700	8	0.254	7.3
MCM06051H20D00			20					0.345	
MCM06061H10D02	610	632 (664)	10	908	840	800	9	0.283	8.0
MCM06061H20D00			20					0.375	
MCM06071H10D02	710	732 (764)	10	1 008	940	900	10	0.313	8.7
MCM06071H20D00			20					0.404	

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	2.3 – 8.5	3.7 – 13.5
10	2.7 – 10.9	4.2 – 16.4
20	4.0 – 15.9	5.5 – 21.3

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	ϕ15	8 300	25 200	6 550	5	12 700	17 000	2 730
10		8 140	20 000		10	12 800		
20		5 080	15 900		20	7 460		


Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	825	1 220	1 220

MCM08

Accuracy grade: High grade (H)

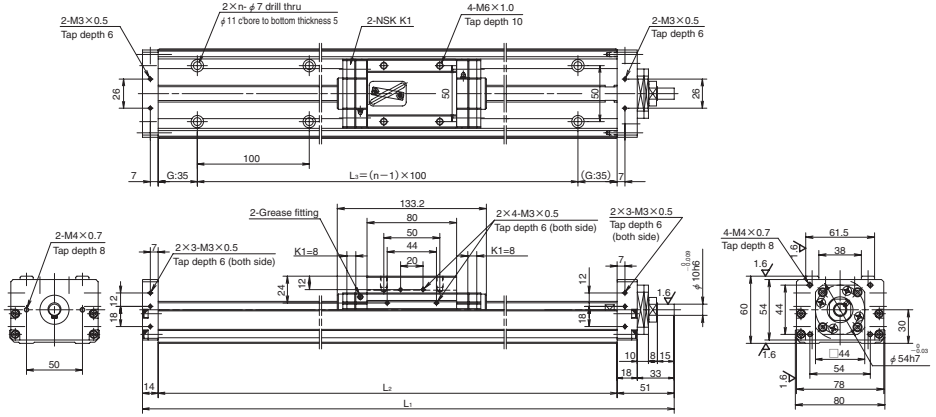Ball screw lead 5, 10 and 20



Dimension of MCM08 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia ×10⁻⁴ (kg · m²)	Mass (kg)
◇MCM08005H05K02	50	86 (102)	5	285	220	100	2	0.082	4.1
◇MCM08005H10K00			10					0.100	
MCM08010H05K02	100	136 (152)	5	335	270	200	3	0.097	4.6
MCM08010H10K00			10					0.114	
MCM08010H20K00			20					0.190	
◇MCM08015H05K02	150	186 (202)	5	385	320	200	3	0.111	5.1
◇MCM08015H10K00			10					0.129	
◇MCM08015H20K00			20					0.205	
MCM08020H05K02	200	236 (252)	5	435	370	300	4	0.126	5.5
MCM08020H10K00			10					0.144	
MCM08020H20K00			20					0.220	
◇MCM08025H05K02	250	286 (302)	5	485	420	300	4	0.141	6.0
◇MCM08025H10K00			10					0.159	
◇MCM08025H20K00			20					0.235	
MCM08030H05K02	300	336 (352)	5	535	470	400	5	0.156	6.5
MCM08030H10K00			10					0.173	
MCM08030H20K00			20					0.249	

Notes: 1. Dimension G is 60 for items marked with ◇.
2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.0 – 5.9	3.1 – 11.5
10	2.0 – 7.8	3.2 – 13.3
20	2.5 – 10.8	4.0 – 16.4
30	2.8 – 12.0	—

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	φ15	8 300	30 800	7 100	5	12 700	22 800	3 040
10		8 140	24 400		10	12 800		
20		5 080	19 400		20	7 460		
30		5 500	16 930		30	8 580		


Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	770	300	300

MCM08

Accuracy grade: High grade (H)

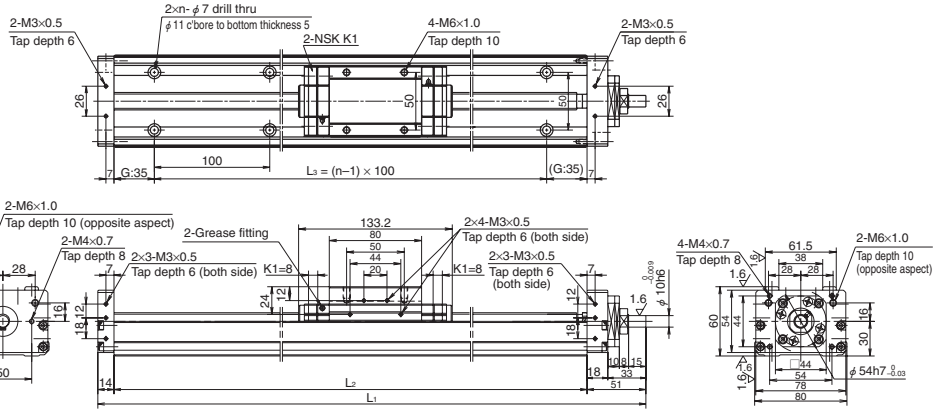Ball screw lead 30



Dimension of MCM08 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia ×10⁻⁴ (kg · m²)	Mass (kg)
MCM08040H05K02	400	436 (452)	5	635	570	500	6	0.185	7.4
MCM08040H10K00			10					0.203	
MCM08040H20K00			20					0.279	
MCM08040H30K00			30					0.405	
MCM08050H05K02	500	536 (552)	5	735	670	600	7	0.214	8.4
MCM08050H10K00			10					0.232	
MCM08050H20K00			20					0.308	
MCM08050H30K00			30					0.435	
MCM08060H05K02	600	636 (652)	5	835	770	700	8	0.244	9.3
MCM08060H10K00			10					0.262	
MCM08060H20K00			20					0.338	
MCM08060H30K00			30					0.464	
MCM08070H05K02	700	736 (752)	5	935	870	800	9	0.273	10.5
MCM08070H10K00			10					0.291	
MCM08070H20K00			20					0.367	
MCM08070H30K00			30					0.494	
MCM08080H05K02	800	836 (852)	5	1 035	970	900	10	0.303	11.2
MCM08080H10K00			10					0.320	
MCM08080H20K00			20					0.396	

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.0 – 5.9	3.1 – 11.5
10	2.0 – 7.8	3.2 – 13.3
20	2.5 – 10.8	4.0 – 16.4
30	2.8 – 12.0	—

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	φ15	8 300	30 800	7 100	5	12 700	22 800	3 040
10		8 140	24 400		10	12 800		
20		5 080	19 400		20	7 460		
30		5 500	16 930		30	8 580		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	770	300	300

MCM08 (Double slider)

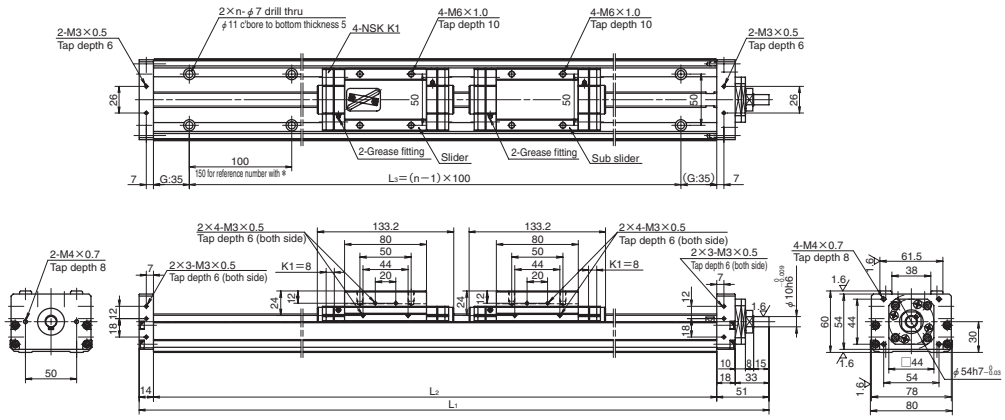Accuracy grade: High grade (H)



Dimension of MCM08 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m²)	Mass (kg)
***MCM08008H10D00**	80	103 (135)	10	435	370	300	3	0.169	6.5
MCM08018H10D00	180	203 (235)	10	535	470	400	5	0.199	7.5
MCM08018H20D00			20					0.351	
MCM08028H10D00	280	303 (335)	10	635	570	500	6	0.228	8.4
MCM08028H20D00			20					0.380	
MCM08038H10D00	380	403 (435)	10	735	670	600	7	0.257	9.4
MCM08038H20D00			20					0.409	

Notes: 1. Bolt hole pitch L3 on item marked with * is 150 mm.
2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	10, 20	00
LG2	10, 20	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	2.5 – 10.8	3.9 – 16.2
20	4.0 – 17.2	5.4 – 22.6

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
10	φ15	8 140	24 400	7 100	10	12 800	22 800	3 040
20		5 080	19 400		20	7 460		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	1 540	2 050	2 050

MCM08 (Double slider)

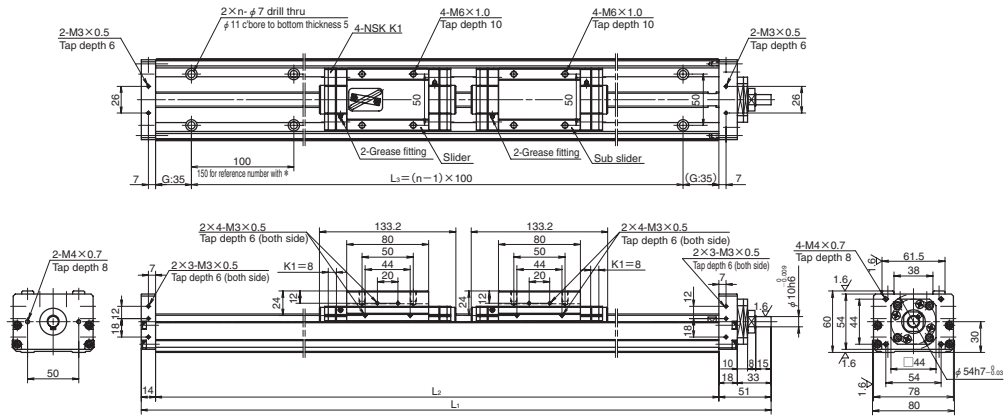Accuracy grade: High grade (H)



Dimension of MCM08 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m²)	Mass (kg)
MCM08048H10D00	480	503 (535)	10	835	770	700	8	0.287	10.3
MCM08048H20D00			20					0.439	
MCM08058H10D00	580	603 (635)	10	935	870	800	9	0.316	11.5
MCM08058H20D00			20					0.468	
MCM08068H10D00	680	703 (735)	10	1 035	970	900	10	0.346	12.2
MCM08068H20D00			20					0.498	

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	10, 20	00
LG2	10, 20	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	2.5 – 10.8	3.9 – 16.2
20	4.0 – 17.2	5.4 – 22.6

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
10	φ15	8 140	24 400	7 100	10	12 800	22 800	3 040
20		5 080	19 400		20	7 460		


Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	1 540	2 050	2 050

MCM10

Accuracy grade: High grade (H)

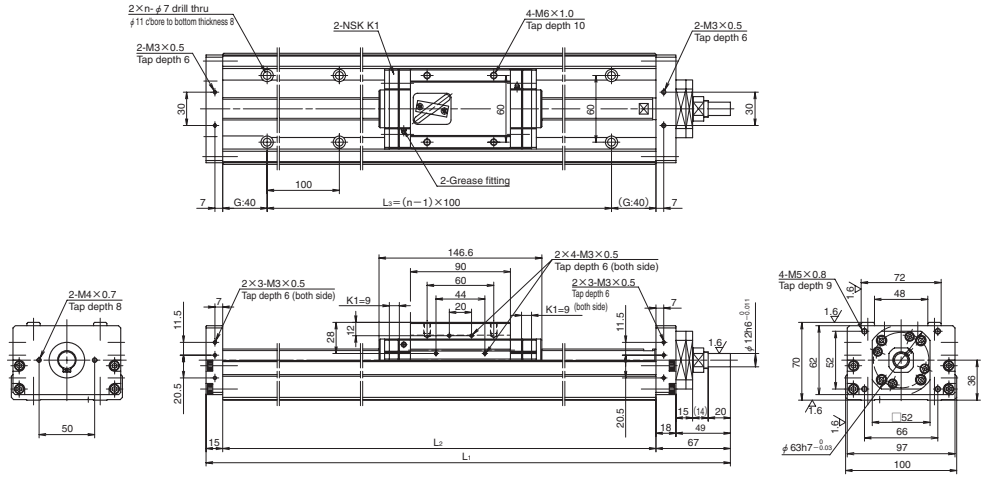Ball screw lead 10 and 20



Dimension of MCM10 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m^2)	Mass (kg)
MCM10010H10K00	100	133	10	362	280	200	2*	0.332	7.8
MCM10010H20K00		(151)	20					0.446	
◇**MCM10015H10K00**	150	183	10	412	330	300	4	0.378	8.7
◇**MCM10015H20K00**		(201)	20					0.492	
MCM10020H10K00	200	233	10	462	380	300	4	0.425	9.5
MCM10020H20K00		(251)	20					0.539	
◇**MCM10025H10K00**	250	283	10	512	430	400	5	0.472	10.4
◇**MCM10025H20K00**		(301)	20					0.586	
MCM10030H10K00	300	333	10	562	480	400	5	0.519	11.2
MCM10030H20K00		(351)	20					0.633	
MCM10040H10K00	400	433	10	662	580	500	6	0.612	13.0
MCM10040H20K00		(451)	20					0.726	
MCM10050H10K00	500	533	10	762	680	600	7	0.706	14.6
MCM10050H20K00		(551)	20					0.820	
MCM10050H30K00			30					1.010	

Notes: 1) Dimension G is 15 for items marked with ◇.
2) ∗: Use mounting holes on each end of the rail.

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	2.7 – 10.8	4.7 – 19.7
20	3.1 – 12.7	5.2 – 21.6
30	5.1 – 18.0	—

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
10	ϕ20	12 800	33 500	7 600	10	21 400	29 400	3 380
20		8 190	26 600		20	12 600		
30		13 200	23 200		30	22 900		


Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	1 170	425	425

MCM10

Accuracy grade: High grade (H)

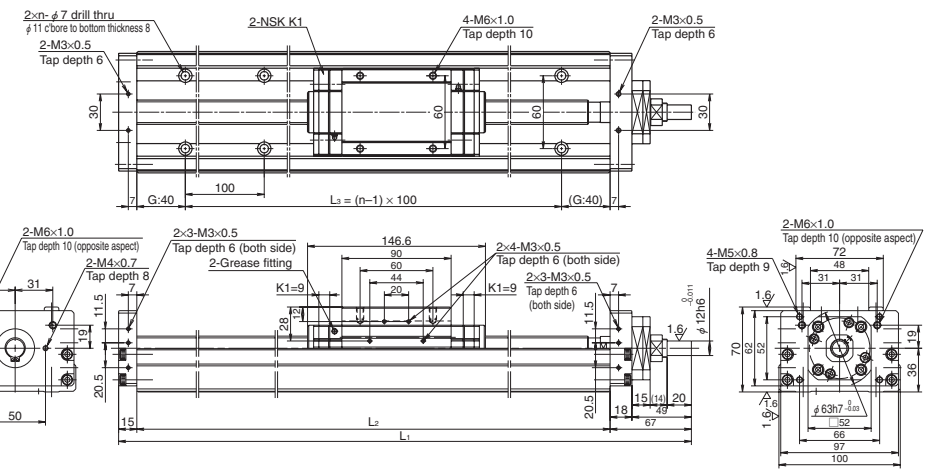Ball screw lead 30



Dimension of MCM10 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m^2)	Mass (kg)
MCM10060H10K00	600	633	10	862	780	700	8	0.800	16.3
MCM10060H20K00		(651)	20					0.914	
MCM10060H30K00			30					1.104	
MCM10070H10K00	700	733	10	962	880	800	9	0.893	18.0
MCM10070H20K00		(751)	20					1.007	
MCM10070H30K00			30					1.197	
MCM10080H10K00	800	833	10	1 062	980	900	10	0.987	19.7
MCM10080H20K00		(851)	20					1.101	
MCM10080H30K00			30					1.291	
MCM10090H10K00	900	933	10	1 162	1 080	1 000	11	1.081	21.4
MCM10090H20K00		(951)	20					1.195	
◇**MCM10100H10K00**	1 000	1 033	10	1 262	1 180	1 000	11	1.174	23.1
◇**MCM10100H20K00**		(1 051)	20					1.288	

Note: Dimension G is 90 for items marked with ◇.

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	2.7 – 10.8	4.7 – 19.7
20	3.1 – 12.7	5.2 – 21.6
30	5.1 – 18.0	—

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
10	ϕ20	12 800	33 500	7 600	10	21 400	29 400	3 380
20		8 190	26 600		20	12 600		
30		13 200	23 200		30	22 900		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	1 170	425	425

MCM10 (Double slider)

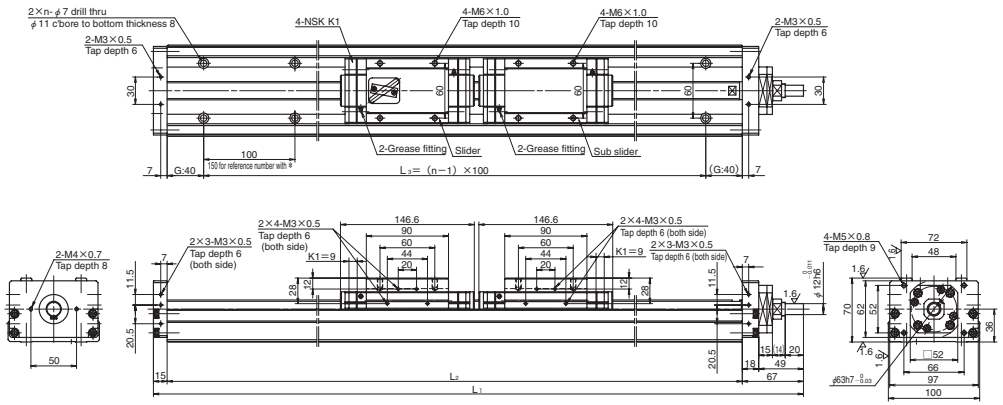Accuracy grade: High grade (H)



Dimension of MCM10 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m^2)	Mass (kg)
✻MCM10007H10D00	70	86 (122)	10	462	380	300	3	0.463	11.0
MCM10017H10D00	170	186	10	562	480	400	5	0.557	12.7
MCM10017H20D00		(222)	20					0.785	
MCM10027H10D00	270	286	10	662	580	500	6	0.650	13.4
MCM10027H20D00		(322)	20					0.878	
MCM10037H10D00	370	386	10	762	680	600	7	0.744	15.1
MCM10037H20D00		(422)	20					0.972	
MCM10047H10D00	470	486	10	862	780	700	8	0.838	17.8
MCM10047H20D00		(522)	20					1.066	

Note: Bolt hole pitch L_3 on item marked with ✻ is 150 mm.

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	4.2 – 15.6	6.1 – 24.5
20	5.0 – 19.6	7.0 – 28.5

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
10	φ20	12 800	33 500	7 600	10	21 400	29 400	3 380
20		8 190	26 600		20	12 600		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	2 340	2 940	2 940

MCM10 (Double slider)

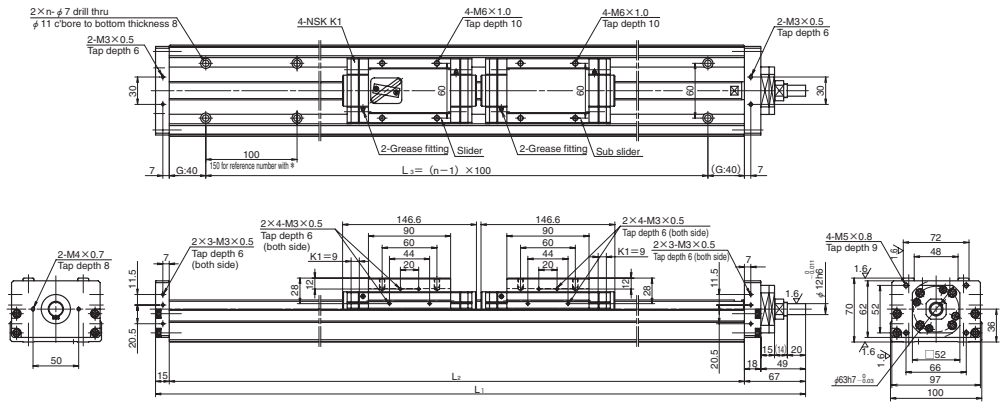Accuracy grade: High grade (H)



Dimension of MCM10 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m^2)	Mass (kg)
MCM10057H10D00	570	586	10	962	880	800	9	0.931	19.5
MCM10057H20D00		(622)	20					1.159	
MCM10067H10D00	670	686	10	1 062	980	900	10	1.025	21.2
MCM10067H20D00		(722)	20					1.253	
◇MCM10087H10D00	870	886	10	1 262	1 180	1 000	11	1.212	23.6
◇MCM10087H20D00		(922)	20					1.440	

Note: Dimension G is 90 for items marked with ◇.

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	4.2 – 15.6	6.1 – 24.5
20	5.0 – 19.6	7.0 – 28.5

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
10	φ20	12 800	33 500	7 600	10	21 400	29 400	3 380
20		8 190	26 600		20	12 600		


Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	2 340	2 940	2 940

C-1-5.3 MCM Series Accessories

C-1-5. 3. 1 Sensor Unit

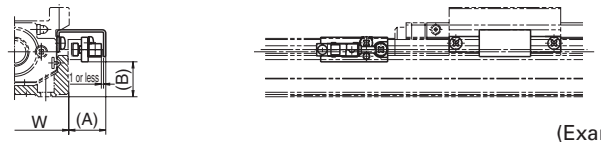●Proximity switch




(Example of assembly)

Model No.		Reference No.			A (mm)	B (mm)	Body width W (mm)
MCM02		MC-SR02-00	MC-SR02-01	MC-SR02-02	17	2	28
MCM03		MC-SR03-10	MC-SR03-11	MC-SR03-12	17	3	34
MCM05		MC-SR05-10	MC-SR05-11	MC-SR05-12	17	15	48.6
MCM06		MC-SR06-10	MC-SR06-11	MC-SR06-12	17	19	58
MCM08		MC-SR08-10	MC-SR08-11	MC-SR08-12	16	27	80
MCM10		MC-SR10-10	MC-SR10-11	MC-SR10-12	16	35	100
Quantity	Proximity switch (normally open contact)	—	3	1	E2S-W13 (OMRON Corp.)		
	Proximity switch (normally close contact)	3	—	2	E2S-W14 (OMRON Corp.)		

Notes: 1. See page C137 for proximity switch specification.
2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.
3. Sensor unit for MCM02 contains two sensor dogs.
4. A spacer plate is required when using a cover unit or sensor unit for MCM03 with the lead of 1 or 2 mm. (Refer to page C53.)

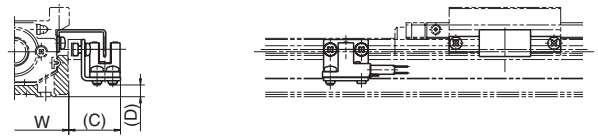●Photo sensor




(Example of assembly)

Model No.	Reference No.	C (mm)	D (mm)	Body width W (mm)	Remarks
MCM03	MC-SR03-13	24	0.5	34	EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector attachment)
MCM05	MC-SR05-13	24	5	48.6	
MCM06	MC-SR06-13	24	9	58	
MCM08	MC-SR08-13	23	17	80	
MCM10	MC-SR10-13	22	24	100	

Notes: 1. See page C138 for photo sensor specification.
2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.
3. A spacer plate is required when using a cover unit or sensor unit for MCM03 with the lead of 1 or 2 mm. (Refer to page C53.)


(1) Sensor Rail

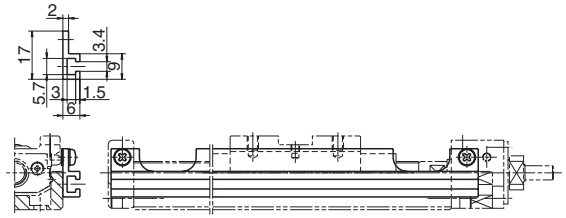Sensor rail for MCM03: MC-SRL3-＊＊＊＊




(Example of assembly)

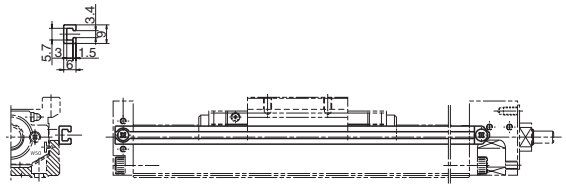Sensor rail for MCM05: MC-SRL5-＊＊＊＊



(Example of assembly)

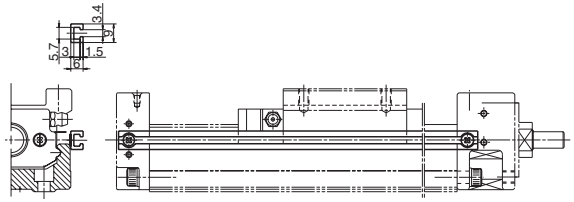Sensor rail for MCM02: MC-SRL2-＊＊＊＊
Sensor rail for MCM06: MC-SRL6-＊＊＊＊
Sensor rail for MCM08: MC-SRL8-＊＊＊＊
Sensor rail for MCM10: MC-SRL1-＊＊＊＊



(Example of assembly)

Notes: 1. ＊＊＊＊ is the same as rail dimension L_2.
2. Please assemble the attached seat between the sensor rail and the support unit for MCM03, MCM05, MCM06 and MCM08.
3. For combinations of sensors and rails, see pages C51 to C52.

MCM Series and Sensor Rail Combination Table


Table 4

Model No.	Body length L_2 (mm)	Reference No.	Sensor rail reference No.
MCM02	100	MCM02005H01K MCM02005P01K MCM02005H02K MCM02005P02K	MC-SRL2-0100※
	150	MCM02010H01K MCM02010P01K MCM02010H02K MCM02010P02K	MC-SRL2-0150
	200	MCM02015H01K MCM02015P01K MCM02015H02K MCM02015P02K	MC-SRL2-0200
MCM03	115	MCM03005P01K00 MCM03005P02K00	MC-SRL3-0115
	140	MCM03005H05K00 MCM03005H10K00 MCM03005H12K00 MCM03005H15K00	MC-SRL3-0140
	190	MCM03010P01K00 MCM03010P02K00 MCM03010H05K00 MCM03010H10K00 MCM03010H12K00 MCM03010H15K00	MC-SRL3-0190
	240	MCM03015P01K00 MCM03015P02K00 MCM03015H05K00 MCM03015H10K00 MCM03015H12K00 MCM03015H15K00	MC-SRL3-0240
	290	MCM03020H05K00 MCM03020H10K00 MCM03020H12K00 MCM03020H15K00	MC-SRL3-0290
	340	MCM03025H05K00 MCM03025H10K00 MCM03025H12K00 MCM03025H15K00	MC-SRL3-0340
MCM05	180	MCM05005H05K00 MCM05005H10K00 MCM05005H20K00	MC-SRL5-0180
	230	MCM05010H05K00 MCM05010H10K00 MCM05010H20K00	MC-SRL5-0230
	280	MCM05015H05K00 MCM05015H10K00 MCM05015H20K00 MCM05006H10D00	MC-SRL5-0280
	330	MCM05020H05K00 MCM05020H10K00 MCM05020H20K00 MCM05011H10D00	MC-SRL5-0330
	380	MCM05025H05K00 MCM05025H10K00 MCM05025H20K00 MCM05016H10D00	MC-SRL5-0380
	430	MCM05030H05K00 MCM05030H10K00 MCM05030H20K00 MCM05030H30K00 MCM05021H10D00 MCM05021H20D00	MC-SRL5-0430
	530	MCM05040H05K00 MCM05040H10K00 MCM05040H20K00 MCM05040H30K00 MCM05031H10D00	MC-SRL5-0530
MCM05	530	MCM05031H20D00	MC-SRL5-0530
	630	MCM05050H05K00 MCM05050H10K00 MCM05050H20K00 MCM05050H30K00 MCM05041H10D00 MCM05041H20D00	MC-SRL5-0630
	730	MCM05060H05K00 MCM05060H10K00 MCM05060H20K00 MCM05060H30K00 MCM05051H10D00 MCM05051H20D00	MC-SRL5-0730
MCM06	190	MCM06005H05K02 MCM06005H10K00 MCM06005H20K00	MC-SRL6-0190
	240	MCM06010H05K02 MCM06010H10K00 MCM06010H20K00	MC-SRL6-0240
	290	MCM06015H05K02 MCM06015H10K00 MCM06015H20K00	MC-SRL6-0290
	340	MCM06020H05K02 MCM06020H10K00 MCM06020H20K00 MCM06011H05D02 MCM06011H10D00	MC-SRL6-0340
	390	MCM06025H05K02 MCM06025H10K00 MCM06025H20K00	MC-SRL6-0390
	440	MCM06030H05K02 MCM06030H10K00 MCM06030H20K00 MCM06021H05D02 MCM06021H10D00 MCM06021H20D00	MC-SRL6-0440
	540	MCM06040H05K02 MCM06040H10K00 MCM06040H20K00 MCM06031H05D02 MCM06031H10D00 MCM06031H20D00	MC-SRL6-0540
	640	MCM06050H05K02 MCM06050H10K00 MCM06050H20K00 MCM06041H05D02 MCM06041H10D00 MCM06041H20D00	MC-SRL6-0640
	740	MCM06060H05K02 MCM06060H10K00 MCM06060H20K00 MCM06051H10D00 MCM06051H20D00	MC-SRL6-0740
	840	MCM06070H05K02 MCM06070H10K00 MCM06070H20K00 MCM06061H10D00 MCM06061H20D00	MC-SRL6-0840
	940	MCM06080H05K02 MCM06080H10K00 MCM06080H20K00 MCM06071H10D00 MCM06071H20D00	MC-SRL6-0940
MCM08	220	MCM08005H05K02 MCM08005H10K00	MC-SRL8-0220
	270	MCM08010H05K02 MCM08010H10K00 MCM08010H20K00	MC-SRL8-0270
	320	MCM08015H05K02 MCM08015H10K00 MCM08015H20K00	MC-SRL8-0320
	370	MCM08020H05K02 MCM08020H10K00 MCM08020H20K00 MCM08008H10D00	MC-SRL8-0370
	420	MCM08025H05K02 MCM08025H10K00 MCM08025H20K00	MC-SRL8-0420
	470	MCM08030H05K02 MCM08030H10K00 MCM08030H20K00 MCM08018H10D00 MCM08018H20D00	MC-SRL8-0470
	570	MCM08040H05K02 MCM08040H10K00 MCM08040H20K00 MCM08040H30K00 MCM08028H10D00 MCM08028H20D00	MC-SRL8-0570
	670	MCM08050H05K02 MCM08050H10K00 MCM08050H20K00 MCM08050H30K00 MCM08038H10D00 MCM08038H20D00	MC-SRL8-0670
	770	MCM08060H05K02 MCM08060H10K00 MCM08060H20K00 MCM08060H30K00 MCM08048H10D00 MCM08048H20D00	MC-SRL8-0770
	870	MCM08070H05K02 MCM08070H10K00 MCM08070H20K00 MCM08070H30K00 MCM08058H10D00 MCM08058H20D00	MC-SRL8-0870
	970	MCM08080H05K02 MCM08080H10K00 MCM08080H20K00 MCM08080H30K00 MCM08068H10D00 MCM08068H20D00	MC-SRL8-0970
MCM10	280	MCM10010H10K00 MCM10010H20K00	MC-SRL1-0280
	330	MCM10015H10K00 MCM10015H20K00	MC-SRL1-0330
	380	MCM10020H10K00 MCM10020H20K00 MCM10007H10D00	MC-SRL1-0380
	430	MCM10025H10K00 MCM10025H20K00	MC-SRL1-0430
	480	MCM10030H10K00 MCM10030H20K00 MCM10017H10D00 MCM10017H20D00	MC-SRL1-0480
	580	MCM10040H10K00 MCM10040H20K00 MCM10027H10D00 MCM10027H20D00	MC-SRL1-0580
	680	MCM10050H10K00 MCM10050H20K00 MCM10050H30K00 MCM10037H10D00 MCM10037H20D00	MC-SRL1-0680
	780	MCM10060H10K00 MCM10060H20K00 MCM10060H30K00 MCM10047H10D00 MCM10047H20D00	MC-SRL1-0780
	880	MCM10070H10K00 MCM10070H20K00 MCM10070H30K00 MCM10057H10D00 MCM10057H20D00	MC-SRL1-0880
	980	MCM10080H10K00 MCM10080H20K00 MCM10080H30K00 MCM10067H10D00 MCM10067H20D00	MC-SRL1-0980
	1 080	MCM10090H10K00 MCM10090H20K00	MC-SRL1-1080
	1 180	MCM10100H10K00 MCM10100H20K00 MCM10087H10D00 MCM10087H20D00	MC-SRL1-1180

*) When using NSK standard sensors, prepare two sensor rails. Two sensor rails will also be required for another Monocarriers depending on signal points of sensors. Contact NSK for details.

C-1-5. 3. 2 Cover Unit

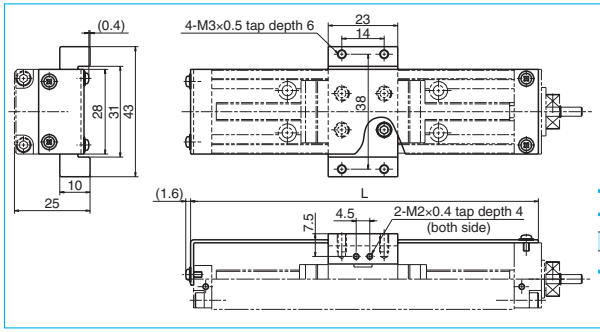Cover Unit for MCM02




Unit: mm

Stroke	Reference No.	Length(*L*)
50	**MC-CV02005-00**	115
100	**MC-CV02010-00**	165
150	**MC-CV02015-00**	215

Height of screw head is not included.

Cover Unit for MCM03

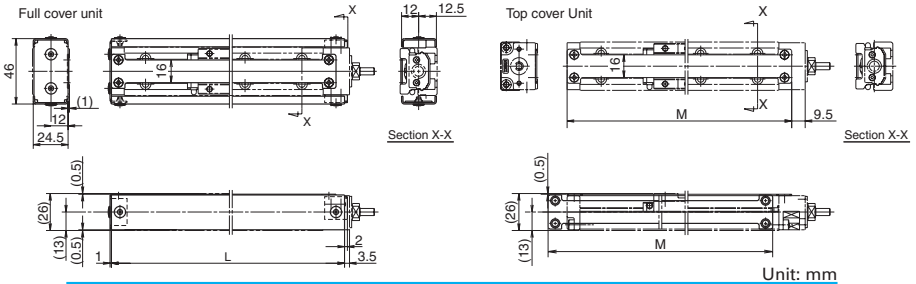Notes:1. When the cover is used for leads 1 and 2, an optional spacer plate (nominal No.: MC-SP03-00) is required.
2. When the cover is used for lead 15, an optional spacer plate (nominal No.: MC-SP03-01) is required.
3. A full cover unit cannot be installed for lead 15.




Unit: mm

Stroke	Reference No.		Cover length	
	Top cover unit	Full cover unit	Length (*L*)	Length (*M*)
50 (lead 1, 2)	**MC-CV03005-02**	***MC-CV03005-01**	139	133
50 (lead 5, 10, 12, 15)	**MC-CV03005-02A**	***MC-CV03005-01A**	164	158
100	**MC-CV03010-02**	***MC-CV03010-01**	214	208
150	**MC-CV03015-02**	***MC-CV03015-01**	264	258
200	**MC-CV03020-02**	***MC-CV03020-01**	314	308
250	**MC-CV03025-02**	***MC-CV03025-01**	364	358

*) The full-cover unit cannot be used when the sensor unit is used. Height of screw head is not included.


Spacer for MCM03 (Optional)

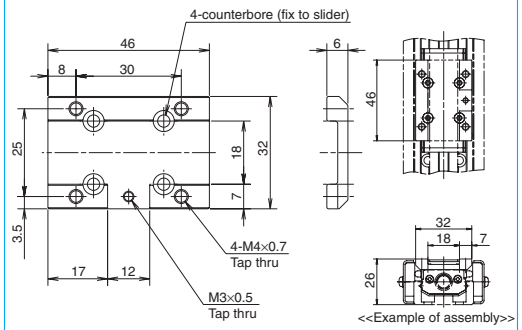MC-SP03-00 (for ball screw lead 1 and 2 mm)




Note: Spacer is required when using sensor unit and cover unit.

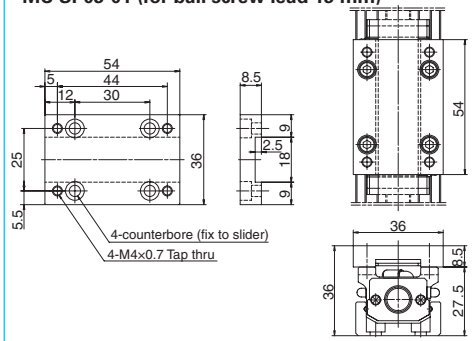MC-SP03-01 (for ball screw lead 15 mm)



Note: To use an upper surface cover, use it during assembly.

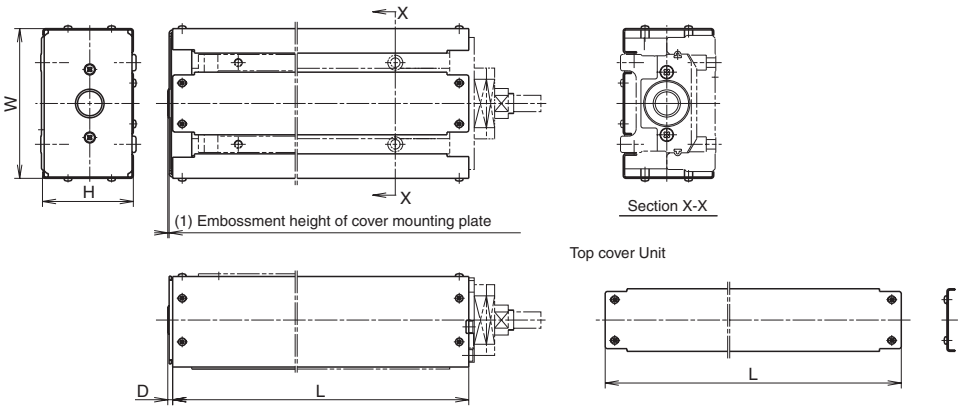Cover unit for MCM05, 06, 08, and 10



Unit: mm

Model No.	Stroke		Cover unit reference No.		Cover length			
	Single slider	Double slider	Top cover Unit	Full cover Unit*1	Length (L)	Height (H)	Width (W)	End part (D)
MCM05	50	—	MC-CV05005-01	MC-CV05005-00	200	38.5	65	2.6
	100	—	MC-CV05010-01	MC-CV05010-00	250			
	150	60	MC-CV05015-01	MC-CV05015-00	300			
	200	110	MC-CV05020-01	MC-CV05020-00	350			
	250	160	MC-CV05025-01	MC-CV05025-00	400			
	300	210	MC-CV05030-01	MC-CV05030-00	450			
	400	310	MC-CV05040-01	MC-CV05040-00	550			
	500	410	MC-CV05050-01	MC-CV05050-00	650			
	600	510	MC-CV05060-01	MC-CV05060-00	750			
MCM06	50	—	MC-CV06005-01	MC-CV06005-00	225	48.5	75	*2 —
	100	—	MC-CV06010-01	MC-CV06010-00	275			
	150	—	MC-CV06015-01	MC-CV06015-00	325			
	200	110	MC-CV06020-01	MC-CV06020-00	375			
	250	—	MC-CV06025-01	MC-CV06025-00	425			
	300	210	MC-CV06030-01	MC-CV06030-00	475			
	400	310	MC-CV06040-01	MC-CV06040-00	575			
	500	410	MC-CV06050-01	MC-CV06050-00	675			
	600	510	MC-CV06060-01	MC-CV06060-00	775			
	700	610	MC-CV06070-01	MC-CV06070-00	875			
	800	710	MC-CV06080-01	MC-CV06080-00	975			
MCM08	50	—	MC-CV08005-01	MC-CV08005-00	248	56.5	90	2.6
	100	—	MC-CV08010-01	MC-CV08010-00	298			
	150	—	MC-CV08015-01	MC-CV08015-00	348			
	200	80	MC-CV08020-01	MC-CV08020-00	398			
	250	—	MC-CV08025-01	MC-CV08025-00	448			
	300	180	MC-CV08030-01	MC-CV08030-00	498			
	400	280	MC-CV08040-01	MC-CV08040-00	598			
	500	380	MC-CV08050-01	MC-CV08050-00	698			
	600	480	MC-CV08060-01	MC-CV08060-00	798			
	700	580	MC-CV08070-01	MC-CV08070-00	898			
	800	680	MC-CV08080-01	MC-CV08080-00	998			
MCM10	100	—	MC-CV10010-01	MC-CV10010-00	308	66.5	110	3.6
	150	—	MC-CV10015-01	MC-CV10015-00	358			
	200	70	MC-CV10020-01	MC-CV10020-00	408			
	250	—	MC-CV10025-01	MC-CV10025-00	458			
	300	170	MC-CV10030-01	MC-CV10030-00	508			
	400	270	MC-CV10040-01	MC-CV10040-00	608			
	500	370	MC-CV10050-01	MC-CV10050-00	708			
	600	470	MC-CV10060-01	MC-CV10060-00	808			
	700	570	MC-CV10070-01	MC-CV10070-00	908			
	800	670	MC-CV10080-01	MC-CV10080-00	1008			
	900	—	MC-CV10090-01	MC-CV10090-00	1108			
	1000	870	MC-CV10100-01	MC-CV10100-00	1208			

Note: The dimensions of cover shown above do not include the head height of fixing machine screws. Add the head of machine screws of approximately 2.5 mm to the outer measurement of a cover unit. Set a margin for mechanical interference with surrounding components.

*1) When using sensor unit, full-cover unit cannot be used.

*2) A cover mounting plate is not used to MCM06.

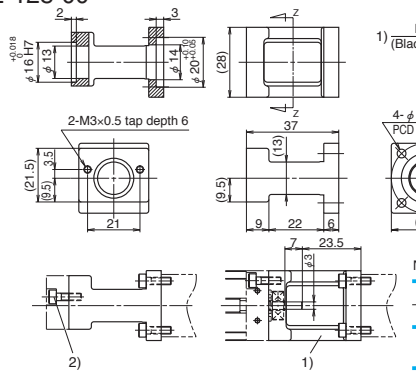
C-1-5. 3. 3 Motor Bracket

Motor models are subject to change at the motor manufacturers. For details, please contact the manufacturer.

Motor bracket for MCM02

■Reference number

MC-BK02-128-00



1) Motor bracket (Aℓ) (Black anodized aluminum)


2) Hexagon socket head cap screw (M3×0.5, length 10)

Note: Be sure to align centerlines when installing motor.

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp. (Σ- mini Series)	SGMM-A1 (10W) SGMM-A2 (20W)

■Reference number

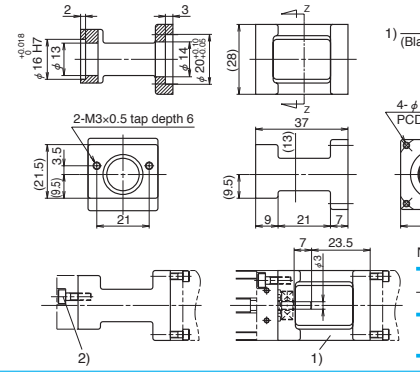MC-BK02-133-00



1) Motor bracket (Aℓ) (Black anodized aluminum)


2) Hexagon socket head cap screw (M3×0.5, length 10)

Note: Be sure to align centerlines when installing motor.

Compatible motor	
Maker	Motor models
Mitsubishi Electric Corp. (Melservo series)	HC-AQ013 (10W) HC-AQ023 (20W)

■Reference number

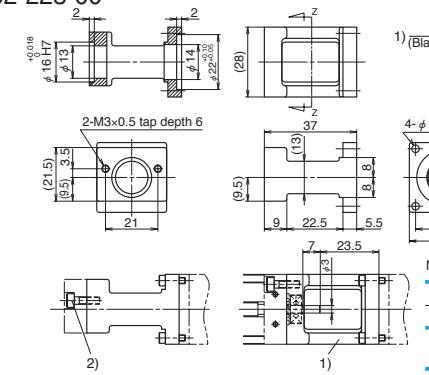MC-BK02-223-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M3×0.5, length 10)


Note: Be sure to align centerlines when installing motor.

Compatible motor	
Maker	Motor models
ORIENTAL MOTOR Co., Ltd.	PMU33/35 (5-phase stepping motor) PMC33/35 (5-phase stepping motor)

Motor bracket for MCM03

■Reference number

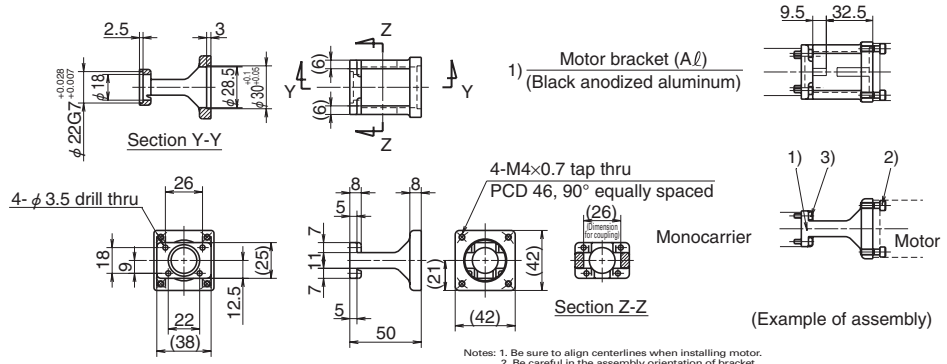MC-BK03-146-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M4, length 12)

3) Hexagon socket head cap screw (M3, length 10)


Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMAH-A3(30W), SGMJV-A5A(50W), SGMAV-A5A(50W) SGMJV-01A(100W), SGMAV-01A(100W), SGMAV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W) HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)
SANYO DENKI Co., Ltd.	P30B04003(30W), P30B04005(50W), P30B04010(100W)

Motor bracket for MCM03

■Reference number

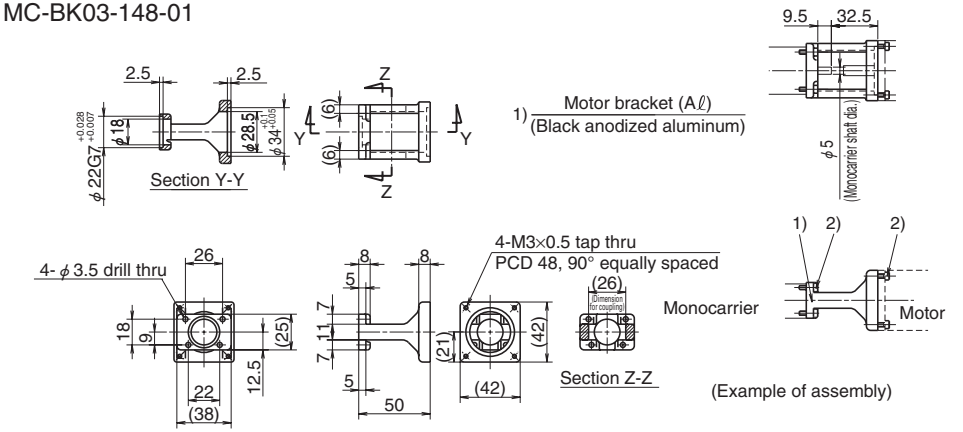MC-BK03-148-01



1) Motor bracket (Aℓ) (Black anodized aluminum)


2) Hexagon socket head cap screw (M3, length 10)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	P50B04006 (60W), P50B04010 (100W)

Motor bracket for MCM03

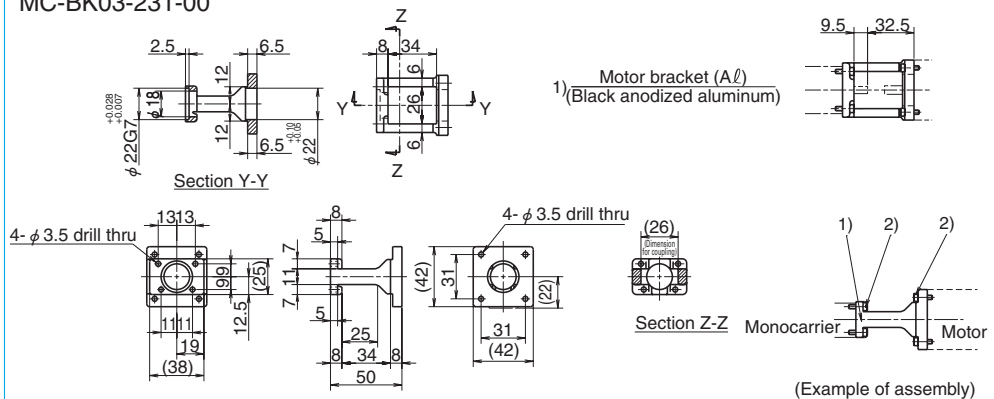■Reference number
MC-BK03-231-00



1) Motor bracket (Aℓ) (Black anodized aluminum)


2) Hexagon socket head cap screw (M3, length 10)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM423xxx, 103F55xx
ORIENTAL MOTOR Co., Ltd.	AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x UMK24x, CSK24x, PK24x

Motor bracket for MCM05

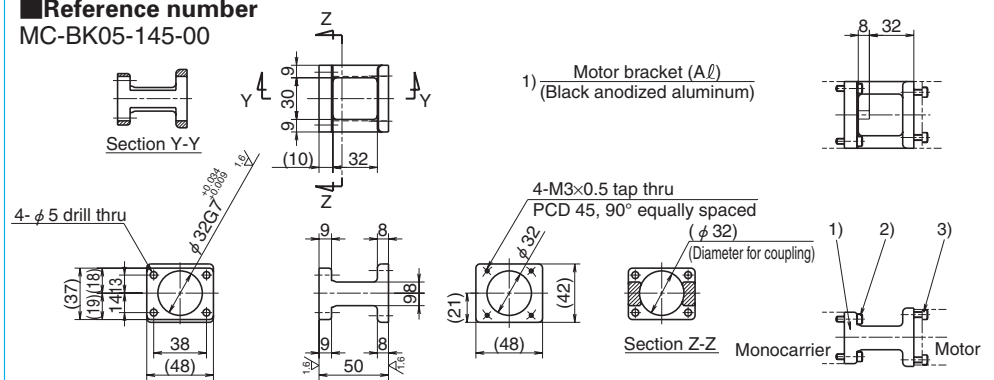■Reference number
MC-BK05-145-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M4, length 15)


3) Hexagon socket head cap screw (M3, length 12)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD5A(50W), MSMD01(100W)

Motor bracket for MCM05

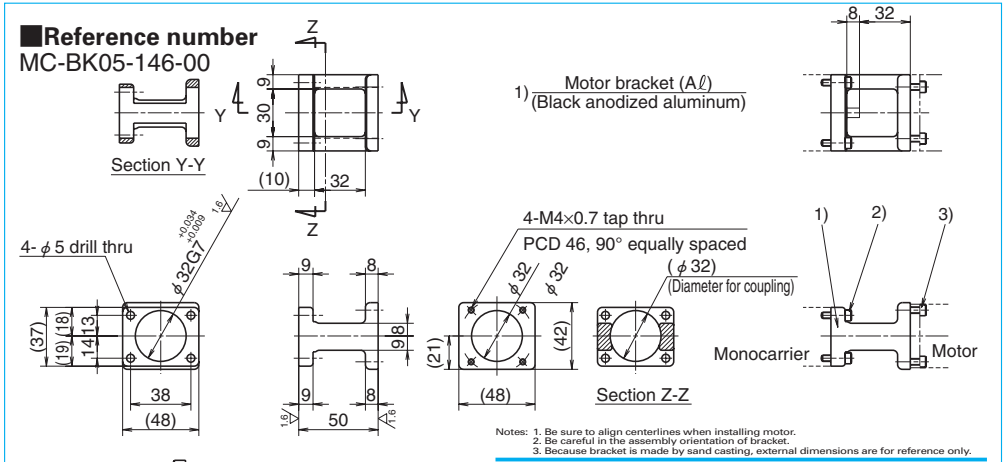■Reference number
MC-BK05-146-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M4, length 15)


3) Hexagon socket head cap screw (M4, length 12)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMAH-A3(30W), SGMJV-A5A(50W), SGMAV-A5A(50W) SGMJV-01A(100W), SGMAV-01A(100W), SGMAV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W) HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)
SANYO DENKI Co., Ltd.	P30B04003(30W), P30B04005(50W), P30B04010(100W)

Motor bracket for MCM05

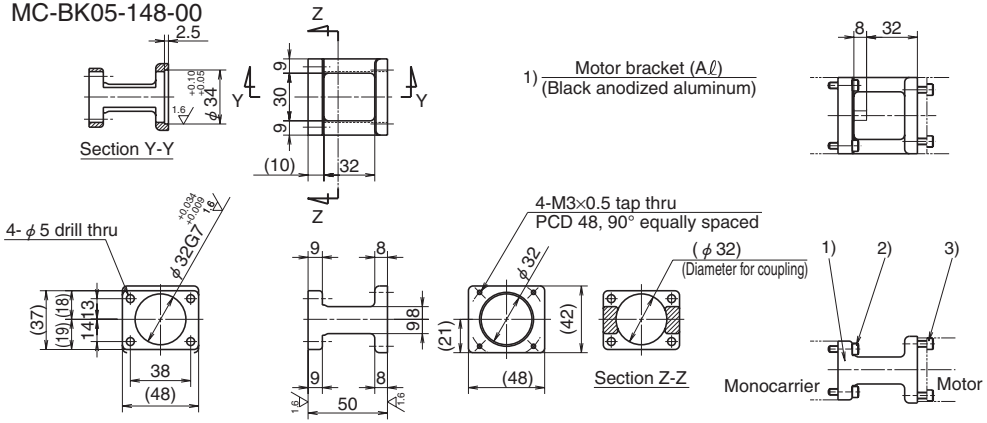■Reference number
MC-BK05-148-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M4, length 15)


3) Hexagon socket head cap screw (M3, length 12)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MAMA01(100W)

Motor bracket for MCM05

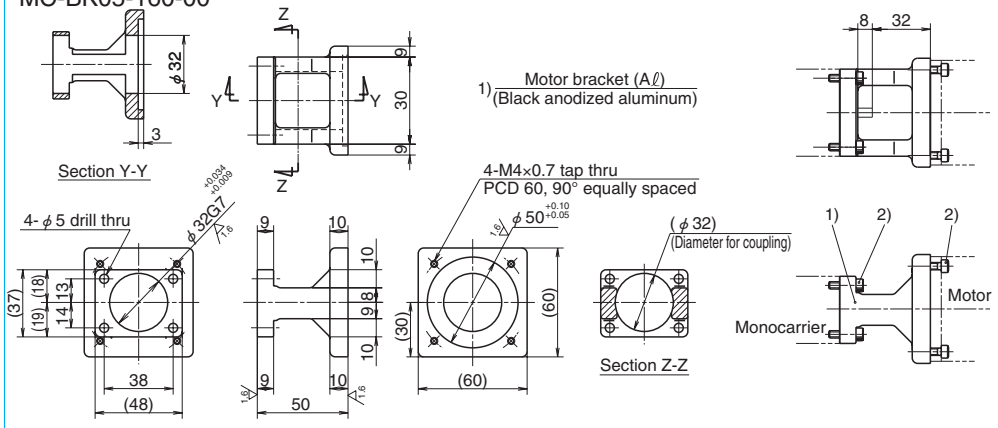■Reference number
MC-BK05-160-00




Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

Motor bracket for MCM05

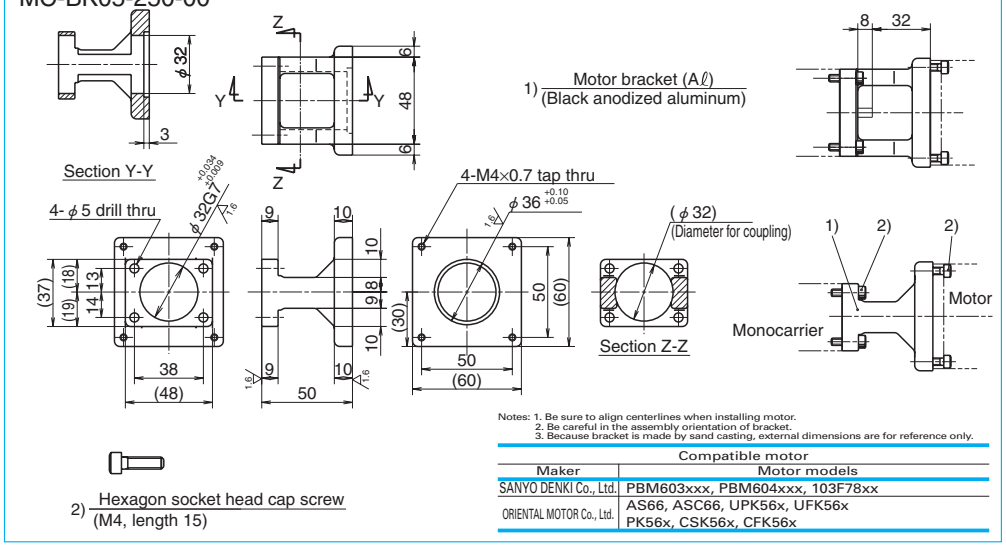■Reference number
MC-BK05-250-00




Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM603xxx, PBM604xxx, 103F78xx
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56x, UFK56x PK56x, CSK56x, CFK56x

Motor bracket for MCM06

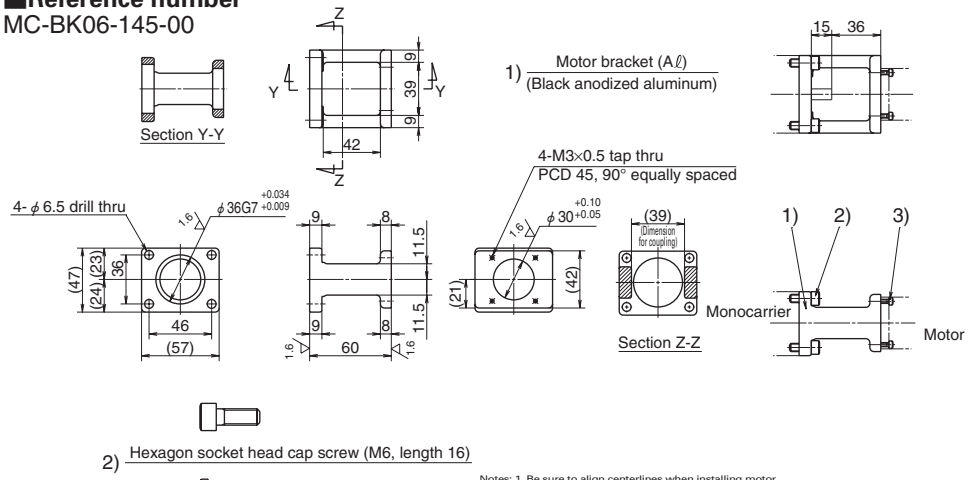■Reference number
MC-BK06-145-00




Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD5A(50W), MSMD01(100W)

Motor bracket for MCM06

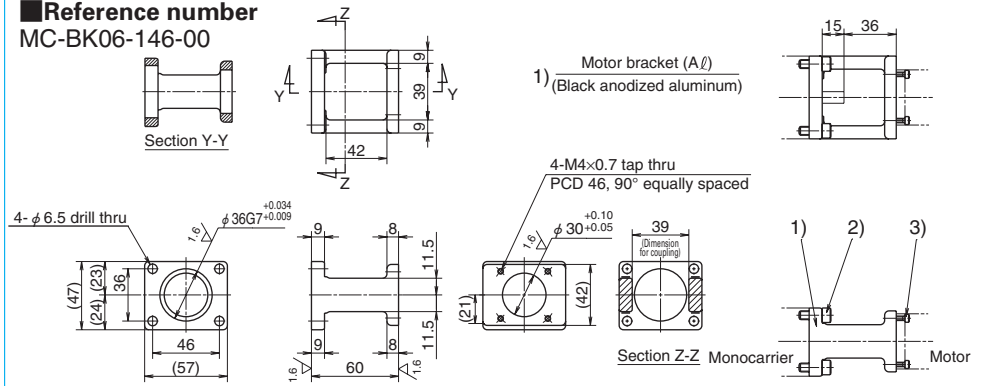■Reference number
MC-BK06-146-00




Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMJV-A5A(50W), SGMAV-A5A(50W) SGMJV-01A(100W), SGMAV-01A(100W), SGMAV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W) HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)
SANYO DENKI Co., Ltd.	P30B04003(30W), P30B04005(50W), P30B04010(100W)

Motor bracket for MCM06

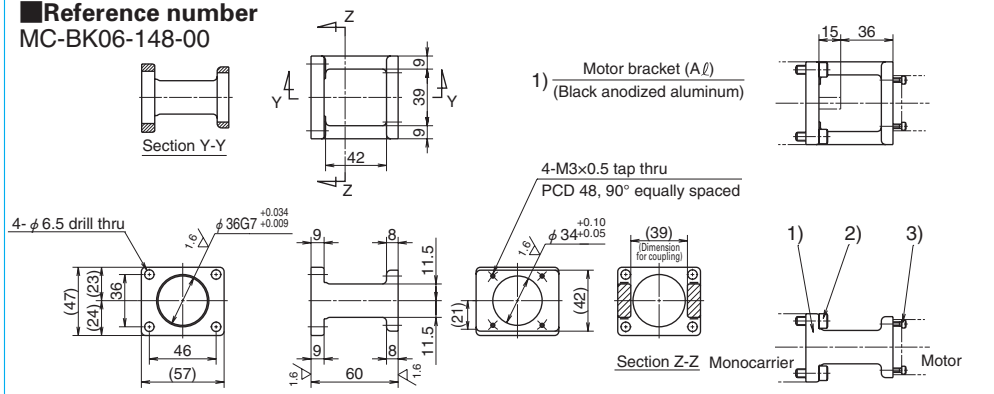■Reference number
MC-BK06-148-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M6, length 16)


3) Hexagon socket head cap screw (M3, length 12)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MAMA01(100W)
SANYO DENKI Co., Ltd.	P50B04006(60W), P50B04010(100W)

Motor bracket for MCM06

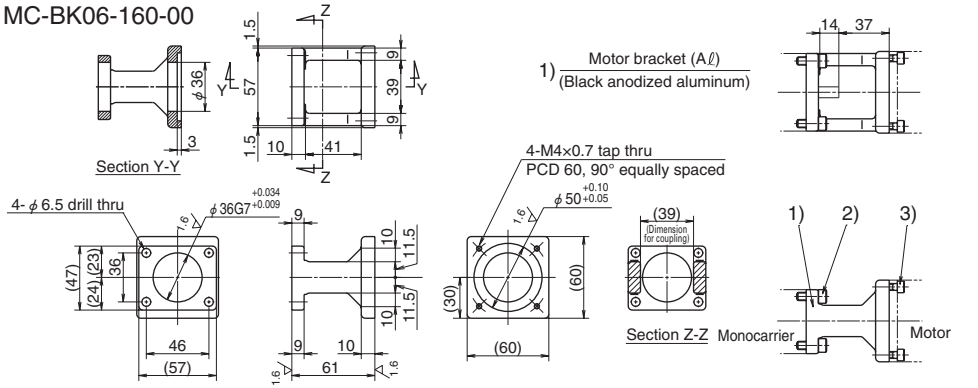■Reference number
MC-BK06-160-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M6, length 16)


3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

Motor bracket for MCM06

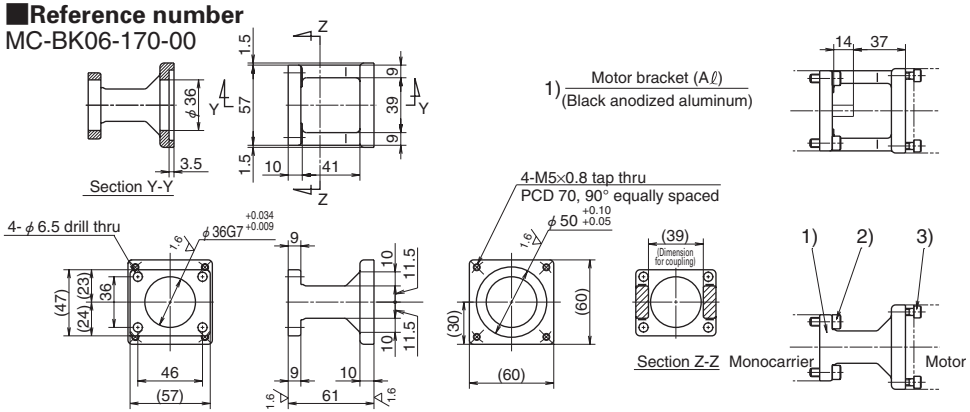■Reference number
MC-BK06-170-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M6, length 16)


3) Hexagon socket head cap screw (M5, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMJV-02A(200W), SGMAV-02A(200W), SGMJV-04A(400W), SGMAV-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W) HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
SANYO DENKI Co., Ltd.	P30B06020(200W), P30B06040(400W)

Motor bracket for MCM06

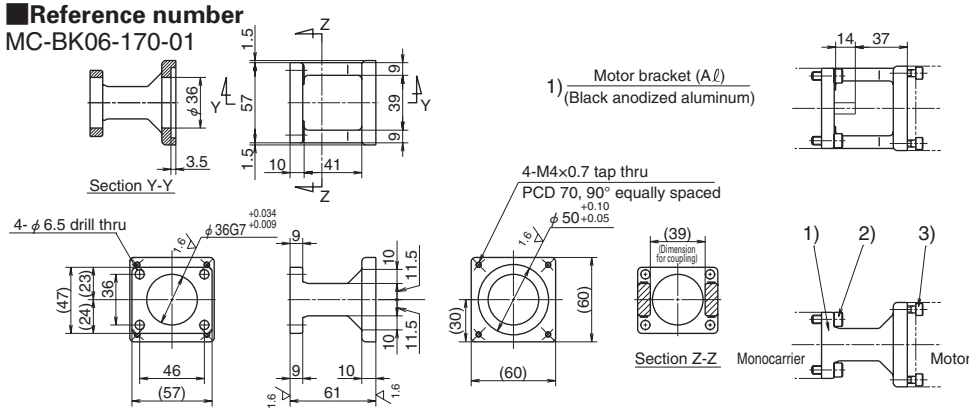■Reference number
MC-BK06-170-01



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M6, length 16)


3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

Motor bracket for MCM06

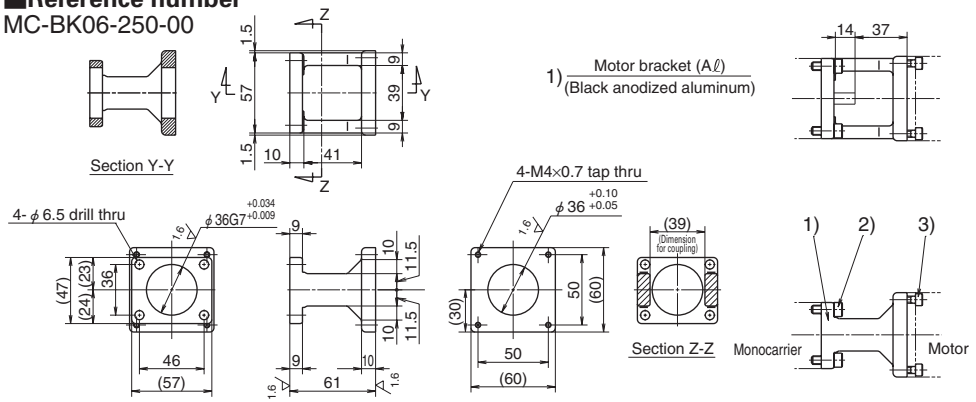■Reference number
MC-BK06-250-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M6, length 16)


3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM603xxx, PBM604xxx, 103F78xx
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56x, PK56x, CSK56x CFK56x, UFK56x

Motor bracket for MCM08

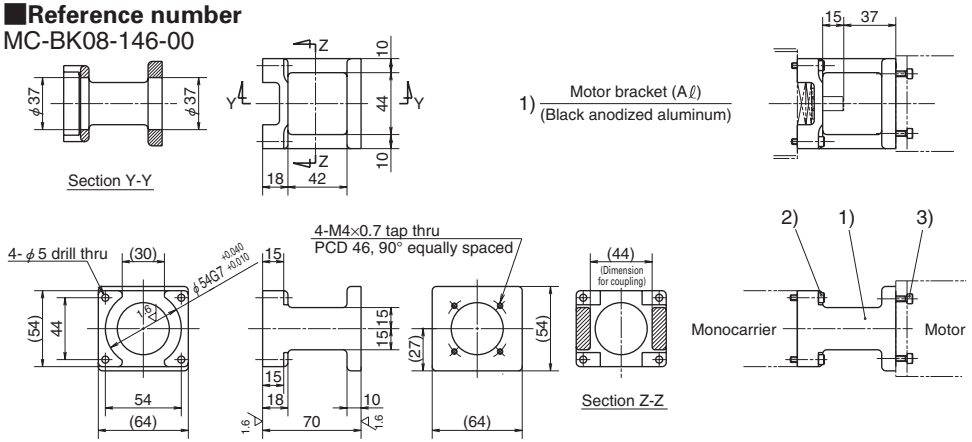■Reference number
MC-BK08-146-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M4, length 20)


3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMJV-01A(100W), SGMAV-01A(100W), SGMAV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
SANYO DENKI Co., Ltd.	P30B04003(30W), P30B04005(50W), P30B04010(100W)

Motor bracket for MCM08

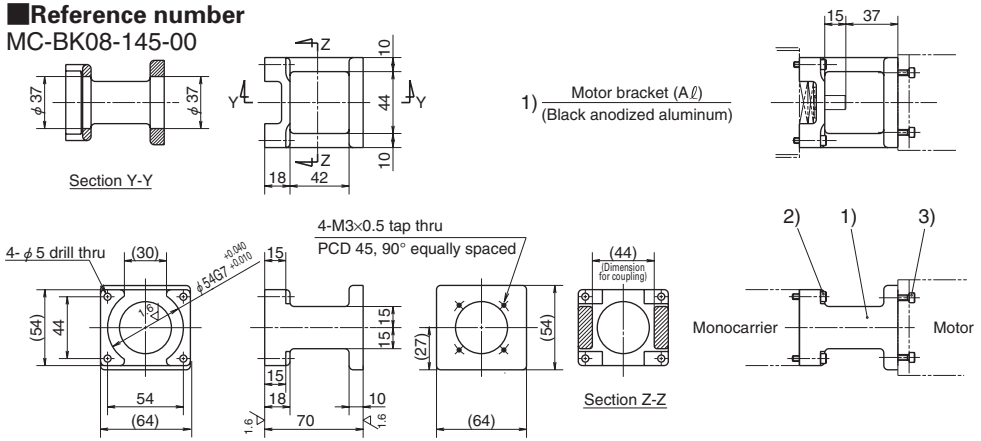■Reference number
MC-BK08-145-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M4, length 20)


3) Hexagon socket head cap screw (M3, length 12)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD01(100W)

Motor bracket for MCM08

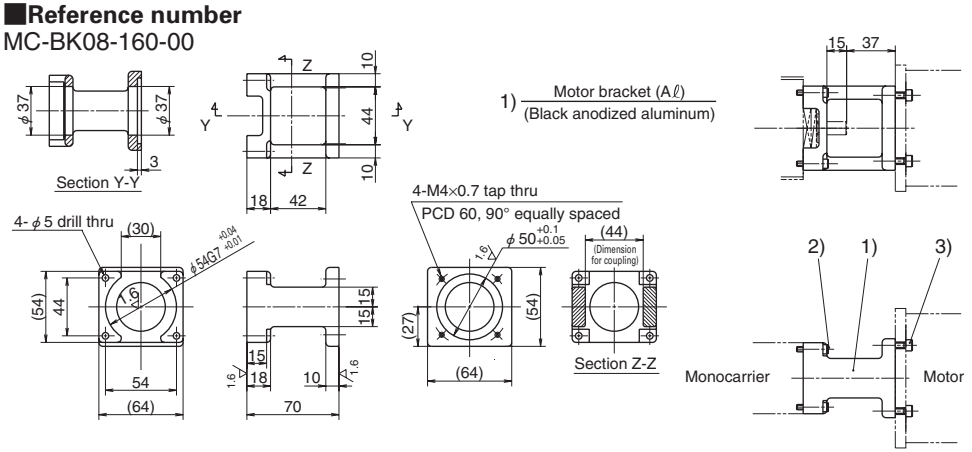■Reference number
MC-BK08-160-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M4, length 20)


3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

Motor bracket for MCM08

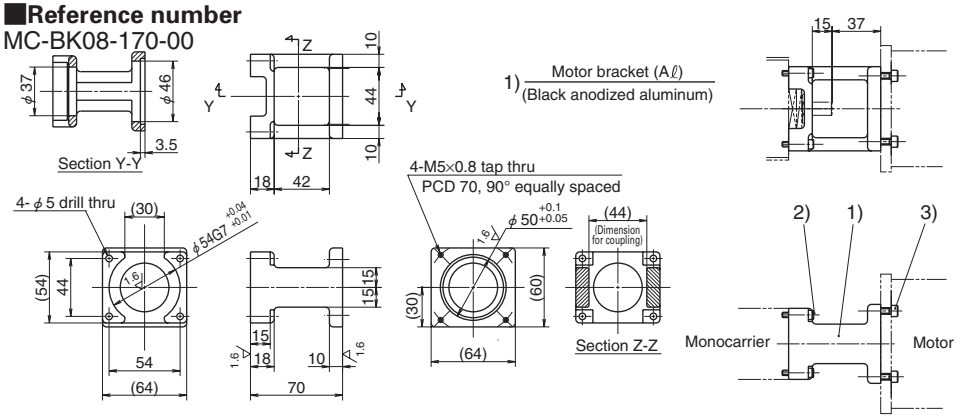■Reference number
MC-BK08-170-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M4, length 20)


3) Hexagon socket head cap screw (M5, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMJV-02A(200W), SGMAV-02A(200W), SGMJV-04A(400W), SGMAV-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W) HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
SANYO DENKI Co., Ltd.	P30B06020(200W), P30B06040(400W)

Motor bracket for MCM08

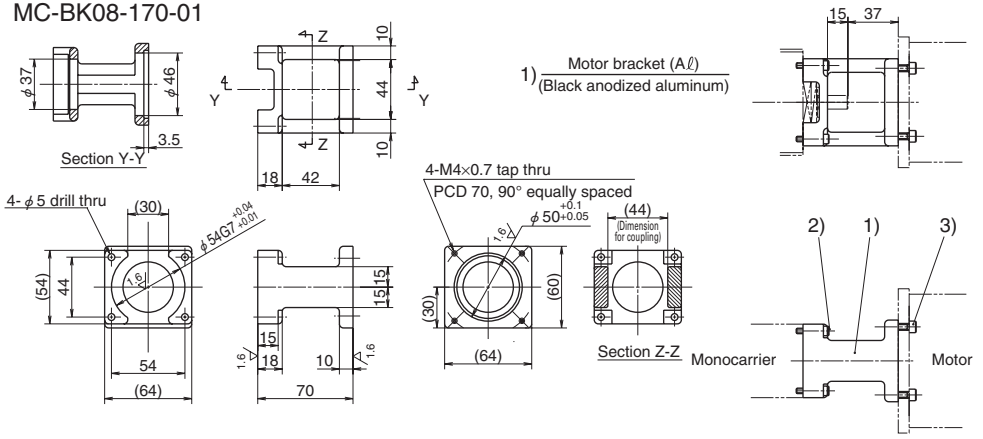■Reference number
MC-BK08-170-01



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M4, length 20)


3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400WW)

Motor bracket for MCM08

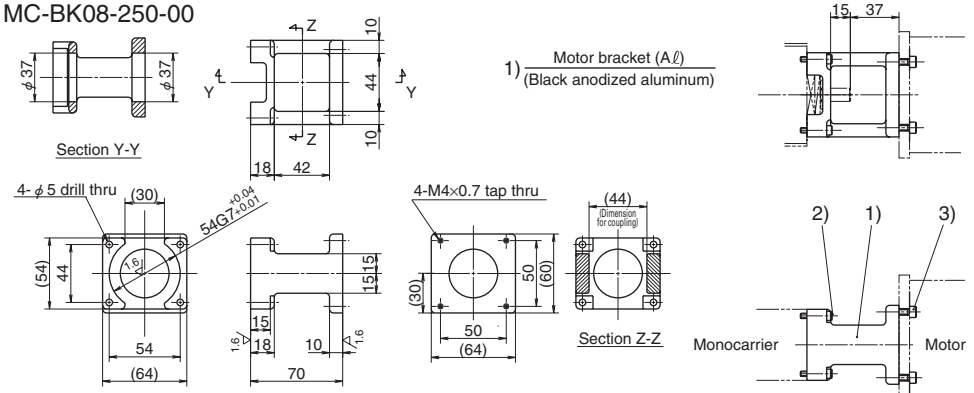■Reference number
MC-BK08-250-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M4, length 20)


3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM603xxx, PBM604xxx, 103F78xx
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56xx, PK56xx, CSK56x CFK56x, UFK56x

Motor bracket for MCM08

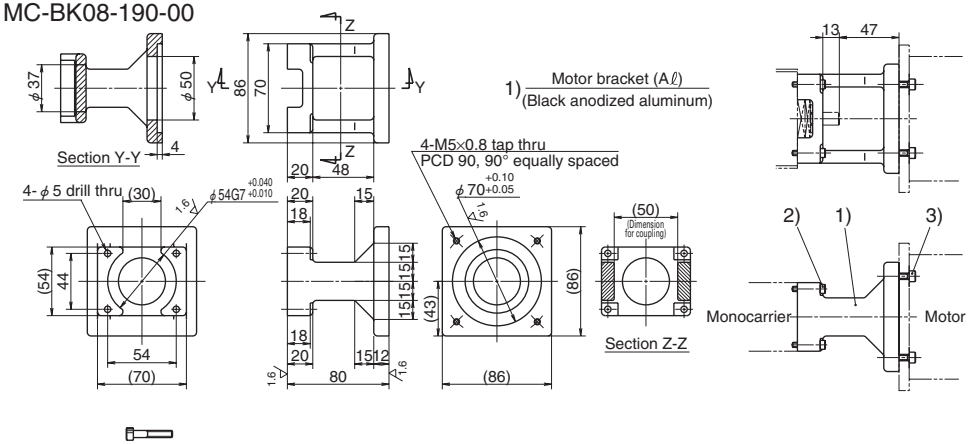■Reference number
MC-BK08-190-00



1) Motor bracket (Aℓ) (Black anodized aluminum)

2) Hexagon socket head cap screw (M4, length 22)


3) Hexagon socket head cap screw (M5, length 16)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)

Motor bracket for MCM08

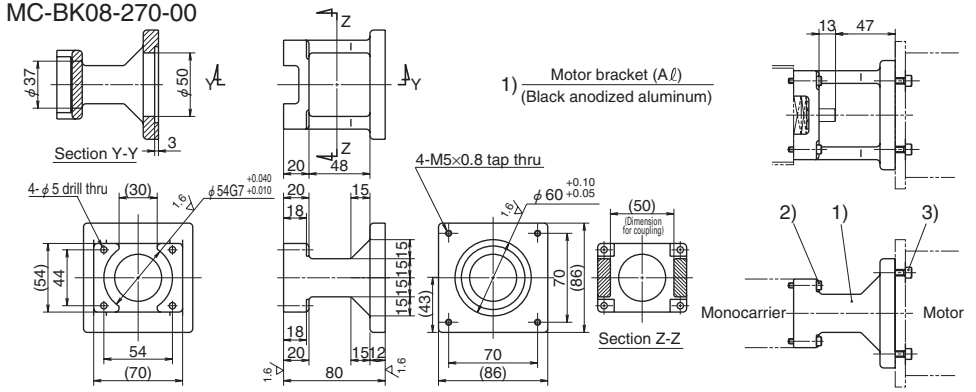■Reference number
MC-BK08-270-00




Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
ORIENTAL MOTOR Co., Ltd.	AS98, UPK59x, PK59x CSK59x, CFK59x, UFK59x
SANYO DENKI Co., Ltd.	103F85xx

Motor bracket for MCM10

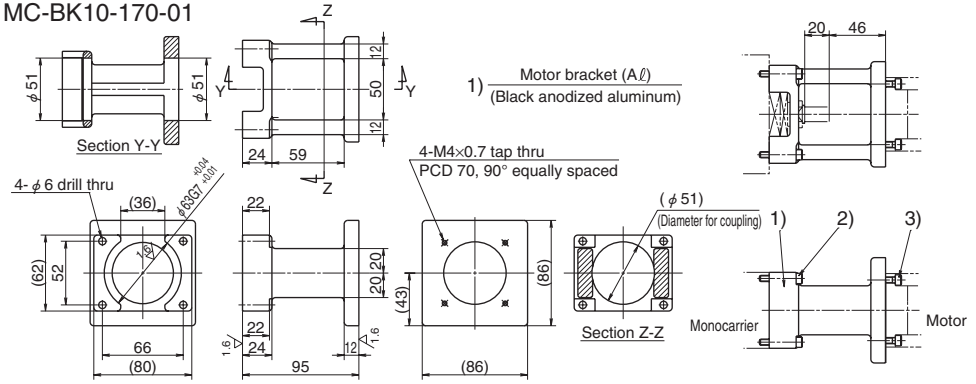■Reference number
MC-BK10-170-01




Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

Motor bracket for MCM10

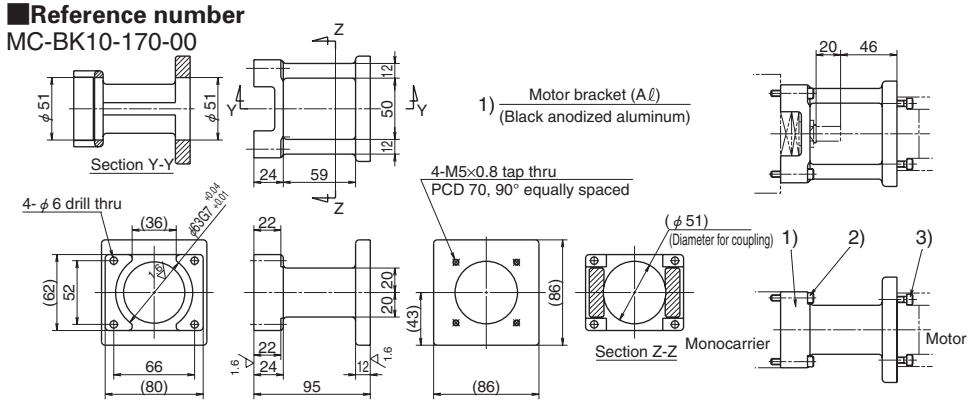■Reference number
MC-BK10-170-00




Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMJV-02A(200W), SGMAV-02A(200W), SGMJV-04A(400W), SGMAV-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W) HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
SANYO DENKI Co., Ltd.	P30B06020(200W), P30B06040(400W)

Motor bracket for MCM10

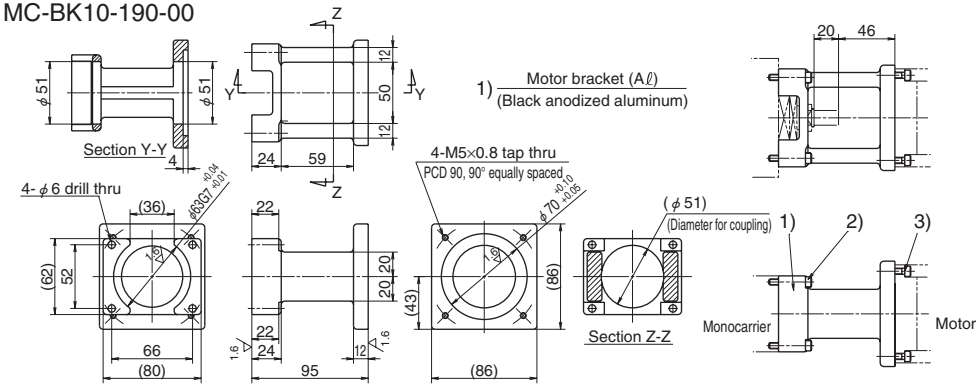■Reference number
MC-BK10-190-00




Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD08(750W), MAMA08(750W)
SANYO DENKI Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)

Motor bracket for MCM10

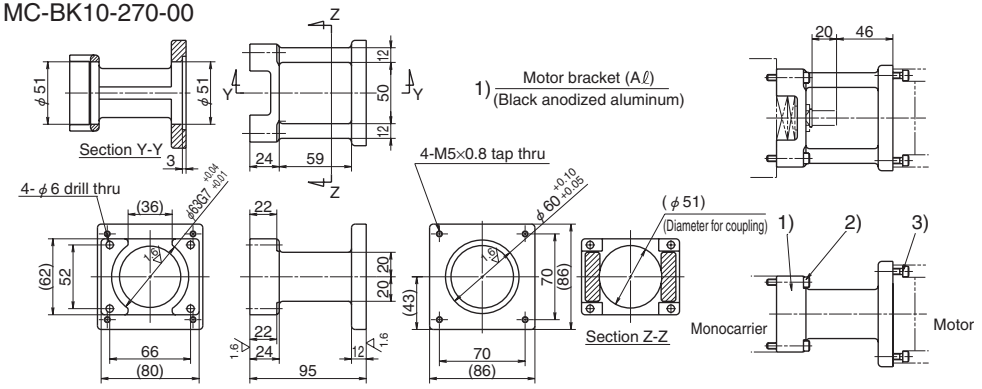■Reference number
MC-BK10-270-00



2) Hexagon socket head cap screw (M5, length 30)

3) Hexagon socket head cap screw (M5, length 18)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	103F85xx
ORIENTAL MOTOR Co., Ltd.	AS98, UPK59x, PK59x, CSK59x CFK59x, UFK59x

Motor Availability Table of Motor Bracket for MCM Series

Table 5

Model No.	Reference No. code	Motor bracket reference No.	Motor manufacturer	Stepping motor model No.	Wattage of AC servo motor 10	20	30	50	60	100	150	200	300	400	750
MCM02	1	MC-BK02-128-00	YASKAWA Electric Corp.		SGMM-A1	SGMM-A2									
	2	MC-BK02-133-00	Mitsubishi Electric Corp.		HC-AQ013	HC-AQ023									
	3	MC-BK02-223-00	ORIENTAL MOTOR Co., Ltd.	PMU33/35 (5-phase) PMC33/35 (5-phase)											
MCM03	1	MC-BK03-146-00	YASKAWA Electric Corp.				SGMAH-A3	SGMJV-A5A SGMAV-A5A		SGMJV-01A SGMAV-01A	SGMAV-C2A				
			Mitsubishi Electric Corp.					HF-KP053 HF-MP053 HC-KFS053 HC-MFS053		HF-KP13 HF-MP13 HC-KFS13 HC-MFS13					
			OMRON Corp.				R88M-W03	R88M-W05		R88M-W10					
			SANYO DENKI Co., Ltd.				P30B04003	P30B04005		P30B04010					
	2	MC-BK03-148-01	SANYO DENKI Co., Ltd.						P50B04006	P50B04010					
	3	MC-BK03-231-00	SANYO DENKI Co., Ltd.	PBM423xxx											
			SANYO DENKI Co., Ltd.	103F55xx											
			ORIENTAL MOTOR Co., Ltd.	AS46, ASC46 UPK54x, PK54x CSK54x, CFK54x UMK24x, CSK24x PK24x											
MCM05	1	MC-BK05-145-00	Panasonic Co., Ltd.					MSMD5A		MSMD01					
	2	MC-BK05-146-00	YASKAWA Electric Corp.				SGMAH-A3	SGMJV-A5A SGMAV-A5A		SGMJV-01A SGMAV-01A	SGMAV-C2A				
			Mitsubishi Electric Corp.					HF-KP053 HF-MP053 HC-KFS053 HC-MFS053		HF-KP13 HF-MP13 HC-KFS13 HC-MFS13					
			OMRON Corp.				R88M-W03	R88M-W05		R88M-W10					
			SANYO DENKI Co., Ltd.				P30B04003	P30B04005		P30B04010					
	3	MC-BK05-148-00	Panasonic Co., Ltd.							MAMA01					
	4	MC-BK05-160-00	SANYO DENKI Co., Ltd.					P50B05005		P50B05010		P50B05020			
	5	MC-BK05-250-00	SANYO DENKI Co., Ltd.	PBM603xx, PBM604xx											
			SANYO DENKI Co., Ltd.	103F78xx											
			ORIENTAL MOTOR Co., Ltd.	AS66, ASC66 UPK56x, UFK56x PK56x, CSK56x, CFK56x											
MCM06	1	MC-BK06-145-00	Panasonic Co., Ltd.					MSMD5A		MSMD01					
	2	MC-BK06-146-00	YASKAWA Electric Corp.					SGMJV-A5A SGMAV-A5A		SGMJV-01A SGMAV-01A	SGMAV-C2A				
			Mitsubishi Electric Corp.					HF-KP053 HF-MP053 HC-KFS053 HC-MFS053		HF-KP13 HF-MP13 HC-KFS13 HC-MFS13					
			OMRON Corp.				R88M-W03	R88M-W05		R88M-W10					
			SANYO DENKI Co., Ltd.				P30B04003	P30B04005		P30B04010					
	3	MC-BK06-148-00	SANYO DENKI Co., Ltd.						P50B04006	P50B04010					
			Panasonic Co., Ltd.							MAMA01					
	4	MC-BK06-160-00	SANYO DENKI Co., Ltd.					P50B05005		P50B05010		P50B05020			
	5	MC-BK06-170-00	YASKAWA Electric Corp.									SGMJV-02A SGMAV-02A		SGMJV-04A SGMAV-04A	
			Mitsubishi Electric Corp.									HF-KP23 HF-MP23 HC-KFS23 HC-MFS23		HF-KP43 HF-MP43 HC-KFS43 HC-MFS43	
			OMRON Corp.									R88M-W20		R88M-W40	
			SANYO DENKI Co., Ltd.									P30B06020		P30B06040	
	6	MC-BK06-170-01	Panasonic Co., Ltd.									MSMD02 MAMA02		MSMD04 MAMA04	
	7	MC-BK06-250-00	SANYO DENKI Co., Ltd.	PBM603xxx, PBM604xxx											
			SANYO DENKI Co., Ltd.	103F78xx											
			ORIENTAL MOTOR Co., Ltd.	AS66, ASC66 UPK56x, PK56x CSK56x, CFK56x UFK56x											

Model No.	Reference No. code	Motor bracket reference No.	Motor manufacturer	Stepping motor model No.	Wattage of AC servo motor										
					10	20	30	50	60	100	150	200	300	400	750
MCM08	1	MC-BK08-145-00	Panasonic Co., Ltd.							MSMD01					
	2	MC-BK08-146-00	YASKAWA Electric Corp.							SGMJV-01A SGMAV-01A	SGMAV-C2A				
			Mitsubishi Electric Corp.							HF-KP13 HF-MP13 HC-KFS13 HC-MFS13					
			SANYO DENKI Co., Ltd.				P30B04003	P30B04005		P30B04010					
	3	MC-BK08-160-00	SANYO DENKI Co., Ltd.					P50B05005		P50B05010		P50B05020			
	4	MC-BK08-170-00	YASKAWA Electric Corp.									SGMJV-02A SGMAV-02A		SGMJV-04A SGMAV-04A	
			Mitsubishi Electric Corp.									HF-KP23 HF-MP23 HC-KFS23 HC-MFS23		HF-KP43 HF-MP43 HC-KFS43 HC-MFS43	
			OMRON Corp.									R88M-W20		R88M-W40	
			SANYO DENKI Co., Ltd.									P30B06020		P30B06040	
	5	MC-BK08-170-01	Panasonic Co., Ltd.									MSMD02 MAMA02		MSMD04 MAMA04	
	6	MC-BK08-190-00	SANYO DENKI Co., Ltd.									P50B07020	P50B07030	P50B07040	
	7	MC-BK08-250-00	SANYO DENKI Co., Ltd.	PBM603xxx, PBM604xxx											
			SANYO DENKI Co., Ltd.	103F78xx											
			ORIENTAL MOTOR Co., Ltd.	AS66, ASC66 UPK56x, PK56x CSK56x, CFK56x UFK56x											
	8	MC-BK08-270-00	SANYO DENKI Co., Ltd.	103F85xx											
			ORIENTAL MOTOR Co., Ltd.	AS98 UPK59x, PK59x CSK59x, CFK59x UFK59x											
MCM10	1	MC-BK10-170-00	YASKAWA Electric Corp.									SGMJV-02A SGMAV-02A		SGMJV-04A SGMAV-04A	
			Mitsubishi Electric Corp.									HF-KP23 HF-MP23 HC-KFS23 HC-MFS23		HF-KP43 HF-MP43 HC-KFS43 HC-MFS43	
			OMRON Corp.									R88M-W20		R88M-W40	
			SANYO DENKI Co., Ltd.									P30B06020		P30B06040	
	2	MC-BK10-170-01	Panasonic Co., Ltd.									MSMD02 MAMA02		MSMD04 MAMA04	
	3	MC-BK10-190-00	Panasonic Co., Ltd.												MSMD08 MAMA08
			SANYO DENKI Co., Ltd.									P50B07020	P50B07030	P50B07040	
	4	MC-BK10-270-00	SANYO DENKI Co., Ltd.	103F85xx											
			ORIENTAL MOTOR Co., Ltd.	AS98 UPK59x, PK59x CSK59x, CFK59x UFK59x											



C-1-6 MCH Series
1. MCH Series Reference Number Coding C75
2. MCH Series Dimension Table of Standard Products
MCL06 C76
MCH06 C77
MCH09 C79
MCH10 C81
3. MCH Series Accessories
3.1 Sensor Unit C83
3.2 Cover Unit C85
3.3 Intermediate Plate for Motor C89

MCH Series

C-1-6 MCH Series

C-1-6. 1 MCH Series Reference Number Coding

[Body]

Example: MC H 06 040 H 10 K (B2) *1

- Monocarrier
- H Type: MCH Series
  L Type: MCH Series low profile rail (only for 06 size)
- Nominal size (rail width, Unit: 10mm)
- Stroke (Unit: 10mm)
- Accuracy grade (H, high grade; P, precision grade)
- Ball screw lead (mm)
- Slider specification K: Single slider
  D: Double slider (See page C16.)
- Grease specification: B (LG2) (See page C142.)
- NSK management number (0 or 2)

Note: *1: These two code fields are added except for standard grease.

14th digit is control No. of NSK. Customers cannot specify a number.
See the pages of each nominal number for details.

[With Accessories]

Example: MC S 06 040 H 10 K 0 2 K 0 0 0

- S: With MCH Accessories
- R: With MCL Accessories
- NSK management number
- Sensor unit
- Cover unit
- Intermediate plate for motor

Note: Option parts are available separately.

Table 1 Sensor unit (See page C83.)

Reference No. code	Specification	Reference No.
0	N/A	—
1	Proximity switch (Normally close contact 3 pieces)	MC—SRHxx—10
2	Proximity switch (Normally open contact 3 pieces)	MC—SRHxx—11
3	Proximity switch (Normally open contact 1 piece, Normally close contact 2 pieces)	MC—SRHxx—12
4	Photo sensor 3 pieces	MC—SRHxx—13

Notes: 1) xx: Nominal size
2) Sensor rail is not included in a sensor unit. If you require the rail, please specify upon ordering. (See page C83 to C84.)

Table 2 Cover unit (See page C85 to C87.)

Reference No. code	Specification	Reference No.
0	N/A	—
1	For single slider	MC—HVxxxxx—00
	For double slider	MC—HVxxxxxD00

Note: xxxxx; Nominal size and stroke number

Table 3 Intermediate plate for motor (See page C89 to C92.)


Reference No. code	Model No. MCH06 (MCL06)	MCH09	MCH10
0	N/A	N/A	N/A
1	MC-BKH06-145-00	MC-BKH09-145-00	MC-BKH10-170-00
2	MC-BKH06-146-00	MC-BKH09-146-00	MC-BKH10-170-01
3	MC-BKH06-231-00	MC-BKH09-170-00	MC-BKH10-190-00
4	MC-BKH06-250-00	MC-BKH09-170-01	MC-BKH10-190-01
5	—	MC-BKH09-231-00	MC-BKH10-250-00
6	—	MC-BKH09-250-00	MC-BKH10-270-00

N/A: Not applicable

C-1-6. 2 MCH Series Dimension Table of Standard Products

MCL06

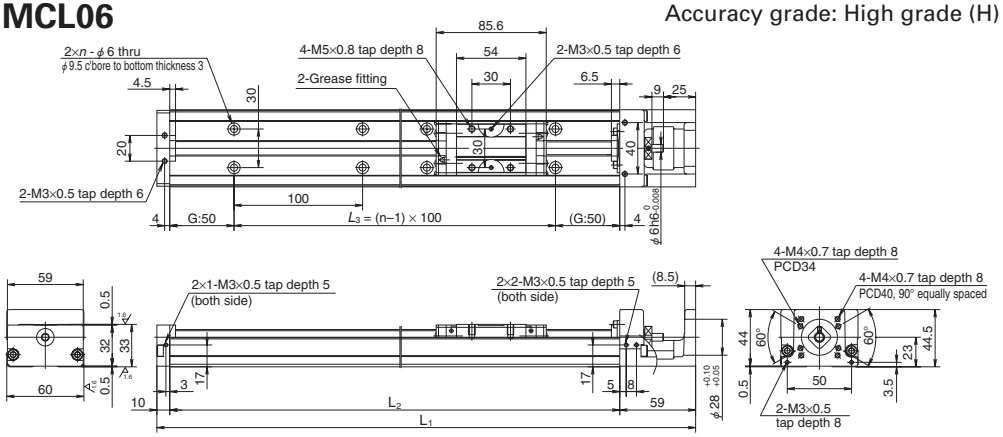Accuracy grade: High grade (H)



- Rail of MCL 06 is made lighter than that of MCH 06 by lowering rail height. Weight ratio between MCH 06 and MCL 06 is 5 to 4.
- Double slider specification is also available for MCL 06.
- Combinations of stroke and ball screw lead of MCL 06 are the same as those of MCH 06.

Dimension of MCL06 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	n	Inertia ×10⁻⁶(kg·m²)	Mass (kg)
◇MCL06005H05K02	50	53 (65)	5	219	150	100	2	2.38	1.0
◇MCL06005H10K02			10					3.45	
MCL06010H05K02	100	103 (115)	5	269	200	100	2	3.17	1.3
MCL06010H10K02			10					4.12	
MCL06020H05K02	200	203 (215)	5	369	300	200	3	4.51	1.9
MCL06020H10K02			10					5.46	
MCL06030H10K02	300	303 (315)	10	469	400	300	4	6.80	2.6
MCL06030H20K02			20					10.6	
MCL06040H10K02	400	403 (415)	10	569	500	400	5	8.13	3.2
MCL06040H20K02			20					11.9	
MCL06050H10K02	500	503 (515)	10	669	600	500	6	9.47	3.9
MCL06050H20K02			20					13.3	

Notes: 1. Dimension G is 25 for items marked with ◇.
2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade High grade	Precision
5	1.0 – 4.8	1.9 – 7.6
10	1.1 – 5.8	2.1 – 8.9
20	1.6 – 7.9	2.5 – 10.6

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	φ12	4 390	22 800	4 400	5	6 260	16 300	1 450
10		2 740	18 100		10	3 820		
20		2 660	14 400		20	3 800		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	335	133	133

MCH06

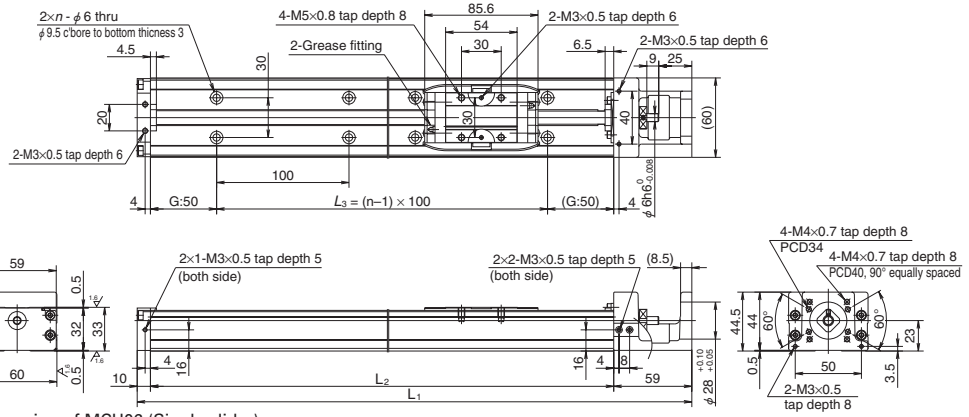Accuracy grade: High grade (H)



Dimension of MCH06 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	n	Inertia ×10⁻⁶(kg·m²)	Mass (kg)
◇MCH06005H05K02	50	53 (65)	5	219	150	100	2	2.38	1.8
◇MCH06005H10K02			10					3.45	
◇MCH06005H20K02			20					7.25	
MCH06010H05K02	100	103 (115)	5	269	200	100	2	3.17	2.2
MCH06010H10K02			10					4.12	
MCH06010H20K02			20					7.92	
MCH06020H05K02	200	203 (215)	5	369	300	200	3	4.51	3.0
MCH06020H10K02			10					5.46	
MCH06020H20K02			20					9.26	
MCH06030H05K02	300	303 (315)	5	469	400	300	4	5.85	3.7
MCH06030H10K02			10					6.80	
MCH06030H20K02			20					10.6	
MCH06040H05K02	400	403 (415)	5	569	500	400	5	7.18	4.5
MCH06040H10K02			10					8.13	
MCH06040H20K02			20					11.9	
MCH06050H05K02	500	503 (515)	5	669	600	500	6	8.52	5.2
MCH06050H10K02			10					9.47	
MCH06050H20K02			20					13.3	

Notes: 1. Dimension G is 25 for items marked with ◇.
2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.0 – 4.8	1.9 – 7.6
10	1.1 – 5.8	2.1 – 8.9
20	1.6 – 7.9	2.5 – 10.6

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	φ12	4 390	22 800	4 400	5	6 260	16 300	1 450
10		2 740	18 100		10	3 820		
20		2 660	14 400		20	3 800		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	335	133	133

MCH06 (Double slider)

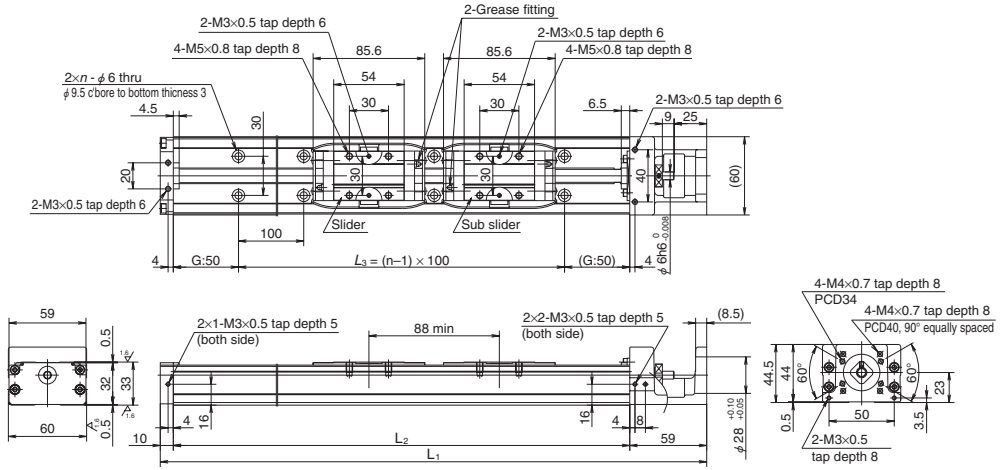Accuracy grade: High grade (H)



Dimension of MCH06 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	n	Inertia ×10⁻⁶(kg·m²)	Mass (kg)
MCH06010H05D02	100	115 (139)	5	369	300	200	3	4.82	3.5
MCH06010H10D02			10					6.72	
MCH06020H05D02	200	215 (239)	5	469	400	300	4	6.16	4.2
MCH06020H10D02			10					8.06	
MCH06030H05D02	300	315 (339)	5	569	500	400	5	7.50	5.0
MCH06030H10D02			10					9.40	
MCH06040H10D02	400	415 (439)	10	669	600	500	6	10.7	5.7
MCH06040H20D02			20					18.3	

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.2 – 5.2	2.1 – 8.5
10	1.5 – 9.6	2.5 – 10.7
20	2.3 – 11.8	3.4 – 14.1

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	φ12	4 390	22 800	4 400	5	6 260	16 300	1 450
10		2 740	18 100		10	3 820		
20		2 660	14 400		20	3 800		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	770	730	730

MCH09

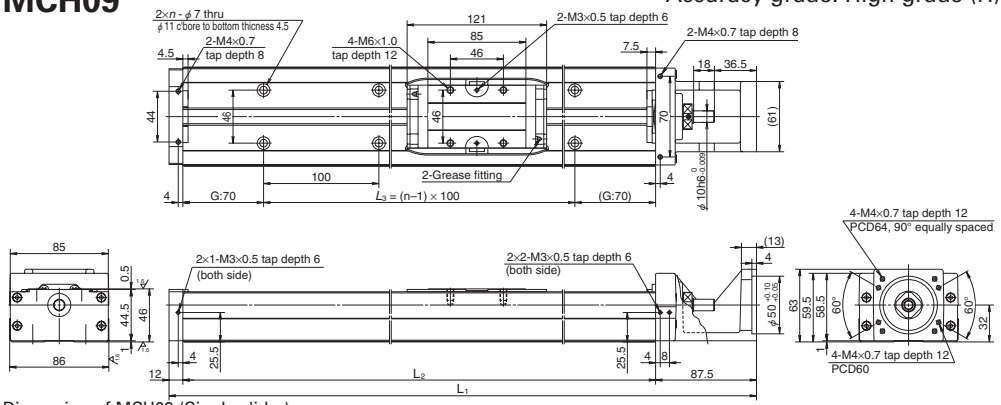Accuracy grade: High grade (H)



Dimension of MCH09 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	n	Inertia ×10⁻⁶(kg · m²)	Mass (kg)
MCH09010H05K02	100	107 (121)	5	339.5	240	100	2	9.2	5.0
MCH09010H10K02			10					10.7	
MCH09010H20K02			20					16.8	
MCH09020H05K02	200	207 (221)	5	439.5	340	200	3	12.4	6.5
MCH09020H10K02			10					13.9	
MCH09020H20K02			20					20.0	
MCH09030H05K02	300	307 (321)	5	539.5	440	300	4	15.6	8.1
MCH09030H10K02			10					17.1	
MCH09030H20K02			20					23.2	
MCH09040H05K02	400	407 (421)	5	639.5	540	400	5	18.8	9.7
MCH09040H10K02			10					20.3	
MCH09040H20K02			20					26.4	
MCH09050H05K02	500	507 (521)	5	739.5	640	500	6	22.0	11
MCH09050H10K02			10					23.5	
MCH09050H20K02			20					29.6	
MCH09060H05K02	600	607 (621)	5	839.5	740	600	7	25.2	13
MCH09060H10K02			10					26.7	
MCH09060H20K02			20					32.8	
MCH09070H05K02	700	707 (721)	5	939.5	840	700	8	28.4	14.5
MCH09070H10K02			10					30.0	
MCH09070H20K02			20					36.0	
MCH09080H05K02	800	807 (821)	5	1 039.5	940	800	9	31.6	16
MCH09080H10K02			10					33.2	
MCH09080H20K02			20					39.2	

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.0 – 5.9	2.5 – 11.0
10	2.0 – 7.8	2.8 – 13.4
20	2.0 – 10.8	3.4 – 16.1

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	φ15	8 300	40 600	7 100	5	12 700	30 500	3 040
10		8 140	32 200		10	12 800		
20		5 080	25 500		20	7 460		

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	890	385	385

MCH09 (Double slider)

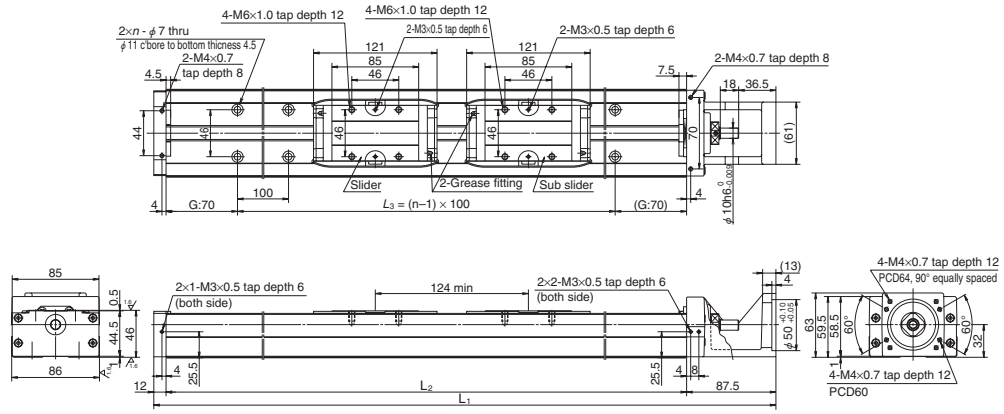Accuracy grade: High grade (H)



Dimension of MCH09 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	n	Inertia ×10⁻⁶(kg · m²)	Mass (kg)
MCH09015H05D02	150	183 (211)	5	539.5	440	300	4	16.1	8.9
MCH09015H10D02			10					19.2	
MCH09025H05D02	250	283 (311)	5	639.5	540	400	5	19.3	11
MCH09025H10D02			10					22.4	
MCH09035H05D02	350	383 (411)	5	739.5	640	500	6	22.5	12
MCH09035H10D02			10					25.6	
MCH09045H10D02	450	483 (511)	10	839.5	740	600	7	28.8	14
MCH09045H20D02			20					40.9	
MCH09065H10D02	650	683 (711)	10	1 039.5	940	800	9	35.2	17
MCH09065H20D02			20					47.3	

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.5 – 7.0	2.8 – 12.4
10	2.5 – 10.8	3.4 – 16.2
20	4.0 – 17.2	4.5 – 21.7

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	φ15	8 300	40 600	7 100	5	12 700	30 500	3 040
10		8 140	32 200		10	12 800		
20		5 080	25 500		20	7 460		


Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	1 780	2 070	2 070

MCH10

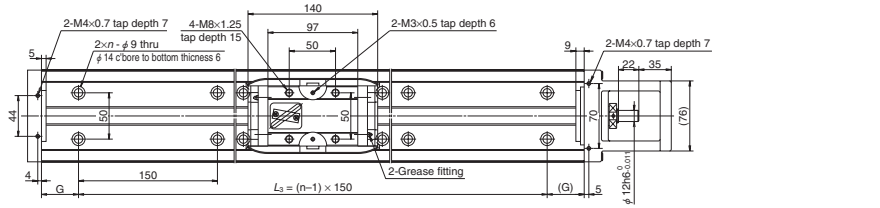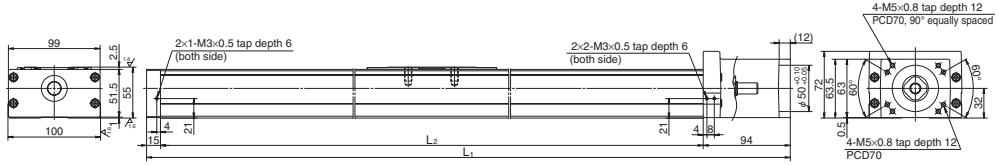Accuracy grade: High grade (H)





Dimension of MCH10 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	G	L_3	n	Inertia $\times 10^{-6}$(kg · m^2)	Mass (kg)
MCH10010H10K02	100	126	10	389	280	65	150	2	33.2	7.3
MCH10010H20K02		(142)	20						41.1	
MCH10020H10K02	200	226	10	489	380	40	300	3	43.4	9.5
MCH10020H20K02		(242)	20						51.3	
MCH10030H10K02	300	326	10	589	480	15	450	4	53.7	12
MCH10030H20K02		(342)	20						61.6	
MCH10040H10K02	400	426	10	689	580	65	450	4	62.4	14
MCH10040H20K02		(442)	20						71.8	
MCH10050H10K02	500	526	10	789	680	40	600	5	74.7	16
MCH10050H20K02		(542)	20						82.3	
MCH10060H10K02	600	626	10	889	780	15	750	6	84.9	19
MCH10060H20K02		(642)	20						92.5	
MCH10070H10K02	700	726	10	989	880	65	750	6	95.1	21
MCH10070H20K02		(742)	20						103	
MCH10080H10K02	800	826	10	1 089	980	40	900	7	105	23
MCH10080H20K02		(842)	20						113	
MCH10090H10K02	900	926	10	1 189	1 080	15	1 050	8	116	25
MCH10090H20K02		(942)	20						123	
MCH10100H10K02	1 000	1 026	10	1 289	1 180	65	1 050	8	126	27
MCH10100H20K02		(1 042)	20						133	
MCH10110H10K02	1 100	1 126	10	1 389	1 280	40	1 200	9	136	29
MCH10110H20K02		(1 142)	20						143	
MCH10120H10K02	1 200	1 226	10	1 489	1 380	15	1 350	10	146	32
MCH10120H20K02		(1 242)	20						154	

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade High grade	Precision
10	2.7 – 10.8	3.3 – 17.5
20	3.1 – 12.7	3.8 – 20.4

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
10	ϕ20	12 800	44 600	7 600	10	21 400	42 000	3 380
20		8 190	35 400		20	12 600		


Basic static moment load of linear guide

Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Single	1 460	610	610

MCH10 (Double slider)

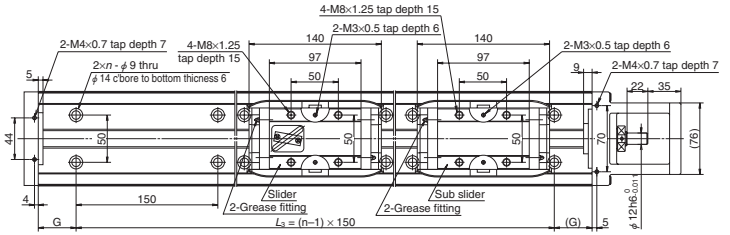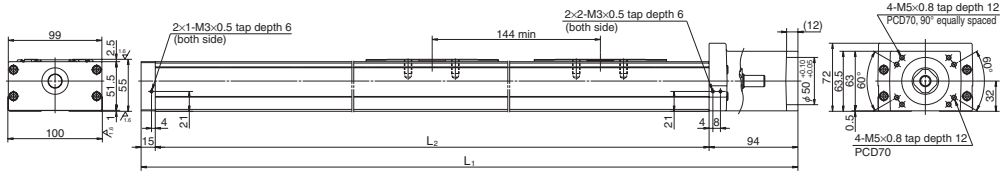Accuracy grade: High grade (H)





Dimension of MCH10 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm) L_1	L_2	G	L_3	n	Inertia $\times 10^{-6}$(kg · m^2)	Mass (kg)
MCH10025H10D02	250	282	10	689	580	65	450	4	67.1	15
MCH10025H20D02		(314)	20						82.4	
MCH10035H10D02	350	382	10	789	680	40	600	5	77.3	17
MCH10035H20D02		(414)	20						92.5	
MCH10045H10D02	450	482	10	889	780	15	750	6	87.5	20
MCH10045H20D02		(514)	20						103	
MCH10055H10D02	550	582	10	989	880	65	750	6	97.7	22
MCH10055H20D02		(614)	20						113	
MCH10065H10D02	650	682	10	1 089	980	40	900	7	108	24
MCH10065H20D02		(714)	20						123	
MCH10075H20D02	750	782 (814)	20	1 189	1 080	15	1 050	8	133	26
MCH10085H20D02	850	882 (914)	20	1 289	1 180	65	1 050	8	143	28
MCH10095H20D02	950	982 (1 014)	20	1 389	1 280	40	1 200	9	154	30
MCH10105H20D02	1 050	1 082 (1 114)	20	1 489	1 380	15	1 350	10	164	33

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade High grade	Precision
10	4.2 – 15.6	4.4 – 21.6
20	5.0 – 19.6	5.6 – 27.4

Notes:
1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N) Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Basic static load rating (N) Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
10	ϕ20	12 800	44 600	7 600	10	21 400	42 000	3 380
20		8 190	35 400		20	12 600		

Basic static moment load of linear guide


Slider	Basic static moment load (N · m) Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	2 920	3 430	3 430

C-1-6. 3 MCH Series Accessories

C-1-6. 3. 1 Sensor Unit

●Proximity switch

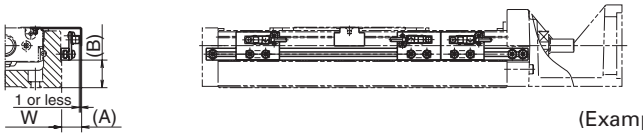Sensor rail is not included in a sensor unit.




(Example of assembly)

Model No.		Reference No.			A (mm)	B (mm)	Body width W (mm)
MCH06		MC-SRH06-10	MC-SRH06-11	MC-SRH06-12	17	10	60
MCH09		MC-SRH09-10	MC-SRH09-11	MC-SRH09-12	16	21	86
MCH10		MC-SRH10-10	MC-SRH10-11	MC-SRH10-12	16	16	100
Quantity	Proximity switch (normally open contact)	—	3	1	E2S-W13 (OMRON Corp.)		
	Proximity switch (normally close contact)	3	—	2	E2S-W14 (OMRON Corp.)		

Notes: 1. See page C137 for proximity switch specifications. 2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.

●Photo sensor

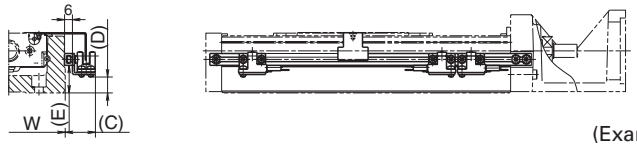Sensor rail is not included in a sensor unit.



(Example of assembly)


Model No.	Reference No.	C (mm)	D (mm)	E (mm)	Body width W (mm)	Remarks
MCH06	MC-SRH06-13	24	2	11	60	EE-SX674 (OMRON Corp.)
MCH09	MC-SRH09-13	23	12	21	86	3 sets
MCH10	MC-SRH10-13	23	29	16	100	(EE-1001 connector attachment)

Notes: 1. See page C138 for proximity switch specifications. 2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.

(1) Sensor rail

Reference number: MC-SRL- ＊＊＊＊

● ＊＊＊＊ is the same as rail dimension L_2.



Note: For combinations of sensors and rails, see page C82.


Body of MCH Series and Sensor Rail Combination Table

Table 4

Model No.	Body length L_2 (mm)	Reference No.	Sensor rail reference No.
MCH06	150	MCH06005H05K02 MCH06005H10K02 MCH06005H20K02	MC-SRL-0150
	200	MCH06010H05K02 MCH06010H10K02 MCH06010H20K02	MC-SRL-0200
	300	MCH06020H05K02 MCH06020H10K02 MCH06020H20K02 MCH06010H05D02 MCH06010H10D02	MC-SRL-0300
	400	MCH06030H05K02 MCH06030H10K02 MCH06030H20K02 MCH06020H05D02 MCH06020H10D02	MC-SRL-0400
	500	MCH06040H05K02 MCH06040H10K02 MCH06040H20K02 MCH06030H05D02 MCH06030H10D02	MC-SRL-0500
	600	MCH06050H05K02 MCH06050H10K02 MCH06050H20K02 MCH06040H10D02 MCH06040H20D02	MC-SRL-0600
MCL06	150	MCL06005H05K02 MCL06005H10K02	MC-SRL-0150
	200	MCL06010H05K02 MCL06010H10K02	MC-SRL-0200
	300	MCL06020H05K02 MCL06020H10K02	MC-SRL-0300
	400	MCL06030H10K02 MCL06030H20K02	MC-SRL-0400
	500	MCL06040H10K02 MCL06040H20K02	MC-SRL-0500
	600	MCL06050H10K02 MCL06050H20K02	MC-SRL-0600
MCH09	240	MCH09010H05K02 MCH09010H10K02 MCH09010H20K02	MC-SRL-0240
	340	MCH09020H05K02 MCH09020H10K02 MCH09020H20K02	MC-SRL-0340
	440	MCH09030H05K02 MCH09030H10K02 MCH09030H20K02 MCH09015H05D02 MCH09015H10D02	MC-SRL-0440
	540	MCH09040H05K02 MCH09040H10K02 MCH09040H20K02 MCH09025H05D02 MCH09025H10D02	MC-SRL-0540
	640	MCH09050H05K02 MCH09050H10K02 MCH09050H20K02 MCH09035H05D02 MCH09035H10D02	MC-SRL-0640
	740	MCH09060H05K02 MCH09060H10K02 MCH09060H20K02 MCH09045H10D02 MCH09045H20D02	MC-SRL-0740
MCH09	840	MCH09070H05K02 MCH09070H10K02 MCH09070H20K02	MC-SRL-0840
	940	MCH09080H05K02 MCH09080H10K02 MCH09080H20K02 MCH09065H10D02 MCH09065H20D02	MC-SRL-0940
MCH10	280	MCH10010H10K02 MCH10010H20K02	MC-SRL-0280
	380	MCH10020H10K02 MCH10020H20K02	MC-SRL-0380
	480	MCH10030H10K02 MCH10030H20K02	MC-SRL-0480
	580	MCH10040H10K02 MCH10025H10D02	MC-SRL-0580
	680	MCH10050H10K02 MCH10050H20K02 MCH10035H10D02 MCH10035H20D02	MC-SRL-0680
	780	MCH10060H10K02 MCH10060H20K02 MCH10045H10D02 MCH10045H20D02	MC-SRL-0780
	880	MCH10070H10K02 MCH10070H20K02 MCH10055H10D02 MCH10055H20D02	MC-SRL-0880
	980	MCH10080H10K02 MCH10080H20K02 MCH10065H10D02 MCH10065H20D02	MC-SRL-0980
	1 080	MCH10090H10K02 MCH10090H20K02 MCH10075H20D02	MC-SRL-1080
	1 180	MCH10100H10K02 MCH10100H20K02 MCH10085H20D02	MC-SRL-1180
	1 280	MCH10110H10K02 MCH10110H20K02 MCH10095H20D02	MC-SRL-1280
	1 380	MCH10120H10K02 MCH10120H20K02 MCH10105H20D02	MC-SRL-1380

C-1-6. 3. 2 Cover Unit

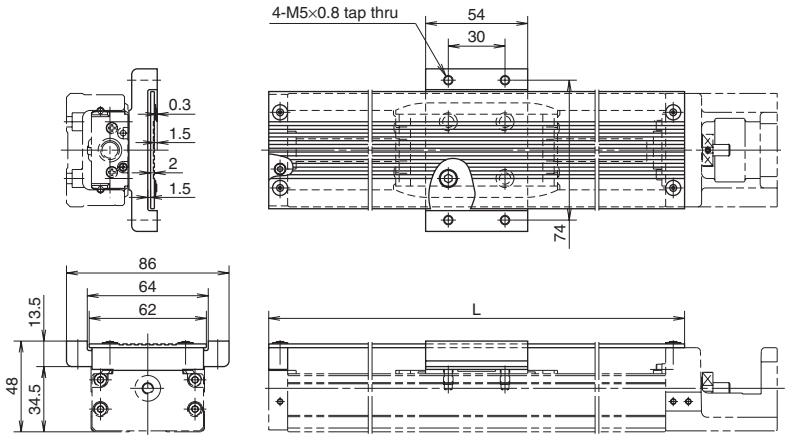
Cover unit for MCH06 and MCL06



Unit: mm

Single slider		Double slider		Top cover length
Stroke	Reference No.	Stroke	Reference No.	*L*
50	MC-HV06005-00	–	–	170
100	MC-HV06010-00	–	–	220
200	MC-HV06020-00	100	MC-HV06010D00	320
300	MC-HV06030-00	200	MC-HV06020D00	420
400	MC-HV06040-00	300	MC-HV06030D00	520
500	MC-HV06050-00	400	MC-HV06040D00	620

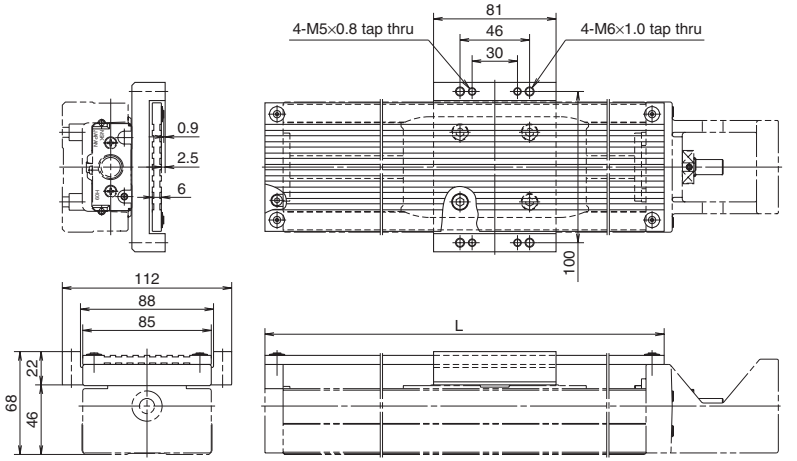Cover unit for MCH09




Unit: mm

Single slider		Double slider		Top cover length
Stroke	Reference No.	Stroke	Reference No.	*L*
100	MC-HV09010-00	–	–	264
200	MC-HV09020-00	–	–	364
300	MC-HV09030-00	150	MC-HV09015D00	464
400	MC-HV09040-00	250	MC-HV09025D00	564
500	MC-HV09050-00	350	MC-HV09035D00	664
600	MC-HV09060-00	450	MC-HV09045D00	764
700	MC-HV09070-00	–	–	864
800	MC-HV09080-00	650	MC-HV09065D00	964


●Cover unit for double sliders

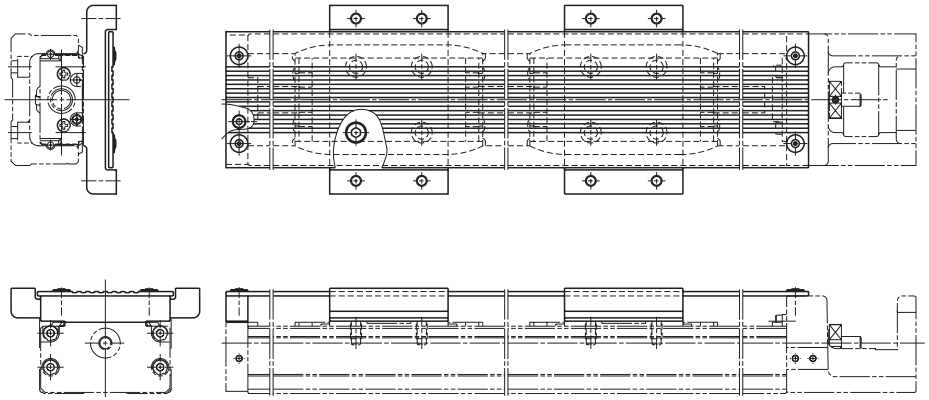Two spacers are provided for double slider.




●Cover unit for double sliders

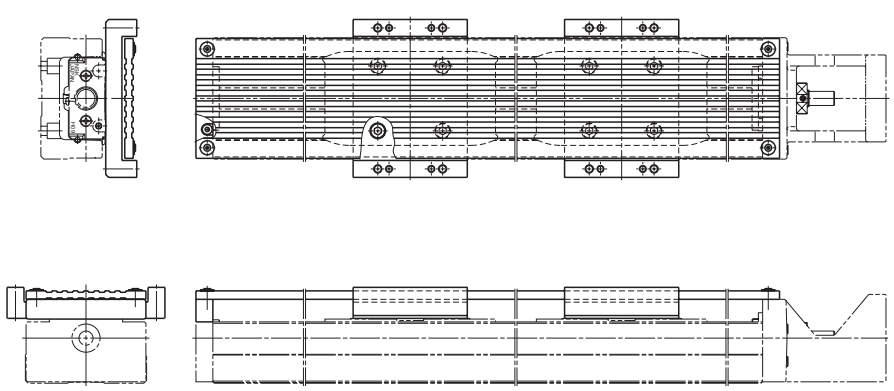Two spacers are provided for double slider.



Cover unit for MCH10

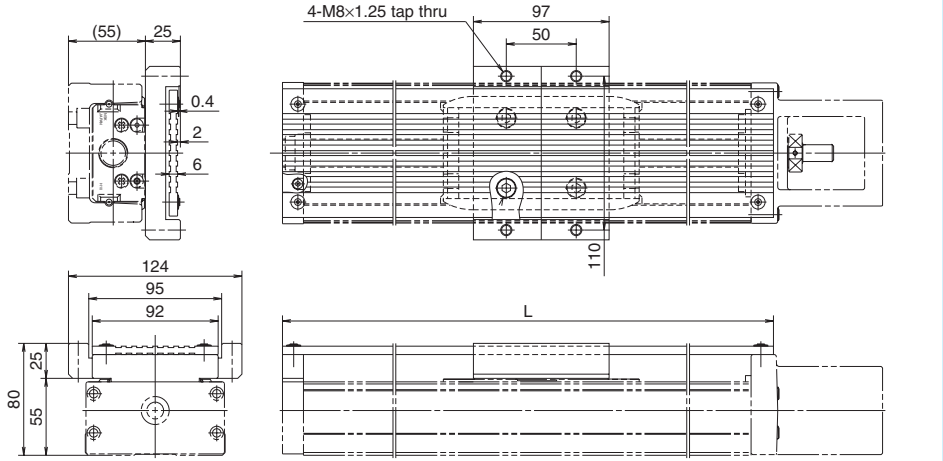


Unit: mm

Single slider		Double slider		Top cover length
Stroke	Reference No.	Stroke	Reference No.	*L*
100	MC-HV10010-00	–	–	310
200	MC-HV10020-00	–	–	410
300	MC-HV10030-00	–	–	510
400	MC-HV10040-00	250	MC-HV10025D00	610
500	MC-HV10050-00	350	MC-HV10035D00	710
600	MC-HV10060-00	450	MC-HV10045D00	810
700	MC-HV10070-00	550	MC-HV10055D00	910
800	MC-HV10080-00	650	MC-HV10065D00	1 010
900	MC-HV10090-00	750	MC-HV10075D00	1 110
1 000	MC-HV10100-00	850	MC-HV10085D00	1 210
1 100	MC-HV10110-00	950	MC-HV10095D00	1 310
1 200	MC-HV10120-00	1 050	MC-HV10105D00	1 410

●Cover unit for double sliders

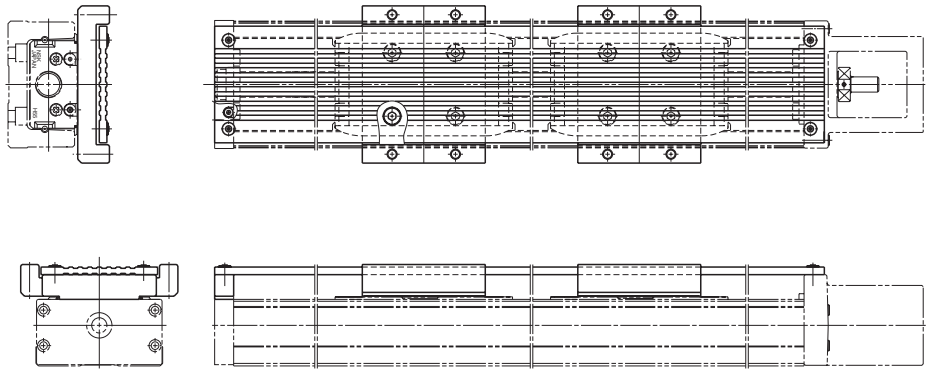Two spacers are provided for double slider.




C-1-6. 3. 3 Intermediate Plate for Motor

●Please ask NSK about motors not listed in compatible motor list.
●In case of parallel motor mount, please consult with NSK. ●Be sure to align centerlines when installing motor.
●Motor models are subject to change at the motor manufacturers. For details, please contact the manufacturer.


Motor Bracket for MCH06 and MCL06

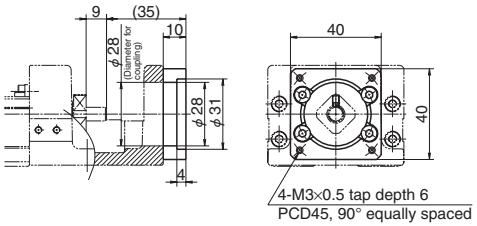Reference number: MC-BKH06-145-00




Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD5A(50W), MSMD01(100W)

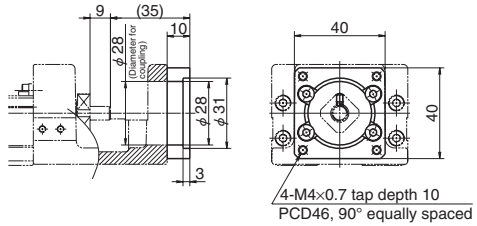Reference number: MC-BKH06-146-00




Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMAH-A3(30W), SGMJV-A5A(50W), SGMAV-A5A(50W) SGMJV-01A(100W), SGMAV-01A(100W)
Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W) HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W) HC-KFS13(100W), HC-MFS13(100W)
OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)
SANYO DENKI Co., Ltd.	P30B04xxx P Series

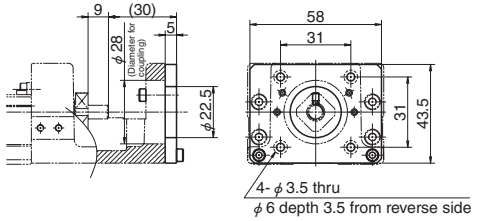Reference number: MC-BKH06-231-00




Compatible motor	
Maker	Motor models
ORIENTAL MOTOR Co., Ltd.	AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x
SANYO DENKI Co., Ltd.	PBM423xxx, 103F55xx

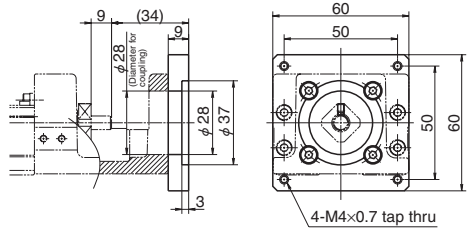Reference number: MC-BKH06-250-00




Compatible motor	
Maker	Motor models
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x
OMRON Corp.	MUMS02(200W), MUMS04(400W)
SANYO DENKI Co., Ltd.	PBM603xx, PBM604xx, 103F78xx

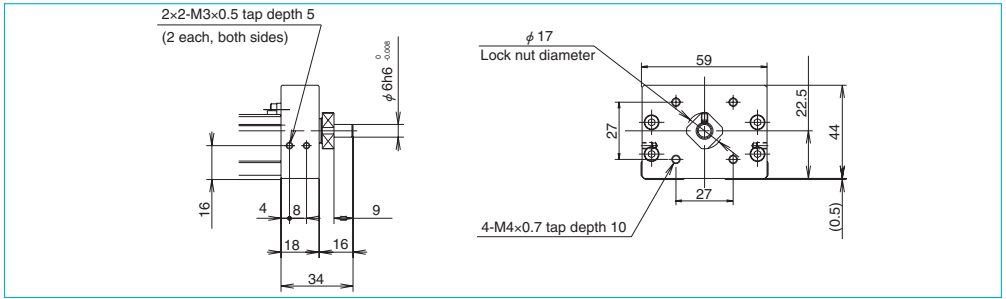Diameter of ball screw shaft end to install a pulley for parallel motor mount of MCH06




Motor Bracket for MCH09

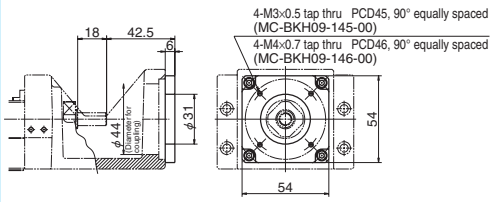Reference number: MC-BKH09-145-00
MC-BKH09-146-00




Reference No.	Compatible motor	
	Maker	Motor models
MC-BKH09-145-00	Panasonic Co., Ltd.	MSMD5A(50W), MSMD01(100W)
MC-BKH09-146-00	YASKAWA Electric Corp.	SGMJV-A5A(50W), SGMAV-A5A(50W) SGMJV-01A(100W), SGMAV-01A(100W)
	Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W) HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W) HC-KFS13(100W), HC-MFS13(100W)
	OMRON Corp.	R88M-W05(50W), R88M-W10(100W)
	SANYO DENKI Co., Ltd.	P30B04xxx P Series

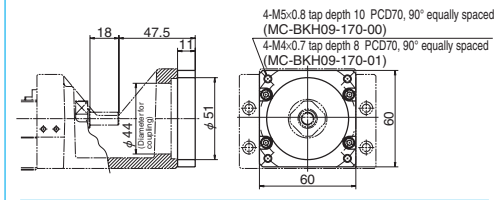Reference number: MC-BKH09-170-00
MC-BKH09-170-01




Reference No.	Compatible motor	
	Maker	Motor models
MC-BKH09-170-00	YASKAWA Electric Corp.	SGMJV-02A(200W), SGMAV-02A(200W) SGMJV-04A(400W), SGMAV-04A(400W)
	Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W) HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W) HC-KFS43(400W), HC-MFS43(400W)
	OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
	SANYO DENKI Co., Ltd.	P30B06xxx P Series
MC-BKH09-170-01	Panasonic Co., Ltd.	MSMD02(200W), MSMA02(200W) MSMA04(400W), MSMD04(400W)

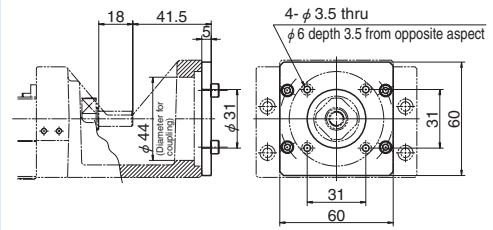Reference number: MC-BKH09-231-00




Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM423xxx, 103F55xx
ORIENTAL MOTOR Co., Ltd.	AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x UMK24x, CSK24x, PK24x

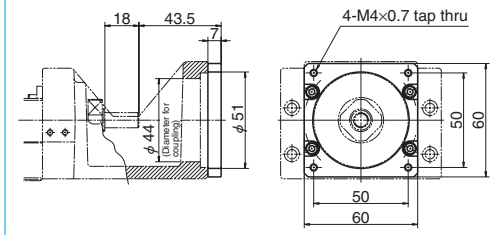Reference number: MC-BKH09-250-00




Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM603xx, PBM604xx, 103F78xx
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56x, UFK56x, PK56x CSK56x, CFK56x

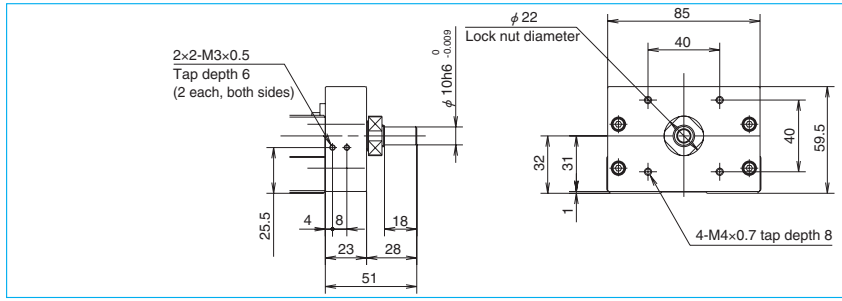Diameter of ball screw shaft end to install a pulley for parallel motor mount of MCH09




Motor Bracket for MCH10

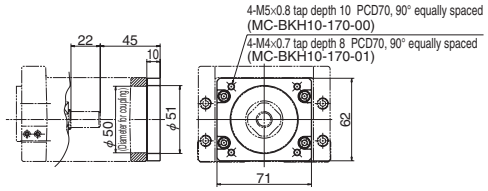Reference number: MC-BKH10-170-00 MC-BKH10-170-01




Reference No.	Compatible motor	
	Maker	Motor models
MC-BKH10-170-00	YASKAWA Electric Corp.	SGMJV-02A(200W), SGMAV-02A(200W) SGMJV-04A(400W), SGMAV-04A(400W)
	Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W) HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W) HC-KFS43(400W), HC-MFS43(400W)
	OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
	SANYO DENKI Co., Ltd.	P30B06xxx P Series
MC-BKH10-170-01	Panasonic Co., Ltd.	MSMD02(200W), MSMA02(200W) MSMD04(400W), MSMA04(400W)

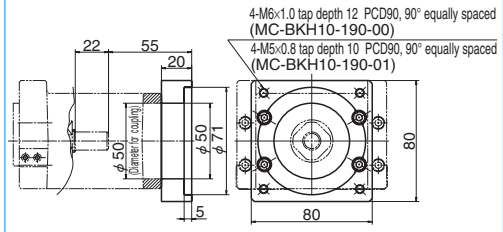Reference number: MC-BKH10-190-00 MC-BKH10-190-01




Reference No.	Compatible motor	
	Maker	Motor models
MC-BKH10-190-00	Mitsubishi Electric Corp.	HC-KFS73(750W), HC-MFS73(750W) HF-KP73(750W), HF-MP73(750W)
MC-BKH10-190-01	SANYO DENKI Co., Ltd.	P50B07xxx P Series

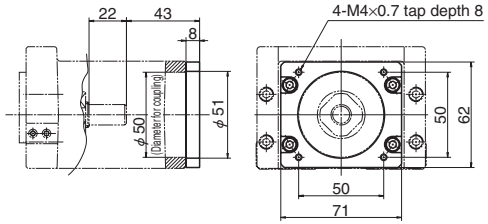Reference number: MC-BKH10-250-00




Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM603xx, PBM604xx, 103F78xx
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56x, PK56x, CSK56x, CFK56x UMK56x, UFK56X

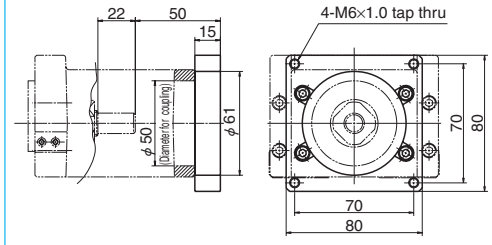Reference number: MC-BKH10-270-00



Compatible motor	
Maker	Motor models
ORIENTAL MOTOR Co., Ltd.	AS98, ASC98, UPK59x, PK59x, CSK59x, CFK59x UMK59x, UFK59x

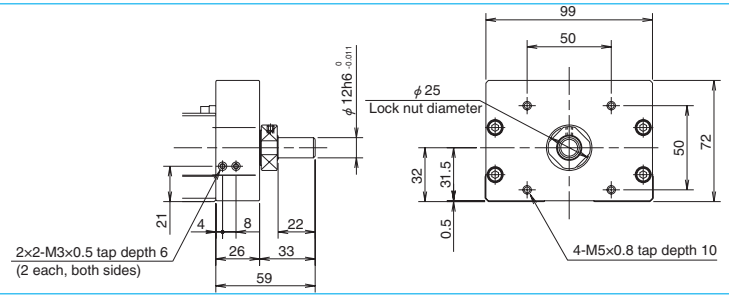Diameter of ball screw shaft end to install a pulley for parallel motor mount of MCH10



Motor Availability Table of Intermediate Plate for MCH Series

Table 5

Model No.	Reference No. code	Motor bracket reference No.	Motor manufacturer	Stepping motor model No.	Wattage of AC servo motor 30	50	100	200	400	750
MCH06 MCL06	1	MC-BKH06-145-00	Panasonic Co., Ltd.			MSMD5A	MSMD01			
	2	MC-BKH06-146-00	YASKAWA Electric Corp.		SGMAH-A3	SGMJV-A5A SGMAV-A5A	SGMJV-01A SGMAV-01A			
			Mitsubishi Electric Corp.			HF-KP053 HF-MP053 HC-KFS053 HC-MFS053	HF-KP13 HF-MP13 HC-KFS13 HC-MFS13			
			OMRON Corp.		R88M-W03	R88M-W05	R88M-W10			
			SANYO DENKI Co., Ltd.	P30B04xxx (P Series)						
	3	MC-BKH06-231-00	SANYO DENKI Co., Ltd.	PBM423xxx 103F55xx						
			ORIENTAL MOTOR Co., Ltd.	AS46 , ASC46 UPK54x , PK54x CSK54x , CFK54x UMK24x , CSK24x PK24x						
	4	MC-BKH06-250-00	SANYO DENKI Co., Ltd.	PBM603xx PBM604xx 103F78xx						
			ORIENTAL MOTOR Co., Ltd.	AS66 , ASC66 UPK56x , UFK56x PK56x , CSK56x CFK56x						
			OMRON Corp.					MUMS02	MUMS04	
MCH09	1	MC-BKH09-145-00	Panasonic Co., Ltd.			MSMD5A	MSMD01			
	2	MC-BKH09-146-00	YASKAWA Electric Corp.			SGMJV-A5A SGMAV-A5A	SGMJV-01A SGMAV-01A			
			Mitsubishi Electric Corp.			HF-KP053 HF-MP05 HC-KFS053 HC-MFS053	HF-KP13 HF-MP13 HC-KFS13 HC-MFS13			
			OMRON Corp.			R88M-W05	R88M-W10			
			SANYO DENKI Co., Ltd.	P30B04xxx (P Series)						
	3	MC-BKH09-170-00	YASKAWA Electric Corp.					SGMJV-02A SGMAV-02A	SGMJV-04A SGMAV-04A	
			Mitsubishi Electric Corp.					HF-KP23 HF-MP23 HC-KFS23 HC-MFS23	HF-KP43 HF-MP43 HC-KFS43 HC-MFS43	
			OMRON Corp.					R88M-W20	R88M-W40	
			SANYO DENKI Co., Ltd.	P30B06xxx (P Series)						
	4	MC-BKH09-170-01	Panasonic Co., Ltd.					MSMD02 MSMA02	MSMD04 MSMA04	
	5	MC-BKH09-231-00	SANYO DENKI Co., Ltd.	PBM423xxx 103F55xx						
			ORIENTAL MOTOR Co., Ltd.	AS46 , ASC46 UPK54x , PK54x CSK54x , CFK54x UMK24x , CSK24x PK24x						
	6	MC-BKH09-250-00	SANYO DENKI Co., Ltd.	PBM603xx PBM604xx 103F78xx						
			ORIENTAL MOTOR Co., Ltd.	AS66 , ASC66 UPK56x , UFK56x PK56x , CSK56x CFK56x						
MCH10	1	MC-BKH10-170-00	YASKAWA Electric Corp.					SGMJV-02A SGMAV-02A	SGMJV-04A SGMAV-04A	
			Mitsubishi Electric Corp.					HF-KP23 HF-MP23 HC-KFS23 HC-MFS23	HF-KP43 HF-MP43 HC-KFS43 HC-MFS43	
			OMRON Corp.					R88M-W20	R88M-W40	
			SANYO DENKI Co., Ltd.	P30B06xxx (P Series)						
	2	MC-BKH10-170-01	Panasonic Co., Ltd.					MSMD02 MSMA02	MSMD04 MSMA04	
	3	MC-BKH10-190-00	Mitsubishi Electric Corp.							HC-KFS73 HC-MFS73 HF-KP73 HF-MP73
	4	MC-BKH10-190-01	SANYO DENKI Co., Ltd.	P50B07xxx (P Series)						
	5	MC-BKH10-250-00	SANYO DENKI Co., Ltd.	PBM603xx PBM604xx 103F78xx						
			ORIENTAL MOTOR Co., Ltd.	AS66 , ASC66 UPK56x , PK56x CSK56x , CFK56x UMK56x , UFK56x						
	6	MC-BKH10-270-00	ORIENTAL MOTOR Co., Ltd.	AS98 , ASC98 UPK59x , PK59x CSK59x , CFK59x UMK59x , UFK59x						

C-2 Toughcarrier™

1. Features C95
2. Classification and Series C95
3. Accessories C97
4. Selection of Toughcarrier C98
   - 4.1 Selection Procedures C98
   - 4.2 Stroke and Lead C99
   - 4.3 Reference Number Coding and Accuracy Grade C100
   - 4.4 Maximum Speed C101
   - 4.5 Rigidity C103
   - 4.6 Basic Load Rating C104
   - 4.7 Estimation of Life Expectancy C105
   - 4.8 Example of Life Estimation C107
5. TCH Series Dimension Table for Standard Products C111
   - 5.1 TCH06 Series C111
   - 5.2 TCH09 Series C113
   - 5.3 TCH10 Series C115
6. Accessories C117
   - 6.1 Sensor Unit C117
   - 6.2 Cover Unit C118
   - 6.3 Motor Bracket C121
7. Motor Bracket Compatibility Table C130
8. Sensor Rail and Top Cover Unit Combination Table C131
9. Toughcarrier High-Thrust Series C134

C-2 Toughcarrier™

C-2 Toughcarrier™

C-2-1 Features

Greatly improved load capacity due to switching of rolling elements to rollers.
Mounting dimensions are compatible with those of the MCH Series, allowing substitution.

● Light weight and compact design

Taking into account part composition and rigidity, the cross sections of the rail and slider are the same as MCH series.

● Superb rust-preventive ability

Low-temperature chrome plating comes standard.

● All-in-one structure

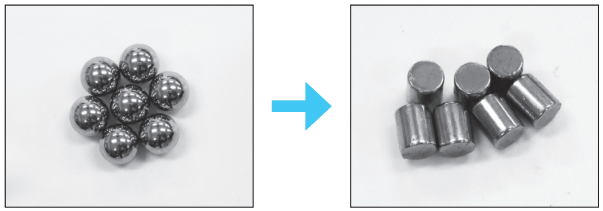
1) The all-in-one structure integrates a ball screw, a linear guide and a support unit into a single structure to significantly reduce design time.
2) The bottom and one side of the rail are datum surfaces to facilitate highly accurate installation. Models with pin holes are also available as standard.
3) Immediate operation after installation and run-in is possible due to pre-packed grease.
4) A wide selection of ball screw leads are available.

● Long-term maintenance-free operation

Use of NSK K1 lubrication unit and grease maintains smooth lubricating performance for long periods.

● Updated rolling elements

Rollers are installed as rolling elements for the first time anywhere.




C-2-2 Classification and Series

Structure


Rolling elements: Balls


MCH Series




Rolling elements: Rollers

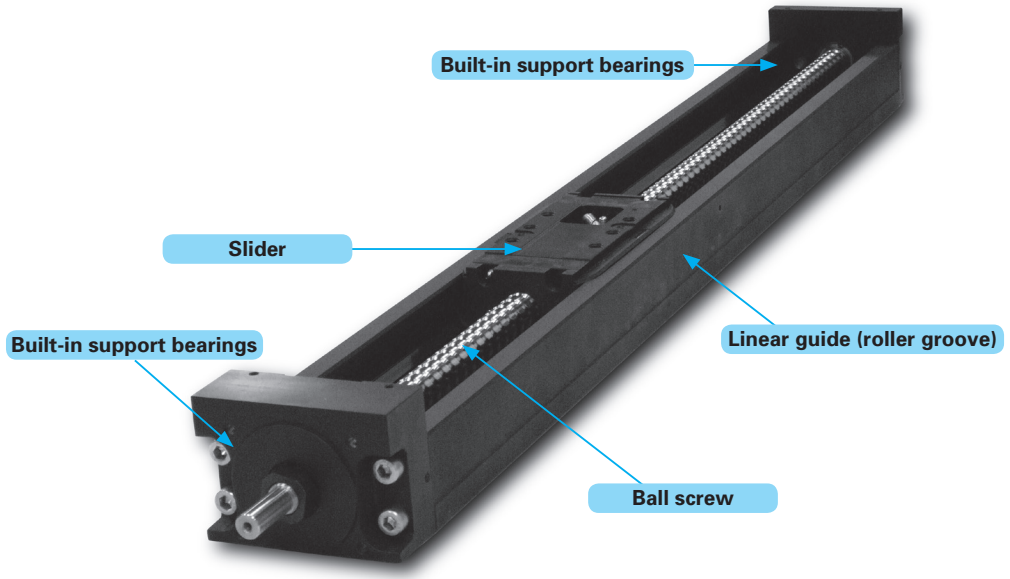TCH Series






● High rigidity, long life (N)

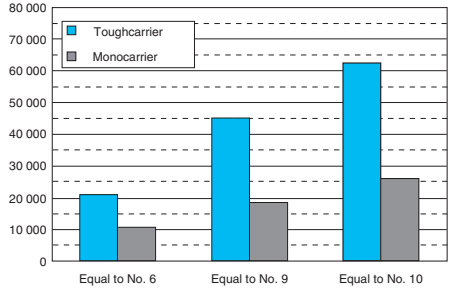

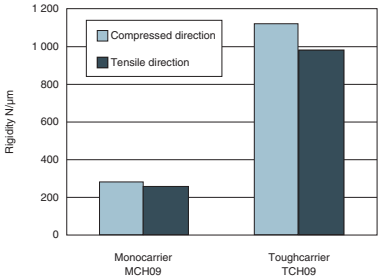
Twice the dynamic load rating and nine-times longer life compared to Monocarrier




Four-times higher rigidity than Monocarrier

Cross-sections of TCH Series


TCH06



TCH09

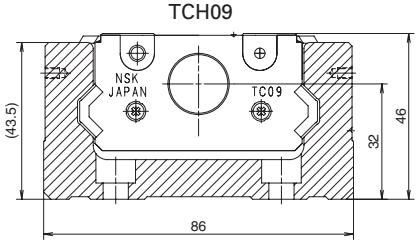


TCH10

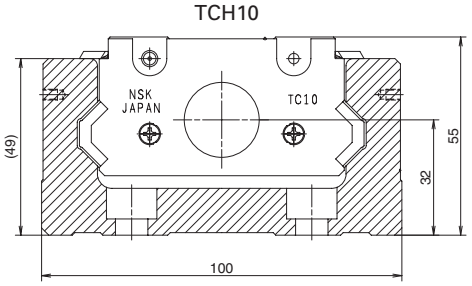

C-2-3 Accessories

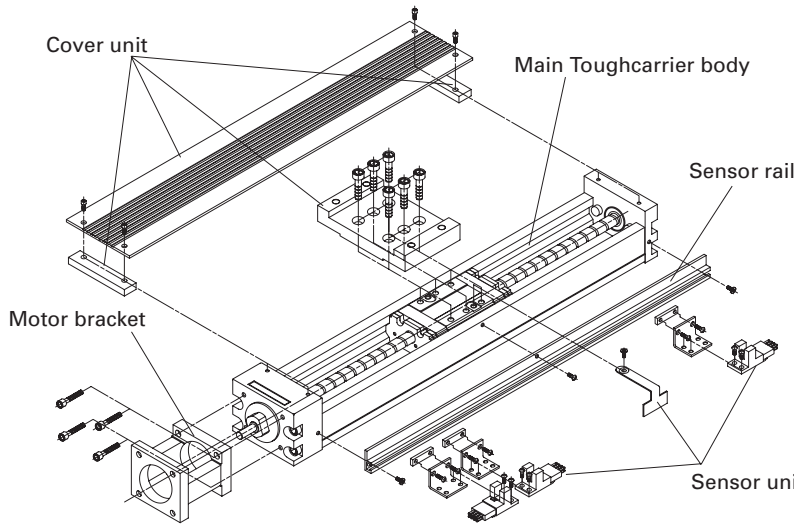Accessories for Toughcarrier




Assembly Example of accessories

Sensor unit, cover unit, motor bracket and sensor rail are available as options for Toughcarrier.
Contact NSK for other specifications other than those of NSK standard accessories.

1. Sensor unit:
   ●Photo sensor…Use of both OMRON EE-SX674 and EE-1001
   ●Proximity switch…Use of OMRON E2S-W13, E2S-W14
   Available in a unit including sensor fitting clamps.
2. Sensor rail : This rail holds the sensor. Please order the appropriate rail according to the stroke.
3. Cover unit : This unit consists of a top cover and spacer plate.
4. Motor bracket: Brackets are available for a variety of models from different motor manufacturers. Please consult NSK when the mounting dimensions differ from your order.

C-2-4 Selection of Toughcarrier

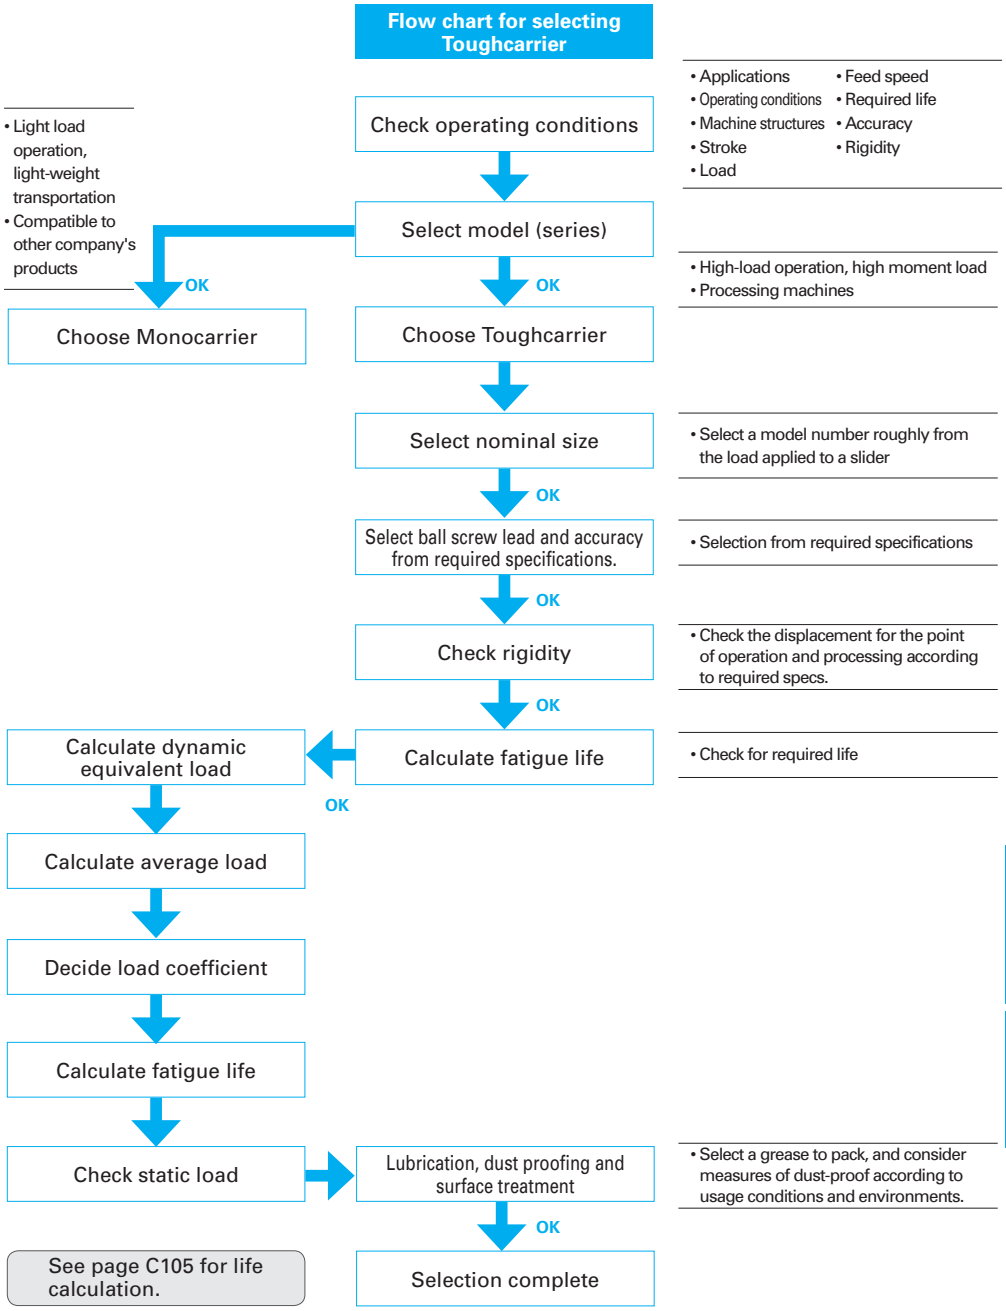C-2-4. 1 Selection Procedure for Toughcarrier



C-2-4. 2 Stroke and Lead

◆ Combinations of rail length and lead

● TCH06

Slider type	Standard slider						Short slider					
	Single slider			Double slider			Single slider			Double slider		
Lead (mm) / Rail length (mm)	5	10	20	5	10	20	5	10	20	5	10	20
150	✓	✓	✓				✓	✓				
200	✓	✓	✓				✓	✓				
300	✓	✓	✓	✓	✓		✓	✓		✓	✓	
400	✓	✓	✓	✓	✓		✓	✓		✓	✓	
500	✓	✓	✓	✓	✓		✓	✓		✓	✓	
600	✓	✓	✓		✓	✓	✓	✓			✓	

*20 mm lead for short sliders not available.

● TCH09

Slider type	Standard slider						Short slider					
	Single slider			Double slider			Single slider			Double slider		
Lead (mm) / Rail length (mm)	5	10	20	5	10	20	5	10	20	5	10	20
240	✓	✓	✓				✓	✓	✓			
340	✓	✓	✓				✓	✓	✓			
440	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	
540	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	
640	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	
740	✓	✓	✓		✓	✓	✓	✓	✓		✓	✓
840	✓	✓	✓				✓	✓	✓			
940	✓	✓	✓		✓	✓	✓	✓	✓		✓	✓

● TCH10

Slider type	Standard slider				Short slider			
	Single slider		Double slider		Single slider		Double slider	
Lead (mm) / Rail length (mm)	10	20	10	20	10	20	10	20
280	✓	✓			✓	✓		
380	✓	✓			✓	✓		
480	✓	✓			✓	✓		
580	✓	✓	✓	✓	✓	✓	✓	✓
680	✓	✓	✓	✓	✓	✓	✓	✓
780	✓	✓	✓	✓	✓	✓	✓	✓
880	✓	✓	✓	✓	✓	✓	✓	✓
980	✓	✓	✓	✓	✓	✓	✓	✓
1 080	✓	✓		✓	✓	✓		✓
1 180	✓	✓		✓	✓	✓		✓
1 280	✓	✓		✓	✓	✓		✓
1 380	✓	✓		✓	✓	✓		✓

◆ Availability

Model No.	Lead (mm)	Slider	Rail length (mm)
TCH06	5, 10, 20	Single	600
		Double	
TCH09	5, 10, 20	Single	940
		Double	
TCH10	10, 20	Single	1 380
		Double	

C-2-4. 3 Reference Number Coding and Accuracy Grade

● Reference number coding for TCH Series

Body
Reference number: TC H 06 030 H 10 K 0 0

- TC: Toughcarrier
- H: Model: TCH Series (with accessories: TCS)
- 06: Nominal size (rail width, 10 mm units)
- 030: Stroke (10 mm units)
- H: Accuracy grade: H, High grade; P, Precision grade
- 10: Ball screw lead (mm)
- K: Slider specification*
- 0: Grease (0: YS2, standard)
- 0: NSK control number (0: without pin holes) (1: with pin holes)

* K: Single slider
D: Double slider
A: Single short slider
B: Double short slider

Special specifications
Reference number: TC H 06 030 H 10 K – □ XXB

- □: 3: Toughcarrier for special specs; 5: Toughcarrier high-thrust series*
- XXB: Design serial number

* For the specifications of the High-Thrust Series, see page C134.

● Reference number for accessories

1. Sensor unit
Reference number: TC – SRH XX – 00
- TC: Toughcarrier
- SRH: Sensor unit
- XX: Nominal size: 06, 09 and 10
- 00: Control no. : see page C117

2. Sensor rail
Reference number: TC – SRL X – XXXX
- TC: Toughcarrier
- SRL: Sensor rail
- X: Nominal size: 06 is 6, 09 is 9, and 10 is 1.
- XXXX: Body rail length

3. Cover unit
Reference number: TC – HV XX XXX K 00
- TC: Toughcarrier
- HV: Cover unit
- XX: Nominal size: 06, 09 and 10
- XXX: Stroke (nominal)
- K: Slider specs: refer to the body reference no.
- 00: Control no.: See pages C118 to C120

4. Motor bracket
Reference number: TC – BKH XX – XXX – 00
- TC: Toughcarrier
- BKH: Motor bracket
- XX: Nominal size: 06, 09 and 10
- XXX: Dimension for motor mounting
- 00: Control no.

◆ Accuracy grade

Unit: μm

Grade	High grade (H grade)			Precision grade (P grade)			
Stroke (mm)	Repeatability	Running parallelism (vertical)	Backlash	Repeatability	Positioning accuracy	Running parallelism (vertical)	Backlash
to 200	±10	14	20 or less	±3	20	8	3 or less
to 400		16			25	10	
to 600		20			30	12	
to 700		23				15	
to 1 000					35		
to 1 200		30			40	20	

High and precision grades are available for accuracy grade. Consult NSK for your requirements.

C-2-4. 4 Maximum Speed

● Maximum speed (standard slider)

Maximum speed of the Toughcarrier is determined by the critical speed of the ball screw shaft and the d · n value.

Do not exceed the maximum speed in the table below.

	Stroke (nominal)	Ball screw lead (mm)	Body rail length L_2 (mm)	Maximum speed (mm/s)
TCH06 Single slider	50	5	150	250
	100		200	
	200		300	
	300		400	
	400		500	
	500		600	
	50	10	150	500
	100		200	
	200		300	
	300		400	
	400		500	
	500		600	
	50	20	150	1 000
	100		200	
	200		300	
	300		400	
	400		500	
	500		600	
TCH06 Double slider	130	5	300	250
	230		400	
	330		500	
	130	10	300	500
	230		400	
	330		500	
	430		600	
	430	20	600	1 000
TCH09 Single slider	100	5	240	250
	200		340	
	300		440	
	400		540	
	500		640	
	600		740	
	700		840	
	800		940	210
	100	10	240	500
	200		340	
	300		440	
	400		540	
	500		640	
	600		740	
	700		840	
	800		940	410
	100	20	240	1 000
	200		340	
	300		440	
	400		540	
	500		640	
	600		740	
	700		840	
	800		940	820

	Stroke (nominal)	Ball screw lead (mm)	Body rail length L_2 (mm)	Maximum speed (mm/s)
TCH09 Double slider	170	5	440	250
	270		540	
	370		640	
	170	10	440	500
	270		540	
	370		640	
	470		740	
	670		940	
	470	20	740	1 000
	670		940	
TCH10 Single slider	100	10	280	500
	200		380	
	300		480	
	400		580	
	500		680	
	600		780	
	700		880	
	800		980	
	900		1 080	440
	1 000		1 180	360
	1 100		1 280	300
	1 200		1 380	250
	100	20	280	1 000
	200		380	
	300		480	
	400		580	
	500		680	
	600		780	
	700		880	
	800		980	
	900		1 080	870
	1 000		1 180	720
	1 100		1 280	600
	1 200		1 380	510
TCH10 Double slider	270	10	580	500
	370		680	
	470		780	
	570		880	
	670		980	
	270	20	580	1 000
	370		680	
	470		780	
	570		880	
	670		980	
	770		1 080	
	870		1 180	930
	970		1 280	780
	1 070		1 380	650

Notes: 1) Please consult NSK before operating Monocarrier near maximum speed.
2) Maximum rotational speed is (3000 min^{-1}).
3) Refer to the above table for maximum speed for each stroke.

● Maximum speed (short slider)

Maximum speed of the Toughcarrier is determined by the critical speed of the ball screw shaft and the d · n value.

Do not exceed the maximum speed in the table below.


	Stroke (nominal)	Ball screw lead (mm)	Body rail length L_2 (mm)	Maximum speed (mm/s)
TCH06 Single slider	70	5	150	250
	120		200	
	220		300	
	320		400	
	420		500	
	520		600	
	70	10	150	500
	120		200	
	220		300	
	320		400	
	420		500	
	520		600	
TCH06 Double slider	170	5	300	250
	270		400	
	370		500	
	170	10	300	500
	270		400	
	370		500	
	470		600	
TCH09 Single slider	140	5	240	250
	240		340	
	340		440	
	440		540	
	540		640	
	640		740	
	740		840	240
	840		940	190
	140	10	240	500
	240		340	
	340		440	
	440		540	
	540		640	
	640		740	
	740		840	480
	840		940	380
	140	20	240	1 000
	240		340	
	340		440	
	440		540	
	540		640	
	640		740	
	740		840	960
	840		940	760

	Stroke (nominal)	Ball screw lead (mm)	Body rail length L_2 (mm)	Maximum speed (mm/s)
TCH09 Double slider	250	5	440	250
	350		540	
	450		640	
	250	10	440	500
	350		540	
	450		640	
	550		740	
	750		940	460
	550	20	740	1 000
	750		940	930
TCH10 Single slider	160	10	280	500
	260		380	
	360		480	
	460		580	
	560		680	
	660		780	
	760		880	
	860		980	490
	960		1 080	400
	1 060		1 180	330
	1 160		1 280	280
	1 260		1 380	240
	160	20	280	1 000
	260		380	
	360		480	
	460		580	
	560		680	
	660		780	
	760		880	
	860		980	980
	960		1 080	800
	1 060		1 180	660
	1 160		1 280	560
	1 260		1 380	480
TCH10 Double slider	360	10	580	500
	460		680	
	560		780	
	660		880	
	760		980	
	360	20	580	1 000
	460		680	
	560		780	
	660		880	
	760		980	
	860		1 080	980
	960		1 180	800
	1 060		1 280	660
	1 160		1 380	560

Notes: 1) Please consult NSK before operating Monocarrier near maximum speed.
2) Maximum rotational speed is (3000 min^{-1}).
3) Refer to the above table for maximum speed for each stroke.

C-2-4. 5 Rigidity

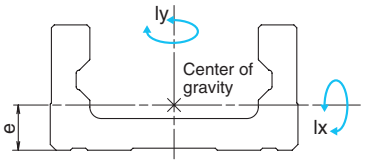
Rigidity of rail




Model no.	Geometrical moment of inertia×10⁴ (mm⁴)		Center of gravity (mm)	Mass (kg/100mm)
	Ix	Iy	e	w
TCH06	6.47	36.2	10.6	0.6
TCH09	28.4	162	15.7	1.32
TCH10	46	283	17.2	1.73

◆ Rigidity in radial direction


TCH06 standard slider




TCH09 standard slider




TCH10 standard slider




TCH06 short slider



TCH09 short slider




TCH10 short slider




◆ Moment in radial direction


TCH06 standard slider




TCH09 standard slider




TCH10 standard slider




TCH06 short slider



TCH09 short slider



TCH10 short slider



C-2-4. 6 Basic Load Rating

◆ Basic load rating for TCH series

Standard slider

Model no.	Lead ℓ (mm)	Shaft dia. d (mm)	Basic dynamic load rating (N) Ball screw Ca	Linear guide C	Support bearings Ca	Basic static load rating (N) Ball screw C0a	Linear guide C0	Support bearing limit load (N)
TCH06	5	φ12	4 390	20 900	6 600	6 260	45 000	2 700
	10		2 740			3 820		
	20		2 660			3 800		
TCH09	5	φ15	8 300	44 900	8 800	12 700	96 900	5 090
	10		8 140			12 800		
	20		5 080			7 460		
TCH10	10	φ20	12 800	62 400	9 600	21 400	132 000	5 670
	20		8 190			12 600		

Short slider

Model no.	Lead ℓ (mm)	Shaft dia. d (mm)	Basic dynamic load rating (N) Ball screw Ca	Linear guide C	Support bearings Ca	Basic static load rating (N) Ball screw C0a	Linear guide C0	Support bearing limit load (N)
TCH06	5	φ12	4 390	12 200	6 600	6 260	22 500	2 700
	10		2 740			3 820		
TCH09	5	φ15	8 300	27 900	8 800	12 700	52 500	5 090
	10		8 140			12 800		
	20		5 080			7 460		
TCH10	10	φ20	12 800	38 700	9 600	21 400	71 500	5 670
	20		8 190			12 600		

- Basic dynamic and static load ratings indicate values for one slider.
- Basic dynamic load rating of linear guide is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball mounting surface.
- Basic dynamic load rating of ball screw is load in the axial direction that allows 90% of ball screws of a group of the same Toughcarriers to rotate 1 million revolutions under the same condition without causing flaking by rolling contact fatigue.
- Basic dynamic load rating of support bearings is load that allows 1 million revolutions under the same condition.
- Basic static load rating is load that results in combined permanent deformations at contact points of rolling elements and rolling surfaces of respective parts at a diameter of 0.01%.


◆ Basic static moment load of linear guide

Standard slider

Model no.	Slider	Basic static moment load (N·m) Rolling MRO	Pitching MPO	Yawing MYO
TCH06	Single	800	340	340
TCH09	Single	2 510	1 340	1 340
TCH10	Single	3 980	2 150	2 150

Short slider

Model no.	Slider	Basic static moment load (N·m) Rolling MRO	Pitching MPO	Yawing MYO
TCH06	Single	400	85	85
TCH09	Single	1 350	390	390
TCH10	Single	2 150	630	630



MRO : Rolling moment
MPO : Pitching moment
MYO : Yawing moment

C-2-4. 7 Estimation of Life Expectancy

(1) Life of linear guide for Toughcarrier

Study the load to be applied to the linear guide of Toughcarrier (**Fig. 1**). The equivalent load (F_e) is determined by substituting the load for equation 1) (Eq. 2) or 2') for tightly coupled double slider type).

● For single slider

$$F_e = Y_H F_H + Y_V F_V + Y_R \varepsilon_R M_R + Y_P \varepsilon_P M_P + Y_Y \varepsilon_Y M_Y \quad \cdots\cdots 1)$$

● For double slider

For double sliders, calculation of the load applied to each slider is required.

Dynamic equivalent load is only for rolling moment.

This is the same procedure as for linear guide selection where two sliders are installed in a rail. Check the mean load for each slider, and calculate shortest life becomes the life of linear guide.

When lateral direction (F_H) and vertical direction (F_V) loads are applied to the center of the coordinate in **Fig. 1**,

$$F_{HA} = \frac{F_H}{2} + \frac{M_Y}{\ell},\ F_{VA} = \frac{F_V}{2} + \frac{M_P}{\ell}$$

$$F_{HB} = \frac{F_H}{2} - \frac{M_Y}{\ell},\ F_{VB} = \frac{F_V}{2} - \frac{M_P}{\ell}$$

[Slider A]

$$F_{eA} = Y_H \cdot F_{HA} + Y_V \cdot F_{VA} + Y_R \varepsilon_R \frac{M_R}{2} \quad \cdots\cdots 2)$$

$$= Y_H \left(\frac{F_H}{2} + \frac{M_Y}{\ell} \right) + Y_V \left(\frac{F_V}{2} + \frac{M_P}{\ell} \right) + Y_R \varepsilon_R \frac{M_R}{2}$$

[Slider B]

$$F_{eB} = Y_H \cdot F_{HB} + Y_V \cdot F_{VB} + Y_R \varepsilon_R \frac{M_R}{2} \quad \cdots\cdots 2)'$$

$$= Y_H \left(\frac{F_H}{2} - \frac{M_Y}{\ell} \right) + Y_V \left(\frac{F_V}{2} - \frac{M_P}{\ell} \right) + Y_R \varepsilon_R \frac{M_R}{2}$$

F_H : Lateral direction load acting on the slider (N)
F_V : Vertical direction load acting on the slider (N)
M_R : Rolling moment acting on the slider (N · m)
M_P : Pitching moment acting on the slider (N · m)
M_Y : Yawing moment acting on the slider (N · m)
ε_R : Dynamic equivalent coefficient to rolling moment
ε_P : Dynamic equivalent coefficient to pitching moment
ε_Y : Dynamic equivalent coefficient to yawing moment
ℓ : Sliders span (m)

*For dynamic equivalent coefficient, see **Table 1**.
Y_H, Y_V, Y_R, Y_P, Y_Y: 1.0 or 0.5

At equations 1), 2) and 2') for obtaining equivalent load F_e, the maximum value of Y in the values for each equation is assumed to be 1.0. For others it is assumed to be 0.5.

Fig.1 Direction of load


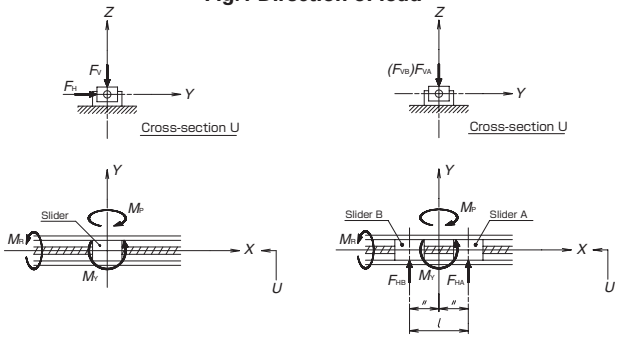


Fig. 2 Stepwise Fluctuating Load



If the loads acting on the slider fluctuate (in general, M_P and M_Y may fluctuate with the acceleration/deceleration of slider), the mean effective load is determined by Eq. 3).

Travelling distance under the equivalent load F_{e1} : L_1
Travelling distance under the equivalent load F_{e2} : L_2
. . . . . .
Travelling distance under the equivalent load F_{en} : L_n

Mean effective load F_m is calculated by the following equation.

$$F_m = \sqrt[\frac{10}{3}]{\frac{1}{L}(F_{e1}^{\frac{10}{3}} \cdot L_1 + F_{e2}^{\frac{10}{3}} \cdot L_2 + \cdots + F_{en}^{\frac{10}{3}} \cdot L_n)} \quad \cdots 3)$$

F_m: Mean effective load of fluctuating loads (N)
L : Total travelling distance (mm)

The life of linear guide for Toughcarrier is determined by Eq. 4).

$$L = 50 \times \left(\frac{C}{f_w \cdot F_m} \right)^{\frac{10}{3}} \quad \cdots\cdots 4)$$

L : Life of linear guide (km)
C : Basic dynamic load rating of linear guide (N)
F_m : Mean effective load acting on linear guide (N)
f_w : Load coefficient (see **Table 2**)

When the estimated life does meet clear the required life, the life of the linear guide is calculated again after following measures are taken,

1: Change from single slider type to double slider type.
2: Use a larger Toughcarrier.

(2) Life of Ball Screw (Support Bearing)

The mean effective load is determined from the axial load.

Axial direction mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L}(F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + \cdots + F_{en}^3 \cdot L_n)} \quad \cdots 5)$$

The life of ball screw is determined by Eq. 6).

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 \quad \cdots\cdots 6)$$

ℓ : Ball screw lead (mm)
L : Life of ball screw (mm)
C_a : Basic dynamic load rating of ball screw (N)
F_m : Mean effective load acting on ball screw (N)
f_w : Load factor (**see Table 2**)

The life of a support bearing is calculated by Eq. 6). If the life of ball screw/support bearing does not meet the required life, use a larger size Toughcarrier. After applying the calculations mentioned above, selection of the Toughcarrier is completed.

Table 2 Value of load factor

Operating conditions	Load factor f_w
At smooth operation with no mechanical shock	1.0 – 1.2
At normal operation	1.2 – 1.5
At operation with mechanical shock and vibration	1.5 – 3.0

*When the bottom of rail is not fastened, the load factor is 1.5 or greater.


Table 1 Dynamic equivalent coefficient

	TCH06			TCH09			TCH10		
	Rolling	Pitching	Yawing	Rolling	Pitching	Yawing	Rolling	Pitching	Yawing
Standard slider	56	93	93	39	51	51	33	44	44
Short slider	56	186	186	39	95	95	33	80	80

C-2-4. 8 Example of Life Estimation

Example of life estimation for Toughcarrier

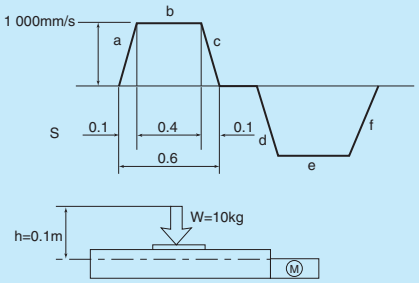Example-1



1. Use condition

Stroke	: 500 mm
Maximum speed	: 1 000 mm/s
Load mass	: W = 10 kg
Acceleration	: 9.80 m/s²
Setting position	: Horizontal
Operating profile	: See figure to above

2. Selection of model number (interim selection)
First, select a greater ball screw lead as the maximum speed is 1 000 mm/s.
The interim selection is TCH06050H20K00, a single slider specification TCH06 that has 500 mm stroke, as the stroke is 500 mm.

3. Calculation
3-1. Linear guide
3-1-1. Fatigue life: Multiply the result of Eq. 1) by the dynamic equivalent coefficient (**Table 1** single slider) to convert the load volume. From operation profile in the above figure, the acceleration is 10 m/s².

i) Constant speed $F_{e1} = Y_V \cdot F_V = Y_V \cdot W \cdot g$
$= 1 \cdot 10 \cdot 9.8 = 98$ N

ii) Accelerating $F_{e2} = Y_V \cdot F_V + Y_P \cdot \varepsilon_P \cdot M_P$
$= Y_V \cdot W \cdot g + Y_P \cdot \varepsilon_P hW\alpha$
$= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 93 \cdot 0.1 \cdot 10 \cdot 10$
$= 979$ N

iii) Decelerating $F_{e3} = Y_V \cdot F_V + Y_P \cdot \varepsilon_P \cdot M_P$
$= Y_V \cdot W \cdot g + Y_P \cdot \varepsilon_P hW\alpha$
$= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 93 \cdot 0.1 \cdot 10 \cdot 10$
$= 979$ N

Mean effective load F_m

$$F_m = \sqrt[\frac{10}{3}]{\frac{1}{L}\left(F_{e1}^{\frac{10}{3}} \cdot L_1 + F_{e2}^{\frac{10}{3}} \cdot L_2 + F_{e3}^{\frac{10}{3}} \cdot L_3\right)}$$
$$= \sqrt[\frac{10}{3}]{\frac{1}{500}\left(98^{\frac{10}{3}} \cdot 400 + 979^{\frac{10}{3}} \cdot 50 + 979^{\frac{10}{3}} \cdot 50\right)}$$
$$= 605 \text{ N}$$

$$L = 50 \times \left(\frac{C}{f_w \cdot F_m}\right)^{\frac{10}{3}}$$
$$= 50 \times \left(\frac{20\,900}{1.2 \cdot 605}\right)^{\frac{10}{3}}$$
$$= 3.65 \times 10^6 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_S = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{45\,000}{979} = 45.9$$

3-2. Ball screw
3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, and then calculate the mean load.
By the process above,

i) Constant speed
$F_{e1} = \mu \cdot W \cdot g = 0.01 \cdot 10 \cdot 9.8 = 0.98$ N

ii) Accelerating
$F_{e2} = F_{e1} + W \cdot \alpha = 0.98 + 10 \cdot 10 = 101$ N

iii) Decelerating
$F_{e3} = F_{e1} + W \cdot \alpha = 0.98 - 10 \cdot 10 = 99$ N

Axial mean effective load

$$F_m = \sqrt[3]{\frac{1}{L}\left(F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3\right)}$$
$$= \sqrt[3]{\frac{1}{500}\left(0.98^3 \cdot 400 + 101^3 \cdot 50 + 99^3 \cdot 50\right)}$$
$$= 59 \text{ N}$$

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m}\right)^3 \times 10^6$$
$$= 20 \times \left(\frac{2\,660}{1.2 \cdot 59}\right)^3 \times 10^6$$
$$= 10.6 \times 10^5 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_S = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{3\,800}{101} = 37.6$$

3-3. Support bearings
3-3-1. Fatigue life: Use the axial load F_m = 59 N that is the result of the calculation in 3-2-1, above.

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m}\right)^3 \times 10^6$$
$$= 20 \times \left(\frac{6\,600}{1.2 \cdot 59}\right)^3 \times 10^6$$
$$= 1.62 \times 10^7 \text{ km}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.


$$F_S = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{2\,730}{101} = 26.7$$

3-4. Result

TCH06050H20K00	Linear guide	Ball screw	Support bearings
Fatigue life	3.65 × 10⁶ km	10.6 × 10⁵ km	1.62 × 10⁷ km
Static safety factor	45.9	37.6	26.7


Example of life estimation

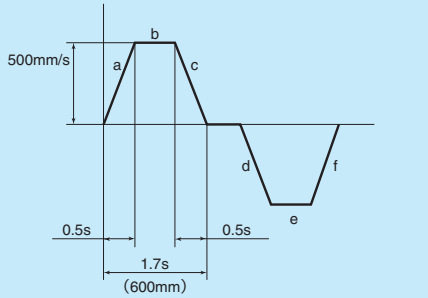Example-2



1. Use condition

Stroke	: 600 mm
Maximum speed	: 500 mm/s
Load mass	: W = 20 kg
Acceleration	: 9.8 m/s²
Setting position	: Vertical
Operating profile	: See fiure to above



2. Selection of model number (interim selection)
Select a 10 mm lead ball screw as the maximum speed is 500 mm/s.
The interim selection is TCH09067H10D00 (double slider specification) from the stroke and the vertical setting position.

3. Calculation
3-1. Linear guide
3-1-1. Fatigue life: Multiply the result of Eq. 2) and 2') by the dynamic equivalent coefficient (**Table 1** double slider) to convert the load volume. From operation profile in the above figure, the acceleration is 1 m/s². The interim slider span is 0.13.
Under this condition,

$F_H = 0,\ F_V = 0,\ M_R = 0$

in Eq., and both sliders have the same load with different direction.

i) Constant speed

$$F_{e1} = Y_H \cdot \frac{M_Y}{\ell} + Y_V \cdot \frac{M_P}{\ell}$$
$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot 9.8}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot 9.8}{0.13}$$
$$= 302 \text{ N}$$

ii) Accelerating

$$F_{e2} = Y_H \cdot \frac{M_Y}{\ell} + Y_V \cdot \frac{M_P}{\ell}$$
$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot (9.8 + 1.0)}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot (9.8 + 1.0)}{0.13}$$
$$= 333 \text{ N}$$

iii) Decelerating

$$F_{e3} = Y_H \cdot \frac{M_Y}{\ell} + Y_V \cdot \frac{M_P}{\ell}$$
$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot (9.8 - 1.0)}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot (9.8 - 1.0)}{0.13}$$
$$= 271 \text{ N}$$

Mean effective load F_m

$$F_m = \sqrt[\frac{10}{3}]{\frac{1}{L}\left(F_{e1}^{\frac{10}{3}} \cdot L_1 + F_{e2}^{\frac{10}{3}} \cdot L_2 + F_{e3}^{\frac{10}{3}} \cdot L_3\right)}$$
$$= \sqrt[\frac{10}{3}]{\frac{1}{600}\left(302^{\frac{10}{3}} \cdot 350 + 333^{\frac{10}{3}} \cdot 125 + 271^{\frac{10}{3}} \cdot 125\right)}$$
$$= 304 \text{ N}$$
$$L = 50 \times \left(\frac{C}{f_w \cdot F_m}\right)^{\frac{10}{3}}$$
$$= 50 \times \left(\frac{44\,900}{1.2 \cdot 304}\right)^{\frac{10}{3}}$$
$$= 4.63 \times 10^8 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_s = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{96\,900}{333} = 290$$

3-2. Ball screw
3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, and then calculate the mean load.

i) Constant speed
$F_{e1} = W \cdot g = 20 \cdot 9.8 = 196$ N

ii) Accelerating
$F_{e2} = F_{e1} + W \cdot \alpha = 196 + 20 \cdot 1.0 = 216$ N

iii) Decelerating
$F_{e3} = F_{e1} - W \cdot \alpha = 196 - 20 \cdot 1.0 = 176$ N

Axial mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L}\left(F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3\right)}$$
$$= \sqrt[3]{\frac{1}{600}\left(196^3 \cdot 350 + 216^3 \cdot 125 + 176^3 \cdot 125\right)}$$
$$= 197 \text{ N}$$
$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m}\right)^3 \times 10^6$$
$$= 10 \times \left(\frac{8\,140}{1.2 \cdot 197}\right)^3 \times 10^6$$
$$= 4.08 \times 10^5 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{12\,800}{216} = 59.2$$

3-3. Support bearings
3-3-1. Fatigue life: Use the axial load F_m = 197 N that is the result of the calculation in 3-2-1, above.

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m}\right)^3 \times 10^6$$
$$= 10 \times \left(\frac{8\,800}{1.2 \cdot 197}\right)^3 \times 10^6$$
$$= 5.15 \times 10^5 \text{ km}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{5\,090}{216} = 23.5$$


3-4. Result

TCH09067H10D00	Linear guide	Ball screw	Support bearings
Fatigue life	4.63 × 10^8 km	4.08 × 10^5 km	5.15 × 10^5 km
Static safety factor	290	59.2	23.5

C-2-5 TCH Series Dimension Table for Standard Products

C-2-5. 1 TCH06 series

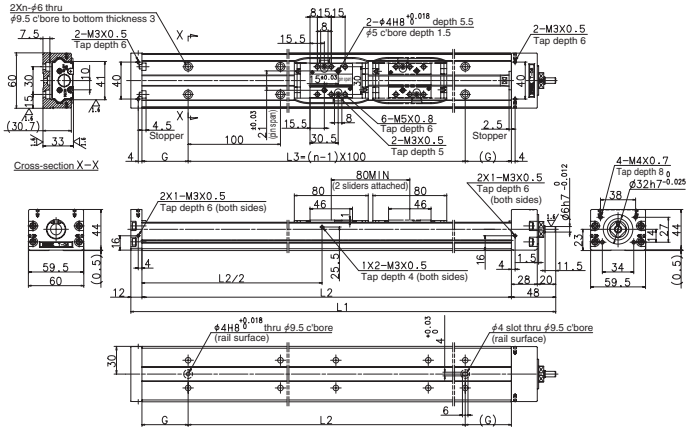
◆ TCH06 Standard Slider Specifications (with pin holes)



Toughcarrier dynamic torque specifications Unit: N · cm

Model no.	Slider specifications	Ball screw lead (mm)	Accuracy grade	
			High grade	Precision grade
TCH06	Single standard slider	5	1.0 – 6.0	1.8 – 9.0
		10	1.1 – 7.2	2.0 – 10.6
		20	1.6 – 9.5	2.2 – 12.9
	Double standard sliders	5	1.2 – 7.2	2.0 – 10.1
		10	1.2 – 9.5	2.2 – 12.9
		20	1.8 – 14.1	2.8 – 17.5

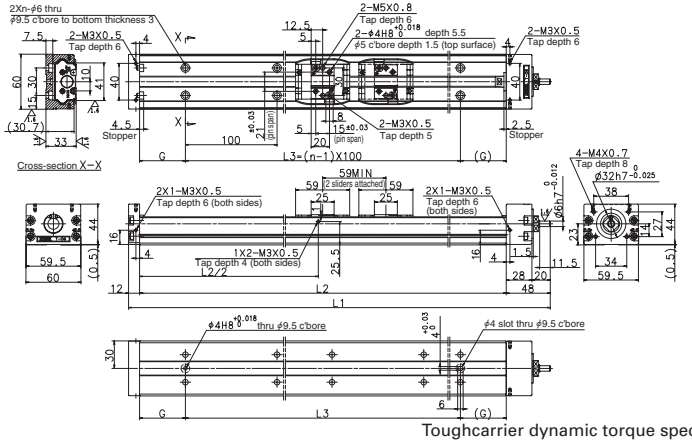◆ TCH06 Short Slider Specifications (with pin holes)



Toughcarrier dynamic torque specifications Unit: N · cm

Model no.	Slider specifications	Ball screw lead (mm)	Accuracy grade	
			High grade	Precision grade
TCH06	Single short slider	5	0.8 – 5.9	1.8 – 8.9
		10	1.0 – 7.0	2.0 – 10.4
	Double short sliders	5	1.0 – 7.0	2.0 – 10.0
		10	1.2 – 9.2	2.2 – 12.6

TCH06 Standard Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	G	No. of mounting holes n	Inertia ×10⁻⁶ (kg · m²)	Mass (kg)
∗TCH06005H05K00 (01)	50	63	5	210	150	100	25	2	2.94	2.2
∗TCH06005H10K00 (01)			10						3.38	
∗TCH06005H20K00 (01)			20						5.10	
∗TCH06010H05K00 (01)	100	113	5	260	200	100	50	2	3.74	2.5
∗TCH06010H10K00 (01)			10						4.18	
∗TCH06010H20K00 (01)			20						5.90	
TCH06020H05K00 (01)	200	213	5	360	300	200	50	3	5.34	3.3
TCH06020H10K00 (01)			10						5.78	
TCH06020H20K00 (01)			20						7.50	
TCH06030H05K00 (01)	300	313	5	460	400	300	50	4	6.84	3.9
TCH06030H10K00 (01)			10						7.28	
TCH06030H20K00 (01)			20						9.00	
TCH06040H05K00 (01)	400	413	5	560	500	400	50	5	8.44	4.6
TCH06040H10K00 (01)			10						8.88	
TCH06040H20K00 (01)			20						10.6	
TCH06050H05K00 (01)	500	513	5	660	600	500	50	6	10.1	5.3
TCH06050H10K00 (01)			10						10.5	
TCH06050H20K00 (01)			20						12.2	

Items marked with ∗ are unavailable for upside-down operation.

TCH06 Standard Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	G	No. of mounting holes n	Inertia ×10⁻⁶ (kg · m²)	Mass (kg)
∗TCH06013H05D00 (01)	130	133	5	360	300	200	50	3	5.47	3.6
∗TCH06013H10D00 (01)			10						6.32	
∗TCH06023H05D00 (01)	230	233	5	460	400	300	50	4	7.06	4.2
∗TCH06023H10D00 (01)			10						7.91	
∗TCH06033H05D00 (01)	330	333	5	560	500	400	50	5	8.64	4.9
∗TCH06033H10D00 (01)			10						9.49	
TCH06043H10D00 (01)	430	433	10	660	600	500	50	6	11.08	5.6
TCH06043H20D00 (01)			20						14.4	

Items marked with ∗ are unavailable for upside-down operation.

TCH06 Short Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	G	No. of mounting holes n	Inertia ×10⁻⁶ (kg · m²)	Mass (kg)
∗TCH06007H05A00 (01)	70	84	5	210	150	100	25	2	2.87	2.1
∗TCH06007H10A00 (01)			10						3.06	
∗TCH06012H05A00 (01)	120	134	5	260	200	100	50	2	3.67	2.4
∗TCH06012H10A00 (01)			10						3.86	
TCH06022H05A00 (01)	220	234	5	360	300	200	50	3	5.27	3.2
TCH06022H10A00 (01)			10						5.46	
TCH06032H05A00 (01)	320	334	5	460	400	300	50	4	6.77	3.8
TCH06032H10A00 (01)			10						6.96	
TCH06042H05A00 (01)	420	434	5	560	500	400	50	5	8.37	4.5
TCH06042H10A00 (01)			10						8.56	
TCH06052H05A00 (01)	520	534	5	660	600	500	50	6	9.97	5.2
TCH06052H10A00 (01)			10						10.2	

Items marked with ∗ are unavailable for upside-down operation.


TCH06 Short Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	G	No. of mounting holes n	Inertia ×10⁻⁶ (kg · m²)	Mass (kg)
∗TCH06017H05B00 (01)	170	175	5	360	300	200	50	3	5.34	3.4
∗TCH06017H10B00 (01)			10						5.81	
TCH06027H05B00 (01)	270	275	5	460	400	300	50	4	6.93	4.0
TCH06027H10B00 (01)			10						7.40	
TCH06037H05B00 (01)	370	375	5	560	500	400	50	5	8.51	4.7
TCH06037H10B00 (01)			10						8.98	
TCH06047H10B00 (01)	470	475	10	660	600	500	50	6	10.57	5.4

Items marked with ∗ are unavailable for upside-down operation.

C-2-5. 2 TCH09 Series

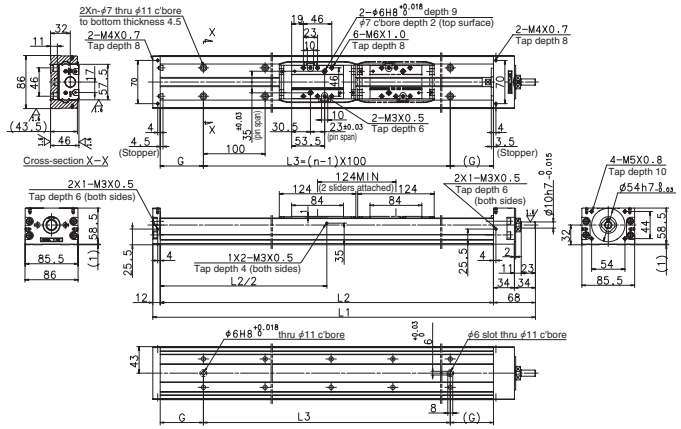
◆ TCH09 Standard Slider Specifications (with pin holes)



Toughcarrier dynamic torque specifications Unit: N · cm

Model no.	Slider specifications	Ball screw lead (mm)	Accuracy grade	
			High grade	Precision grade
TCH09	Single standard slider	5	2.8 – 7.7	4.2 – 12.8
		10	3.7 – 9.5	4.5 – 15.1
		20	3.7 – 12.6	5.1 – 17.9
	Double standard sliders	5	3.2 – 8.7	4.5 – 14.1
		10	4.2 – 12.6	5.1 – 17.9
		20	5.7 – 18.9	6.3 – 23.3

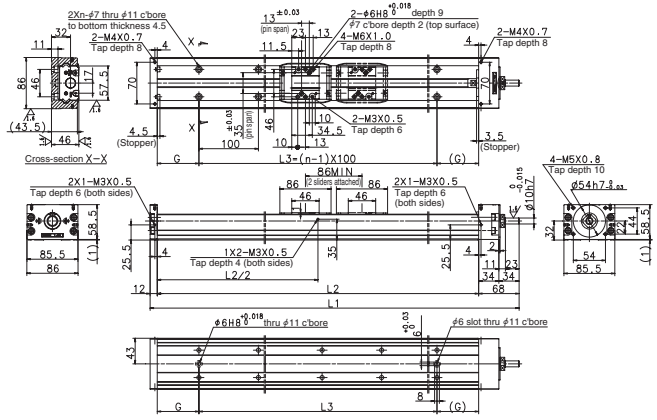◆ TCH09 Short Slider Specifications (with pin holes)



Toughcarrier dynamic torque specifications Unit: N · cm

Model no.	Slider specifications	Ball screw lead (mm)	Accuracy grade	
			High grade	Precision grade
TCH09	Single short slider	5	2.0 – 6.9	3.5 – 12.0
		10	2.9 – 8.7	3.8 – 14.3
		20	2.9 – 11.8	4.3 – 17.1
	Double short sliders	5	2.5 – 7.9	3.8 – 13.3
		10	3.4 – 11.8	4.3 – 17.1
		20	4.9 – 18.1	5.5 – 22.6

TCH09 Standard Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	G	No. of mounting holes n	Inertia ×10⁻⁶ (kg · m²)	Mass (kg)
∗TCH09010H05K00 (01)	100	108	5	320	240	100	70	2	9.13	6.5
∗TCH09010H10K00 (01)			10						11.0	
∗TCH09010H20K00 (01)			20						18.6	
TCH09020H05K00 (01)	200	208	5	420	340	200	70	3	14.2	7.9
TCH09020H10K00 (01)			10						16.0	
TCH09020H20K00 (01)			20						23.6	
TCH09030H05K00 (01)	300	308	5	520	440	300	70	4	18.1	9.4
TCH09030H10K00 (01)			10						19.9	
TCH09030H20K00 (01)			20						27.5	
TCH09040H05K00 (01)	400	408	5	620	540	400	70	5	21.9	10.8
TCH09040H10K00 (01)			10						23.8	
TCH09040H20K00 (01)			20						31.4	
TCH09050H05K00 (01)	500	508	5	720	640	500	70	6	25.9	12.3
TCH09050H10K00 (01)			10						27.7	
TCH09050H20K00 (01)			20						35.3	
TCH09060H05K00 (01)	600	608	5	820	740	600	70	7	29.4	13.6
TCH09060H10K00 (01)			10						31.3	
TCH09060H20K00 (01)			20						38.9	
TCH09070H05K00 (01)	700	708	5	920	840	700	70	8	33.5	15.0
TCH09070H10K00 (01)			10						35.4	
TCH09070H20K00 (01)			20						43.0	
TCH09080H05K00 (01)	800	808	5	1 020	940	800	70	9	37.4	16.4
TCH09080H10K00 (01)			10						39.3	
TCH09080H20K00 (01)			20						46.9	

Items marked with ∗ are unavailable for upside-down operation.

TCH09 Standard Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	G	No. of mounting holes n	Inertia ×10⁻⁶ (kg · m²)	Mass (kg)
∗TCH09017H05D00 (01)	170	184	5	520	440	300	70	4	19.47	10.3
∗TCH09017H10D00 (01)			10						22.89	
∗TCH09027H05D00 (01)	270	284	5	620	540	400	70	5	23.35	11.7
∗TCH09027H10D00 (01)			10						26.77	
TCH09037H05D00 (01)	370	384	5	720	640	500	70	6	27.22	13.2
TCH09037H10D00 (01)			10						30.64	
TCH09047H10D00 (01)	470	484	10	820	740	600	70	7	34.55	14.5
TCH09047H20D00 (01)			20						48.24	
TCH09067H10D00 (01)	670	684	10	1 020	940	800	70	9	42.27	17.3
TCH09067H20D00 (01)			20						55.96	

Items marked with ∗ are unavailable for upside-down operation.

TCH09 Short Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	G	No. of mounting holes n	Inertia ×10⁻⁶ (kg · m²)	Mass (kg)
∗TCH09014H05A00 (01)	140	146	5	320	240	100	70	2	8.9	6.1
∗TCH09014H10A00 (01)			10						10.1	
∗TCH09014H20A00 (01)			20						14.6	
TCH09024H05A00 (01)	240	246	5	420	340	200	70	3	13.9	7.5
TCH09024H10A00 (01)			10						15.1	
TCH09024H20A00 (01)			20						19.6	
TCH09034H05A00 (01)	340	346	5	520	440	300	70	4	17.8	9.0
TCH09034H10A00 (01)			10						18.9	
TCH09034H20A00 (01)			20						23.5	
TCH09044H05A00 (01)	440	446	5	620	540	400	70	5	21.7	10.4
TCH09044H10A00 (01)			10						22.8	
TCH09044H20A00 (01)			20						27.4	
TCH09054H05A00 (01)	540	546	5	720	640	500	70	6	25.6	11.9
TCH09054H10A00 (01)			10						26.7	
TCH09054H20A00 (01)			20						31.3	
TCH09064H05A00 (01)	640	646	5	820	740	600	70	7	29.2	13.2
TCH09064H10A00 (01)			10						30.3	
TCH09064H20A00 (01)			20						34.9	
TCH09074H05A00 (01)	740	746	5	920	840	700	70	8	33.3	14.6
TCH09074H10A00 (01)			10						34.4	
TCH09074H20A00 (01)			20						39.9	
TCH09084H05A00 (01)	840	846	5	1 020	940	800	70	9	37.2	16.0
TCH09084H10A00 (01)			10						38.3	
TCH09084H20A00 (01)			20						42.8	


Items marked with ∗ are unavailable for upside-down operation.

TCH09 Short Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	G	No. of mounting holes n	Inertia ×10⁻⁶ (kg · m²)	Mass (kg)
TCH09025H05B00 (01)	250	260	5	520	440	300	70	4	18.96	9.5
TCH09025H10B00 (01)			10						20.86	
TCH09035H05B00 (01)	350	360	5	620	540	400	70	5	22.84	10.9
TCH09035H10B00 (01)			10						24.74	
TCH09045H05B00 (01)	450	460	5	720	640	500	70	6	26.71	12.4
TCH09045H10B00 (01)			10						28.61	
TCH09055H10B00 (01)	550	560	10	820	740	600	70	7	32.52	13.7
TCH09055H20B00 (01)			20						40.13	
TCH09075H10B00 (01)	750	760	10	1 020	940	800	70	9	40.24	16.5
TCH09075H20B00 (01)			20						47.85	

C-2-5. 3 TCH 10 Series

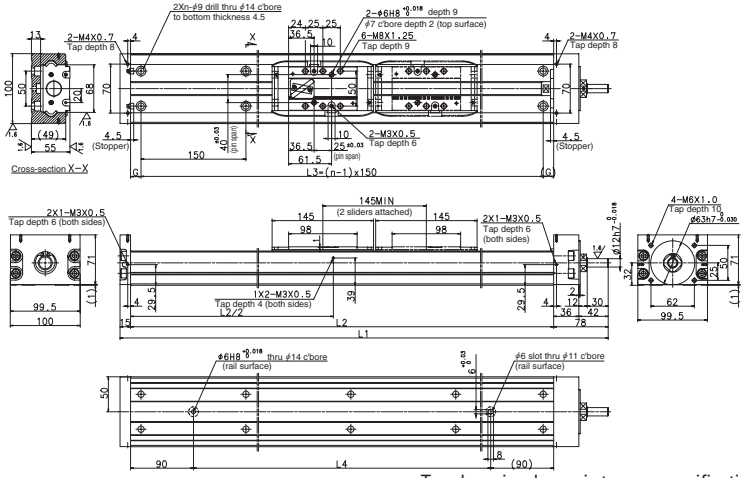◆ TCH10 Standard Slider Specifications (with pin holes)




Toughcarrier dynamic torque specifications

Unit: N · cm

Model no.	Slider specifications	Ball screw lead (mm)	Accuracy grade	
			High grade	Precision grade
TCH10	Single standard slider	10	3.5 – 12.3	3.7 – 21.2
		20	4.1 – 16.6	4.3 – 25.5
	Double standard sliders	10	4.1 – 16.6	4.3 – 25.5
		20	5.4 – 25.2	5.6 – 34.1

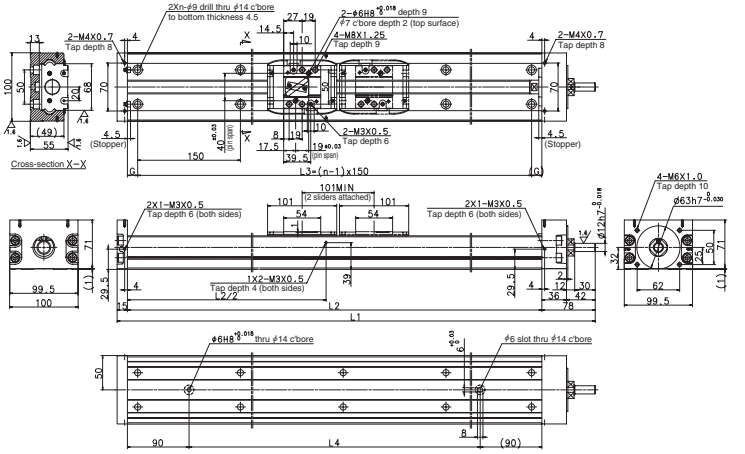◆ TCH10 Short Slider Specifications (with pin holes)



Toughcarrier dynamic torque specifications

Unit: N · cm

Model no.	Slider specifications	Ball screw lead (mm)	Accuracy grade	
			High grade	Precision grade
TCH10	Single short slider	10	3.6 – 11.7	3.8 – 20.5
		20	4.4 – 15.4	4.6 – 24.2
	Double short sliders	10	4.4 – 15.4	4.6 – 24.2
		20	6.0 – 22.7	6.2 – 31.5

TCH10 Standard Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	L_4	G	No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m^2)	Mass (kg)
∗TCH10010H10K00 (01)	100	126	10	373	280	150	100	65	2	42.72	9.6
∗TCH10010H20K00 (01)			20							58.52	
TCH10020H10K00 (01)	200	226	10	473	380	300	200	40	3	54.97	11.5
TCH10020H20K00 (01)			20							65.62	
TCH10030H10K00 (01)	300	326	10	573	480	450	300	15	4	67.22	13.5
TCH10030H20K00 (01)			20							77.87	
TCH10040H10K00 (01)	400	426	10	673	580	450	400	65	4	79.47	15.4
TCH10040H20K00 (01)			20							90.12	
TCH10050H10K00 (01)	500	526	10	773	680	600	500	40	5	91.72	17.4
TCH10050H20K00 (01)			20							102.37	
TCH10060H10K00 (01)	600	626	10	873	780	750	600	15	6	104.02	19.3
TCH10060H20K00 (01)			20							114.67	
TCH10070H10K00 (01)	700	726	10	973	880	750	700	65	6	116.22	21.2
TCH10070H20K00 (01)			20							126.87	
TCH10080H10K00 (01)	800	826	10	1 073	980	900	800	40	7	128.52	23.2
TCH10080H20K00 (01)			20							139.17	
TCH10090H10K00 (01)	900	926	10	1 173	1 080	1 050	900	15	8	140.70	25.2
TCH10090H20K00 (01)			20							151.35	
TCH10100H10K00 (01)	1 000	1 026	10	1 273	1 180	1 050	1 000	65	8	152.94	27.1
TCH10100H20K00 (01)			20							163.59	
TCH10110H10K00 (01)	1 100	1 126	10	1 373	1 280	1 200	1 100	40	9	165.19	29.1
TCH10110H20K00 (01)			20							175.84	
TCH10120H10K00 (01)	1 200	1 226	10	1 473	1 380	1 350	1 200	15	10	177.43	31.1
TCH10120H20K00 (01)			20							188.08	

Items marked with ∗ are unavailable for upside-down operation

TCH10 Standard Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	L_4	G	No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m^2)	Mass (kg)
∗TCH10027H10D00 (01)	270	281	10	673	580	450	400	65	4	83.02	16.8
∗TCH10027H20D00 (01)			20							104.31	
∗TCH10037H10D00 (01)	370	381	10	773	680	600	500	40	5	95.27	18.8
∗TCH10037H20D00 (01)			20							116.56	
TCH10047H10D00 (01)	470	481	10	873	780	750	600	15	6	107.57	20.7
TCH10047H20D00 (01)			20							128.86	
TCH10057H10D00 (01)	570	581	10	973	880	750	700	65	6	119.77	22.6
TCH10057H20D00 (01)			20							141.06	
TCH10067H10D00 (01)	670	681	10	1 073	980	900	800	40	7	132.07	24.6
TCH10067H20D00 (01)			20							153.36	
TCH10077H20D00 (01)	770	781	20	1 173	1 080	1 050	900	15	8	165.54	26.6
TCH10087H20D00 (01)	870	881	20	1 273	1 180	1 050	1 000	65	8	177.78	28.5
TCH10097H20D00 (01)	970	981	20	1 373	1 280	1 200	1 100	40	9	190.03	30.5
TCH10107H20D00 (01)	1 070	1 081	20	1 473	1 380	1 350	1 200	15	10	202.27	32.5

Items marked with ∗ are unavailable for upside-down operation

TCH10 Short Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	L_4	G	No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m^2)	Mass (kg)
∗TCH10016H10A00 (01)	160	170	10	373	280	150	100	65	2	41.19	8.9
∗TCH10016H20A00 (01)			20							47.36	
TCH10026H10A00 (01)	260	270	10	473	380	300	200	40	3	53.45	10.9
TCH10026H20A00 (01)			20							59.54	
TCH10036H10A00 (01)	360	370	10	573	480	450	300	15	4	65.70	12.8
TCH10036H20A00 (01)			20							71.79	
TCH10046H10A00 (01)	460	470	10	673	580	450	400	65	4	77.95	14.8
TCH10046H20A00 (01)			20							84.04	
TCH10056H10A00 (01)	560	570	10	773	680	600	500	40	5	90.20	16.7
TCH10056H20A00 (01)			20							96.29	
TCH10066H10A00 (01)	660	670	10	873	780	750	600	15	6	102.50	18.6
TCH10066H20A00 (01)			20							108.59	
TCH10076H10A00 (01)	760	770	10	973	880	750	700	65	6	114.70	20.6
TCH10076H20A00 (01)			20							120.79	
TCH10086H10A00 (01)	860	870	10	1 073	980	900	800	40	7	127.00	22.6
TCH10086H20A00 (01)			20							133.09	
TCH10096H10A00 (01)	960	970	10	1 173	1 080	1 050	900	15	8	139.18	24.5
TCH10096H20A00 (01)			20							145.27	
TCH10106H10A00 (01)	1 060	1 070	10	1 273	1 180	1 050	1 000	65	8	151.42	26.5
TCH10106H20A00 (01)			20							157.51	
TCH10116H10A00 (01)	1 160	1 170	10	1 373	1 280	1 200	1 100	40	9	163.67	28.4
TCH10116H20A00 (01)			20							169.76	
TCH10126H10A00 (01)	1 260	1 270	10	1 473	1 380	1 350	1 200	15	10	175.91	30.4
TCH10126H20A00 (01)			20							182.00	

Items marked with ∗ are unavailable for upside-down operation

TCH10 Short Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm) L_1	L_2	L_3	L_4	G	No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m^2)	Mass (kg)
TCH10036H10B00 (01)	360	369	10	673	580	450	400	65	4	79.97	15.6
TCH10036H20B00 (01)			20							92.14	
TCH10046H10B00 (01)	460	469	10	773	680	600	500	40	5	92.22	17.5
TCH10046H20B00 (01)			20							104.39	
TCH10056H10B00 (01)	560	569	10	873	780	750	600	15	6	104.52	19.4
TCH10056H20B00 (01)			20							116.69	
TCH10066H10B00 (01)	660	669	10	973	880	750	700	65	6	116.72	21.4
TCH10066H20B00 (01)			20							128.89	
TCH10076H10B00 (01)	760	769	10	1 073	980	900	800	40	7	129.02	23.4
TCH10076H20B00 (01)			20							141.19	
TCH10086H20B00 (01)	860	869	20	1 173	1 080	1 050	900	15	8	153.37	25.3
TCH10096H20B00 (01)	960	969	20	1 273	1 180	1 050	1 000	65	8	165.61	27.3
TCH10106H20B00 (01)	1 060	1 069	20	1 373	1 280	1 200	1 100	40	9	177.86	29.2
TCH10116H20B00 (01)	1 160	1 169	20	1 473	1 380	1 350	1 200	15	10	190.10	31.2

C-2-6 Accessories

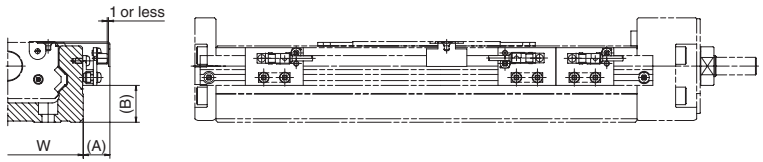
C-2-6. 1 Sensor Unit

Reference number TC — SRH □□— 1 □

Nominal size


Coding for model no.
- 0: Proximity switch (3 b-contacts)
- 1: Proximity switch (3 a-contacts)
- 2: Proximity switch (1 a-contact, 2 b-contacts)
- 3: Photo sensor (3 sensors)

◆ Proximity switch



Model no.		Reference number			Dimensions A (mm)	Dimensions B (mm)	Dimensions Body width W (mm)
TCH06		TC-SRH06-10	TC-SRH06-11	TC-SRH06-12	17	10	60
TCH09		TC-SRH09-10	TC-SRH09-11	TC-SRH09-12	16	21	86
TCH10		TC-SRH10-10	TC-SRH10-11	TC-SRH10-12	16	25	100
Quantity	Proximity switch (a-contact)	—	3	1	E2S-W13 (OMRON Corp.)		
	Proximity switch (b-contact)	3	—	2	E2S-W14 (OMRON Corp.)		

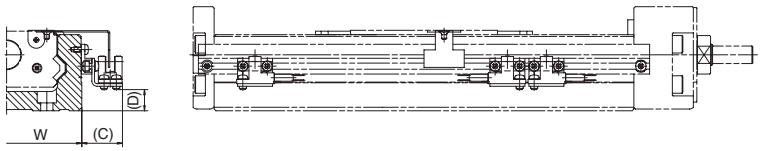◆ Photo sensor




Model no.	Reference number	Dimensions C (mm)	Dimensions D (mm)	Dimensions Body width W (mm)	Note
TCH06	TC-SRH06-13	24	2	60	EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector included
TCH09	TC-SRH09-13	24	12	86	
TCH10	TC-SRH10-13	24	16	100	

(1) Sensor Rail

Reference number TC — SRL □—□□□□

Body rail length

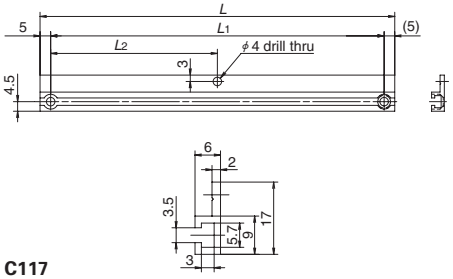Nominal no. 06→6
09→9
10→1




Model no.	Body rail length	Dimensions L	Dimensions L_1	Dimensions L_2
TCH06	150	168	158	79
	200	218	208	104
	300	318	308	154
	400	418	408	204
	500	518	508	254
	600	618	608	304
TCH09	240	258	248	124
	340	358	348	174
	440	458	448	224
	540	558	548	274
	640	658	648	324
	740	758	748	374
	840	858	848	424
	940	958	948	474
TCH10	280	298	288	144
	380	398	388	194
	480	498	488	244
	580	598	588	294
	680	698	688	344
	780	798	788	394
	880	898	888	444
	980	998	988	494
	1 080	1 098	1 088	544
	1 180	1 198	1 188	594
	1 280	1 298	1 288	644
	1 380	1 398	1 388	694


C-2-6. 2 Cover Unit

◆ Cover Unit

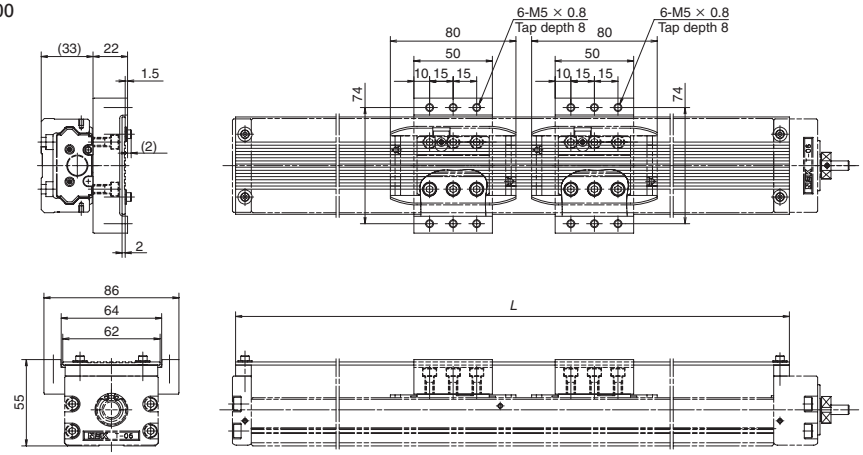TC-HV06XXXK00
TC-HV06XXXD00




TC-HV06XXXA00
TC-HV06XXXB00

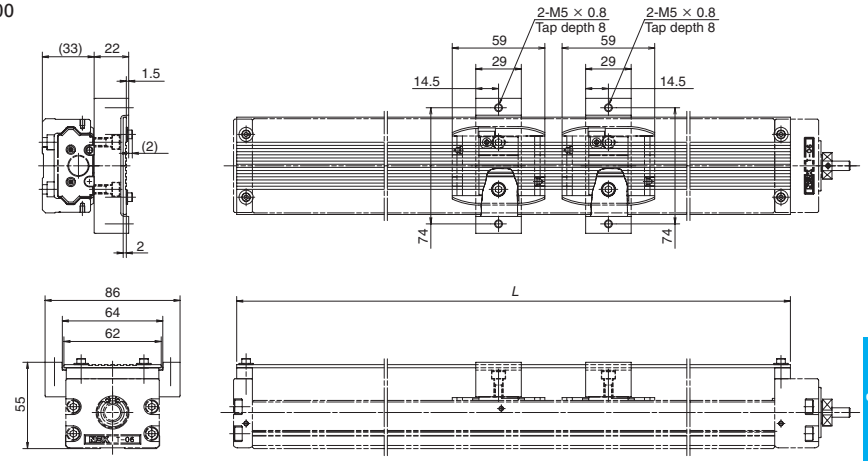


TCH06

Body rail length	Dimensions L	Slider specifications Standard Single	Standard Double	Short Single	Short Double
150	170	TC-HV06005K00	—	TC-HV06007A00	—
200	220	TC-HV06010K00	—	TC-HV06012A00	—
300	320	TC-HV06020K00	TC-HV06013D00	TC-HV06022A00	TC-HV06017B00
400	420	TC-HV06030K00	TC-HV06023D00	TC-HV06032A00	TC-HV06027B00
500	520	TC-HV06040K00	TC-HV06033D00	TC-HV06042A00	TC-HV06037B00
600	620	TC-HV06050K00	TC-HV06043D00	TC-HV06052A00	TC-HV06047B00

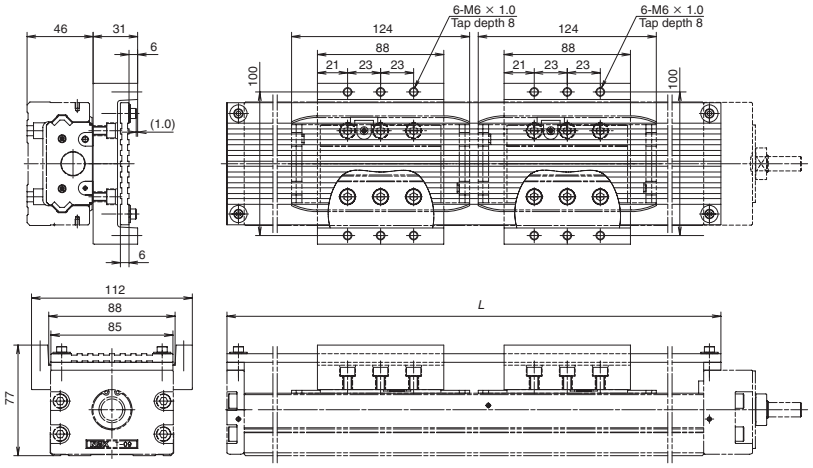TC-HV09XXXK00
TC-HV09XXXD00




TC-HV09XXXA00
TC-HV09XXXB00

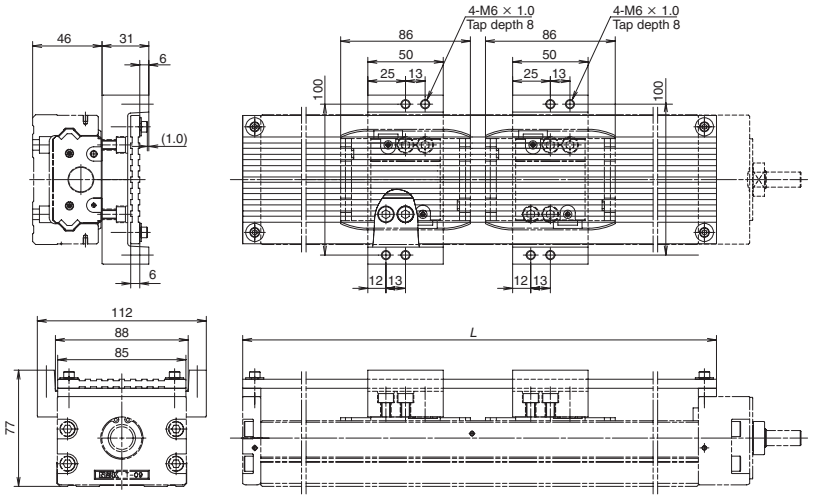


TCH09

Body rail length	Dimensions	Slider specifications			
		Standard		Short	
	L	Single	Double	Single	Double
240	264	TC-HV09010K00	—	TC-HV09014A00	—
340	364	TC-HV09020K00	—	TC-HV09024A00	—
440	464	TC-HV09030K00	TC-HV09017D00	TC-HV09034A00	TC-HV09025B00
540	564	TC-HV09040K00	TC-HV09027D00	TC-HV09044A00	TC-HV09035B00
640	664	TC-HV09050K00	TC-HV09037D00	TC-HV09054A00	TC-HV09045B00
740	764	TC-HV09060K00	TC-HV09047D00	TC-HV09064A00	TC-HV09055B00
840	864	TC-HV09070K00	—	TC-HV09074A00	—
940	964	TC-HV09080K00	TC-HV09067D00	TC-HV09084A00	TC-HV09075B00

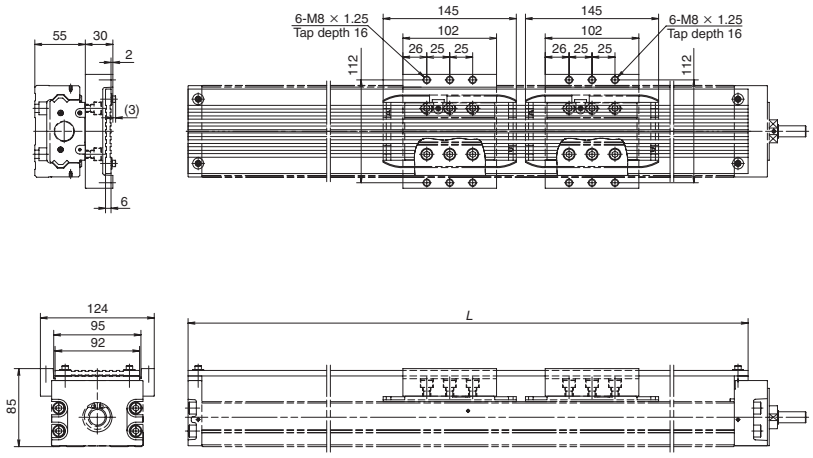TC-HV10XXXK00
TC-HV10XXXD00



TC-HV10XXXA00
TC-HV10XXXB00

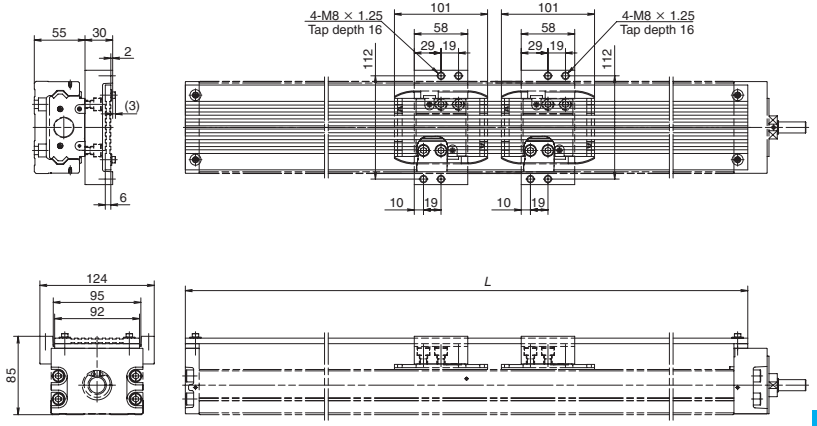

TCH10

Body rail length	Dimensions	Slider specifications			
		Standard		Short	
	L	Single	Double	Single	Double
280	310	TC-HV10010K00	—	TC-HV10016A00	—
380	410	TC-HV10020K00	—	TC-HV10026A00	—
480	510	TC-HV10030K00	—	TC-HV10036A00	—
580	610	TC-HV10040K00	TC-HV10027D00	TC-HV10046A00	TC-HV10036B00
680	710	TC-HV10050K00	TC-HV10037D00	TC-HV10056A00	TC-HV10046B00
780	810	TC-HV10060K00	TC-HV10047D00	TC-HV10066A00	TC-HV10056B00
880	910	TC-HV10070K00	TC-HV10057D00	TC-HV10076A00	TC-HV10066B00
980	1 010	TC-HV10080K00	TC-HV10067D00	TC-HV10086A00	TC-HV10076B00
1 080	1 110	TC-HV10090K00	TC-HV10077D00	TC-HV10096A00	TC-HV10086B00
1 180	1 210	TC-HV10100K00	TC-HV10087D00	TC-HV10106A00	TC-HV10096B00
1 280	1 310	TC-HV10110K00	TC-HV10097D00	TC-HV10116A00	TC-HV10106B00
1 380	1 410	TC-HV10120K00	TC-HV10107D00	TC-HV10126A00	TC-HV10116B00

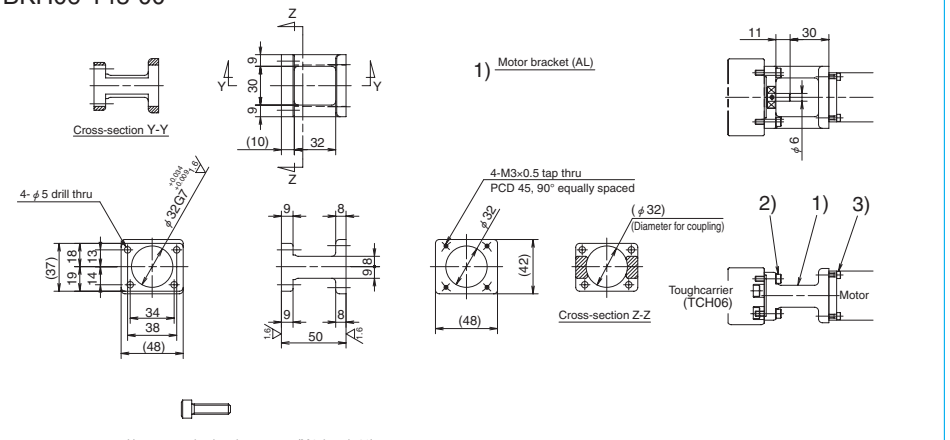
C-2-6. 3 Motor Bracket

◆ Motor bracket

Motor models are subject to change at the motor manufacturers. For details, please contact the manufacturer. For motors other than applicable motors shown below, please contact NSK.

■Reference number

TC-BKH06-145-00




Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD5A(50W), MSMD10(100W)

■Reference number

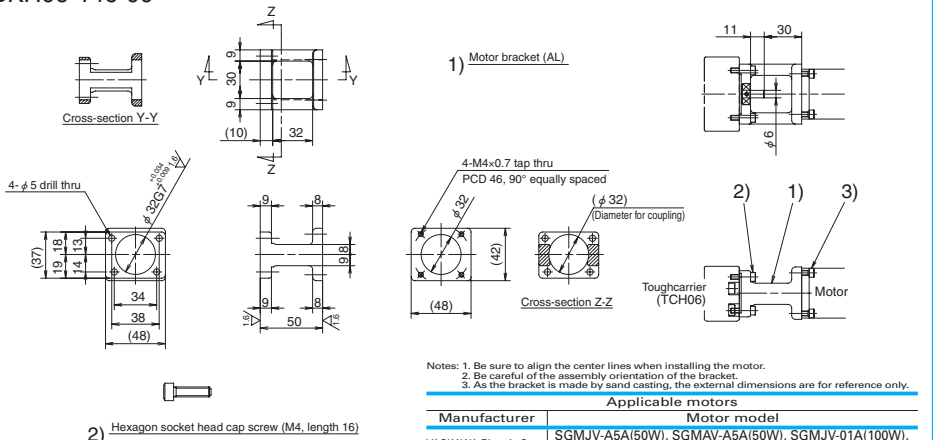TC-BKH06-146-00




Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
YASKAWA Electric Corp.	SGMJV-A5A(50W), SGMAV-A5A(50W), SGMJV-01A(100W), SGMAV-01A(100W), SGMAV-C2A(150W), SGMJV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HCMFS053(50W), HF-KP13(100W), HF-MP13(100W), HCKFS13(100W), HC-MFS13(100W)
OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)
SANYO DENKI Co., Ltd.	P30B04003(30W), P30B04005(50W), P30B04010(100W), R2AA04005(50W), R2AA04010(100W)

■Reference number

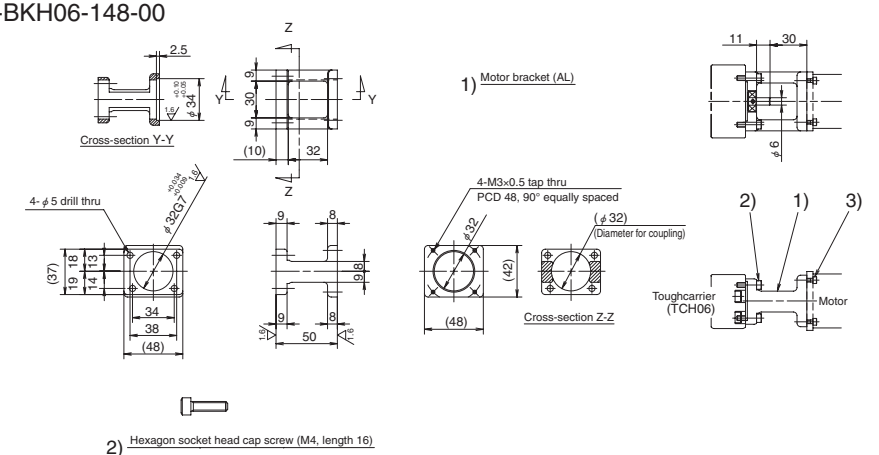TC-BKH06-148-00




Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
Panasonic Co., Ltd.	MAMA01(100W)
SANYO DENKI Co., Ltd.	P50B04006(60W), P50B04010(100W)

■Reference number

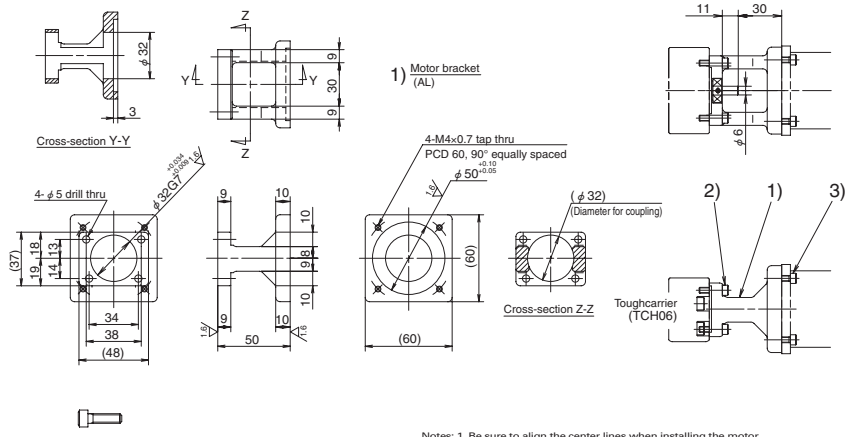TC-BKH06-160-00




Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

■Reference number

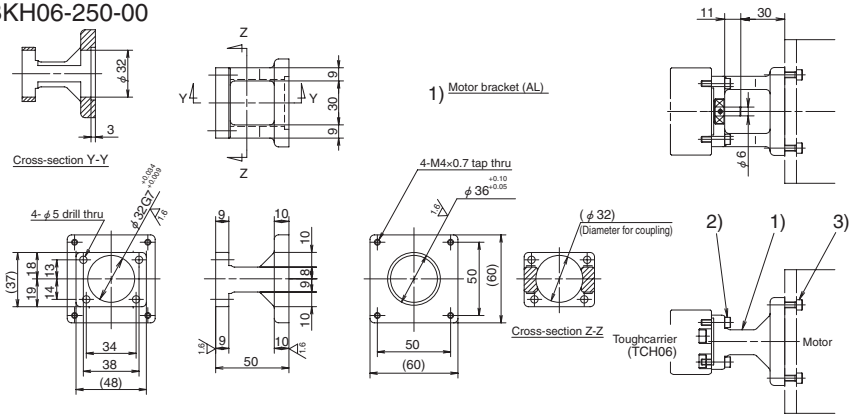TC-BKH06-250-00



2) Hexagon socket head cap screw (M4, length 16)

3) Hexagon socket head cap screw (M4, length 14)


Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
SANYO DENKI Co., Ltd.	PBM603XXX, PBM604XXX, 103F78XX
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56X, PK56X, CSK56X, CFK56X, UFK56X

■Reference number

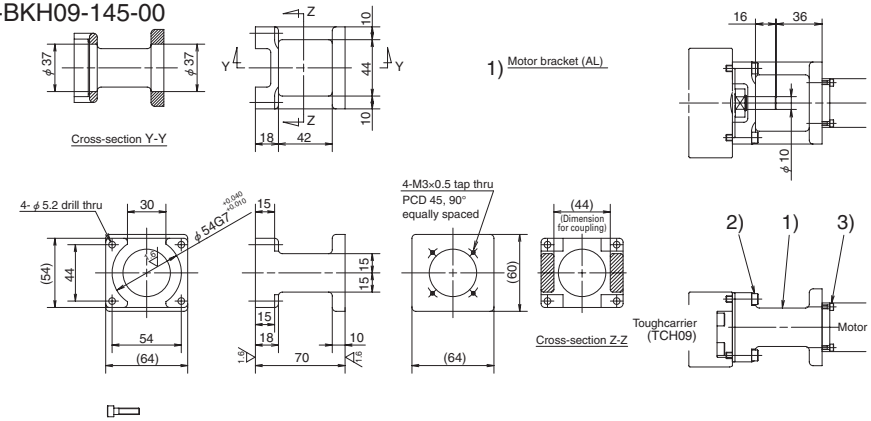TC-BKH09-145-00



2) Hexagon socket head cap screw (M5, length 20)

3) Hexagon socket head cap screw (M3, length 12)


Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD01(100W)

■Reference number

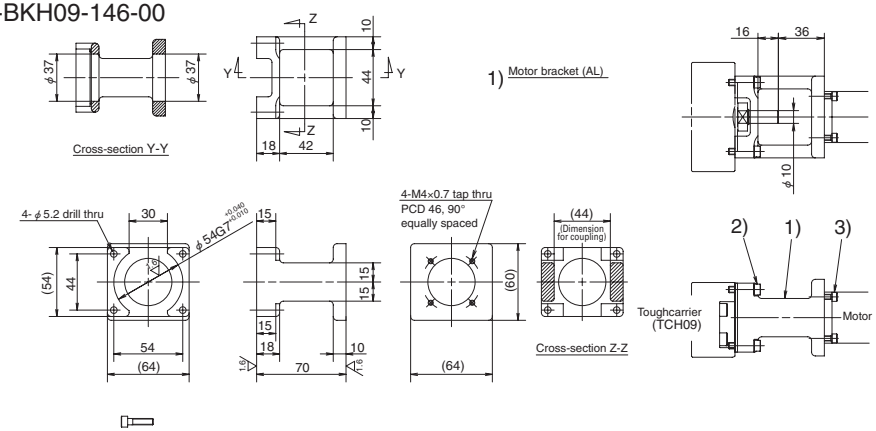TC-BKH09-146-00



2) Hexagon socket head cap screw (M5, length 20)


3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
YASKAWA Electric Corp.	SGMJV-01A(100W), SGMAV-01A(100W), SGMAV-C2A(150W), SGMJV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
OMRON Corp.	P30B04005(50W), P30B04010(100W), R2AA04010(100W)

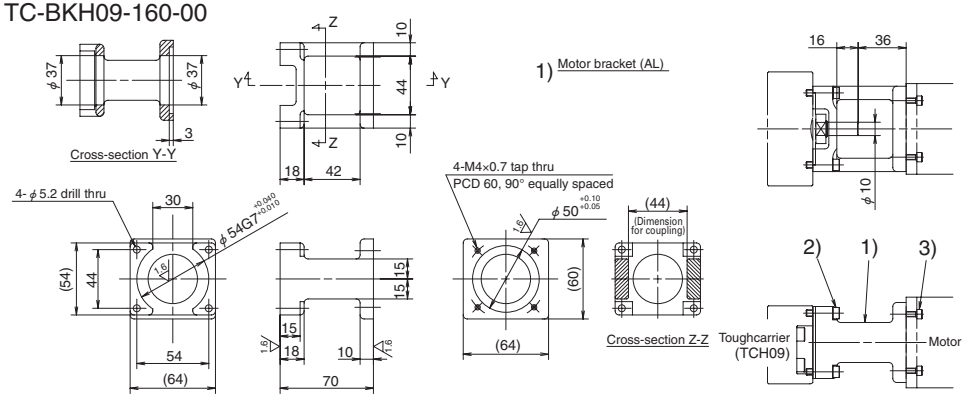■Reference number
TC-BKH09-160-00



2) Hexagon socket head cap screw (M5, length 20)


3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

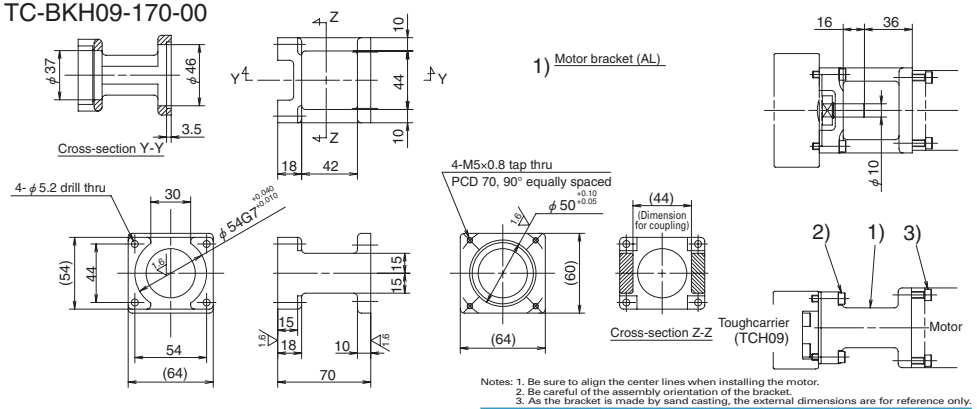■Reference number
TC-BKH09-170-00



2) Hexagon socket head cap screw (M5, length 20)


3) Hexagon socket head cap screw (M5, length 14)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
YASKAWA Electric Corp.	SGMJV-02A(200W), SGMAV-02A(200W), SGMJV-04A(400W), SGMAV-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
SANYO DENKI Co., Ltd.	P50B06020(200W), P30B06040(400W), R2AA06010(100W), R2AA06020(200W), R2A06040(400W)

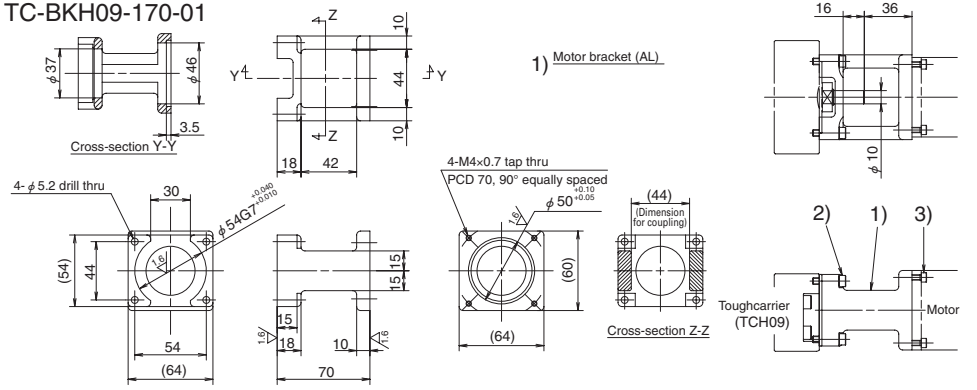■Reference number
TC-BKH09-170-01



2) Hexagon socket head cap screw (M5, length 20)


3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

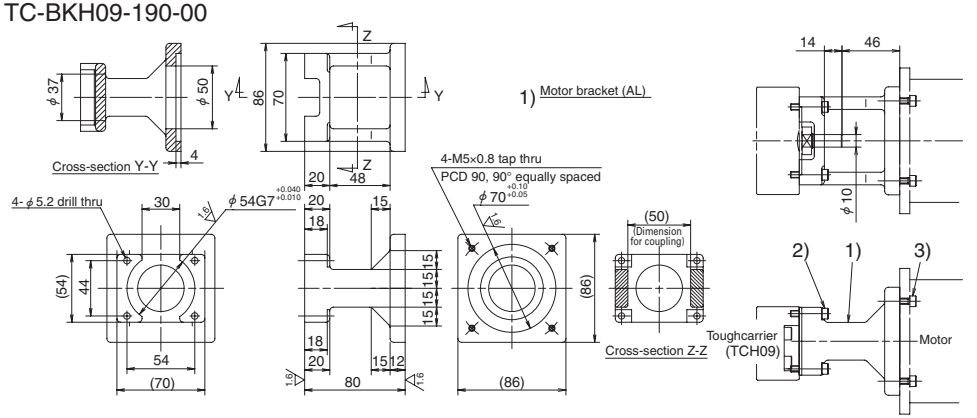■Reference number
TC-BKH09-190-00



2) Hexagon socket head cap screw (M5, length 25)

3) Hexagon socket head cap screw (M5, length 16)


Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
SANYO DENKI Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)

Toughcarrier

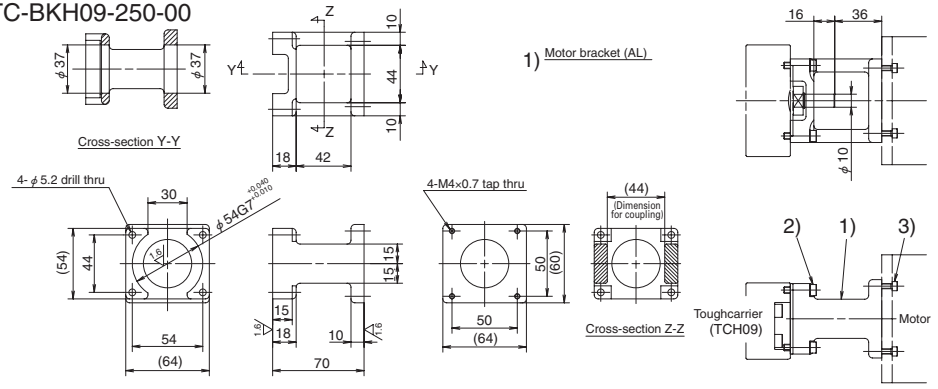■Reference number
TC-BKH09-250-00



2) Hexagon socket head cap screw (M5, length 20)


3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
SANYO DENKI Co., Ltd.	PBM603XXX, PBM604XXX, 103F78XX
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56XX, PK56XX, CSK56X, CFK56X, UFK56X

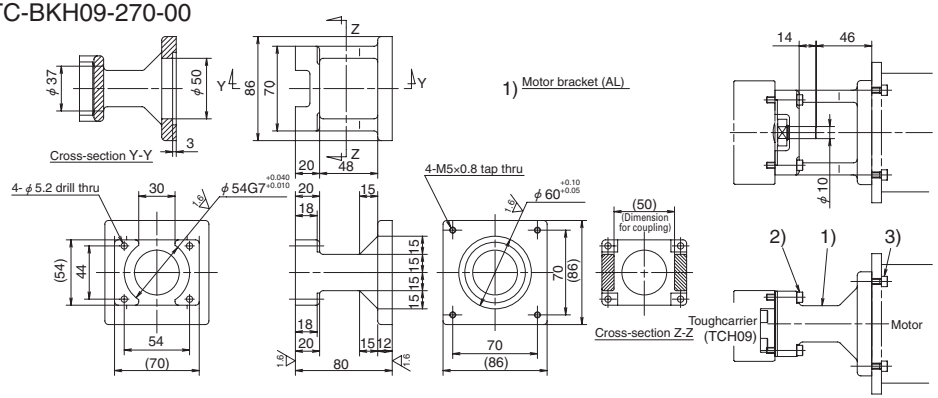■Reference number
TC-BKH09-270-00



2) Hexagon socket head cap screw (M5, length 25)


3) Hexagon socket head cap screw (M5, length 16)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
SANYO DENKI Co., Ltd.	103F85XX
ORIENTAL MOTOR Co., Ltd.	AS98, UPK59X, PK59X, CSK56X, CFK59X, UFK59X

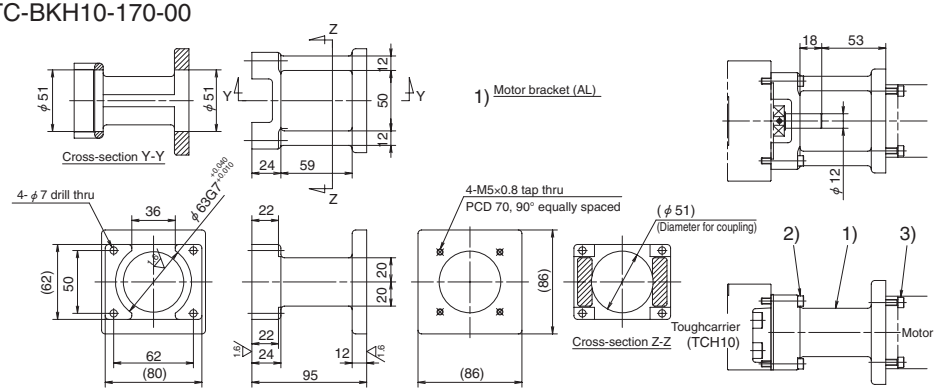■Reference number
TC-BKH10-170-00



2) Hexagon socket head cap screw (M6, length 30)


3) Hexagon socket head cap screw (M5, length 20)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
YASKAWA Electric Corp.	SGMJV-02A(200W), SGMAV-02A(200W), SGMJV-04A(400W), SGMAV-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
SANYO DENKI Co., Ltd.	P30B06020(200W), P30B06040(400W), R2AA06020(200W), R2A06040(400W)

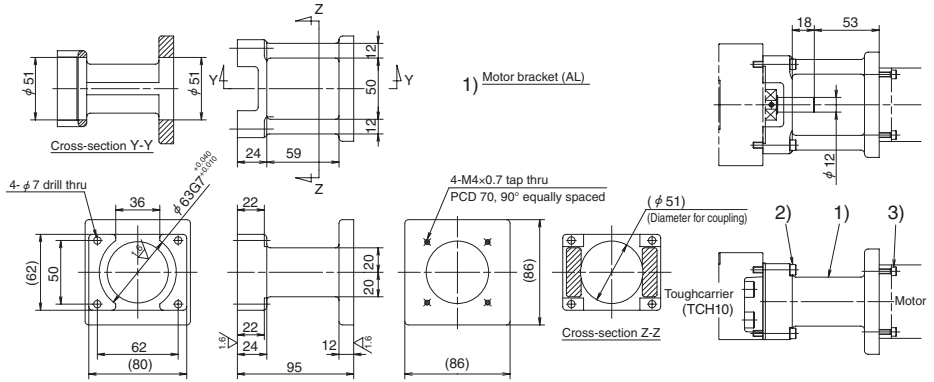■Reference number
TC-BKH10-170-01



2) Hexagon socket head cap screw (M6, length 30)


3) Hexagon socket head cap screw (M4, length 16)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

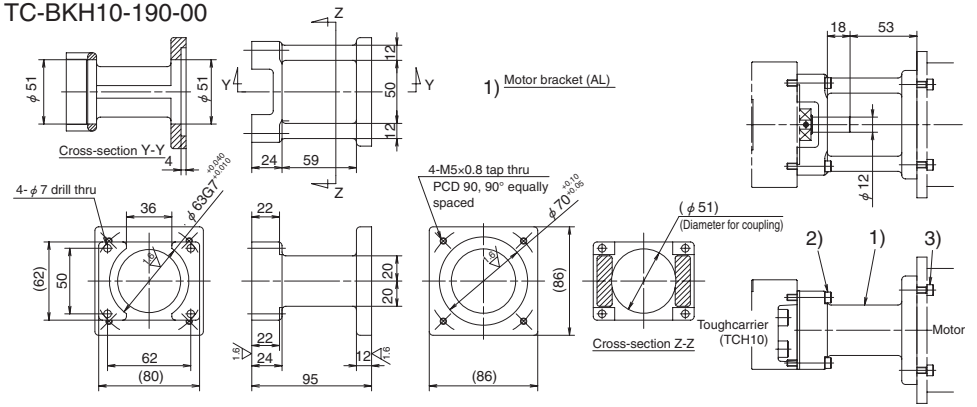■Reference number
TC-BKH10-190-00



2) Hexagon socket head cap screw (M6, length 30)


3) Hexagon socket head cap screw (M5, length 16)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD08(750W), MAMA08(750W)
SANYO DENKI Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)

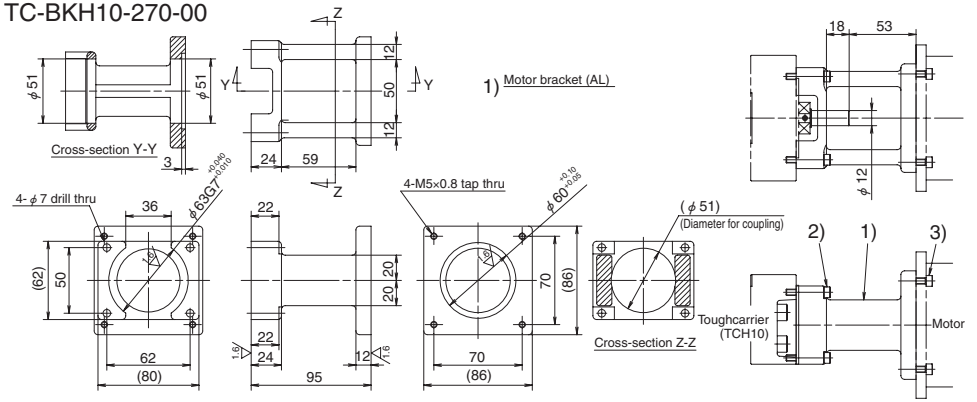■Reference number
TC-BKH10-270-00



2) Hexagon socket head cap screw (M6, length 30)

3) Hexagon socket head cap screw (M5, length 16)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
SANYO DENKI Co., Ltd.	103FB5XX
ORIENTAL MOTOR Co., Ltd.	AS98, UPK59X, PK59X, CSK59X, CFK59X, UFK59X

C-2-7 Motor Bracket Compatibility Table

Model No.	Reference number	Motor manufacturer	Stepping motor model no.	Wattage of AC servo motor								
				30W	50W	60W	100W	150W	200W	300W	400W	750W
TCH06	TC-BKH06-145-00	Panasonic Co., Ltd.			MSMD5A		MSMD10					
	TC-BKH06-146-00	YASKAWA Electric Corp.			SGMJV-A5A SGMAV-A5A		SGMJV-01A SGMAV-01A	SGMJV-C2A SGMAV-C2A				
		Mitsubishi Electric Corp.			HF-KP053 HF-MP053 HC-KFS053 HC-MFS053		HF-KP13 HF-MP13 HC-KFS13 HC-MFS13					
		OMRON Corp.		R88M-W03	R88M-W05		R88M-W10					
		SANYO DENKI Co., Ltd.		P30B04003	P30B04005 R2AA04005		P30B04010 R2AA04010					
	TC-BKH06-148-00	Panasonic Co., Ltd.					MAMA01					
		SANYO DENKI Co., Ltd.				P50B04006	P50B04010					
	TC-BKH06-160-00	SANYO DENKI Co., Ltd.			P50B05005		P50B05010		P50B05020			
	TC-BKH06-250-00	SANYO DENKI Co., Ltd.	PBM603XXX PBM604XXX 103F78XX									
		ORIENTAL MOTOR Co., Ltd.	AS66 ASC66 UPK56X PK56X CSK56X CFK56X UFK56X									
TCH09	TC-BKH09-145-00	Panasonic Co., Ltd.					MSMD01					
	TC-BKH09-146-00	YASKAWA Electric Corp.					SGMJV-01A SGMAV-01A	SGMJV-C2A SGMAV-C2A				
		Mitsubishi Electric Corp.					HF-KP13 HF-MP13 HC-KFS13 HC-MFS13					
		SANYO DENKI Co., Ltd.			P30B04005		P30B04010 R2AA04010					
	TC-BKH09-160-00	SANYO DENKI Co., Ltd.			P50B05005		P50B05010		P50B05020			
	TC-BKH09-170-00	YASKAWA Electric Corp.							SGMJV-02A SGMAV-02A		SGMJV-04A SGMAV-04A	
		Mitsubishi Electric Corp.							HF-KP23 HF-MP23 HC-KFS23 HC-MFS23		HF-KP43 HF-MP43 HC-KFS43 HC-MFS43	
		OMRON Corp.							R88M-W20		R88M-W40	
		SANYO DENKI Co., Ltd.					R2AA06010		P30B06020 R2AA06020		P30B06040 R2AA06040	
	TC-BKH09-170-01	Panasonic Co., Ltd.							MSMD02 MAMA02		MSMD04 MAMA04	
	TC-BKH09-190-00	SANYO DENKI Co., Ltd.							P50B07020	P50B07030	P50B07040	
	TC-BKH09-250-00	SANYO DENKI Co., Ltd.	PBM603XXX PBM604XXX 103F78XX									
		ORIENTAL MOTOR Co., Ltd.	AS66 ASC66 UPK56X PK56X CSK56X CFK56X UFK56X									
	TC-BKH09-270-00	ORIENTAL MOTOR Co., Ltd.	AS98 UPK59X PK59X CSK59X CFK59X UFK59X									
		SANYO DENKI Co., Ltd.	103FB5XX									
TCH10	TC-BKH10-170-00	YASKAWA Electric Corp.							SGMJV-02A SGMAV-02A		SGMJV-04A SGMAV-04A	
		Mitsubishi Electric Corp.							HF-KP23 HF-MP23 HC-KFS23 HC-MFS23		HF-KP43 HF-MP43 HC-KFS43 HC-MFS43	
		OMRON Corp.							R88M-W20		R88M-W40	
		SANYO DENKI Co., Ltd.							P30B06020 R2AA06020		P30B06040 R2AA06040	
	TC-BKH10-170-01	Panasonic Co., Ltd.							MSMD02 MAMA02		MSMD04 MAMA04	
	TC-BKH10-190-00	Panasonic Co., Ltd.										MSMD08 MAMA08
		SANYO DENKI Co., Ltd.							P50B07020	P50B07030	P50B07040	
	TC-BKH10-270-00	SANYO DENKI Co., Ltd.	103FB5XX									
		ORIENTAL MOTOR Co., Ltd.	AS98 UPK59X PK59X CSK59X CFK59X UFK59X									

C-2-8 Sensor Rail and Top Cover Unit Combination Table

Model No.	Reference number	Rail length (L_3)	Sensor rail reference number	Cover unit reference number
TCH06	TCH06005H05K00	150	TC-SRL6-0150	TC-HV06005K00
	TCH06005H10K00			
	TCH06005H20K00			
	TCH06007H05A00			TC-HV06007A00
	TCH06007H10A00			
	TCH06010H05K00	200	TC-SRL6-0200	TC-HV06010K00
	TCH06010H10K00			
	TCH06010H20K00			
	TCH06012H05A00			TC-HV06012A00
	TCH06012H10A00			
	TCH06020H05K00	300	TC-SRL6-0300	TC-HV06020K00
	TCH06020H10K00			
	TCH06020H20K00			
	TCH06013H05D00			TC-HV06013D00
	TCH06013H10D00			
	TCH06022H05A00			TC-HV06022A00
	TCH06022H10A00			
	TCH06017H05B00			TC-HV06017B00
	TCH06017H10B00			
	TCH06030H05K00	400	TC-SRL6-0400	TC-HV06030K00
	TCH06030H10K00			
	TCH06030H20K00			
	TCH06023H05D00			TC-HV06023D00
	TCH06023H10D00			
	TCH06032H05A00			TC-HV06032A00
	TCH06032H10A00			
	TCH06027H05B00			TC-HV06027B00
	TCH06027H10B00			
	TCH06040H05K00	500	TC-SRL6-0500	TC-HV06040K00
	TCH06040H10K00			
	TCH06040H20K00			
	TCH06033H05D00			TC-HV06033D00
	TCH06033H10D00			
	TCH06042H05A00			TC-HV06042A00
	TCH06042H10A00			
	TCH06037H05B00			TC-HV06037B00
	TCH06037H10B00			
	TCH06050H05K00	600	TC-SRL6-0600	TC-HV06050K00
	TCH06050H10K00			
	TCH06050H20K00			
	TCH06043H10D00			TC-HV06043D00
	TCH06043H20D00			
	TCH06052H05A00			TC-HV06052A00
	TCH06052H10A00			
	TCH06047H10B00			TC-HV06047B00

- Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
- Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

Model No.	Reference number	Rail length (L_3)	Sensor rail reference number	Cover unit reference number
TCH09	TCH09010H05K00	240	TC-SRL9-0240	TC-HV09010K00
	TCH09010H10K00			
	TCH09010H20K00			
	TCH09014H05A00			TC-HV09014A00
	TCH09014H10A00			
	TCH09014H20A00			
	TCH09020H05K00	340	TC-SRL9-0340	TC-HV09020K00
	TCH09020H10K00			
	TCH09020H20K00			
	TCH09024H05A00			TC-HV09024A00
	TCH09024H10A00			
	TCH09024H20A00			
	TCH09030H05K00	440	TC-SRL9-0440	TC-HV09030K00
	TCH09030H10K00			
	TCH09030H20K00			
	TCH09017H05D00			TC-HV09017D00
	TCH09017H10D00			
	TCH09034H05A00			TC-HV09034A00
	TCH09034H10A00			
	TCH09034H20A00			
	TCH09025H05B00			TC-HV09025B00
	TCH09025H10B00			
	TCH09040H05K00	540	TC-SRL9-0540	TC-HV09040K00
	TCH09040H10K00			
	TCH09040H20K00			
	TCH09027H05D00			TC-HV09027D00
	TCH09027H10D00			
	TCH09044H05A00			TC-HV09044A00
	TCH09044H10A00			
	TCH09044H20A00			
	TCH09035H05B00			TC-HV09035B00
	TCH09035H10B00			
	TCH09050H05K00	640	TC-SRL9-0640	TC-HV09050K00
	TCH09050H10K00			
	TCH09050H20K00			
	TCH09037H05D00			TC-HV09037D00
	TCH09037H10D00			
	TCH09054H05A00			TC-HV09054A00
	TCH09054H10A00			
	TCH09054H20A00			
	TCH09045H05B00			TC-HV09045B00
	TCH09045H10B00			
	TCH09060H05K00	740	TC-SRL9-0740	TC-HV09060K00
	TCH09060H10K00			
	TCH09060H20K00			
	TCH09047H10D00			TC-HV09047D00
	TCH09047H20D00			
	TCH09064H05A00			TC-HV09064A00
	TCH09064H10A00			
	TCH09064H20A00			
	TCH09055H10B00			TC-HV09055B00
	TCH09055H20B00			
	TCH09070H05K00	840	TC-SRL9-0840	TC-HV09070K00
	TCH09070H10K00			
	TCH09070H20K00			
	TCH09074H05A00			TC-HV09074A00
	TCH09074H10A00			
	TCH09074H20A00			
	TCH09080H05K00	940	TC-SRL9-0940	TC-HV09080K00
	TCH09080H10K00			
	TCH09080H20K00			
	TCH09067H10D00			TC-HV09067D00
	TCH09067H20D00			
	TCH09084H05A00			TC-HV09084A00
	TCH09084H10A00			
	TCH09084H20A00			
	TCH09075H10B00			TC-HV09075B00
	TCH09075H20B00			

- Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
- Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

Model No.	Reference number	Rail length (L_2)	Sensor rail reference number	Cover unit reference number
TCH10	TCH10010H10K00	280	TC-SRL1-0280	TC-HV10010K00
	TCH10010H20K00			
	TCH10016H10A00			TC-HV10016A00
	TCH10016H20A00			
	TCH10020H10K00	380	TC-SRL1-0380	TC-HV10020K00
	TCH10020H20K00			
	TCH10026H10A00			TC-HV10026A00
	TCH10026H20A00			
	TCH10030H10K00	480	TC-SRL1-0480	TC-HV10030K00
	TCH10030H20K00			
	TCH10036H10A00			TC-HV10036A00
	TCH10036H10A00			
	TCH10040H10K00	580	TC-SRL1-0580	TC-HV10040K00
	TCH10040H20K00			
	TCH10027H10D00			TC-HV10027D00
	TCH10027H20D00			
	TCH10046H10A00			TC-HV10046A00
	TCH10046H20A00			
	TCH10036H10B00			TC-HV10036B00
	TCH10036H20B00			
	TCH10050H10K00	680	TC-SRL1-0680	TC-HV10050K00
	TCH10050H20K00			
	TCH10037H10D00			TC-HV10037D00
	TCH10037H20D00			
	TCH10056H10A00			TC-HV10056A00
	TCH10056H20A00			
	TCH10046H10B00			TC-HV10046B00
	TCH10046H20B00			
	TCH10060H10K00	780	TC-SRL1-0780	TC-HV10060K00
	TCH10060H20K00			
	TCH10047H10D00			TC-HV10047D00
	TCH10047H20D00			
	TCH10066H10A00			TC-HV10066A00
	TCH10066H20A00			
	TCH10056H10B00			TC-HV10056B00
	TCH10056H20B00			
	TCH10070H10K00	880	TC-SRL1-0880	TC-HV10070K00
	TCH10070H20K00			
	TCH10057H10D00			TC-HV10057D00
	TCH10057H20D00			
	TCH10076H10A00			TC-HV10076A00
	TCH10076H20A00			
	TCH10066H10B00			TC-HV10066B00
	TCH10066H20B00			
	TCH10080H10K00	980	TC-SRL1-0980	TC-HV10080K00
	TCH10080H20K00			
	TCH10067H10D00			TC-HV10067D00
	TCH10067H20D00			
	TCH10086H10A00			TC-HV10086A00
	TCH10086H20A00			
	TCH10076H10B00			TC-HV10076B00
	TCH10076H20B00			
	TCH10090H10K00	1 080	TC-SRL1-1080	TC-HV10090K00
	TCH10090H20K00			
	TCH10077H20D00			TC-HV10077D00
	TCH10096H10A00			TC-HV10096A00
	TCH10096H20A00			
	TCH10086H20B00			TC-HV10086B00
	TCH10100H10K00	1 180	TC-SRL1-1180	TC-HV10100K00
	TCH10100H20K00			
	TCH10087H20D00			TC-HV10087D00
	TCH10106H10A00			TC-HV10106A00
	TCH10106H20A00			
	TCH10096H20B00			TC-HV10096B00
	TCH10110H10K00	1 280	TC-SRL1-1280	TC-HV10110K00
	TCH10110H20K00			
	TCH10097H20D00			TC-HV10097D00
	TCH10116H10A00			TC-HV10116A00
	TCH10116H20A00			
	TCH10106H20B00			TC-HV10106B00
	TCH10120H10K00	1 380	TC-SRL1-1380	TC-HV10120K00
	TCH10120H20K00			
	TCH10107H20D00			TC-HV10107D00
	TCH10126H10A00			TC-HV10126A00
	TCH10126H20A00			
	TCH10116H20B00			TC-HV10116B00

• Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
• Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

C-2-9 Toughcarrier High-Thrust Series (Special product)

◆ Specifications

The life of the feeding system is improved by use of higher load capacity ball screw part and support bearings for standard Toughcarrier.

		TCH06	TCH09		TCH10	
Ball screw	Shaft diameter (mm)	12	20		25	
	Lead (mm)	10	10	20	20	25
	Basic dynamic load rating Ca (N)	4 260	13 400	10 100	11 400	11 400
	Basic static load rating Coa (N)	6 260	25 400	18 700	23 600	23 600
Linear guide	Basic dynamic load rating C (N)	20 900	44 900		62 400	
	Basic static load rating Co (N)	45 000	96 900		132 000	
Support bearings	Basic dynamic load rating (N)	5 900	21 000		23 000	
	Load limit (N)	3 500	18 600*		26 600*	

*Permissible axial load is 0.7 times the limiting axial load.

1) Only compatible with standard slider.
2) Applicable strokes are as follows.
   TCH06: Stroke 500 mm
   TCH09: Stroke 800 mm
   TCH10: Stroke 1 200 mm
3) High and precision grades are available for accuracy

◆ Features

1) Mounting dimensions are the same as Monocarrier MCH Series and standard Toughcarrier. (Interchangeable)
2) Permissible rotational speed is faster than standard Toughcarrier due to different ball recirculation system.

C-3 Technical Materials

1. Sensor Specification C137
   1.1 Proximity Switch C137
   1.2 Photo Sensor C138
2. Characteristics and Evaluation Method C139
   2.1 Positioning Accuracy C139
   2.2 Repeatability C139
   2.3 Running Parallelism C139
3. Special Specifications C140
4. Maintenance C141
   4.1 Maintenance Method C141
   4.2 NSK K1™ Lubricant Unit C141
5. NSK Clean Grease LG2 Specification C142

C-3 Technical Materials

C-3-1 Sensor Specification

C-3-1. 1 Proximity Switch


Use of OMRON E2S-W13 and E2S-W14

Item	E2S–W13 type	E2S–W14 type
Setting surface	Front face	
Sensing distance	1.6 mm ±15%	
Setting distance	0 to 1.2 mm	
Differential travel	10% max. of sensing distance	
Detectable object type	Ferrous metal	
Standard sensing object	Iron,12 × 12 × 1 mm	
Response frequency	1 kHz min.	
Power supply voltage (operating voltage range)	12 to 24 VDC; ripple (p--p), 10% max (10 to 30 VDC)	
Current consumption	13 mA max. at 24 VDC with no load	
Control output (Switching Capacity)	NPN open collector output, 50 mA max. (30 VDC max.)	
Control output (Residual voltage)	1.0 V max. with a load current of 50 mA and a cable length of 1 m	
Indicator	Operation indicator (orange)	
Operating status (with sensing object approaching)	NO (Normally open contact)	NC (Normally close contact)
Wire lead length	1 000 mm	

Notes: 1) Do not make a wrong connection.
2) Please contact NSK for PNP output type.

Movement mode	Output type	Type	Time chart	Output circuit
NO	NPN	E2S-W13 type	Target object: Yes / No; Output transistor (load): ON / OFF; Outoput transistor (orange): ON / OFF	brown, +V, Load, Black*, Output, Main circuit, Blue, 0V; *(Maximum load current: 50 mA)
NC	NPN	E2S-W14 type	Target object: Yes / No; Output transistor (load): ON / OFF; Outoput transistor (orange): ON / OFF	

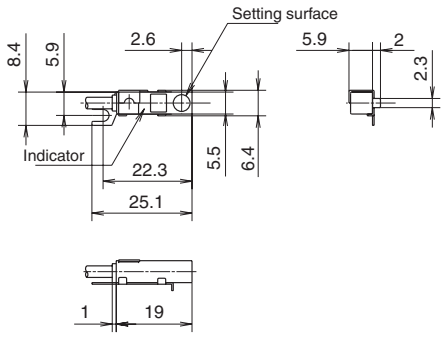E2S-W13 (Normally open contact)
E2S-W14 (Normally close contact)
The external appearances are the same.



C-3-1. 2 Photo Sensor


Use of OMRON EE-SX674

Item	EE-SX674 type
Slot width	5 mm
Standard reference object	Opaque, 2 × 0.8 mm
Differential distance	0.025 mm
Light source	GaAs infrared LED with peak wavelength of 940 nm
Indicator (without detecting object)	ON GaP red LED (peak emission wavelength, 690 nm)
Supply voltage	5 to 24 VDC ±10%; ripple (p--p), 10% max.
Current consumption	35 mA max.
Control output	NPN open collector output models, 5 to 24 VDC, 100 mA load current
Response frequency	1 kHz max. (3 kHz typ.)
Ambient illumination	Fluorescent light, 1 000 lx max.
Ambient temperature	-25°C to 55°C (-13°F to 131°F) (for operating); -30°C to 80°C (-22°F to 176°F) (for storing)
Ambient humidity	5 to 85% RH (for operating); 5 to 95% RH (for storing)
Connecting method	EE-1001/1006 Connectors, soldering terminals

Notes: 1) Do not make a wrong connection.
2) Please contact NSK for PNP output type.

Type	Movement mode	Time chart	Connection terminal	Output circuit
EE-SX674 type	Light-ON	Incident / Interrupted; Indicator (red): ON / OFF; Output transistor: ON / OFF; Load 1 (relay): Operates / Releases; Load 2: H / L	When terminals L and ⊕ are short circuited	Indicator red LED, Main circuit, Load, OUT, IC (Control output) Less than 100 mA, DC 5 to 24 V
	Dark-ON	Incident / Interrupted; Indicator (red): ON / OFF; Output transistor: ON / OFF; Load 1 (relay): Operates / Releases; Load 2: H / L	When terminals L and ⊕ are open circuited	

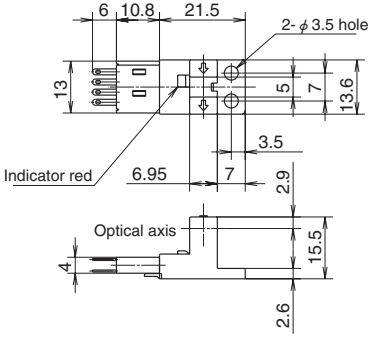EE-SX674 (Sensor)
EE-1001 (Connector)
A connector is mounted to the sensor in the right figure.



C-3-2 Characteristics and Evaluation Method

C-3-2. 1 Positioning Accuracy

Perform successive positioning from the reference position in a specific direction. Measure the difference between the actual and desired travel distances for each point from the reference position. Repeat this measurement seven times to determine the average value. Measure such average value over the entire travel distance at the intervals specified for each model and take the maximum difference of the average values determined at respective positions as the measured value.

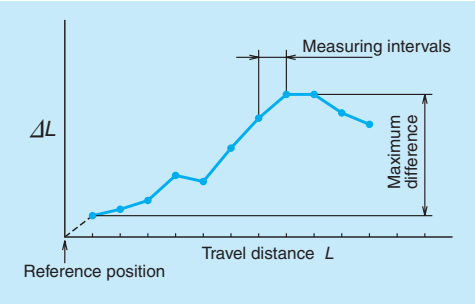


Fig. 1

C-3-2. 2 Repeatability

Repeat positioning at any point seven times from the same direction to measure the stopping position and determine one half of the maximum difference of readings. Repeat this measurement over the entire travel distance at the intervals specified for each model. Take the maximum difference of the determined values as the measured value. Express one half of the maximum difference with a plus-or-minus (±) sign.

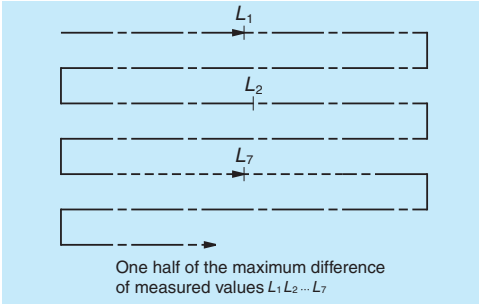


Fig. 2

C-3-2. 3 Running Parallelism (Vertical direction)

We specify the parallelism of slider to the datum bottom surface of rail. An indicator is moved in the axial slider making its stylus slightly touching on the rail bottom surface. The slider is moved in the axial direction for the checking. We define the total indicator reading as the running parallelism. During the checking, the rail is not fixed to the table base. Please be aware that, in general application, the rail is fixed to the machine base, and thus the wobbly rolling error will be added to the running parallelism.

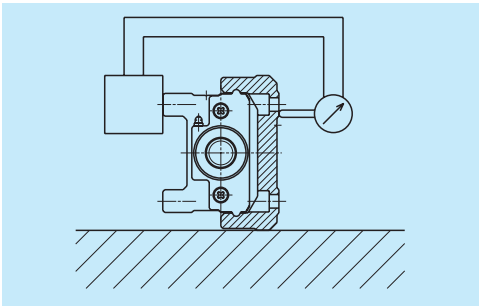


Fig. 3 Setting of indicator

C-3-3 Special Specifications

Please consult NSK if your requirement is not in the standard products.

(1) Surface Treatment

- Fluoride low temperature chrome plating

Note: Ball screw parts (including low temperature chrome plating.)

(2) Special Machining (Processing)

i) Shaft end processing
- Key way processing
- One flat or two flats processing

ii) Pin hole processing
- Slider
- Rail

Note: Due to interference with the internal construction, the position of pin hole is limited. Please consult with NSK about the pin position.

(3) Motor Bracket and Intermediate Plate for Motor Mounting

- We provide motor mounting brackets and intermediate plates that are not listed in the catalog.
- We assemble motor upon request if the motor is provided in advance.

Note: Motion check of the motor is unavailable.

(4) Reversed Motor Mount

The reversed motor mount is available. Please consult NSK.

Notes: 1) We do not check motor running condition.
2) Please refer to the bottom of page C89 to C91 for the configuration of reversed motor mounting of the MCH series.

(5) Right and Left Turn Thread

Right and left turn ball screw is available. Please consult with NSK for available leads.

(6) Ball-Screw-Less Specification (Only Linear Guide Part)

A ball-screw-less rail part with the same cross section of standard Monocarriers is available for a driven linear guide. It will lessen a height adjustment work compared with a construction with two standard Monocarriers.

Note: Height grinding adjustment of the two axes assembly is not available.

C-3-4 Maintenance

C-3-4.1 Maintenance Method

1. For standard Monocarrier, we pack grease in the slider, linear guides and ball screw.
2. Monocarriers are equipped with NSK K1 Lubrication Unit as a standard feature, therefore, you may use it for 5 years or 10 000 km depending on your application, whichever comes first, without maintenance. However, replenishment of preceded grease may extend its life substantially.
3. The NSK K1 Lubrication Unit is ideal in environments where oily dust exists. However, the life may be shorter than described in Clause 2 above. In such a case, it requires increasing the frequency of replenishment.
4. A Nozzle for the NSK grease pump for MCH Monocarriers is available as an option.
   NSK reference number: NSK HGP NZ8

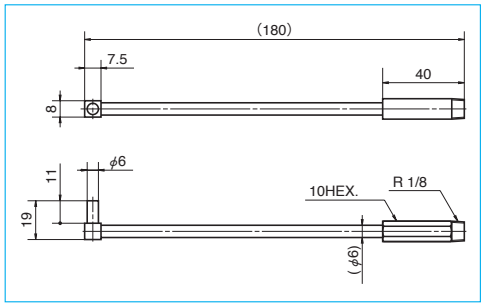


Fig. 4 NSK HGP NZ8

Precautions for handling

1. Please consult with NSK when the motor is coupled to the ball screw using a pulley because there is a restriction on allowable load to the end of ball screw shaft.
2. To extend high performance of NSK K1 lubrication unit, please observe the following.

1. Temperature range	Ambient temperature: 50°C Max. instantaneous temperature: 80°C
2. Use of chemicals	Never leave a Monocarrier in close proximity of grease removing organic solvents such as hexane or thinner. Never immerse it in an antirust solvent that contains kerosene.

Note: Other oils, such as water-based and oil based cutting oil, and grease do not cause any problems.

C-3-4. 2 NSK K1™ Lubricant Unit

NSK K1 lubrication unit exhibits outstanding features, confirmed by abundant experimental data, along with proven performance of linear guides and ball screws that are equipped with NSK K1.

(1) High-Speed Durability Test of Linear Guides without Lubricant

Results of high-speed durability testing of a linear guide without lubricant are shown in **Fig. 5** While the linear guide cannot be operated without lubricant for even short periods without damage, the installation of the NSK K1 permits the linear guide to run over 25 000 km without any problem.

Conditions	Test piece: LH30AN (Preload Z1)
	Speed: 3.3 m/s
	Stroke: 1 800 mm
No lubricant	All grease removed
NSK K1	All grease removed + NSK K1

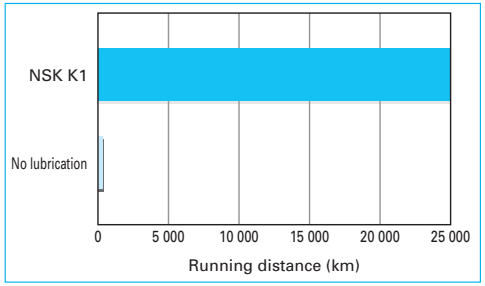


Fig. 5 Results of high-speed durability test of linear guides without lubricant

(2) High-Speed Durability Test of Ball Screws without Lubricant

Results of high-speed durability testing of ball screw without lubrication are shown in **Fig. 6** While the ball screw cannot be operated without a lubricant at 8.5 km without damage, the installation of the NSK K1 permits the ball screw to run over 21 000 km without any problem.

Conditions	Test piece: BS2020 (Ball screw)
	Shaft diameter: 20 mm
	Lead: 20 mm
	Load: none
	Speed: 1.3 m/s (4 000 min^{-1})
	Stroke: 600 mm
No lubricant	All grease removed
NSK K1	All grease removed + NSK K1

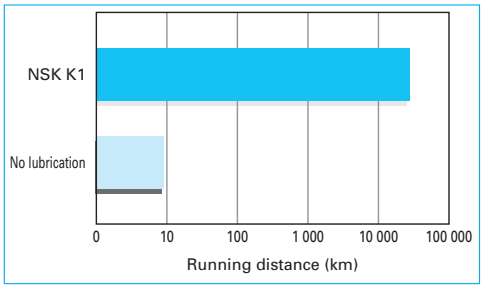


Fig. 6 Results of high-speed durability test of ball screws without lubricant

●NSK K1 Lubrication Units for food processing and medical devices are available.

For safety equipment of food processing and medical care, NSK provides the Monocarrier equipped with special NSK K1 Lubrication Unit that is made of materials approved by the FDA. Dimensions are the same as the standard NSK K1 Lubrication Unit, and special handling care is not required.

C-3-5 NSK Clean Grease LG2 Specification

● Features

This grease was developed by NSK to be exclusively used for linear guides and ball screws in clean rooms. Compared to the fluoride grease which are commonly used in clean rooms, LG2 has several advantages such as: higher in lubrication function, longer lubrication life, more stable torque (resistant to wear), and higher rust prevention.
In dust generation, LG2 is more than equal to fluoride grease in keeping dust volume low. Since the base oil is not a special oil but a mineral oil, LG2 can be handled in the same manner as general grease.

● Applications

LG2 is lubrication grease for rolling contact machine components such as linear guides and ball screws for processing equipment for semiconductors and flat panel display which require highly clean environment at normal pressure in normal temperatures. It cannot be used in a vacuum environment.

● Nature

Thickener	Lithium soap base
Base oil	Mineral oil + Synthetic hydrocarbon oil
Consistency	199
Dropping point	201°C
Volume of evaporation	1.40% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.8% (100°C, 24 hr)
Base oil kinematic Viscosity	32 mm^2/s (40°C)

Other

Other

1. Special Environments ····· D1
 1.1 Specifications for Special Environments ····· D1
 1.2 Lubrication and Materials D3
 1.3 Rust Prevention and Surface Treatment ····· D5
 1.4 Measures Against Special Environments ····· D7
 1.5 Table to Cope with Special Environments ····· D11
 1.6 Precautions for Handling ····· D12
2. Lubrication ····· D13
 2.1 Grease Lubrication ····· D13
 2.2 Oil Lubrication ····· D24
3. RoHS Compliant ····· D24

1 Special Environments

1.1 Specifications for Special Environments

1. Linear guide

Table 1.1 Linear guide specifications

Environment	Condition	NSK linear guide specifications				Technical Explanation Page No.
		Rail, slide	Steel balls/rollers	Ball recirculation component	Lubrication/surface treatment	
Clean	Atmosphere, normal temperature	Standard material	Standard material	Standard material	LG2, LGU Grease	D8
					NSK K1 lubrication unit	D10
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	LG2, LGU Grease	D8
					NSK K1 lubrication unit	D10
					Fluoride low temperature chrome plating	D5
	Atmosphere-Vacuum, normal temperature				Fluoride grease	
	Atmosphere-Vacuum up to 200°C					
Vacuum	Atmosphere-Vacuum, normal temperature	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Fluoride grease	
	Atmosphere-Vacuum up to 200°C					
	Atmosphere-Vacuum up to 300°C				Molybdenum disulfide	
	High vacuum up to 500°C				Special silver film	D7
Corrosion resistance	Vapor, steam	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		
		Standard material	Standard material	Standard material	Fluoride low temperature chrome plating	D5
	Acid, alkali			Austenitic stainless steel		D5
		Martensitic stainless steel	Martensitic stainless steel			D5
	Acid, alkali, clean				Fluoride low temperature chrome plating	D5
					LG2, LGU Grease	D8
	Strong acid, strong alkali				Fluoride low temperature chrome plating	D5
					Fluoride grease	
	Organic solvent				Fluoride grease	
High temperature	Atmosphere up to 150°C	Standard material	Standard material	Austenitic stainless steel	ET-100K Grease	
		Martensitic stainless steel	Martensitic stainless steel			
	Atmosphere up to 200°C				Fluoride grease	
	Atmosphere up to 200°C, Corrosion resistant				Fluoride grease	
Low temperature	-273°C and higher	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Solid lubricant	
Radiation resistance	Atmosphere	Standard material	Standard material	Standard material	Radiation resistant grease	
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		
Foreign matters	Fine particles, wooden chips	Standard material	Standard material	Standard material	NSK K1 lubrication unit	D10
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		D10
	Water, under water		Standard material	Standard material		D10
			Martensitic stainless steel	Austenitic stainless steel		D10

2. Ball screw

Table 1.2 Ball screw specifications

Environment	Condition	NSK Ball screw specification				Technical Explanation Page No.
		Screw shaft, ball nut	Steel balls	Ball Recirculation component	Lubrication/surface treatment	
Clean	Atmosphere, normal temperature	Standard material	Standard material	Standard material	LG2, LGU Grease	D8
					NSK K1 lubrication unit	D10
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	LG2, LGU Grease	D8
					NSK K1 lubrication unit	D10
					Fluoride low temperature chrome plating	D5
	Atmosphere-Vacuum, normal temperature				Fluoride grease	
	Atmosphere-Vacuum up to 200°C					
	Atmosphere-Vacuum up to 200°C, Corrosion resistant	Ceramic	Ceramic	Ceramic	Fluoride grease	
Vacuum	Atmosphere-Vacuum, normal temperature	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Fluoride grease	
	Atmosphere-Vacuum up to 200°C					
	Atmosphere-Vacuum up to 300°C				Molybdenum disulfide	
	High vacuum up to 500°C				Special silver film	D7
Corrosion resistance	Acid, alkali, clean	Standard material	Standard material	Austenitic stainless steel	Fluoride low temperature chrome plating	D5
		Martensitic stainless steel	Martensitic stainless steel			D5
		Precipitation hardening stainless steel	Precipitation hardening stainless steel		Fluoride grease	
	Strong acid, strong alkali, clean, nonmagnetic	Ceramic	Ceramic			
Nonmagnetic	Atmosphere-Vacuum, clean	Special austenitic stainless steel	Ceramic	Austenitic stainless steel	Fluoride grease	
	Atmosphere-Vacuum, up to 200°C, clean	Ceramic			Fluoroplastic	
High temperature	Atmosphere up to 200°C	Standard material	Standard material	Austenitic stainless steel	Fluoride grease	
	Atmosphere up to 200°C	Martensitic stainless steel	Martensitic stainless steel		Fluoride low temperature chrome plating	D5
	Atmosphere up to 500°C, corrosion resistance	Ceramic	Ceramic		Fluoride grease	
Low temperature	-273°C and higher	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Solid lubricant	
Radiation resistance	Atmosphere	Standard material	Standard material	Standard material	Radiation resistant grease	
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		
Foreign matters	Fine particles, wooden chips	Standard material	Standard material	Standard material	NSK K1 lubrication unit	D10
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		D10
	Water, under water					D10

1.2 Lubrication and Materials

1. Lubrication

Grease can be used for high rotation and magnetic field. However, grease evaporates or solidifies in special environment such as vacuum, high temperature, and low temperature. Solid lubricant is used when it is difficult to use grease. Functions of solid lubricant differ greatly by condition where it is used. It is important to select the most suitable solid lubrication for the environment.

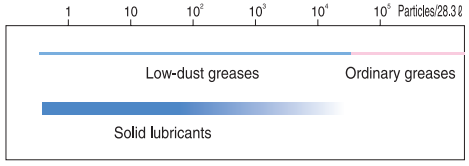


Fig. 2.1 Lubrication in clean environment

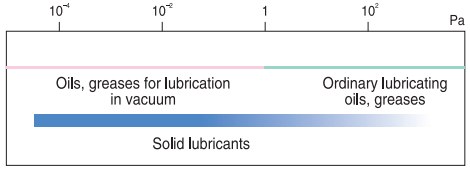


Fig. 2.2 Lubrication in vacuum

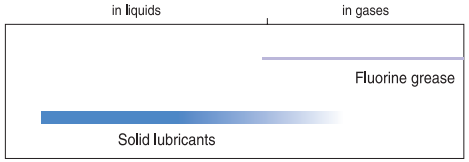


Fig. 2.3 Lubrication in corrosive environment

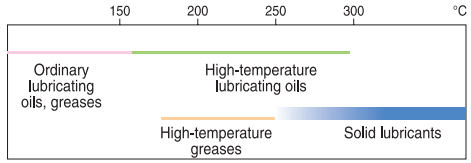


Fig. 2.4 Lubrication in high temperature

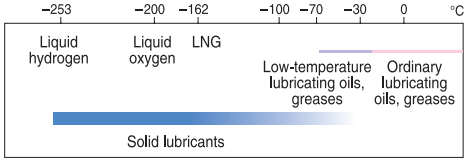


Fig. 2.5 Lubrication in low temperature

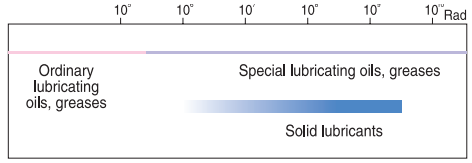


Fig. 2.6 Lubrication in radioactive environment

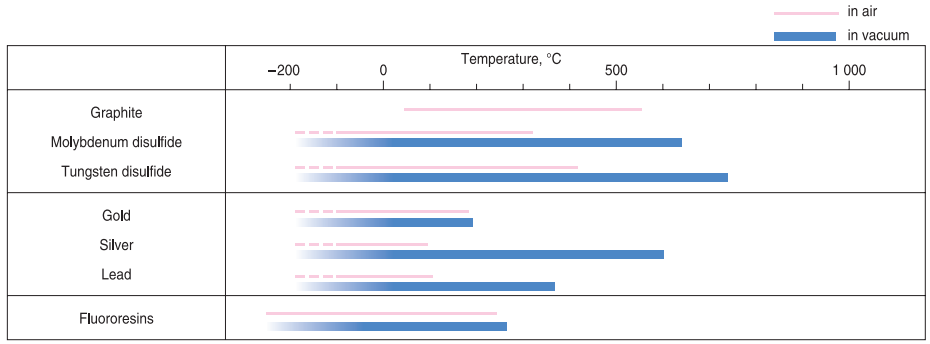


Fig. 2.7 Temperature range for using solid lubricants

2. Materials

Iron type metals are used in vacuum, high temperature, and high speed environments as the basic material. We generally use nonmagnetic stainless steel for nonmagnetic materials.

Table 2.1 Characteristics of metal materials

Application	Type of steel	Linear expansivity ×10⁻⁶/°C	Young's modulus GPa	Hardness* HB
For clean environment, vacuum environment, corrosion resistance, low temperature, high temperature, radioactive resistance	Martensitic stainless steel SUS440C	10.1	200	580
	Austenitic stainless steel SUS304	16.3	193	150
	Precipitation hardening stainless steel SUS630	10.8	200	277 – 363
Nonmagnetic	Nonmagnetic stainless steel	17.0	195	420

*) Hardness of steel is usually indicated by Rockwell C Scale. For comparison, these figures are expressed by Brinell number.

1.3 Rust Prevention and Surface Treatment

1. Fluoride low temperature chrome plating

NSK linear guides, ball screws, and Monocarriers are used in various applications and environments, from industrial machinery to semiconductor/FPD manufacturing and aerospace equipment. Preventing rust from developing in these applications is crucial, particularly for machines around water such as part/device washers and for semiconductor/FPD manufacturing equipment involved in chemical wet processing. NSK applies a fluororesin coating to an electrolytic black plating (fluoride low-temperature chrome plating) on these products for optimal rust resistance.

● What is "Fluoride low temperature chrome plating?"



This is a type of black chrome plating which forms a black film (1 to 2 μm in thickness) on the metal surface. Fluoroplastic coating is added to the film to increase corrosion resistance.

- Accuracy control is easily manageable due to low temperature treatment and to the absence of hydrogen embrittlement.
- Product accuracy is less affected due to the thin film which has high corrosion resistance.
- This method is superior to other surface treatments in durability on the rolling surface.
- Inexpensive compared with products with other surface treatment and stainless steel products.

Do not use organic solvent because it adversely affects antirust property of the plating.

● Humidity chamber test

Table 3.1 Results of the humidity test




Characteristic \ Test sample			Fluoride low temperature chrome plating (recommended)	Hard chrome plating (reference)	Electroless nickel plating (reference)	Equivalent to SUS440C material	Standard steel
Corrosion-resistant property	Rusting	Top	(Ground) B	(Ground) B	(Ground) A	(Ground) C	(Ground) D
		Side	(Ground) A	(Ground) A	(Ground) A	(Ground) C	(Ground) E
		Bottom	(Ground) A	(Ground) A	(Ground) A	(Ground) C	(Ground) E
		End	(Machined) A	(Machined) C	(Machined) A	(Machined) C	(Machined) E
		Chamfer/grinding recess	(Drawn) A	(Drawn) D	(Drawn) A	(Drawn) C	(Drawn) E
	<Test conditions> ● Testing chamber: High temperature, highly moist chamber (made by DABAI ESPEC) ● Temperature: 70°C ● Relative humidity: 95% ● Testing time: 96 h Time to "ramp-up" and "ramp-down" condition of the temperature and the humidity conditions Ramp-up: 5 h Ramp-down: 2 h						
							
	Film thickness		5 μm	0.5 – 7 μm	10 μm	—	—

Rusting A: No rust B: Not rusted, but slightly discolored C: Spotty rust D: slightly rusted E: Completely rusted

● Chemical corrosion resistance test

Table 3.2 Results of the corrosion resistance test

Test conditions: Rail base material: Equivalent to SUS440C; Chemical density: 1 mol/ℓ

Fluoride low temperature chrome plating		Hard chrome plating	None surface treatment
	Immersed in solution for 24 hrs Nitric acid		
	Immersed in solution for 24 hrs Fluoride		
	Exposed to vapor for 72 hrs Hydrochloric acid type washing solution $HC\ell : H_2O_2 : H_2O = 1 : 1 : 8$		
○	Hydrochloric acid (immersed)	○	▲
○	Sulfuric acid (immersed)	○	X
○	Ammonia or sodium hydroxide	○	△

○: Normal △: Partial surface damage ▲: Overall surface damage X: Corroded

● Surface treatment durability test

Peeling resistamce of surface treatment

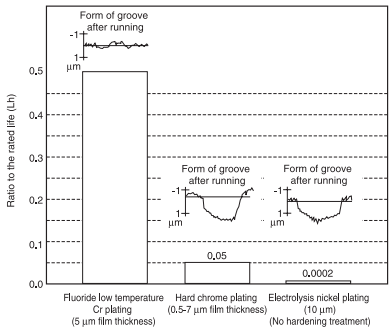


Fig. 3.1 Results of durability test

● Total evaluation

Table 3.3 Evaluation

	Available length	Rust prevention ability	Quality stability	Durability	Cost
Fluoride low temperature chrome plating	◎ (4 m)	◎	○	◎	◎
Hard chrome plating	△ (2 m)	○	X	△	△
Electroless nickel plating	◎ (4 m)	◎	△	X	△
Material equivalent to SUS440C	○ (3.5 m)	○	◎	◎	△

◎: Excellent ○: Suitable in use
△: Not so good for use X: Problem in use

1.4 Measures Against Special Environments

1. In vacuum

● Silver-film plated ball screw

Ball screws that are plated by soft metal (special silver film) as a solid lubricant are developed the application for vacuum environment such as semiconductor manufacturing equipment and surface modification systems.

● Durability test in high vacuum

Test equipment and conditions

Table 4.1 shows ball screw specifications. **Fig. 4.1** is a schematic of the testing system in vacuum chamber. **Table 4.2** shows testing conditions.

Table 4.1 Ball screw specifications

Shaft diameter		12 mm
Lead		4 mm
Steel ball diameter		2.381 mm
Numbers of circuit of balls		2.5 turns, 1 circuit
Axis load (preload)		29.4 N
Maximum surface pressure (preload volume)		about 690 MPa
Material	Shaft	SUS630
	Nut	SUS440C
	Ball return tube	SUS304
	Steel balls	SUS440C
Solid lubricant		Special silver film

Table 4.2 Testing conditions

Rotational speed	300 min^{-1}
Vacuum chamber pressure	1.3×10^{-5} – 1.3×10^{-6} Pa
Stroke	160 mm

Evaluation method

It is understood that the rolling bearing with solid lubrication reaches end of life when the lubrication film deteriorates, resulting in sudden rise of friction torque. In this test, ball screw rotation torque was constantly measured to study durability and operation. Results were then evaluated.

Test results

Fig. 4.2 shows two distinctive examples obtained in the torque characteristic test.

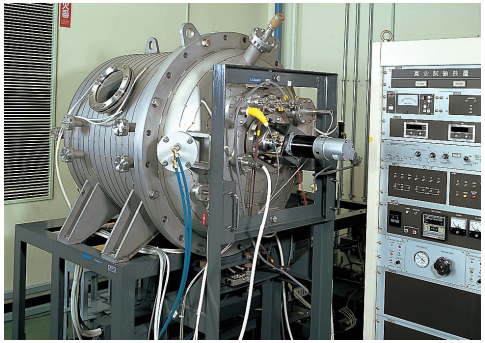


Photo 4.1 Vacuum testing system

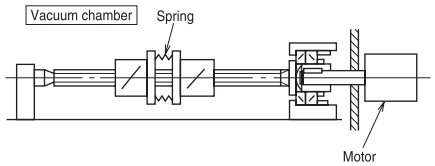


Fig. 4.1 Schematic of the testing system

Test results of the ball screw (a)

The torque tendency was stable until about 1 × 10^7 rev. Then the torque characteristics slightly deteriorated. At about 1.35 × 10^7 rev, the torque suddenly rose. At this point, it was determined that the ball screw reached the end of its life.

Test results of the ball screw (b)

Torque value is a little higher in the test (a). The value is also little unstable. The torque momentarily soared several times during the test (some 10 N·cm). It is thought this is attributable to the repeated peeling/sticking of the surface film made of soft metal (silver, etc.).

When the torque finally soared at 1.13 × 10^7 rev., it was determined that the ball screw reached the end of its life.

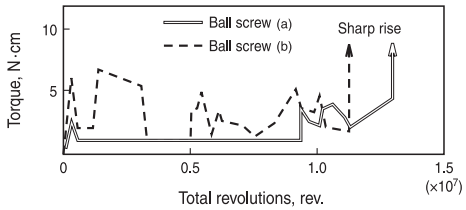


Fig. 4.2 Torque variation

Table 4.3 Ball screw durability

	Classification	Ball screw (a)	Ball screw (b)
Life	Total revolutions (rev.)	1.35×10^7	1.13×10^7
	Total traveling distance (km)	54.0	45.2
	Total traveling hours*(h)	750	628

*) Total traveling hours when operated constantly at 300 min^{-1}

Conclusion

Table 4.3 explains results of the two ball screw durability tests.

From these results and other findings, it is estimated that a life of more than 1 × 10^7 rev. is possible with a load of about 29.4 N.

Torque may soar momentarily before the ball screw reaches its final life due to peeling/sticking of the surface film made of soft metal like silver. For this reason, it is recommendable to select a drive motor with extra torque capacity.

2. Clean environment

● NSK Clean Grease LG2 and LGU

LG2 and LGU "clean" greases are utilized for low-dust specifications of NSK products such as linear guides, ball screws, Monocarriers, Megatorque Motors, XY modules and XY tables. These greases are excellent for cleanrooms thanks to their lower particle emissions and better resistance to corrosion than fluorine greases. Their proven track record makes them particularly suitable for semiconductor production equipment.

Features

- **Remarkably low dust emission**
- **Long life -- More than ten times longer than fluoride greases, and equivalent to ordinary greases.**
- **Excellent rust prevention -- Significantly higher capacity than fluorine greases.**
- **Low and stable torque -- 20% or less than that of fluorine greases**

Table 4.4 Nature of Clean Grease LG2 and LGU

Name	Thickener	Base oil	Base oil kinematic viscosity mm²/s (40°C)	Consistency	Dropping point °C
Clean Grease LG2	Lithium soap	Synthetic hydrocarbon oil + mineral oil	32	199	201
Clean Grease LGU	Diurea	Synthetic hydrocarbon oil	95.8	201	260

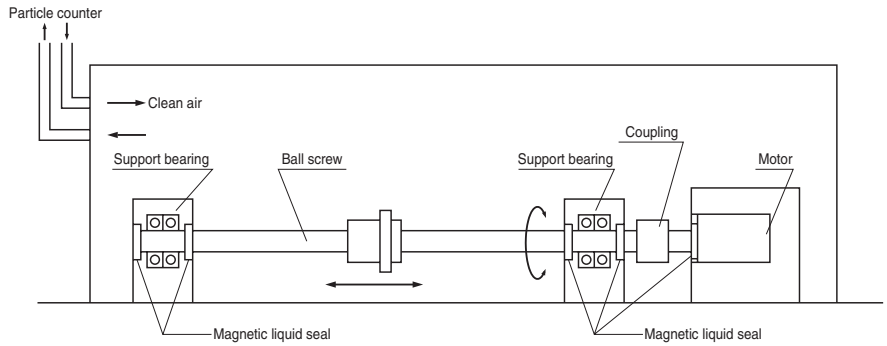


Fig. 4.3 Setting to measure dust generated by ball screw

● Feature 1: Remarkably low dust emission

Compared with fluoride greases, dust emission by LG2 is low and stable for long period of time.

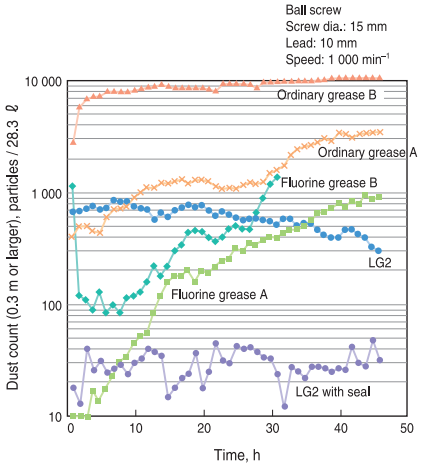


Fig. 4.4 Comparison in dust emission characteristics

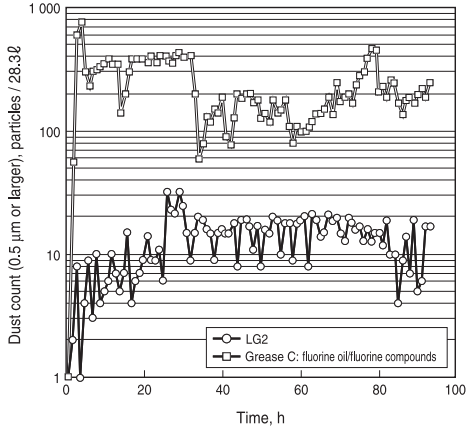


Fig. 4.5 Dust emission from linear guide (Linear guide: LU09)

● Feature 2: Long life

Life is ten times or longer than fluorine greases, and equivalent to ordinary greases. This stretches maintenance intervals.

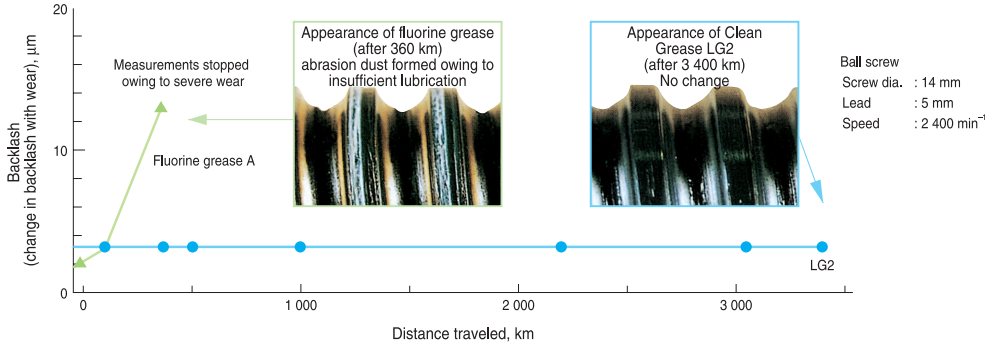


Fig. 4.6 Results of ball screw durability test

● Feature 3: Excellent rust prevention capacity

The rust prevention capacity is significantly higher than fluoride type greases. Handling and preparation for operation are easy.

Ball screw rust prevention test (test conditions: 96 hr at humidity 95%, temperature 70°C)

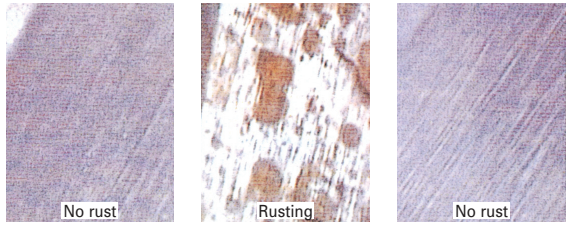


Photo 4.2

Table 4.5 Rust prevention test on bearing

Type	Rusting after 7 days
NSK Clean Grease LG2	No rust
Fluorine grease B	Rusted

Test conditions : 19 mg is sealed in ball bearing 695
: Temp. 90°C, Humidity 60%
Evaluation : Studied by microscope

● Feature 4: Stable torque

Torque is 20% or lower than fluorine greases.

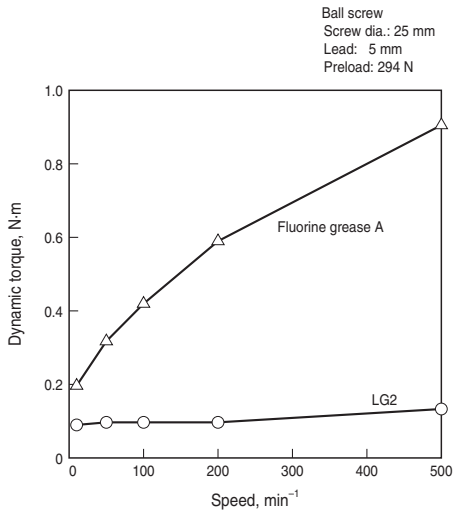


Fig. 4.7 Comparison of torque characteristics

● Total evaluation

Table 4.6 Evaluation

Characteristic	LG2	Fluorine grease	General grease
Dust generation	○	○ – △	△ – X
Torque	○	X	○ – △
Durability	○	△ – X	○
Rust prevention ability	○	△ – X	○

○: Suitable △: Not very suitable X: Problem in use

3. Environment with foreign matters

● NSK K1 lubrication unit (linear guide and ball screw)

Molded oil is made of a lubrication oil and polyolefin which has affinity with the lubrication oil. More than 70% of the mass is lubrication oil.
Molded oil which is formed into NSK K1 lubrication unit effectively seals linear guides, continually supplying lubrication oil. NSK K1 lubrication unit has made it possible to use linear guides in water or powder dust.
NSK K1 lubrication unit for ball screws is also available.
For monocarriers, NSK K1 is equipped as a standard feature.

Features

- **Extend maintenance-free intervals**
- **No contamination of surrounding environment**
- **Prolong life of the products exposed to water**

Refer to pages A38, B579 and C141 for details of NSK K1 lubrication unit.

1.5 Table to Cope With Special Environments

1. Linear guides

Series	Model No.	Special environment which linear guide can tolerate					
		Clean	Vacuum	Corrosive	High-temperature	Hygienic	Dust-contaminated
NH	NH15	○		○		○	
	NH20	○	○	○	○	○	
	NH25	○	○	○	○	○	
	NH30	○	○	○	○	○	
	NH35	○		○	○	○	
	NH45	○		○	○		
	NH55	○		○			
	NH65	○		○			
VH	VH15	○		○			○
	VH20	○		○			○
	VH25	○		○			○
	VH30	○		○			○
	VH35	○		○			○
	VH45	○		○			○
	VH55	○		○			○
NS	NS15	○	○	○	○	○	
	NS20	○	○	○	○	○	
	NS25	○	○	○	○	○	
	NS30	○	○	○	○*	○	
	NS35	○		○		○	
LW	LW17	○		○	○*	○	
	LW21	○		○	○*	○	
	LW27	○		○	○	○	
	LW35	○		○		○	
	LW50	○		○			
PU	PU05	○		○			
	PU07	○		○			
	PU09	○		○		○	
	PU12	○		○		○	
	PU15	○		○		○	
LU	LU05	○		○			
	LU07	○		○			
	LU09_L	○	○	○	○	○	
	LU09_R	○		○		○	
	LU12_L	○	○	○	○	○	
	LU12_R	○		○		○	
	LU15	○	○	○	○*	○	

*) Dust-proof parts are not applicable to high-temperature environmental use.

Series	Model No.	Special environment which linear guide can tolerate					
		Clean	Vacuum	Corrosive	High-temperature	Hygienic	Dust-contaminated
PE	PE05	○		○			
	PE07	○		○			
	PE09	○		○		○	
	PE12	○		○		○	
	PE15	○		○		○	
LE	LE05	○		○			
	LE07	○	○	○	○*		
	LE09_L	○	○	○	○*	○	
	LE09_R	○		○		○	
	LE12_L	○	○	○	○	○	
	LE12_R	○		○		○	
	LE15_L	○	○	○	○	○	
	LE15AR	○		○		○	
Miniature LH	LH08	○		○			
	LH10	○		○			
	LH12	○	○	○	○*	○	
RA	RA15	○		○			
	RA20	○		○			
	RA25	○		○			
	RA30	○		○			
	RA35	○		○			
	RA45	○		○			
	RA55	○		○			
	RA65	○		○			
RB	RB30	○		○			
	RB35	○		○			
	RB45	○		○			
	RB55	○		○			
	RB65	○		○			
LA	LA25	○		○			
	LA30	○		○			
	LA35	○		○			
	LA45	○		○			
	LA55	○		○			
	LA65	○		○			
HA	HA25	○		○			
	HA30	○		○			
	HA35	○		○			
	HA45	○		○			
	HA55	○		○			
HS	HS15	○		○			
	HS20	○		○			
	HS25	○		○			
	HS30	○		○			
	HS35	○		○			

2. Ball screws

Series	Special environment				
	Clean	Vacuum	Rust prevention	High temp.	Foreign matters
KA Series	○	○	○		
For Contaminated environments VSS Type					○
Made-to-order ball screw	○*	○*	○*	○*	○*

*Available in the made-to-order ball screw.
Please consult NSK.

3. Monocarriers

Please consult with NSK for special environmental use.

1.6 Precautions for Handling

Please observe the following precautions to maintain high functions of ball screws and linear motion guide bearings in special environment over a long period.

- Products are washed to remove oil, and wrapped in a way to protect them from moisture. Use the product as soon as possible after opening the package.
- After opening, store the ball slide (random-matching type linear guide) and ball nut (R series ball screw) in a clean, air-tight container such as desiccater with desiccating agent (e.g. silica gel). Do not apply rust preventive oil or paper or product that vaporizes rust preventive agent.
- Wear plastic gloves and handle product in clean place.

2. Lubrication

There are two types of lubricating method -- grease and oil -- for ball screws, linear guides and monocarriers.
Use a lubricant agent and method most suitable to condition requirements and purpose to optimize functions of ball screws, linear guides and monocarriers.
In general, lubricants with low base oil kinematic viscosity are used for high-speed operation, in which thermal expansion has a large impact, and in low temperatures.
Lubrication with high base oil kinematic viscosity is used for oscillating operations, low speeds and high temperatures.
The following are lubrication methods using grease and oil.

2.1 Grease Lubrication

Grease lubrication is widely used because it does not require a special oil supply system or piping. Grease lubricants made by NSK are:
• Various types of grease in bellows tubes that can be instantly attached to a grease pump;
• NSK Grease Unit that consists of a hand grease pump and various nozzles. They are compact and easy to use.

1. NSK grease lubricants

Table 1.1 shows the marketed general grease widely used for linear guides, ball screws and monocarrier for specific uses, conditions and purposes.

Table 1.1 Grease lubricant for linear guides, ball screws and monocarriers

Type	Thickener	Base oil	Base oil kinematic viscosity mm²/s (40°C)	Range of use temperature (°C)	Purpose
AS2	Lithium type	Mineral oil	130	–10 – 110	For general use at high load
PS2	Lithium type	Synthetic oil + synthetic hydrocarbon oil	15.9	–50 – 110	For low temperature and high frequency operation
LR3	Lithium type	Synthetic oil	30	–30 – 130	For high speed, medium load
LG2	Lithium type	Mineral oil + synthetic hydrocarbon oil	32	–20 – 70	For clean environment
LGU	Diurea	Synthetic hydrocarbon oil	95.8	–30 – 120	For clean environment
NF2	Urea composite type	Synthetic hydrocarbon oil	26	–40 – 100	For fretting resistance

(1) NSK Grease AS2

● **Features**
It is an environmentally friendly and widely used grease for high load application. It is mineral oil based grease containing lithium thickener and several additives. It is superb in load resistance as well as stability in oxidization. It not only maintains good lubrication over a long period of time, but also demonstrates superb capability in retaining water. Even containing a large amount of water, it does not lose grease when it is softened.
● **Application**
It is a standard grease for general NSK linear guides, ball screws and monocarriers. It is prevalently used in many applications because of its high base oil viscosity, high load resistance, and stability in oxidization.

● **Nature**

Thickener	Lithium soap base
Base oil	Mineral oil
Consistency	275
Dropping point	181°C
Volume of evaporation	0.24% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	2.8% (100°C, 24 hr)
Base oil kinematic viscosity	130 mm²/s (40°C)

(2) NSK Grease LR3

● **Features**
It contains a special synthetic oil for high temperature and stability, and a carefully selected anti-oxidation agent. This grease dramatically increases lubrication life under high temperature conditions. It is used for high speed, medium load. Lubrication life exceeded 2 000 hours in the endurance test at 150°C. Its rust prevention capacity in severe conditions such as water and moist environments is further strengthened.
● **Application**
It is a standard grease for ball screws PSS type (shaft dia. 15 mm or over), FSS type, FA type (except shaft dia. 10 mm with lead of 4mm and shaft dia. 12 mm with lead of 5 mm) and VFA type. It is ideal for operation with medium load, at high speed such as positioning in high tact material handling equipment.

● **Nature**

Thickener	Lithium soap base
Base oil	Synthetic oil
Consistency	228
Dropping point	208°C
Volume of evaporation	0.58% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	1.9% (100°C, 24 hr)
Base oil kinematic viscosity	30 mm²/s (40°C)

(3) NSK Grease PS2

● **Features**
The major base oil component is synthetic oil with mineral oil. It is an excellent lubrication especially for low temperature operation. It is for high speed and light load.
● **Application**
It is a standard grease for NSK miniature linear guides and ball screws. It is especially superb for low temperature operation, but also functions well in normal temperatures, making it ideal for small equipment with light load.

● **Nature**

Thickener	Lithium soap base
Base oil	Synthetic oil + Synthetic hydrocarbon oil
Consistency	275
Dropping point	190°C
Volume of evaporation	0.60% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	3.6% (100°C, 24 hr)
Base oil kinematic viscosity	15.9 mm²/s (40°C)

(4) NSK Grease LG2

● Features

This grease was developed by NSK to be exclusively used for linear guides and ball screws in clean room. Compared to the fluorine grease which are commonly used in clean room, LG2 has several advantages such as:

- Higher in lubrication function
- Longer lubrication life
- More stable torque (resistant to wear)
- Higher rust prevention.

In dust generation, LG2 is more than equal to fluorine grease in keeping dust volume low. Since the base oil is not a special oil but a mineral oil, LG2 can be handled in the same manner as general greases.

● Application

LG2 is a lubrication grease for rolling element products such as linear guides and ball screws for semiconductor and flat panel display (FPD) processing equipment which require a highly clean environment. Because LG2 is exclusively for a clean environment at normal temperatures, however, it cannot be used in a vacuum environment.

Refer to "Special environment" in page D8 for detailed data on superb characteristics of NSK Grease LG2.

● Nature

Thickener	Lithium soap base
Base oil	Mineral oil + Synthetic hydrocarbon oil
Consistency	199
Dropping point	201°C
Volume of evaporation	1.40% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.8% (100°C, 24 hr)
Base oil kinematic viscosity	32 mm²/s (40°C)

(5) NSK Grease LGU

● Features

This is a proprietary urea base grease of NSK featuring low dust emission exclusively for ball screws and linear guides which are used in clean rooms.

In comparison with fluorine base grease, which has been used commonly in clean rooms, LGU has better lubricating property, longer duration of lubricant, better torque variation, much better anti-rust property, and equivalent or better dust emission. In addition, this grease can be handled in the same way as the other common grease because high-grade synthetic oil is used as the base oil.

LGU grease contains much less metallic elements compared to LG2 grease. It can be used in high temperature environment.

● Application

This is exclusive lubrication grease for ball screws and linear guides that are installed in equipment that requires cleanliness, as same as LG2 grease, and it can be used in high temperature range of –30 to 120°C.

This cannot be used in vacuum.

● Nature

Thickener	Diurea
Base oil	Synthetic hydrocarbon oil
Consistency	201
Dropping point	260°C
Volume of evaporation	0.09% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.6% (100°C, 24 hr)
Base oil kinematic viscosity	95.8 mm²/s (40°C)

(6) NSK Grease NF2

● Features

It uses high-grade synthetic oil as the base oil and urea base organic compound as the thickener. It has remarkable anti-fretting corrosion property. It can be used in wide temperature range, from low to high, and has superior lubrication life.

● Application

This grease is suitable for ball screws and linear guides of which application include oscillating operations. Allowable temperature range is –40 to 100°C.

● Nature

Thickener	Diurea
Base oil	Synthetic hydrocarbon oil
Consistency	288
Dropping point	260°C
Volume of evaporation	0.22% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.5% (100°C, 24 hr)
Base oil kinematic viscosity	26 mm²/s (40°C)

● Precautions for handling

- Wash the linear guides and ball screws to remove oil prior to applying Clean Grease LG2 or LGU, so the grease functions are fully utilized.
- Clean grease is exclusively used for clean environments at normal temperatures.

Note) Refer to NSK Grease Unit Catalog (CAT. No.3317) for details of NSK Grease.

2. Before use of NSK Precision Products

Wipe off the rust preventive oil before use for the products that the oil is applied.

If grease is not applied, apply grease, and move a ball slide or ball nut a few strokes so the grease permeates into the ball slide and inside the nut. (Move the ball slide or the ball nut 5 to 10 times with full stroke.)

Then wipe off the excess grease.

3. How to replenish grease and volume of grease to be replenished

Use grease fitting if exclusive grease supply component is not used. Supply required amount through grease fitting by a grease pump.

Wipe off old grease and accumulated dust before supplying new grease. If grease fitting is not used or there is no oil filler due to the size limitation, apply grease directly to the rail or to the ball groove of the screw shaft. Remove the seal if possible, move a ball slide or ball nut a few strokes so that the grease permeates into the ball slide, nut and inside the slider.

Once grease is replenished, another supply is not required for a long time. But under some operational conditions, it is necessary to periodically replenish grease. The following are replenishing methods.

* When replenishing using a grease pump:

Use a grease pump and fill the inside of ball slide, ball nut and monocarrier slider with grease. Supply grease until it comes out from the ball slide, ball nut or monocarrier slider area. Move ball slide, ball nut or monocarrier slider by hand while filling them with grease, so the grease permeates all areas. Do not operate the machine immediately after replenishing. Always try the system a few times to spread the grease throughout the system and to remove excess grease. Trial operations are necessary because the resistance to sliding force and screw torque greatly increases immediately after replenishment (full-pack state) and may cause problems. The agitating resistance of grease is accountable for this phenomenon. Wipe off excess grease that accumulates at end of rail and screw shaft after trial runs so the grease does not move to other areas.

* When there is an exclusive grease supply system and the volume from the spout can be controlled, the criterion is:

- All at once, replenish the amount that fills about 50% of the internal space of the ball slide or the internal space of the ball nut. This method eliminates waste of grease and is efficient.

Tables 1.2, **1.3** and **1.4** show internal spaces of ball slide, ball nut and monocarrier slider for reference.

Table 1.2 Inside space of the slide of linear guide

NH Series

Unit: cm³

Series / Model No.	NH	
	High-load type	Super-high-load type
15	3	4
20	6	8
25	9	13
30	13	20
35	22	30
45	47	59
55	80	100
65	139	186

PU, LU Series

Unit: cm³

Series / Model No.	PU		LU	
	Standard type	High-load type	Standard type	High-load type
05	0.1	–	0.1	–
07	0.1	–	0.1	–
09	0.2	0.3	0.2	0.3
12	0.3	0.4	0.3	0.4
15	0.8	1.1	0.8	1.1

VH Series

Unit: cm³

Series / Model No.	VH	
	High-load type	Super-high-load type
15	3	4
20	6	8
25	9	13
30	13	20
35	22	30
45	47	59
55	80	100

PE, LE Series

Unit: cm³

Series / Model No.	PE		LE		
	Standard type	High-load type	Medium-load type	Standard type	High-load type
05	0.1	–	0.1	0.1	–
07	0.2	–	0.1	0.2	0.3
09	0.4	0.5	0.2	0.4	0.5
12	0.5	0.7	0.3	0.5	0.7
15	1.2	1.6	0.8	1.2	1.6

NS Series

Unit: cm³

Series / Model No.	NS	
	Medium-load type	High-load type
15	2	3
20	3	4
25	5	8
30	8	12
35	12	19

Miniature LH Series

Unit: cm³

Series / Model No.	LH
08	0.2
10	0.4
12	1.2

LW Series

Unit: cm³

Series / Model No.	LW
17	3
21	3
27	7
35	24
50	52

RA Series

Unit: cm³

Series / Model No.	RA	
	High-load type	Super-high-load type
15	1	1.5
20	2	2.5
25	3	3.5
30	5	6
35	6	8
45	10	13
55	15	20
65	33	42

RB Series

Unit: cm³

Series / Model No.	RB	
	High-load type	Super-high-load type
30	5	6
35	6	8
45	10	13
55	15	20
65	33	42

LA Series

Unit: cm³

Series / Model No.	LA	
	High-load type	Super-high-load type
25	8	12
30	14	18
35	21	29
45	38	48
55	68	86
65	130	177

HA, HS Series

Unit: cm³

Series / Model No.	HA	HS
15	–	5
20	–	9
25	16	16
30	27	25
35	42	40
45	67	–
55	122	–

Table 1.3 Inside space of ball nut

Return tube type (single nut)

Unit: cm³

Nut model	Inside space
1004 – 2.5	0.8
1205 – 2.5	1.2
1210 – 2.5	1.4
1405 – 2.5	2.2
1408 – 2.5	2.1
1510 – 2.5	2.3
1605 – 2.5	2.6
1616 – 1.5	2.1

Unit: cm³

Nut model	Inside space
2004 – 5	2.7
2005 – 5	4.3
2010 – 2.5	4.7
2020 – 1.5	4.2
2504 – 5	3.2
2505 – 5	5
2506 – 5	7
2510 – 3	9.5

Unit: cm³

Nut model	Inside space
2520 – 2.5	12
2525 – 1.5	7.5
2805 – 5	6
2805 – 10	9
2806 – 5	6
2806 – 10	9.5
3205 – 5	7
3206 – 5	9.5
3210 – 5	22

Unit: cm³

Nut model	Inside space
3225 – 2.5	17
3232 – 1.5	15
3610 – 5	32
4005 – 10	14
4010 – 5	30
4012 – 5	34
4510 – 5	34
5010 – 5	37
5010 – 10	59

Deflector (bridge) type (single nut)

Unit: cm³

Nut model	Inside space
2505 – 6	6.5
2510 – 4	10
3205 – 8	9.5
3210 – 6	28
4010 – 8	42
5010 – 8	52

End cap type

Unit: cm³

Nut model	Inside space
1520 – 1.5	1.9
1632 – 1	2
2040 – 1	2.8
2550 – 1	4.2

Note:
Nut model: shaft diameter, lead, total number of turns of balls
Please consult NSK for other specifications.
Refer to B110 to B146 for Compact FA Series.

Table 1.4 Inside space of the monocarrier

MCM Series

Unit: cm³

Model No.	Lead (mm)	Inside space
MCM02	1	0.3
	2	0.3
MCM03	1	1
	2	0.9
	10	1.8
	12	1.7
MCM05	5	4.2
	10	4
	20	2.1
	30	2.0

Unit: cm³

Model No.	Lead (mm)	Inside space
MCM06	5	8.3
	10	6.5
	20	5.5
MCM08	5	11.6
	10	9.8
	20	8.7
	30	4.3
MCM10	10	19.4
	20	17.4
	30	8.8

MCH Series

Unit: cm³

Model No.	Lead (mm)	Inside space
MCH06 MCL06	5	2.8
	10	2.7
	20	2.7
MCH09	5	5.8
	10	5.8
	20	5.6
MCH10	10	10.9
	20	10.1

4. Intervals of checks and replenishments

Although the grease is of high quality, it gradually deteriorates and its lubrication function diminishes. Also, the grease in the ball slide and ball nut is gradually removed by stroke movement. In some environments, the grease becomes dirty, and foreign objects may enter. Grease should be replenished depending on frequency of use. The following is a guide of grease replenishment intervals for linear guides and ball screws.

Table 1.5 Intervals of checks and replenishments for grease lubrication

Intervals of checks	Items to check	Intervals of replenishments
3-6 months	Dirt, foreign matters such as cutting chips	Usually once per year. Every 3 000 km for material handling system that travels more than 3 000 km per year. Replenish if checking results warrant it necessary.

Notes: 1) As a general rule, do not mix greases of different brands.
2) Grease viscosity varies by temperature. Viscosity is particular high in winter due to low temperatures. Pay attention to increases in linear guide and monocarrier sliding resistance and ball screw and monocarrier torque in such conditions.
3) When the ambient temperature is low, or in Winter, if it is difficult to pump out the grease from the container, wait until the grease is softened.
4) In locations where coolant is dispersed or scattered, emulsification of lubricants and rinsing with water may significantly deteriorate the integrity of the lubricant and efficiency of the grease. Protect the grease unit from coolant by shielding it with a cover, etc.

5. NSK Grease Unit

Supply grease to NSK linear guides and ball screws by manual type hand grease pump. Install grease in bellows tube to the pump. Several types of grease (80 g) are available.



Grease in bellows tube



(1) Composition of NSK Grease Unit

Components and grease types are shown below.

	Name	(Tube color)	Reference number
NSK Grease Unit			
NSK Grease (80 g in a bellows tube)	NSK Grease AS2	(Brown)	NSK GRS AS2
	NSK Grease PS2	(Orange)	NSK GRS PS2
	NSK Grease LR3	(Green)	NSK GRS LR3
	NSK Grease LG2	(Blue)	NSK GRS LG2
	NSK Grease LGU	(Yellow)	NSK GRS LGU
	NSK Grease NF2	(Gray)	NSK GRS NF2
NSK Hand Grease Pump Unit			
NSK Hand Grease Pump (Straight nozzle NSK HGP NZ1 -- One nozzle is provided with hand pump.)			NSK HGP
Grease nozzle (used with hand grease pump)			
	NSK straight nozzle		NSK HGP NZ1
	NSK chuck nozzle		NSK HGP NZ2
	NSK drive-in fitting nozzle		NSK HGP NZ3
	NSK point nozzle		NSK HGP NZ4
	NSK flexible nozzle		NSK HGP NZ5
	NSK flexible extension pipe		NSK HGP NZ6
	NSK straight extension pipe		NSK HGP NZ7
	NSK nozzle for MCH		NSK HGP NZ8

(2) NSK Greases (80 g in bellows tube)

Refer to pages D14 and D15 for their natures and details.

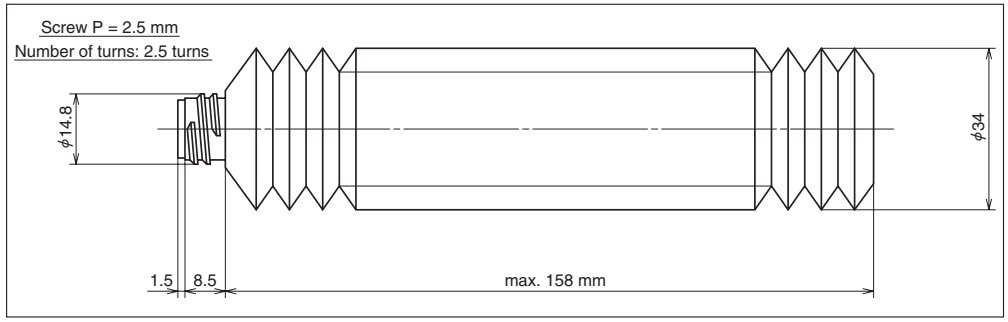


Fig. 1.1 Bellows tube

(3) NSK Manual Grease Pump Unit

a) NSK Hand Grease Pump
(Reference number: NSK HGP)

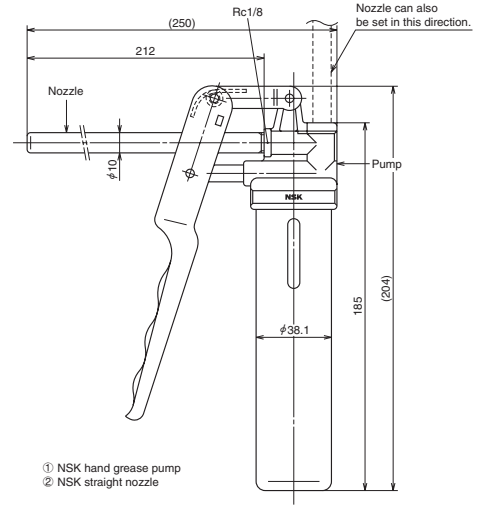


Fig. 1.2 NSK Hand Grease Pump with NSK straight nozzle

● Features

- Light-weight ····· Can be operated by one hand, yet there is no worry to make a mistake.
- Inserting by high pressure···· Insert at 15 Mpa.
- No leaking ····· Does not leak when held upside down.
- Easy to change grease···· Simply attach grease in bellows tube.
- Remaining grease ····· Can be confirmed through slit on tube.
- Several nozzles ····· Six types of nozzles to choose from.

● Specifications

- Discharge pressure ·· 15 Mpa
- Spout volume ····· 0.35 cc/shot
- Mass of main body ··· Without nozzle 240 g
  Provided nozzle 90 g
- Grease tube outer diameter φ38.1
- Accessory····· Several nozzles for a unique application can be attached

*Air is contained in the unopened bellows tube. Try the system tens of times when to use the hand grease pump. The tube will be use after deflated from the tube.

Other

b) Nozzles

Table 1.6 Nozzles that can be attached to NSK Hand Grease Pump

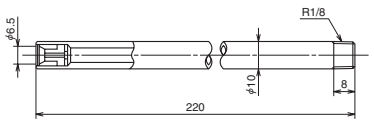
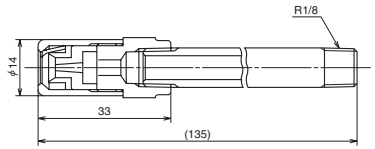
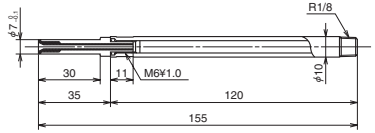
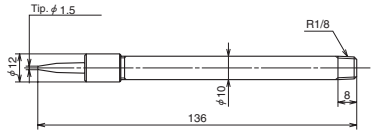




Name	Designation code	Use	Dimensions
NSK straight nozzle	NSK HGP NZ1	Can be used with grease fitting A, B, and C under JIS B1575 standard.	
NSK chuck nozzle	NSK HGP NZ2	Same as above. However, there is no need to press the hand pump because the grease fitting and the nozzle come to contact due to the chucking mechanism at the tip.	
NSK drive-in fitting nozzle	NSK HGP NZ3	Dedicated for the -ϕ3 drive-in grease fitting.	
NSK point nozzle	NSK HGP NZ4	Used for linear guides and ball screws which do not have grease fitting. Supplies grease directly to the ball grooves, or through the opening of ball slide or ball slide to inside.	
NSK flexible nozzle	NSK HGP NZ5	The tip of the flexible nozzle is chuck nozzle. The straight nozzle is not available for use.	
NSK flexible extension pipe	NSK HGP NZ6	Flexible extension pipe connects the grease pump and the nozzle	
NSK straight extension pipe	NSK HGP NZ7	Straight extension pipe connects the grease pump and the nozzle.	
NSK nozzle for MCH	NSK HGP NZ8	For MCH Series grease replenishment	

Table 1.7 Grease fittings used for NSK linear guide

Series	Model number	Tap hole for grease fitting	Standard grease fitting	Straight nozzle NZ1	Chuck nozzles NZ2	Drive-in fitting nozzle NZ3	Point nozzle NZ4	Flexible nozzle NZ5
NH	NH15	ϕ3	Drive-in type			○		
	NH20, 25, 30, 35*	M6×0.75	B type	○	○			○
	NH45, 55, 65	Rc1/8	B type	○	○			○
VH	VH15	ϕ3	Drive-in type			○		
	VH20, 25, 30, 35*	M6×0.75	B type	○	○			○
	VH45, 55	Rc1/8	B type	○	○			○
NS	NS15	ϕ3	Drive-in type			○		
	NS20, 25, 30, 35*	M6×0.75	B type	○	○			○
LW	LW17	ϕ3	Drive-in type			○		
	LW21, 27, 35*	M6×0.75	B type	○	○			○
	LW50	Rc1/8	B type	○	○			○
PU	PU05, 07, 09, 12	–	–				○	
	PU15	ϕ3	Drive-in type			○		
LU	LU05, 07, 09, 12, 15	–	–				○	
PE	PE05, 07, 09, 12	–	–				○	
	PE15	ϕ3	Drive-in type			○		
LE	LE05, 07, 09, 12, 15	–	–				○	
Miniature LH	LH08, 10	–	–				○	
	LH12	ϕ3	Drive-in type			○		
RA	RA15, 20	ϕ3	Drive-in type			○		
	RA25, 30, 35*	M6×0.75	B type	○	○			○
	RA45, 55, 65	Rc1/8	B type	○	○			○
RB	RB30	ϕ3	Drive-in type			○		
	RB35, 45	M6×0.75	B type	○	○			○
	RB55, 65	Rc1/8	B type	○	○			○
LA	LA25, 30, 35*	M6×0.75	B type	○	○			○
	LA45, 55, 65	Rc1/8	B type	○	○			○
HA	HA25, 30, 35*	M6×0.75	B type	○	○			○
	HA45, 55	Rc1/8	B type	○	○			○
HS	HS15	ϕ3	Drive-in type			○		
	HS20, 25, 30, 35*	M6×0.75	B type	○	○			○

*) If using a chuck nozzle, avoid interference with table and rail.

Note: 1) For PU, PE, LU, and LE Series, apply grease directly to ball groove, etc. using point nozzle.

2) A long threaded grease fitting is required for NSK linear guides because of dust-proof parts. Please refer to the sections pertaining to the lubrication and dust-proof parts of each series.

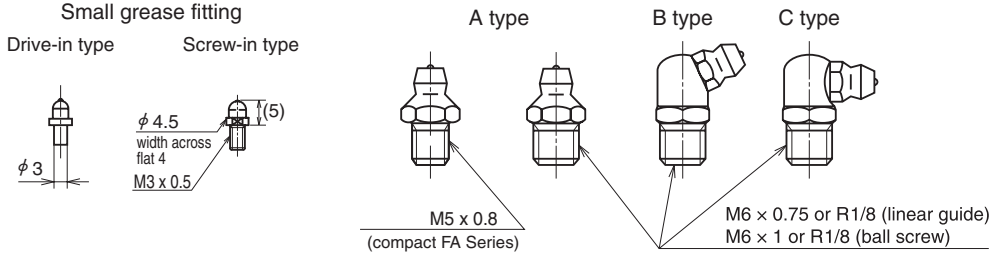


Fig. 1.3 Grease fittings

Table 1.8 Applicable grease nozzle for ball screws

Series			Model No.		Tap hole for grease fitting	Standard grease fitting	Straight nozzle NZ1	Chuck nozzles NZ2	Drive-in fitting nozzle NZ3	Point nozzle NZ4	Flexible nozzle NZ5
Finished shaft end	Compact FA	High-accuracy, clean	USS		M5×0.8	A type	○	○		○	○
		General	PSS			A type	○*1	○*1		○	○*1
		Transfer equipment	FSS			A type	○*1	○*1		○	○*1
	Miniature, fine lead		MA	Shaft dia. 12 or less	–	–				○	
				Shaft dia. 16 or over	M6×1	–				○	
	Small equipment		FA		M6×1	–	○*2	○*2		○	○*2
	Machine tools		SA	Shaft dia. 36 or less	M6×1	–	○	○		○	○
				Shaft dia. 40 or over	Rc1/8	–	○	○		○	○
	Stainless steel		KA	Shaft dia. 12 or less and lead 2 or less	M3×0.5	–			○	○	
				except above	M6×1	–	○*2	○*2		○	○*2
	Transfer equipment		VFA	Shaft dia. 12 or less	ϕ 2.7	–				○	
				Shaft dia. 15 or over	ϕ 3.5	–				○	
			RMA		–	–				○	
Blank shaft end	Miniature, fine lead		MS	Shaft dia. 12 or less	–	–				○	
				Shaft dia. 16 or over	M6×1	–				○	
	Small equipment		FS		M6×1	–	○*2	○*2		○	○*2
	Machine tools		SS	Shaft dia. 36 or less	M6×1	–	○	○		○	○
				Shaft dia. 40 or over	Rc1/8	–	○	○		○	○
			HSS		M6×1	–	○	○		○	○
	Transfer equipment		RMS		–	–				○	
			RNFTL	Shaft dia. 12 or less	M3×0.5	–			○	○	
				Shaft dia. 14 or over	M6×1	–	○	○		○	○
			RNFBL	Shaft dia. 12 or less	M3×0.5	–			○	○	
				Shaft dia. 14 or over	M6×1	–	○	○		○	○
			RNCT		–	–				○	
			RNFCL	Shaft dia. 12 or less	M3×0.5	–			○	○	
				Shaft dia. 15 or over	M6×1	–	○	○		○	○
			RNSTL		M6×1	–	○	○		○	○

*1 Unavailable for shaft dia. 25 mm *2 If using A type grease fitting, may not install the nozzle.

Notes: 1) Normally, grease fitting is not provided to NSK ball screw except Compact FA Series. Ball nut has a tap hole to install a grease fitting. The user should install a grease fitting if necessary.
2) For M3 × 0.5 tap hole, small fitting (screw-in type) is available. Please contact NSK.
3) VFA type cannot install grease fitting. Apply grease directly to inside the nut through oil hole using point nozzle.
4) MA, RMA, MS, RMS, and RNCT types have no tap hole, apply grease directly to the screw shaft and ball grooves using point nozzle.

Table 1.9 Applicable grease nozzles for Monocarriers

Series	Model No.	Tap hole for grease fitting	Standard grease fitting	Straight nozzle NZ1	Chuck nozzles NZ2	Drive-in fitting nozzle NZ3	Flexible nozzle NZ5	MCH exclusive fitting nozzle NZ8
MCM	MCM02	–	–					
	MCM03,05,08,10	ϕ 3	Drive-in type			○		○*
	MCM06	M6×0.75	A type	○	○		○	
MCH	MCH06,09,10	ϕ 3	Drive-in type					○

*) Use of NZ3 is recommended.

2.2 Oil Lubrication

Required amount of new oil is regularly supplied by:
• Manual or automatic intermittent supply system;
• Oil mist lubricating system via piping.
Equipment for oil lubrication is more costly than grease lubrication. However, oil mist lubricating system supplies air as well as oil, raising the inner pressure of the ball slide. This prevents foreign matters from entering, and the air cools the system. Use an oil of high atomizing rate such as ISO VG 32 to 68 for the oil mist lubrication system.
ISO VG 68 to 220 are recommended for common intermittent replenishment system. Approximate volume of oil Q for a ball slide of linear guide per hour can be obtained by the following formula.

In case of ball type linear guides except the LA Series

$Q \geq n/150$ (cm³/hr)

In case of LA Series, RA Series

$Q \geq n/100$ (cm³/hr)

n: Linear guide code

e.g. When NH45 is used,

$n = 45$

Therefore,

$Q = 45/150 = 0.3$ cm³/hr

Similarly, approximate oil supply volume Q to ball screw can be obtained by the following formula.

$Q = d/15$ (cm³/hr)

d: Nominal shaft diameter of the ball screw

e.g. When the shaft diameter is 50,

$d = 50$

Therefore,

$Q = 50/15 = 3.3$ cm³/hr

For oil lubrication by gravity drip, the oil supply position and installation position of the ball slide or ball nut are crucial. In case of linear guide, unless it is installed to a horizontal position, the oil flows only on the down side, and does not spread to all raceway surface. This may cause insufficient lubrication. For ball screw lubrication as well, oil does not spread if the oil orifice is installed at the bottom, causing insufficient lubrication. Please consult NSK to correct such situations prior to use. NSK has internal design which allows oil lubricant to flow throughout the system. **Table 2.1** shows the criterion of intervals of oil checks and replenishments.

Table 2.1 Intervals of checks and replenishments

Method	Intervals of checks	Items to check	Replenishment or intervals of changes
Automatic intermittent supply	Weekly	Volume of oil, dirt, etc.	Replenish at each check. Suitable volume for tank capacity.
Oil bath	Daily before operation	Oil surface	Make a suitable criterion based on consumption

Notes: 1) As with grease lubrication, do not mix oil lubricant with different types.
2) Some components of the linear guide and ball screw are made of plastic. Avoid using an oil that adversely affects synthetic resin.
3) When using oil mist lubricating system, please confirm an oil supply amount at the each outlet part.

3. RoHS Compliant

For details of country-specific RoHS, contact NSK.

APPENDICES: TABLES

E BLOCK

Appendices: Tables

1. Conversion from International Systems of Units (SI) ····· E1
2. Conversion table between N and kgf ·····E3
3. Conversion table between kg and lb ····· E4
4. Hardness conversion table ·· E5
5. Variations of shaft used in common fits ····· E7
6. Variations of housing holes in common fits ····· E9

1. Conversion from international system of units (SI)

Comparisons of SI, CGS, and engineering systems of units

Items / System of units	Length	Mass	Time	Temperature	Acceleration	Force	Stress	Pressure	Energy	Power
SI	m	kg	s	K, °C	m/s^2	N	Pa	Pa	J	W
CGS system	cm	g	s	°C	Gal	dyn	dyn/cm^2	dyn/cm^2	erg	erg/s
Engineering system	m	$kgf \cdot s^2/m$	s	°C	m/s^2	kgf	kgf/m^2	kgf/m^2	kgf • m	kgf • m/s

Prefixes for SI units

Powers of 10	Prefix Name	Prefix Code	Powers of 10	Prefix Name	Prefix Code
10^{18}	exa	E	10^{-1}	deci	d
10^{15}	peta	P	10^{-2}	centi	c
10^{12}	tera	T	10^{-3}	milli	m
10^{9}	giga	G	10^{-6}	micro	μ
10^{6}	mega	M	10^{-9}	nano	n
10^{3}	kilo	k	10^{-12}	pico	p
10^{2}	hecto	h	10^{-15}	femto	f
10^{1}	deca	da	10^{-18}	atto	a

Conversion rates from SI system of units

Item	SI unit: Name of unit	SI unit: Abbreviation	Units other than SI units: Name of unit	Units other than SI units: Abbreviation	Conversion rate from SI unit
Angle	Radian	rad	Degree	°	$180/\pi$
			Minute	'	$10\ 800/\pi$
			Second	''	$648\ 000/\pi$
Length	Meter	m	Micron	μ	10^6
			Angstrom	Å	10^{10}
Area	Square meter	m^2	Are	a	10^{-2}
			Hectare	ha	10^{-4}
Volume	Cubic meter	m^3	Liter	l, L	10^3
			Deciliter	dl, dL	10^4
Time	Second	s	Minute	min	1/60
			Hour	h	1/3 600
			Day	d	1/86 400
Numbers of vibration numbers of frequency	Hertz	Hz	Cycle	s^{-1}	1
Rotational speed	Times per second	s^{-1}	Times per minute	rpm	60
Velocity	Meter per second	m/s	Kilometer per hour	km/h	3 600/1 000
			Knot	kn	3 600/1 852
Acceleration	Meter per square second	m/s^2	Gal	Gal	10^2
			G	G	1/9.806 65
Mass	Kilogram	kg	Ton	t	10^{-3}
Force	Newton	N	Weight kilogram	kgf	1/9.806 65
			Weight ton	tf	$1/(9.806\ 65\times10^3)$
			Dyne	dyn	10^5
Torque and moment of force	Newton meter	N • m	Weight kilogram meter	kgf • m	1/9.806 65
Stress	Pascal (Newtons per square meter)	Pa (N/m^2)	Weight kilogram per square centimeter	kgf/cm^2	$1/(9.806\ 65\times10^4)$
			Weight kilogram per square millimeter	kgf/mm^2	$1/(9.806\ 65\times10^6)$

Conversion rates from SI units (continued from previous page)

Item	SI unit: Name of unit	SI unit: Abbreviation	Units other than SI units: Name of unit	Units other than SI units: Abbreviation	Conversion rate from SI unit
Pressure	Pascal (newton per square meter)	Pa (N/m^2)	Weight kilogram per square meter	kgf/m^2	1/9.806 65
			Water column meter	mH_2O	$1/(9.806\ 65\times10^3)$
			Mercurial column millimeter	mmHg	$760/(1.013\ 25\times10^5)$
			Torr	Torr	$760/(1.013\ 25\times10^5)$
			Bar	bar	10^{-5}
			Atmosphere	atm	$1/(1.013\ 25\times10^5)$
Energy	Joule (newton meter)	J (N • m)	Erg	erg	10^7
			Calorie (international)	cal_{IT}	1/4.186 8
			Weight kilogram meter	kgf • m	1/9.806 65
			Kilowatt hour	kW • h	$1/(3.6\times10^6)$
			Metric horsepower/hour	PS • h	$\approx3.776\ 72\times10^{-7}$
Electric power, power	Watt (joules per second)	W (J/s)	Weight kilogram meter per second	kgf • m/s	1/9.806 65
			Kilo calorie per hour	kcal/h	1/1.163
			Metric horsepower	PS	≈1/735.498 8
Viscosity, Viscosity index	Pascal second	Pa • s	Poise	P	10
Kinematic viscosity, Kinematic viscosity index	Square meter per second	m^2/s	Stokes	St	10^4
			Centistokes	cSt	10^6
Temperature, Difference in temperature	Kelvin, Celsius degrees	K, °C	Degree	°C	[See Note (1)]
Electrical current, magnetomotive force	Ampere	A	Ampere	A	1
Electrical power, electromotive force	Volt	V	(Watt per ampere)	(W/A)	1
Magnetic field intensity	Ampere per meter	A/m	Oersted	Oe	$4\pi/10^3$
Magnetic flux density	Tesla	T	Gauss	Gs	10^4
			Gamma	γ	10^9
Electrical resistance	Ohm	Ω	(Volt per ampere)	(V/A)	1

Note (1) Conversion from *TK* to θ °C is : θ = T – 273.15. To indicate temperature difference: $\Delta T = \Delta\theta$. ΔT and $\Delta\theta$ indicate temperature differences measured by Kelvin and Celsius respectively.

Remarks: Names and abbreviations of the unit in parentheses indicate the definition of the unit shown above the parentheses or left to the parentheses.

Conversion example 1 N = 1/9.806 65 kgf

2. Conversion table between N and kgf

[How to read the table]
To convert 10 N to kgf, locate 10 in the center column in the first block. Locate a corresponding kgf figure in the right side column. You will find 10 N is 1.0197 kgf. To convert 10 kgf to N, locate a figure in N column to its left. You will find 10 kgf is 98.006 N.

1 N = 0.1019716 kgf
1 kgf = 9.80665 N

N		kgf	N		kgf	N		kgf
9.8066	1	0.1020	333.43	34	3.4670	657.05	67	6.8321
19.613	2	0.2039	343.23	35	3.5690	666.85	68	6.9341
29.420	3	0.3059	353.04	36	3.6710	676.66	69	7.0360
39.227	4	0.4079	362.85	37	3.7729	686.47	70	7.1380
49.033	5	0.5099	372.65	38	3.8749	696.27	71	7.2400
58.840	6	0.6118	382.46	39	3.9769	706.08	72	7.3420
68.647	7	0.7138	392.27	40	4.0789	715.89	73	7.4439
78.453	8	0.8158	402.07	41	4.1808	725.69	74	7.5459
88.260	9	0.9177	411.88	42	4.2828	735.50	75	7.6479
98.066	10	1.0197	421.69	43	4.3848	745.31	76	7.7498
107.87	11	1.1217	431.49	44	4.4868	755.11	77	7.8518
117.68	12	1.2237	441.30	45	4.5887	764.92	78	7.9538
127.49	13	1.3256	451.11	46	4.6907	774.73	79	8.0558
137.29	14	1.4279	460.91	47	4.7927	784.53	80	8.1577
147.10	15	1.5296	470.72	48	4.8946	794.34	81	8.2597
156.91	16	1.6315	480.53	49	4.9966	804.15	82	8.3617
166.71	17	1.7335	490.33	50	5.0986	813.95	83	8.4636
176.52	18	1.8355	500.14	51	5.2006	823.76	84	8.5656
186.33	19	1.9375	509.95	52	5.3025	833.57	85	8.6676
196.13	20	2.0394	519.75	53	5.4045	843.37	86	8.7696
205.94	21	2.1414	529.56	54	5.5065	853.18	87	8.8715
215.75	22	2.2434	539.37	55	5.6084	862.99	88	8.9735
225.55	23	2.3453	549.17	56	5.7104	872.79	89	9.0755
235.36	24	2.4473	558.98	57	5.8124	882.60	90	9.1774
245.17	25	2.5493	568.79	58	5.9144	892.41	91	9.2794
254.97	26	2.6513	578.59	59	6.0163	902.21	92	9.3814
264.78	27	2.7532	588.40	60	6.1183	912.02	93	9.4834
274.59	28	2.8552	598.21	61	6.2203	921.83	94	9.5853
284.39	29	2.9572	608.01	62	6.3222	931.63	95	9.6873
294.20	30	3.0591	617.82	63	6.4242	941.44	96	9.7893
304.01	31	3.1611	627.63	64	6.5262	951.25	97	9.8912
313.81	32	3.2631	637.43	65	6.6282	961.05	98	9.9932
323.62	33	3.3651	647.24	66	6.7301	970.86	99	10.095

3. Conversion table between kg and lb

[How to read the table]
To convert 10 kg to lb, locate 10 in the center column in the first block. Locate a corresponding lb figure in right column. You will find 10 kg is 22.046 lb. To convert 10 lb to kg, locate the figure in the kg column to the left. You will find 10 lb is 4.536 kg.

1 kg = 2.2046226 lb
1 lb = 0.45359237 kg

kg		lb	kg		lb	kg		lb
0.454	1	2.205	15.422	34	74.957	30.391	67	147.71
0.907	2	4.409	15.876	35	77.162	30.844	68	149.91
1.361	3	6.614	16.329	36	79.366	31.298	69	152.12
1.814	4	8.818	16.783	37	81.571	31.751	70	154.32
2.268	5	11.023	17.237	38	83.776	32.205	71	156.53
2.722	6	13.228	17.690	39	85.980	32.659	72	158.73
3.175	7	15.432	18.144	40	88.185	33.112	73	160.94
3.629	8	17.637	18.597	41	90.390	33.566	74	163.14
4.082	9	19.842	19.051	42	92.594	34.019	75	165.35
4.536	10	22.046	19.504	43	94.799	34.473	76	167.55
4.990	11	24.251	19.958	44	97.003	34.927	77	169.76
5.443	12	26.455	20.412	45	99.208	35.380	78	171.96
5.897	13	28.660	20.865	46	101.41	35.834	79	174.17
6.350	14	30.865	21.319	47	103.62	36.287	80	176.37
6.804	15	33.069	21.772	48	105.82	36.741	81	178.57
7.257	16	35.274	22.226	49	108.03	37.195	82	180.78
7.711	17	37.479	22.680	50	110.23	37.648	83	182.98
8.165	18	39.683	23.133	51	112.44	38.102	84	185.19
8.618	19	41.888	23.587	52	114.64	38.555	85	187.39
9.072	20	44.092	24.040	53	116.84	39.009	86	189.60
9.525	21	46.297	24.494	54	119.05	39.463	87	191.80
9.979	22	48.502	24.948	55	121.25	39.916	88	194.01
10.433	23	50.706	25.401	56	123.46	40.370	89	196.21
10.886	24	52.911	25.855	57	125.66	40.823	90	198.42
11.340	25	55.116	26.308	58	127.87	41.277	91	200.62
11.793	26	57.320	26.762	59	130.07	41.730	92	202.83
12.247	27	59.525	27.216	60	132.28	42.184	93	205.03
12.701	28	61.729	27.669	61	134.48	42.638	94	207.23
13.154	29	63.934	28.123	62	136.69	43.091	95	209.44
13.608	30	66.139	28.576	63	138.89	43.545	96	211.64
14.061	31	68.343	29.030	64	141.10	43.998	97	213.85
14.515	32	70.548	29.484	65	143.30	44.452	98	216.05
14.969	33	72.753	29.937	66	145.51	44.906	99	218.26

4. Conversion table of hardness

Rockwell C Scale hardness (1 471 N)	Vickers hardness	Brinell hardness		Rockwell hardness A Scale	Rockwell hardness B Scale	Shore hardness
		Standard ball	Tungsten carbide ball	Load 588.4 N brale penetrator	Load 980.7 N Diameter 1.5888 mm {1/16 in} sphere	
68	940	—	—	85.6	—	97
67	900	—	—	85.0	—	95
66	865	—	—	84.5	—	92
65	832	—	739	83.9	—	91
64	800	—	722	83.4	—	88
63	772	—	705	82.8	—	87
62	746	—	688	82.3	—	85
61	720	—	670	81.8	—	83
60	697	—	654	81.2	—	81
59	674	—	634	80.7	—	80
58	653	—	615	80.1	—	78
57	633	—	595	79.6	—	76
56	613	—	577	79.0	—	75
55	595	—	560	78.5	—	74
54	577	—	543	78.0	—	72
53	560	—	525	77.4	—	71
52	544	500	512	76.8	—	69
51	528	487	496	76.3	—	68
50	513	475	481	75.9	—	67
49	498	464	469	75.2	—	66
48	484	451	455	74.7	—	64
47	471	442	443	74.1	—	63
46	458	432	432	73.6	—	62
45	446	421	421	73.1	—	60
44	434	409	409	72.5	—	58
43	423	400	400	72.0	—	57
42	412	390	390	71.5	—	56
41	402	381	381	70.9	—	55
40	392	371	371	70.4	—	54
39	382	362	362	69.9	—	52
38	372	353	353	69.4	—	51
37	363	344	344	68.9	—	50
36	354	336	336	68.4	(109.0)	49
35	345	327	327	67.9	(108.5)	48
34	336	319	319	67.4	(108.0)	47
33	327	311	311	66.8	(107.5)	46
32	318	301	301	66.3	(107.0)	44
31	310	294	294	65.8	(106.0)	43
30	302	286	286	65.3	(105.5)	42
29	294	279	279	64.7	(104.5)	41
28	286	271	271	64.3	(104.0)	41
27	279	264	264	63.8	(103.0)	40
26	272	258	258	63.3	(102.5)	38
25	266	253	253	62.8	(101.5)	38
24	260	247	247	62.4	(101.0)	37
23	254	243	243	62.0	100.0	36
22	248	237	237	61.5	99.0	35
21	243	231	231	61.0	98.5	35
20	238	226	226	60.5	97.8	34
(18)	230	219	219	—	96.7	33
(16)	222	212	212	—	95.5	32
(14)	213	203	203	—	93.9	31
(12)	204	194	194	—	92.3	29
(10)	196	187	187	—	90.7	28
(8)	188	179	179	—	89.5	27
(6)	180	171	171	—	87.1	26
(4)	173	165	165	—	85.5	25
(2)	166	158	158	—	83.5	24
(0)	160	152	152	—	81.7	24

5. Deviations of shafts used in common fits

Unit: μm

Classification of diameter (mm)		d6	e6	f6	g5	g6	h5	h6	h7	h8	h9	h10	js5	js6
Over	or less													
—	3	− 20 − 26	− 14 − 20	− 6 − 12	− 2 − 6	− 2 − 8	0 − 4	0 − 6	0 −10	0 − 14	0 − 25	0 − 40	± 2	± 3
3	6	− 30 − 38	− 20 − 28	− 10 − 18	− 4 − 9	− 4 − 12	0 − 5	0 − 8	0 −12	0 − 18	0 − 30	0 − 48	± 2.5	± 4
6	10	− 40 − 49	− 25 − 34	− 13 − 22	− 5 −11	− 5 − 14	0 − 6	0 − 9	0 −15	0 − 22	0 − 36	0 − 58	± 3	± 4.5
10	18	− 50 − 61	− 32 − 43	− 16 − 27	− 6 −14	− 6 − 17	0 − 8	0 −11	0 −18	0 − 27	0 − 43	0 − 70	± 4	± 5.5
18	30	− 65 − 78	− 40 − 53	− 20 − 33	− 7 −16	− 7 − 20	0 − 9	0 −13	0 −21	0 − 33	0 − 52	0 − 84	± 4.5	± 6.5
30	50	− 80 − 96	− 50 − 66	− 25 − 41	− 9 −20	− 9 − 25	0 −11	0 −16	0 −25	0 − 39	0 − 62	0 −100	± 5.5	± 8
50	80	−100 −119	− 60 − 79	− 30 − 49	−10 −23	− 10 − 29	0 −13	0 −19	0 −30	0 − 46	0 − 74	0 −120	± 6.5	± 9.5
80	120	−120 −142	− 72 − 94	− 36 − 58	−12 −27	− 12 − 34	0 −15	0 −22	0 −35	0 − 54	0 − 87	0 −140	± 7.5	±11
120	180	−145 −170	− 85 −110	− 43 − 68	−14 −32	− 14 − 39	0 −18	0 −25	0 −40	0 − 63	0 −100	0 −160	± 9	±12.5
180	250	−170 −199	−100 −129	− 50 − 79	−15 −35	− 15 − 44	0 −20	0 −29	0 −46	0 − 72	0 −115	0 −185	±10	±14.5
250	315	−190 −222	−110 −142	− 56 − 88	−17 −40	− 17 − 49	0 −23	0 −32	0 −52	0 − 81	0 −130	0 −210	±11.5	±16
315	400	−210 −246	−125 −161	− 62 − 98	−18 −43	− 18 − 54	0 −25	0 −36	0 −57	0 − 89	0 −140	0 −230	±12.5	±18
400	500	−230 −270	−135 −175	− 68 −108	−20 −47	− 20 − 60	0 −27	0 −40	0 −63	0 − 97	0 −155	0 −250	±13.5	±20
500	630	−260 −304	−145 −189	− 76 −120	—	− 22 − 66	—	0 −44	0 −70	0 −110	0 −175	0 −280	—	±22
630	800	−290 −340	−160 −210	− 80 −130	—	− 24 − 74	—	0 −50	0 −80	0 −125	0 −200	0 −320	—	±25
800	1 000	−320 −376	−170 −226	− 86 −142	—	− 26 − 82	—	0 −56	0 −90	0 −140	0 −230	0 −360	—	±28
1 000	1 250	−350 −416	−195 −261	− 98 −164	—	− 28 − 94	—	0 −66	0 −105	0 −165	0 −260	0 −420	—	±33
1 250	1 600	−390 −468	−220 −298	−110 −188	—	− 30 −108	—	0 −78	0 −125	0 −195	0 −310	0 −500	—	±39
1 600	2 000	−430 −522	−240 −332	−120 −212	—	− 32 −124	—	0 −92	0 −150	0 −230	0 −370	0 −600	—	±46

j5	j6	j7	k5	k6	k7	m5	m6	n6	p6	r6	r7	Classification of diameter (mm)	
												Over	or less
± 2	+ 4 − 2	+ 6 − 4	+ 4 0	+ 6 0	+10 0	+ 6 + 2	+ 8 + 2	+ 10 + 4	+ 12 + 6	+ 16 + 10	+ 20 + 10	—	3
+ 3 − 2	+ 6 − 2	+ 8 − 4	+ 6 + 1	+ 9 + 1	+13 + 1	+ 9 + 4	+ 12 + 4	+ 16 + 8	+ 20 + 12	+ 23 + 15	+ 27 + 15	3	6
+ 4 − 2	+ 7 − 2	+10 − 5	+ 7 + 1	+10 + 1	+16 + 1	+12 + 6	+ 15 + 6	+ 19 + 10	+ 24 + 15	+ 28 + 19	+ 34 + 19	6	10
+ 5 − 3	+ 8 − 3	+12 − 6	+ 9 + 1	+12 + 1	+19 + 1	+15 + 7	+ 18 + 7	+ 23 + 12	+ 29 + 18	+ 34 + 23	+ 41 + 23	10	18
+ 5 − 4	+ 9 − 4	+13 − 8	+11 + 2	+15 + 2	+23 + 2	+17 + 8	+ 21 + 8	+ 28 + 15	+ 35 + 22	+ 41 + 28	+ 49 + 28	18	30
+ 6 − 5	+11 − 5	+15 −10	+13 + 2	+18 + 2	+27 + 2	+20 + 9	+ 25 + 9	+ 33 + 17	+ 42 + 26	+ 50 + 34	+ 59 + 34	30	50
+ 6 − 7	+12 − 7	+18 −12	+15 + 2	+21 + 2	+32 + 2	+24 +11	+ 30 + 11	+ 39 + 20	+ 51 + 32	+ 60 + 41 + 62 + 43	+ 71 + 41 + 73 + 43	50 65	65 80
+ 6 − 9	+13 − 9	+20 −15	+18 + 3	+25 + 3	+38 + 3	+28 +13	+ 35 + 13	+ 45 + 23	+ 59 + 37	+ 73 + 51 + 76 + 54	+ 86 + 51 + 89 + 54	80 100	100 120
+ 7 −11	+14 −11	+22 −18	+21 + 3	+28 + 3	+43 + 3	+33 +15	+ 40 + 15	+ 52 + 27	+ 68 + 43	+ 88 + 63 + 90 + 65 + 93 + 68	+103 + 63 +105 + 65 +108 + 68	120 140 160	140 160 180
+ 7 −13	+16 −13	+25 −21	+24 + 4	+33 + 4	+50 + 4	+37 +17	+ 46 + 17	+ 60 + 31	+ 79 + 50	+106 + 77 +109 + 80 +113 + 84	+123 + 77 +126 + 80 +130 + 84	180 200 225	200 225 250
+7 −16	±16	±26	+27 + 4	+36 + 4	+56 + 4	+43 +20	+ 52 + 20	+ 66 + 34	+ 88 + 56	+126 + 94 +130 + 98	+146 + 94 +150 + 98	250 280	280 315
+7 −18	±18	+29 −28	+29 + 4	+40 + 4	+61 + 4	+46 +21	+ 57 + 21	+ 73 + 37	+ 98 + 62	+144 +108 +150 +114	+165 +108 +171 +114	315 355	355 400
+7 −20	±20	+31 −32	+32 + 5	+45 + 5	+68 + 5	+50 +23	+ 63 + 23	+ 80 + 40	+108 + 68	+166 +126 +172 +132	+189 +126 +195 +132	400 450	450 500
—	—	—	—	+44 0	+70 0	—	+ 70 + 26	+ 88 + 44	+122 + 78	+194 +150 +199 +155	+220 +150 +225 +155	500 560	560 630
—	—	—	—	+50 0	+80 0	—	+ 80 + 30	+100 + 50	+138 + 88	+225 +175 +235 +185	+255 +175 +265 +185	630 710	710 800
—	—	—	—	+56 0	+90 0	—	+ 90 + 34	+112 + 56	+156 +100	+266 +210 +276 +220	+300 +210 +310 +220	800 900	900 1 000
—	—	—	—	+66 0	+105 0	—	+106 + 40	+132 + 66	+186 +120	+316 +250 +326 +260	+355 +250 +365 +260	1 000 1 120	1 120 1 250
—	—	—	—	+78 0	+125 0	—	+126 + 48	+156 + 78	+218 +140	+378 +300 +408 +330	+425 +300 +455 +330	1 250 1 400	1 400 1 600
—	—	—	—	+92 0	+150 0	—	+150 + 58	+184 + 92	+262 +170	+462 +370 +492 +400	+520 +370 +550 +400	1 600 1 800	1 800 2 000

6. Deviations of holes used in common fits

Unit: μm

Classification of diameter (mm)		E6	F6	F7	G6	G7	H6	H7	H8	J6	J7	JS6	JS7
Over	or less												
—	3	+ 20 + 14	+ 12 + 6	+ 16 + 6	+ 8 + 2	+ 12 + 2	+ 6 0	+ 10 0	+ 14 0	+ 2 − 4	+ 4 − 6	± 3	± 5
3	6	+ 28 + 20	+ 18 + 10	+ 22 + 10	+ 12 + 4	+ 16 + 4	+ 8 0	+ 12 0	+ 18 0	+ 5 − 3	± 6	± 4	± 6
6	10	+ 34 + 25	+ 22 + 13	+ 28 + 13	+ 14 + 5	+ 20 + 5	+ 9 0	+ 15 0	+ 22 0	+ 5 − 4	+ 8 − 7	± 4.5	± 7.5
10	18	+ 43 + 32	+ 27 + 16	+ 34 + 16	+ 17 + 6	+ 24 + 6	+ 11 0	+ 18 0	+ 27 0	+ 6 − 5	+10 − 8	± 5.5	± 9
18	30	+ 53 + 40	+ 33 + 20	+ 41 + 20	+ 20 + 7	+ 28 + 7	+ 13 0	+ 21 0	+ 33 0	+ 8 − 5	+12 − 9	± 6.5	±10.5
30	50	+ 66 + 50	+ 41 + 25	+ 50 + 25	+ 25 + 9	+ 34 + 9	+ 16 0	+ 25 0	+ 39 0	+10 − 6	+14 −11	± 8	±12.5
50	80	+ 79 + 60	+ 49 + 30	+ 60 + 30	+ 29 + 10	+ 40 + 10	+ 19 0	+ 30 0	+ 46 0	+13 − 6	+18 −12	± 9.5	±15
80	120	+ 94 + 72	+ 58 + 36	+ 71 + 36	+ 34 + 12	+ 47 + 12	+ 22 0	+ 35 0	+ 54 0	+16 − 6	+22 −13	±11	±17.5
120	180	+110 + 85	+ 68 + 43	+ 83 + 43	+ 39 + 14	+ 54 + 14	+ 25 0	+ 40 0	+ 63 0	+18 − 7	+26 −14	±12.5	±20
180	250	+129 +100	+ 79 + 50	+ 96 + 50	+ 44 + 15	+ 61 + 15	+ 29 0	+ 46 0	+ 72 0	+22 − 7	+30 −16	±14.5	±23
250	315	+142 +110	+ 88 + 56	+108 + 56	+ 49 + 17	+ 69 + 17	+ 32 0	+ 52 0	+ 81 0	+25 − 7	+36 −16	±16	±26
315	400	+161 +125	+ 98 + 62	+119 + 62	+ 54 + 18	+ 75 + 18	+ 36 0	+ 57 0	+ 89 0	+29 − 7	+39 −18	±18	±28.5
400	500	+175 +135	+108 + 68	+131 + 68	+ 60 + 20	+ 83 + 20	+ 40 0	+ 63 0	+ 97 0	+33 − 7	+43 −20	±20	±31.5
500	630	+189 +145	+120 + 76	+146 + 76	+ 66 + 22	+ 92 + 22	+ 44 0	+ 70 0	+110 0	—	—	±22	±35
630	800	+210 +160	+130 + 80	+160 + 80	+ 74 + 24	+104 + 24	+ 50 0	+ 80 0	+125 0	—	—	±25	±40
800	1 000	+226 +170	+142 + 86	+176 + 86	+ 82 + 26	+116 + 26	+ 56 0	+ 90 0	+140 0	—	—	±28	±45
1 000	1 250	+261 +195	+164 + 98	+203 + 98	+ 94 + 28	+133 + 28	+ 66 0	+105 0	+165 0	—	—	±33	±52.5
1 250	1 600	+298 +220	+188 +110	+235 +110	+108 + 30	+155 + 30	+ 78 0	+125 0	+195 0	—	—	±39	±62.5
1 600	2 000	+332 +240	+212 +120	+270 +120	+124 + 32	+182 + 32	+ 92 0	+150 0	+230 0	—	—	±46	±75

K5	K6	K7	M5	M6	M7	N5	N6	N7	P6	P7	Classification of diameter (mm)	
											Over	or less
0 − 4	0 − 6	0 − 10	− 2 − 6	− 2 − 8	− 2 − 12	− 4 − 8	− 4 − 10	− 4 − 14	− 6 − 12	− 6 − 16	—	3
0 − 5	+ 2 − 6	+ 3 − 9	− 3 − 8	− 1 − 9	0 − 12	− 7 −12	− 5 − 13	− 4 − 16	− 9 − 17	− 8 − 20	3	6
+ 1 − 5	+ 2 − 7	+ 5 − 10	− 4 −10	− 3 − 12	0 − 15	− 8 −14	− 7 − 16	− 4 − 19	− 12 − 21	− 9 − 24	6	10
+ 2 − 6	+ 2 − 9	+ 6 − 12	− 4 −12	− 4 − 15	0 − 18	− 9 −17	− 9 − 20	− 5 − 23	− 15 − 26	− 11 − 29	10	18
+ 1 − 8	+ 2 −11	+ 6 − 15	− 5 −14	− 4 − 17	0 − 21	−12 −21	− 11 − 24	− 7 − 28	− 18 − 31	− 14 − 35	18	30
+ 2 − 9	+ 3 −13	+ 7 − 18	− 5 −16	− 4 − 20	0 − 25	−13 −24	− 12 − 28	− 8 − 33	− 21 − 37	− 17 − 42	30	50
+ 3 −10	+ 4 −15	+ 9 − 21	− 6 −19	− 5 − 24	0 − 30	−15 −28	− 14 − 33	− 9 − 39	− 26 − 45	− 21 − 51	50	80
+ 2 −13	+ 4 −18	+ 10 − 25	− 8 −23	− 6 − 28	0 − 35	−18 −33	− 16 − 38	− 10 − 45	− 30 − 52	− 24 − 59	80	120
+ 3 −15	+ 4 −21	+ 12 − 28	− 9 −27	− 8 − 33	0 − 40	−21 −39	− 20 − 45	− 12 − 52	− 36 − 61	− 28 − 68	120	180
+ 2 −18	+ 5 −24	+ 13 − 33	−11 −31	− 8 − 37	0 − 46	−25 −45	− 22 − 51	− 14 − 60	− 41 − 70	− 33 − 79	180	250
+ 3 −20	+ 5 −27	+ 16 − 36	−13 −36	− 9 − 41	0 − 52	−27 −50	− 25 − 57	− 14 − 66	− 47 − 79	− 36 − 88	250	315
+ 3 −22	+ 7 −29	+ 17 − 40	−14 −39	− 10 − 46	0 − 57	−30 −55	− 26 − 62	− 16 − 73	− 51 − 87	− 41 − 98	315	400
+ 2 −25	+ 8 −32	+ 18 − 45	−16 −43	− 10 − 50	0 − 63	−33 −60	− 27 − 67	− 17 − 80	− 55 − 95	− 45 −108	400	500
—	0 −44	0 − 70	—	− 26 − 70	− 26 − 96	—	− 44 − 88	− 44 −114	− 78 −122	− 78 −148	500	630
—	0 −50	0 − 80	—	− 30 − 80	− 30 −110	—	− 50 −100	− 50 −130	− 88 −138	− 88 −168	630	800
—	0 −56	0 − 90	—	− 34 − 90	− 34 −124	—	− 56 −112	− 56 −146	−100 −156	−100 −190	800	1 000
—	0 −66	0 −105	—	− 40 −106	− 40 −145	—	− 66 −132	− 66 −171	−120 −186	−120 −225	1 000	1 250
—	0 −78	0 −125	—	− 48 −126	− 48 −173	—	− 78 −156	− 78 −203	−140 −218	−140 −265	1 250	1 600
—	0 −92	0 −150	—	− 58 −150	− 58 −208	—	− 92 −184	− 92 −242	−170 −262	−170 −320	1 600	2 000

Worldwide Sales Offices

P: Phone F: Fax ☆: Head Office

NSK LTD.-HEADQUARTERS, TOKYO, JAPAN

Nissei Bldg., 1-6-3 Ohsaki, Shinagawa-ku, Tokyo 141-8560, Japan

INDUSTRIAL MACHINERY BUSINESS DIVISION-HEADQUARTERS
P: +81-3-3779-7227 F: +81-3-3779-7432

AUTOMOTIVE BUSINESS DIVISION-HEADQUARTERS
P: +81-3-3779-7189 F: +81-3-3779-7917

●Africa

South Africa:

NSK SOUTH AFRICA (PTY) LTD.

SANDTON 25 Galaxy Avenue, Linbro Business Park, Sandton 2146, South Africa
P: +27-011-458-3600 F: +27-011-458-3608

●Asia and Oceania

Australia:

NSK AUSTRALIA PTY. LTD.

MELBOURNE ☆ 100 Logis Boulevard, Dandenong South, Victoria, 3175, Australia
P: +61-3-9765-4400 F: +61-3-9765-4466

SYDNEY Suite A315, 20 Lexington Drive, Bella Vista, New South Wales, 2153, Australia
P: +61-2-9839-2300 F: +61-2-8824-5794

BRISBANE 1/69 Selhurst Street, Coopers Plains, Queensland 4108, Australia
P: +61-7-3347-2600 F: +61-7-3345-5376

PERTH Unit 1, 71 Tacoma Circuit, Canning Vale, Western Australia 6155, Australia
P: +61-8-9256-5000 F: +61-8-9256-1044

New Zealand:

NSK NEW ZEALAND LTD.

AUCKLAND Unit F, 70 Business Parade South, Highbrook, Business Park Auckland 2013, New Zealand
P: +64-9-276-4992 F: +64-9-276-4082

China:

NSK (SHANGHAI) TRADING CO., LTD.

JIANGSU No.8 NSK Rd., Huaqiao Economic Development Zone, Kunshan, Jiangsu, China (215332)
P: +86-512-5796-3000 F: +86-512-5796-3300

NSK (CHINA) INVESTMENT CO., LTD.

JIANGSU ☆ No.8 NSK Rd., Huaqiao Economic Development Zone, Kunshan, Jiangsu, China (215332)
P: +86-512-5796-3000 F: +86-512-5796-3300

BEIJING Room 1906, Beijing Fortune Bldg., No.5 Dong San Huan Bei Lu, Chao Yang District, Beijing, China (100004)
P: +86-10-6590-8161 F: +86-10-6590-8166

TIAN JIN Unit 4604, 46/F., Metropolitan Tower, 183 Nanjing Road, Heping District, Tianjin, China (300051)
P: +86-22-8319-5030 F: +86-22-8319-5033

CHANGCHUN Room 902-03, Changchun Hongwell International Plaza, No.3299 Renmin Street, Changchun, Jilin, China (130061)
P: +86-431-8898-8682 F: +86-431-8898-8670

SHENYANG Room 1101, China Resources Building, No. 286 Qingnian Street, Heping District, Shenyang Liaoning, China (110004)
P: +86-24-2334-2868 F: +86-24-2334-2058

DALIAN Room 1805 Xiwang Tower, No.136 Zhongshan Road, Zhongshan District, Dalian, Liaoning, China (116001)
P: +86-411-8800-8168 F: +86-411-8800-8160

NANJING Room A1 22F, Golden Eagle International Plaza, No.89 Hanzhong Road, Nanjing, Jiangsu, China (210029)
P: +86-25-8472-6671 F: +86-25-8472-6687

FUZHOU Room 1801-1811, B1#1A Class Office Building, Wanda Plaza, No.8 Aojiang Road, Fuzhou, China (350009)
P: +86-591-8380-1030 F: +86-591-8380-1225

WUHAN Room 1512, No.198Yuncai Road, Office Building, Oceanwide City Square, JiangHan, District, WuHan, China (400039)
P: +86-27-8556-9630 F: +86-27-8556-9615

QINGDAO Room 802, Farglory International Plaza, No.26 Xianggang Zhong Road, Shinan District, Qingdao, Shandong, China (266071)
P: +86-532-5568-3877 F: +86-532-5568-3876

GUANGZHOU Room 1011-16, Yuexiu Financial Tower, No.28 Zhujiang Road East, Zhujiang New Town, Guangzhou, Guangdong, China (510627)
P: +86-20-3817-7800 F: +86-20-3786-4501

CHANGSHA Room 3209, Huayuan International Center, No.36, Section 2, Xiangjiang Middle Road, Tianxin District, Changsha, Hunan, China (410002)
P: +86-731-8571-3100 F: +86-731-8571-3255

LUOYANG Room 955, HUA-YANG PLAZA HOTEL, NO.88 Kaixuan W.Rd., Jian Xi District, Luoyang,Henan Province, China (471003)
P: +86-379-6069-6188 F: +86-379-6069-6180

XI'AN Room 1007, B Changan Metropolls Center, No.88 Nanguanzheng Steet, Xi'an, Shanxi, China (710068)
P: +86-29-8765-1896 F: +86-29-8765-1895

CHONGQING Room 612, Commercial Apartment, Athestel Hotel, No.288, Keyuan Rd.4, Jiulongpo District, Chongqing, China (400039)
P: +86-23-6806-5310 F: +86-23-6806-5292

CHENGDU Room1117, Lippo Tower, No.62 North Kehua Road, Chengdu, Sichuan, China (610041)
P: +86-28-8528-3680 F: +86-28-8528-3690

NSK CHINA SALES CO., LTD.

JIANGSU No.8 NSK Rd., Huaqiao Economic Development Zone, Kunshan, Jiangsu, China (215332)
P: +86-512-5796-3000 F: +86-512-5796-3300

NSK HONG KONG LTD.

HONG KONG ☆ Suite 705, 7th Floor, South Tower, World Finance Centre, Harbour City, T.S.T, Kowloon, Hong Kong, China
P: +852-2739-9933 F: +852-2739-9323

SHENZHEN Room 624-626, 6/F, Kerry Center, Renminnan Road, Shenzhen, Guangdong, China
P: +86-755-25904886 F: +86-755-25904883

Taiwan:

TAIWAN NSK PRECISION CO., LTD.

TAIPEI ☆ 10F-A6, No.168, Sec.3, Nanjing East Rd., Zhongshan Dist., Taipei City 104, Taiwan
P: +886-2-2772-3355 F: +886-2-2772-3300

TAICHUNG 3F.-2, No. 540, Sec. 3, Taiwan Blvd., Xitun Dist., Taichung City 407, Taiwan
P: +886-4-2708-3393 F: +886-4-2708-3395

TAINAN Rm. A1, 9F., No.189, Sec. 1, Yongfu Rd., West Central Dist., Tainan City 700, Taiwan
P: +886-6-215-6058 F: +886-6-215-5518

India:

NSK BEARINGS INDIA PRIVATE LTD.

CHENNAI ☆ TVH Beliciaa Towers, 2nd Floor, Block I, No.71/1, MRC Nagar Main Road, MRC Nagar, Chennai-600 028,India
P: +91-44-2847-9600 F: +91-44-2847-9601

MUMBAI No.321, A Wing, Ahura Centre, 82, Mahakali Caves Road, Andheri (E), Mumbai-400 093, India
P: +91-22-2838-7787

JAMSHEDPUR 13/A, 2nd Floor, Circuit House Area, North West Layout, Road No.12, (Near Sai Baba Mandir), Sonari, Jamshedpur–831 011, Jharkhand, India
P: +91-657–2421144

GURGAON Unit No. 202, 2nd Floor, 'A' Block, Iris Tech Park, Sector – 48 (Sohna Road), Gurgaon–122018, Haryana, India
P: +91-124-4838000

Indonesia:

PT. NSK INDONESIA

JAKARTA Summitmas II, 6th Floor, Jl. Jend Sudirman Kav. 61-62, Jakarta 12190, Indonesia
P: +62-21-252-3458 F: +62-21-252-3223

Korea:

NSK KOREA CO., LTD.

SEOUL Posco Center (West Wing) 9F, 440, Teheran-ro, Gangnam-gu, Seoul, 06194, Korea
P: +82-2-3287-0300 F: +82-2-3287-0345

Malaysia:

NSK BEARINGS (MALAYSIA) SDN. BHD.

SHAH ALAM ☆ No. 2, Jalan Pemaju, U1/15, Seksyen U1, Hicom Glenmarie Industrial Park, 40150 Shah Alam, Selangor, Malaysia
P: +60-3-7803-8859 F: +60-3-7806-5982

PRAI No.24, Jalan kikik, Taman Inderawasih, 13600 Prai, Penang, Malaysia
P: +60-4-3902275 F: +60-4-3991830

JOHOR BAHRU 88 Jalan Ros Merah 2/17, Taman Johor Jaya, 81100 Johor Bahru, Johor, Malaysia
P: +60-7-3546290 F: +60-7-3546291

IPOH No.10&10A, Jalan Industri Paloh, Kawasan Perindustrian Ringan Paloh, 30200 Ipoh, Perak,Malaysia
P: +60-5-2555000 F: +60-5-2553373

Philippines:

NSK REPRESENTATIVE OFFICE

MANILA 8th Floor The Salcedo Towers 169 H.V. Dela Costa St.,Salcedo Villege Makati City, Philippines 1227
P: +63-2-893-9543 F: +63-2-893-9173

Singapore:

NSK INTERNATIONAL (SINGAPORE) PTE LTD.

SINGAPORE 238A, Thomson Road, #24-01/05, Novena Square Tower A, Singapore 307684
P: +65-6496-8000 F: +65-6250-5845

NSK SINGAPORE (PRIVATE) LTD.

SINGAPORE 238A, Thomson Road, #24-01/05, Novena Square Tower A, Singapore 307684
P: +65-6496-8000 F: +65-6250-5845

Thailand:

NSK BEARINGS (THAILAND) CO.,LTD.

BANGKOK 26 Soi Onnuch 55/1 Pravet Subdistrict, Pravet District, Bangkok 10250, Thailand
P: +66-2320-2555 F: +66-2320-2826

Vietnam:

NSK VIETNAM CO., LTD.

HANOI Techno Center, Room 204-205, Thang Long Industrial Park, Dong Anh District, Hanoi, Vietnam
P: +84-24-3955-0159 F: +84-24-3955-0158

NSK REPRESENTATIVE OFFICE

HO CHI MINH CITY Suite 307, Metropolitan Building, 235 Dong Khoi Street, District 1,HCMC, Vietnam
P: +84-28-3822-7907 F: +84-28-3822-7910

Worldwide Sales Offices

P: Phone F: Fax ☆: Head Office

●Europe

United Kingdom:

NSK EUROPE LTD. (EUROPEAN HEADQUARTERS)

MAIDENHEAD Belmont Place, Belmont Road, Maidenhead, Berkshire SL6 6TB, U.K.
P: +44-1628-509-800 F: +44-1628-509-808

NSK UK LTD.

NEWARK Northern Road, Newark, Nottinghamshire NG24 2JF, U.K.
P: +44-1636-605-123 F: +44-1636-605-000

France:

NSK FRANCE S.A.S.

PARIS Quartier de l'Europe, 2 Rue Georges Guynemer, 78283 Guyancourt, France
P: +33-1-30-57-39-39 F: +33-1-30-57-00-01

Germany:

NSK DEUTSCHLAND GMBH

DUSSELDORF ☆ Harkortstrasse 15, D-40880 Ratingen, Germany
P: +49-2102-4810 F: +49-2102-4812-290

STUTTGART Liebknechtstrasse 33, D-70565 Stuttgart-Vaihingen, Germany
P: +49-711-79082-0 F: +49-711-79082-289

WOLFSBURG Tischlerstrasse 3, D-38440 Wolfsburg, Germany
P: +49-5361-27647-10 F: +49-5361-27647-70

Italy:

NSK ITALIA S.P.A.

MILANO Via Garibaldi 215, Garbagnate Milanese (Milano) 20024, Italy
P: +39-299-5191 F: +39-299-025778

Netherlands:

NSK EUROPEAN DISTRIBUTION CENTRE B.V.

TILBURG Brakman 54, 5047 SW Tilburg, Netherlands
P: +31-13-4647647 F: +31-13-4641082

Poland:

NSK REPRESENTATIVE OFFICE

WARSAW Ul. Migdałowa 4/73, 02-796, Warsaw, Poland
P: +48-22-645-1525 F: +48-22-645-1529

Russia:

NSK POLSKA SP. Z O.O.

SAINT-PETERSBURG Office I 703, Bldg 29, 18th Line of Vasilievskiy Ostrov, Saint-Petersburg, Russia, 199178
P: +7-812-332-5071 F: +7-812-332-5072

Spain:

NSK SPAIN S.A.

BARCELONA C/Tarragona, 161 Cuerpo Bajo, 2a Planta, 08014, Barcelona, Spain
P: +34-93-289-2763 F: +34-93-433-5776

Turkey:

NSK RULMANLARI ORTA DOGU TIC. LTD. STI.

ISTANBUL Cevizli Mahallesi. D-100 Güney Yanyolu, Kuriş Kule İş Merkezi No:2 Kat:4, P.K.: 34846, Cevizli-Kartal-Istanbul, Turkey
P: +90-216-5000-675 F: +90-216-5000-676

United Arab Emirates:

NSK BEARINGS GULF TRADING CO.

DUBAI JAFZA View 19, Floor 24 Office LB192402/3, PO Box 262163, Downtown Jebel Ali, Dubai, U.A.E
P: +971-(0)4-804-8200 F: +971-(0)4-884-7227

●North and South America

United States of America:

NSK AMERICAS, INC. (AMERICAN HEADQUARTERS)

ANN ARBOR 4200 Goss Road, Ann Arbor, Michigan 48105, U.S.A.
P: +1-734-913-7500 F: +1-734-913-7511

NSK CORPORATION

ANN ARBOR 4200 Goss Road, Ann Arbor, Michigan 48105, U.S.A.
P: +1-734-913-7500 F: +1-734-913-7511

NSK PRECISION AMERICA, INC.

FRANKLIN ☆ 3450 Bearing Drive, Franklin, Indiana 46131, U.S.A.
P: +1-317-738-5000 F: +1-317-738-5050

SAN JOSE 780 Montague Expressway, Suite 505, San Jose, California, 95131, U.S.A.
P: +1-408-944-9400 F: +1-408-944-9405

NSK LATIN AMERICA, INC.

MIAMI 11601 NW 107 Street, Suite 200, Miami Florida, 33178, U.S.A.
P: +1-305-477-0605 F: +1-305-477-0377

Canada:

NSK CANADA INC.

TORONTO ☆ 317 Rutherford Road South, Brampton, Ontario, L6W 3R5, Canada
P: +1-888-603-7667 F: +1-905-890-1938

MONTREAL 2150-32E Avenue Lachine, Quebec, Canada H8T 3H7
P: +1-514-633-1220 F: +1-800-800-2788

Argentina:

NSK ARGENTINA SRL

BUENOS AIRES Garcia del Rio 2477 Piso 7 Oficina "A" (1429) Buenos Aires-Argentina
P: +54-11-4704-5100 F: +54-11-4704-0033

Brazil:

NSK BRASIL LTDA.

SUZANO ☆ Av. Vereador João Batista Fitipaldi, 66, Vila Maluf, Suzano-SP-Brazil-CEP 08685-000
P: +55-11-4744-2500

JOINVILLE Rua Blumenau, 178, sala 910, Centro, Joinville-SC-Brazil-CEP 89204-250
P: +55-47-3422-2239

Peru:

NSK PERU S.A.C.

LIMA Calle Teniente Enrique Palacios 360 Oficina 311 Miraflores, Lima, Peru
P: +51-493-4385

Mexico:

NSK RODAMIENTOS MEXICANA, S.A. DE C.V.

SILAO, GUANAJUATO Circuito Mexiamora Oriente No. 331, Parque Industrial Santa Fe I, Puerto Interior. Silao, Guanajuato, Mexico. C.P. 36275
P: +52-472-500-9500 F: +52-472-103-9403

<As of November 2020>

For the latest information, please refer to the NSK website.

www.nsk.com

Every care has been taken to ensure the accuracy of data in this publication, but NSK Ltd. accepts no liability for any loss or damage incurred from errors or omissions. As we pursue continuous improvement, all content (text, images, product appearances, specifications, etc.) contained in this publication is subject to change without notice. Unauthorized copying and/or use of the contents of this publication is strictly prohibited. Please investigate and follow the latest product export laws, regulations, and permit procedures when exporting to other countries.

MOTION & CONTROL™

NSK

Eco-awareness and reliability in motion

NSK used environmentally friendly paper and printing methods for this publication.

CAT. No. E3162j 2021 Z-3 Printed in Japan©NSK Ltd. First edition published in OCT. 2008